


B1 89S36-095-550	4 3620	T2 89S36-095-550	2 3620	W3 89S36-095-550	14 1376	W4 89S36-095-550	2 1458	W5 89S36-095-550	10 1457
W6 89S36-095-550	4 1471	W7 89S36-095-550	4 1454	FRAMECAD M6 Screw	204	Working Sheet: 90_Girders		Assembly Weight	45.6kg

Powered by FRAMECAD Structure É

Minimum number of fasteners required is 2 per joint

WELD ALL

WEBS

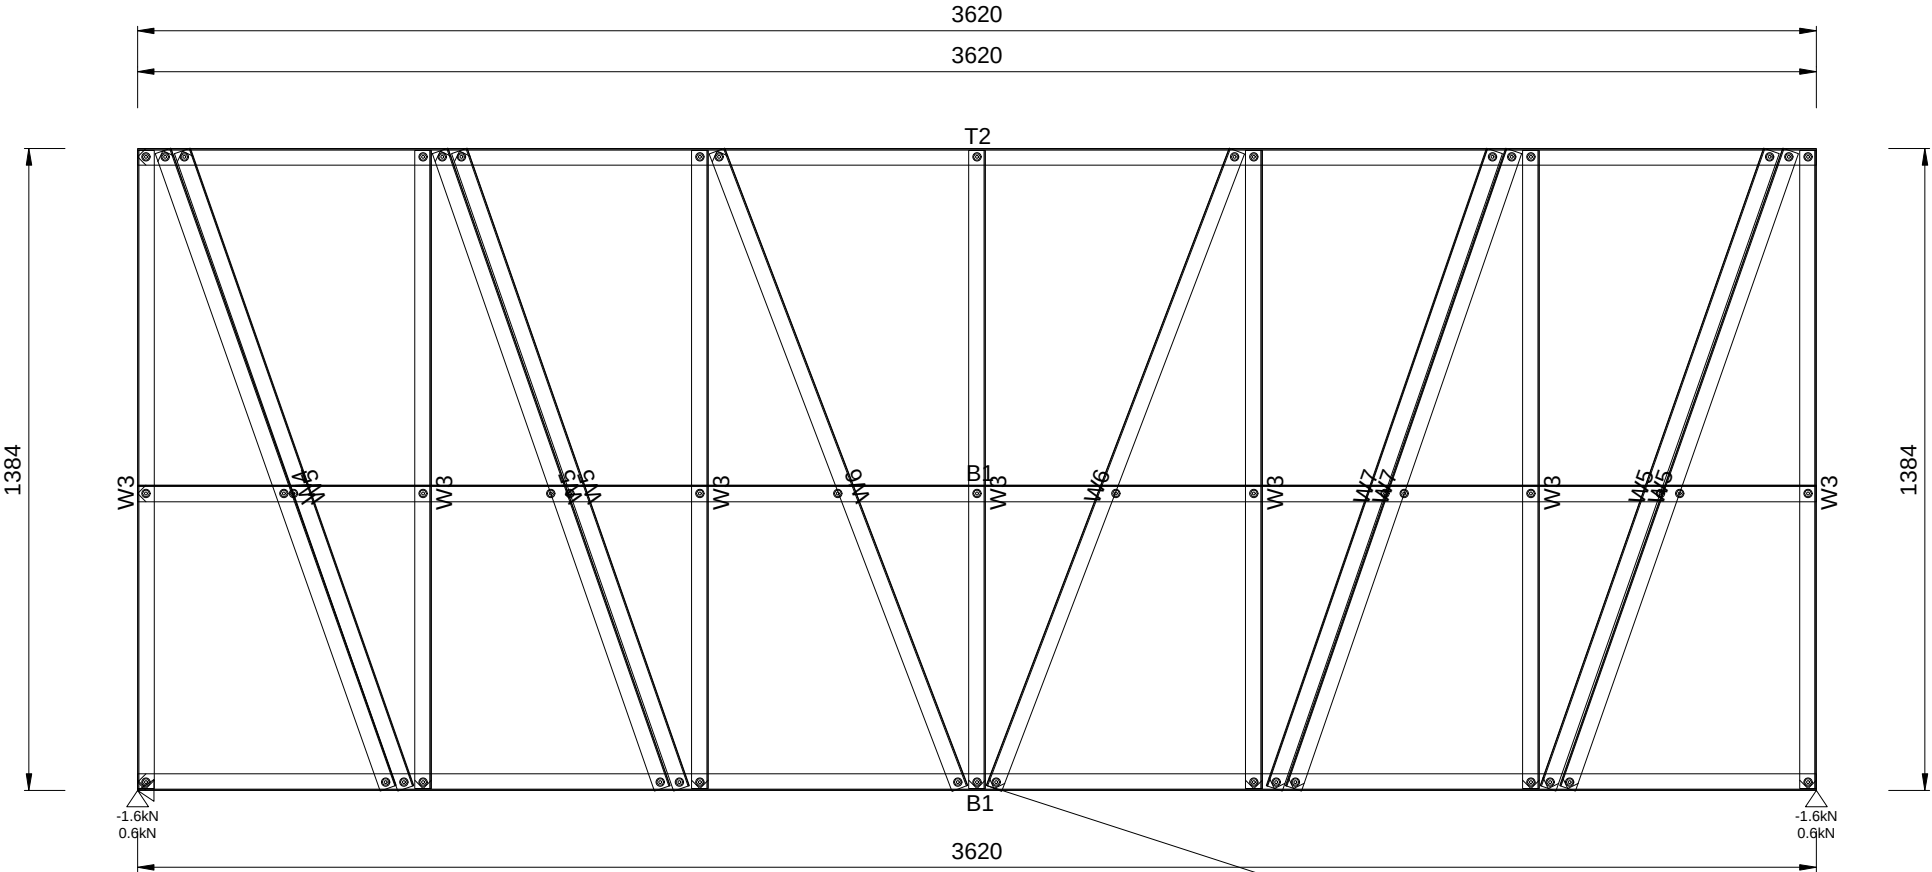

SPUR BRACING FOR BOTTOM CHORDS,

MAX SPACING = 1.8M

Quantity Required = 2 Mark as GI903 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M30 89S36 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	1.500	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	1387h x 3620w		