


B1	75S41-095-550	1	2136	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	816	W8	75S41-095-550	1	662	W9	75S41-095-550	1	654	W10	75S41-095-550	1	422
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

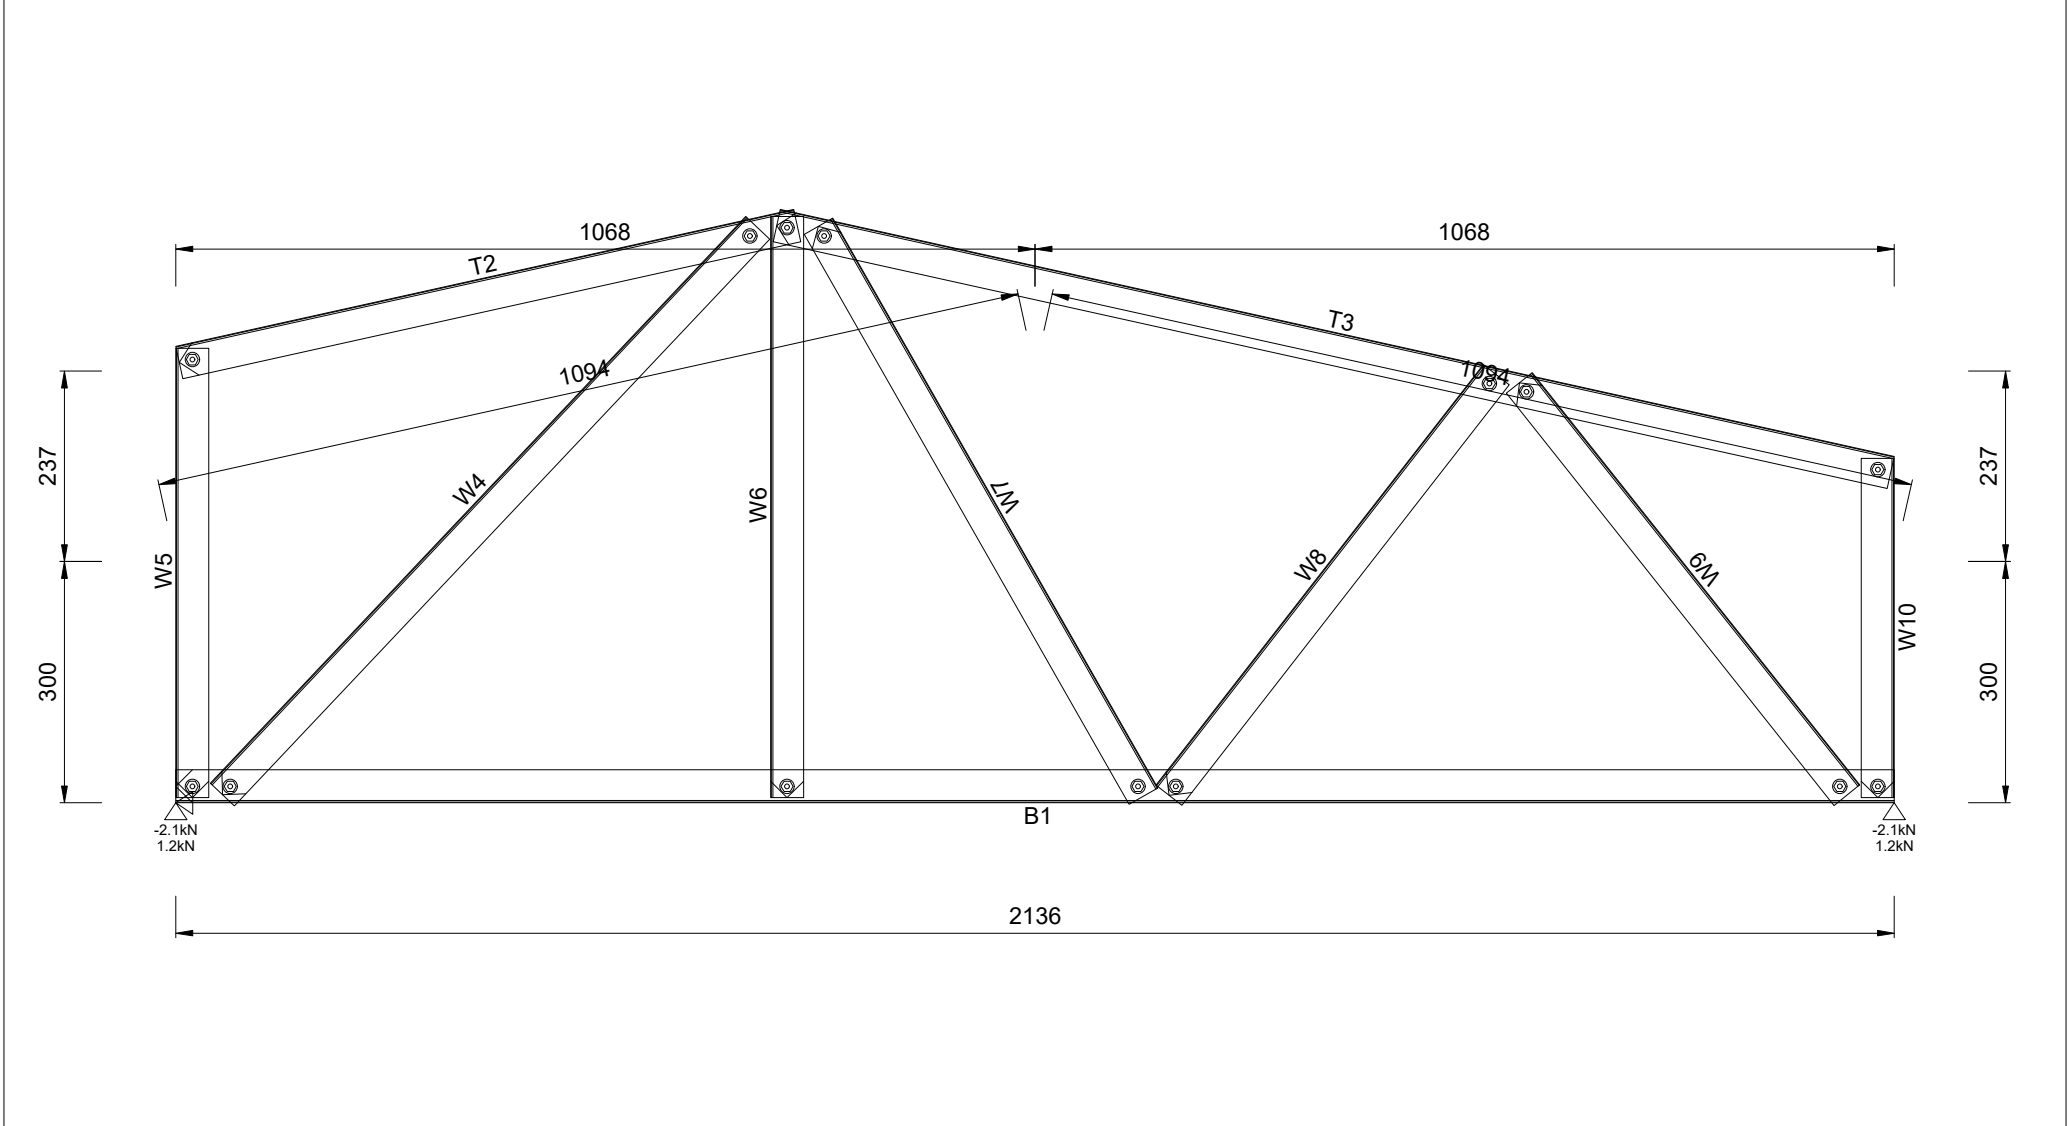


Quantity Required = 1 Mark as N101 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2136w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1725	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	869	W8	75S41-095-550	1	698	W9	75S41-095-550	1	691	W10	75S41-095-550	1	355
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				12.7kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

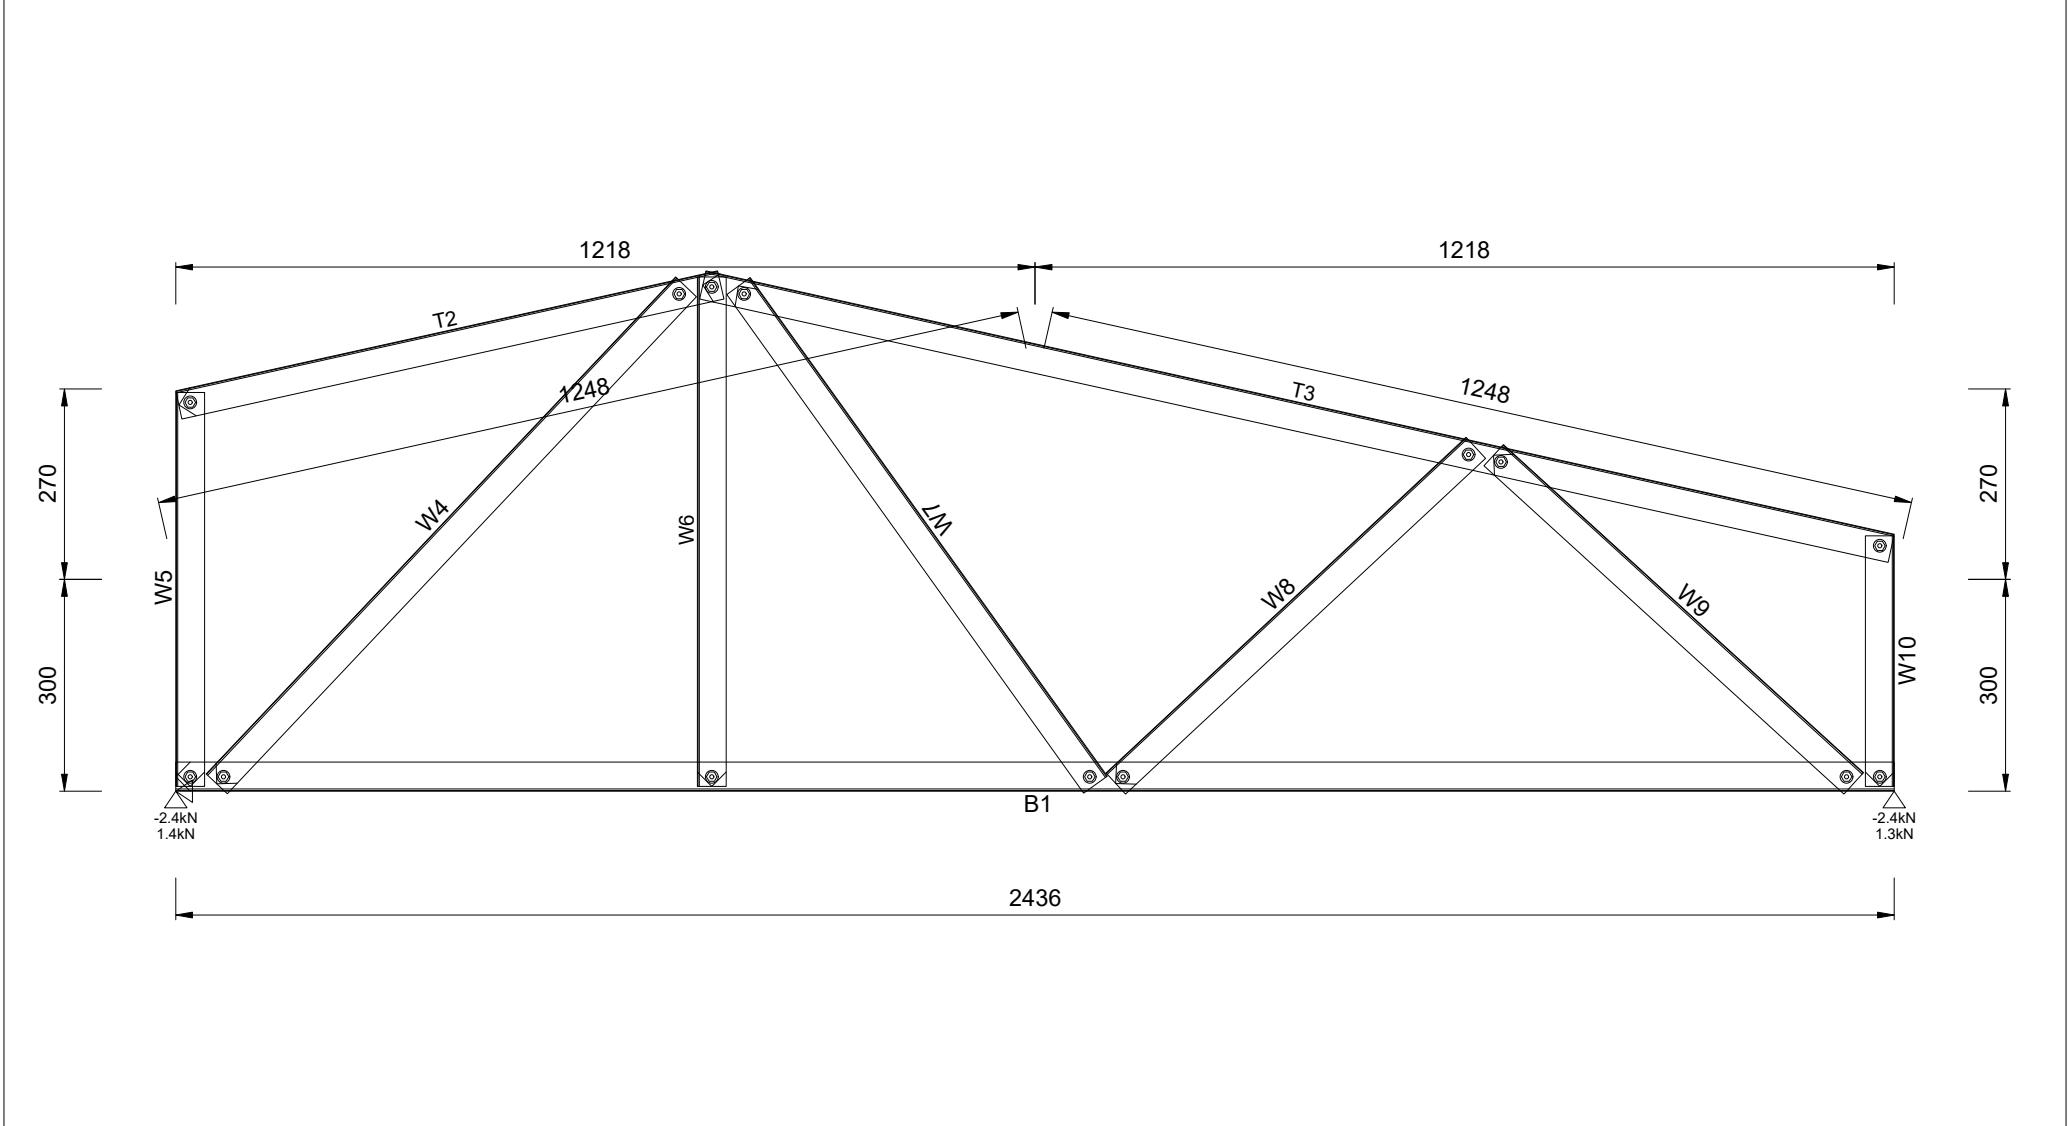


Quantity Required = 1 Mark as N102 Engineering Status = 65%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 2436w				

B1	75S41-095-550	1	2736	T2	75S41-095-550	1	1094	T3	75S41-095-550	1	1725	W4	75S41-095-550	1	492	W5	75S41-095-550	1	667
W6	75S41-095-550	1	859	W7	75S41-095-550	1	722	W8	75S41-095-550	1	869	W9	75S41-095-550	1	698	W10	75S41-095-550	1	691
W11	75S41-095-550	1	355	FRAMECAD M6 Screw			32	Working Sheet: Trusses				Assembly Weight			14.1kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

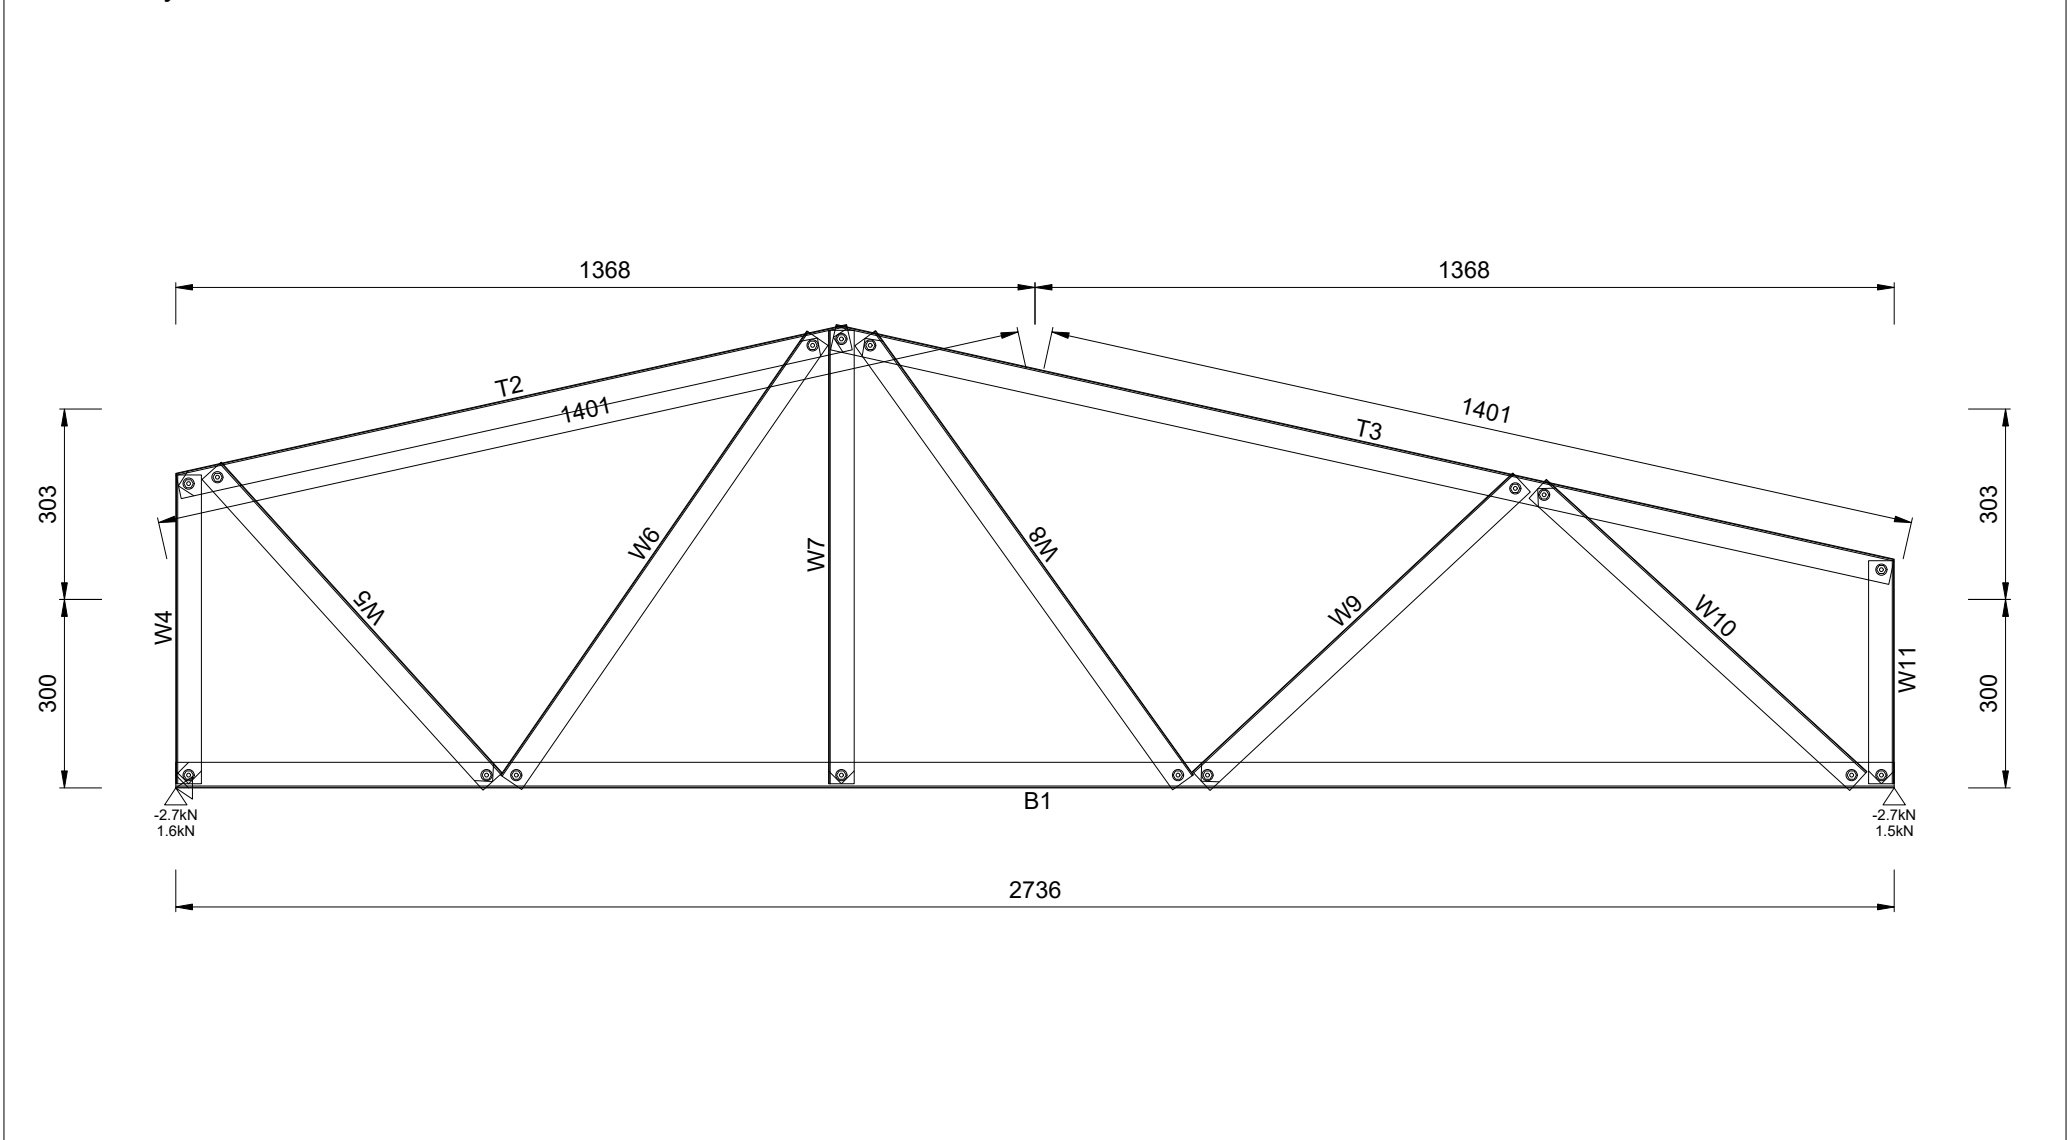


Quantity Required = 1 Mark as N103 Engineering Status = 71%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 2736w				

B1	75S41-095-550	1	4372	T2	75S41-095-550	1	2436	T3	75S41-095-550	1	1878	H4	75S41-095-550	1	523
W5	75S41-095-550	1	194	W6	75S41-095-550	1	468	W7	75S41-095-550	1	470	W8	75S41-095-550	1	304
W9	75S41-095-550	1	478	W10	75S41-095-550	1	589	W11	75S41-095-550	1	598	W12	75S41-095-550	1	716
W13	75S41-095-550	2	670	W14	75S41-095-550	2	715	W15	75S41-095-550	1	805	W16	75S41-095-550	1	646
W17	75S41-095-550	1	657	W18	75S41-095-550	1	315	FRAMECAD 1.15mm Fix Plate	2			FRAMECAD 10g-16mm Flathead	30		
FRAMECAD M6 Screw		68		Working Sheet: Trusses				Assembly Weight		23.5kg					

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

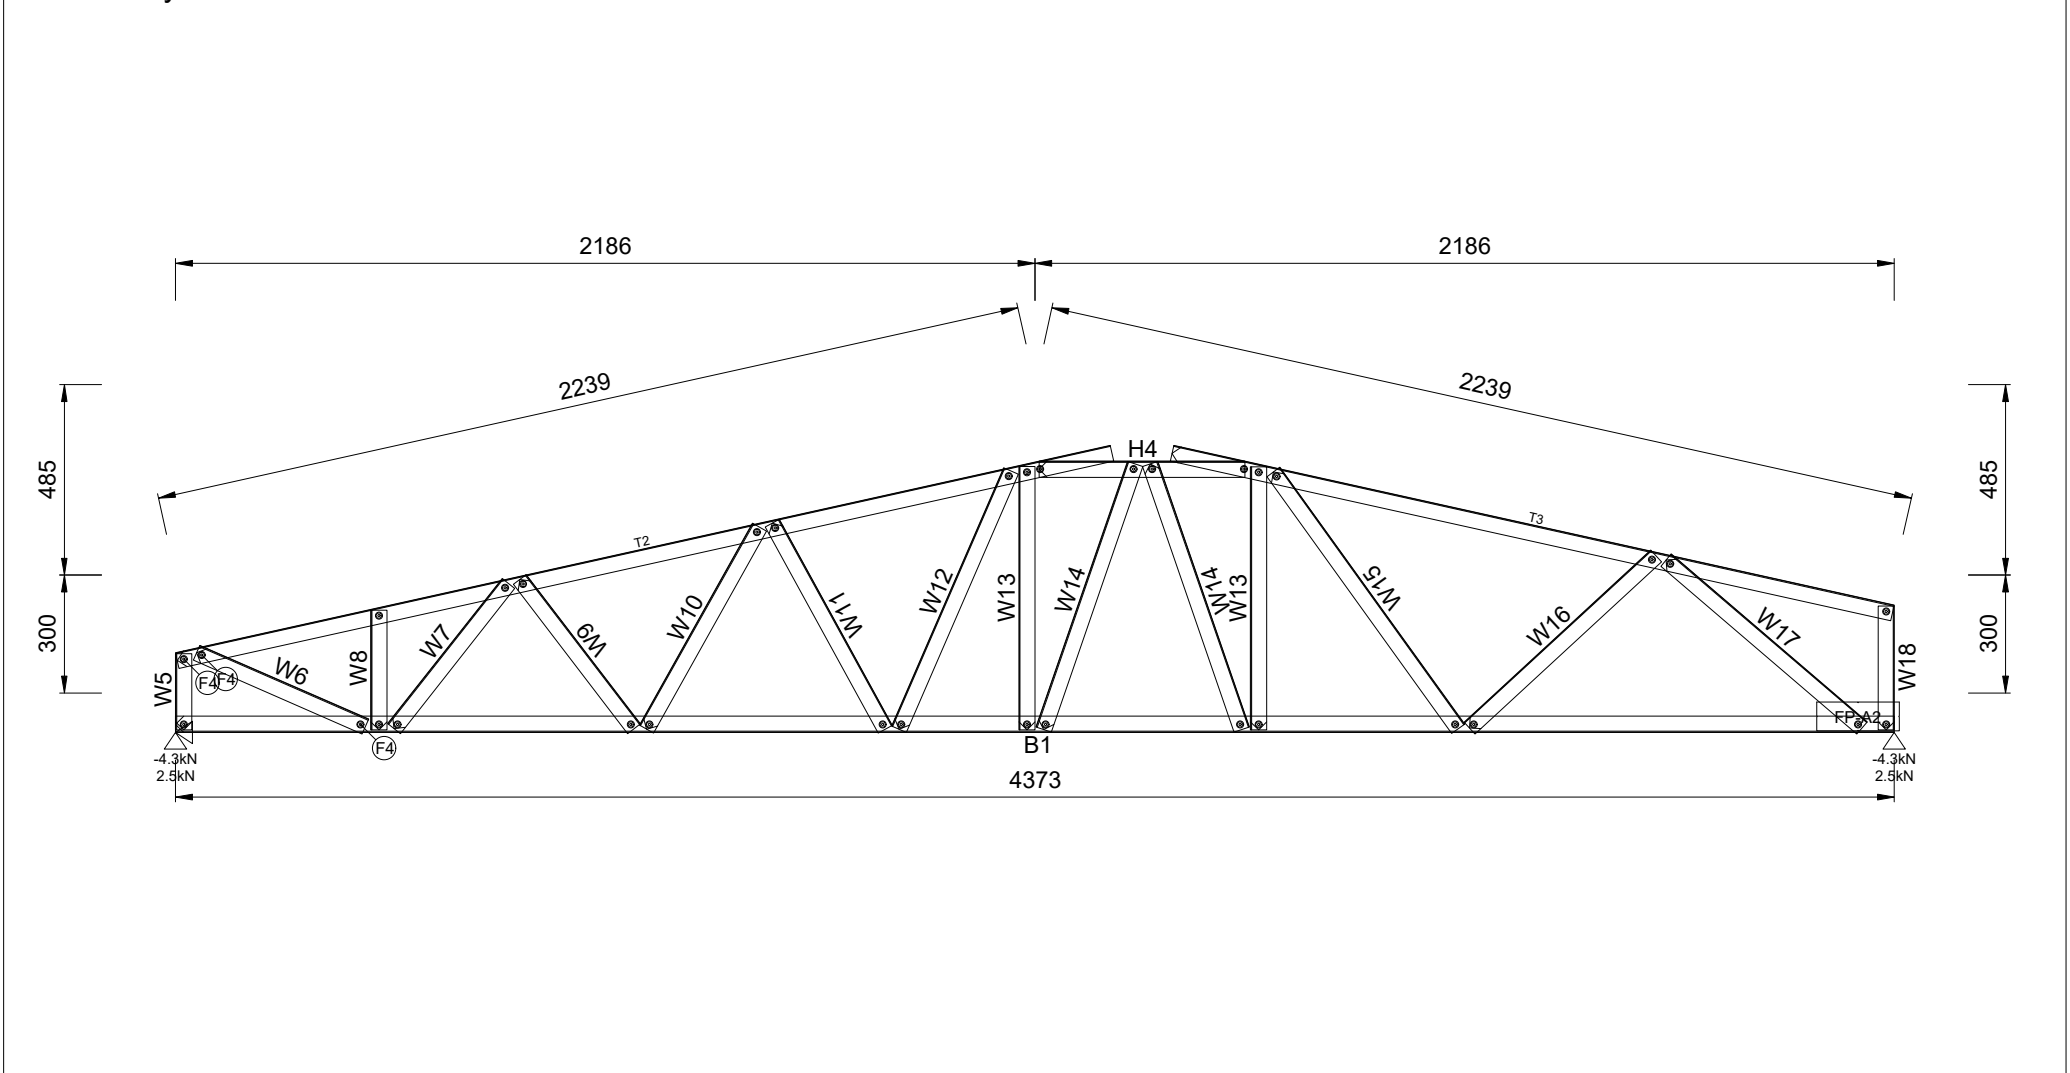


Quantity Required = 1 Mark as N104 Engineering Status = 70%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	734h x 4372w				

B1	75S41-095-550	1	2136	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	422
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

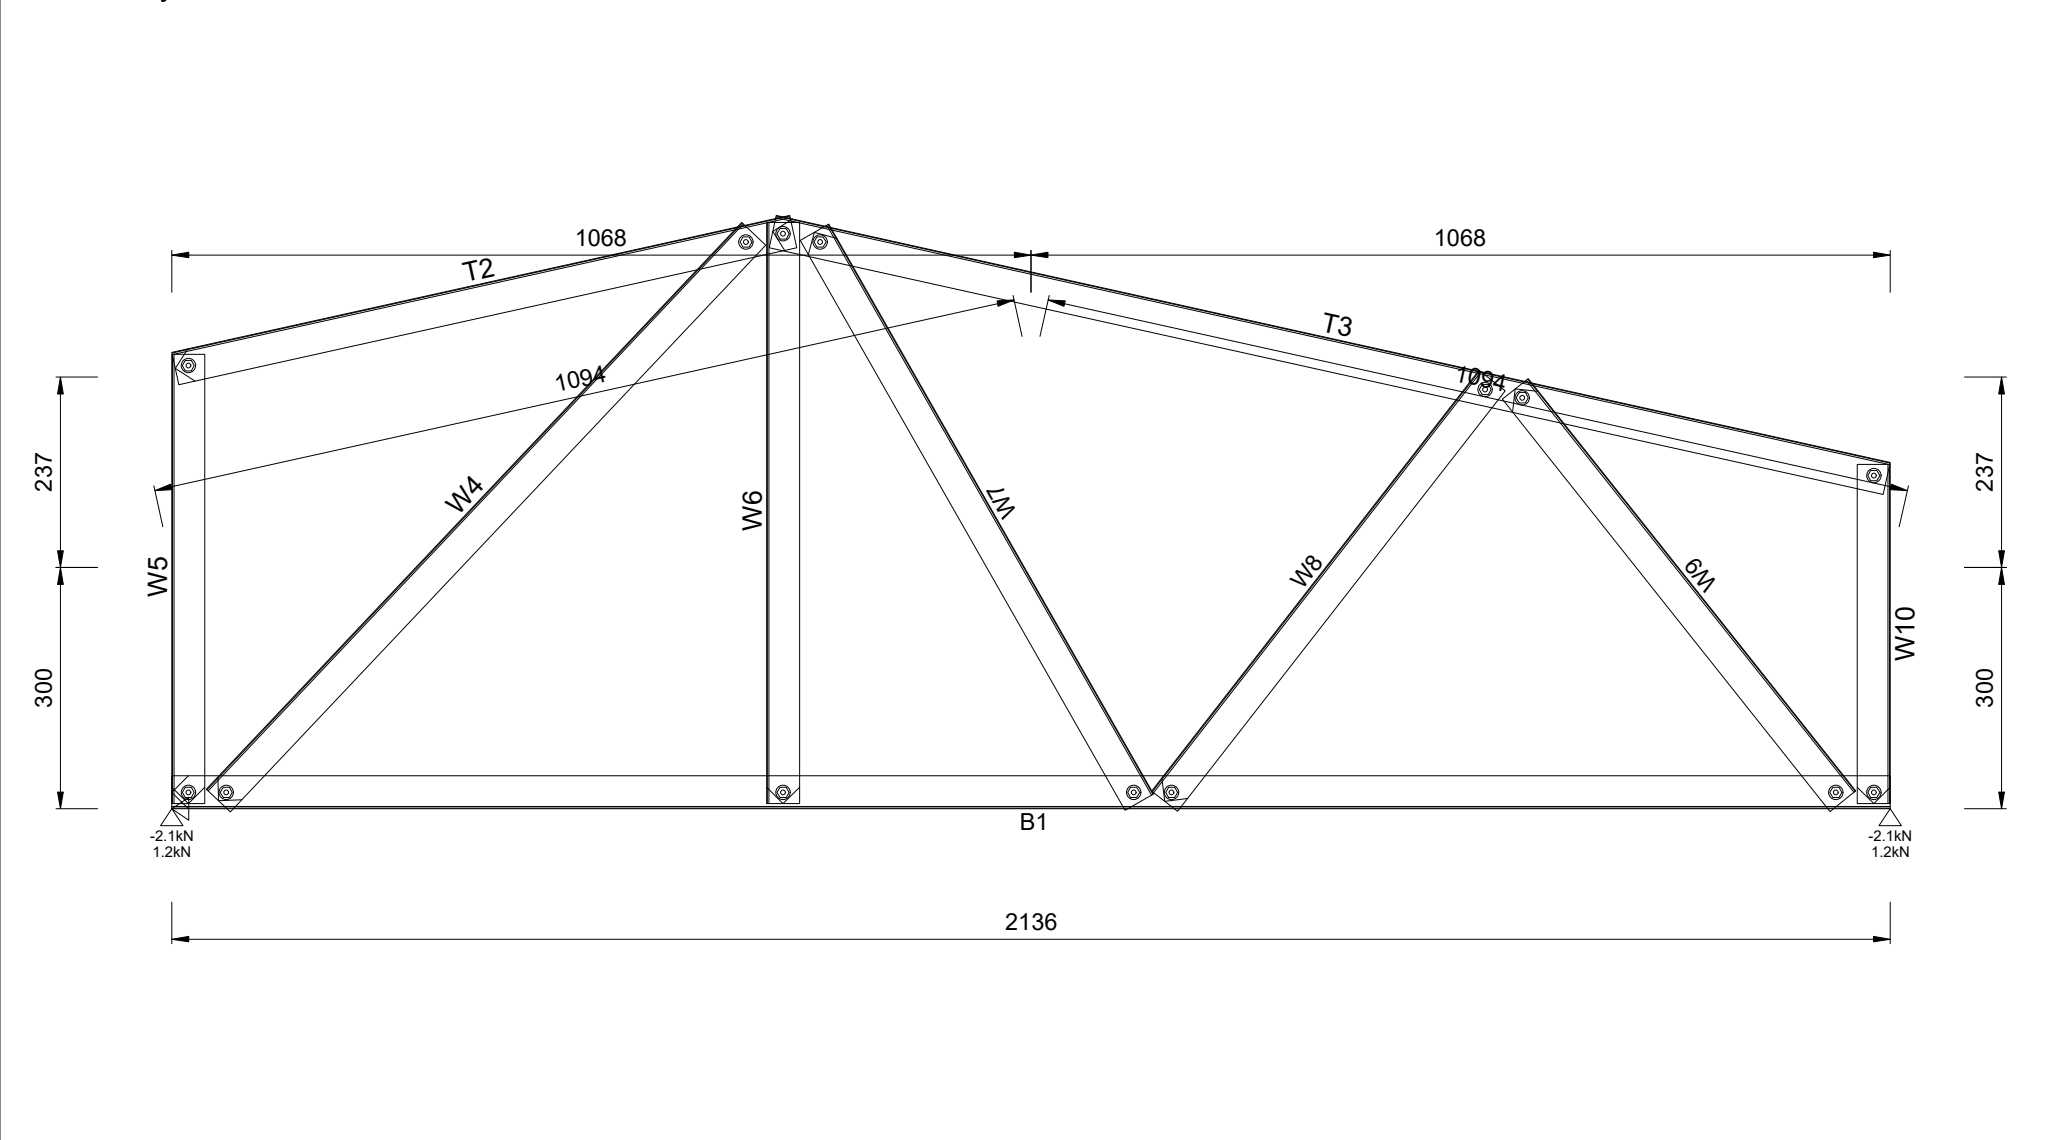


Quantity Required = 1 Mark as N105 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2136w				

B1	75S41-095-550	3	2922	T2	75S41-095-550	3	2220	T3	75S41-095-550	3	790	W4	75S41-095-550	3	510	W5	75S41-095-550	3	160
W6	75S41-095-550	3	464	W7	75S41-095-550	3	578	W8	75S41-095-550	3	586	W9	75S41-095-550	3	724	W10	75S41-095-550	3	635
W11	75S41-095-550	3	910	W12	75S41-095-550	3	470	FRAMECAD M6 Screw		108		Working Sheet: Trusses				Assembly Weight		14.1kg	

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

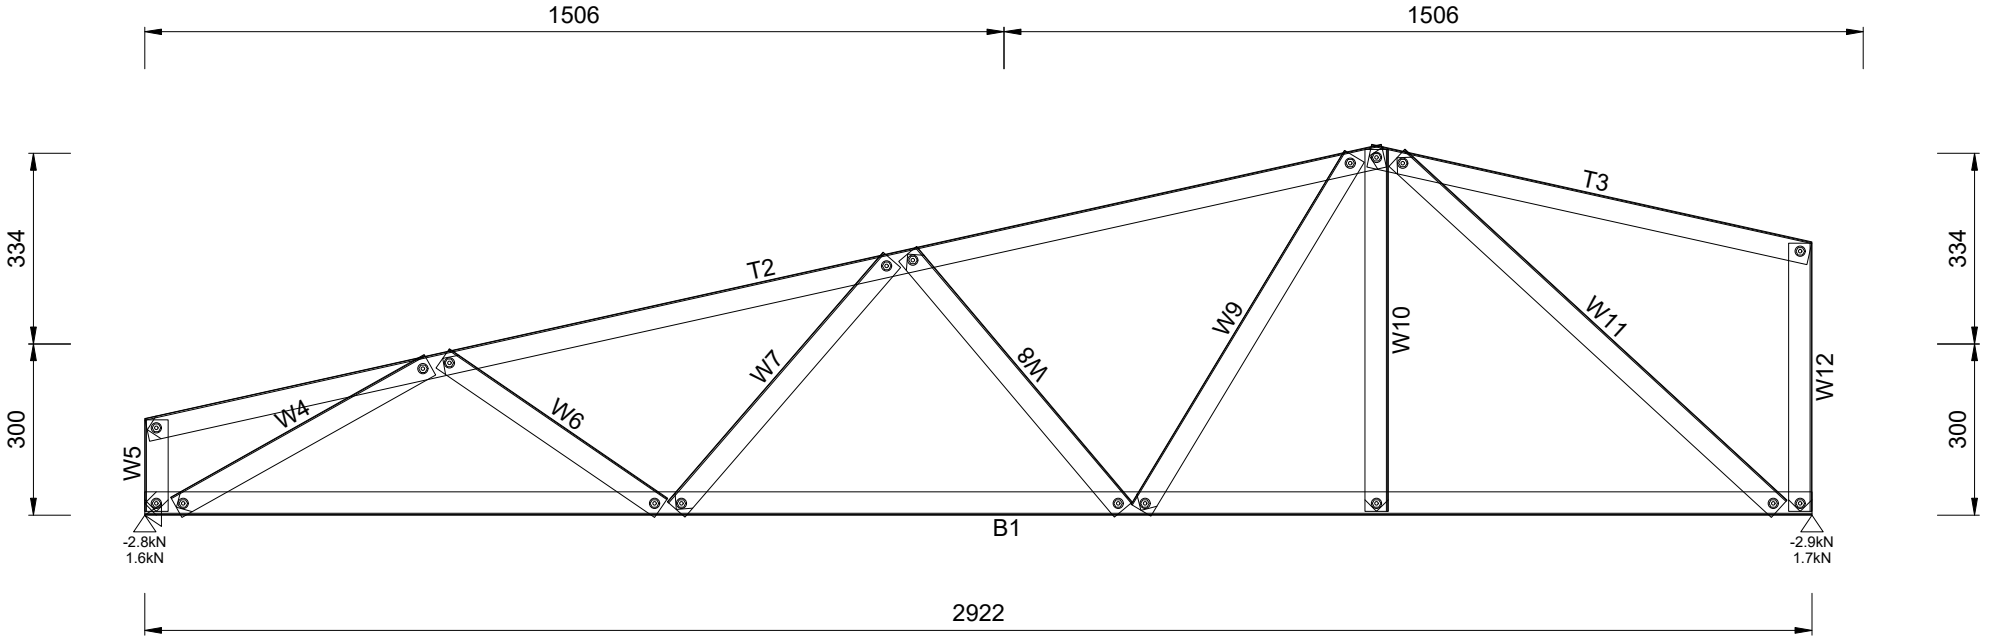


Quantity Required = 3 Mark as N106 Engineering Status = 50%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	654h x 2922w				

B1	75S41-095-550	1	2954	T2	75S41-095-550	1	787	T3	75S41-095-550	1	2255	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	459
W11	75S41-095-550	1	409	W12	75S41-095-550	1	329	W13	75S41-095-550	1	240	FRAMECAD M6 Screw		40	Working Sheet: Trusses				
Assembly Weight		15.2kg																	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

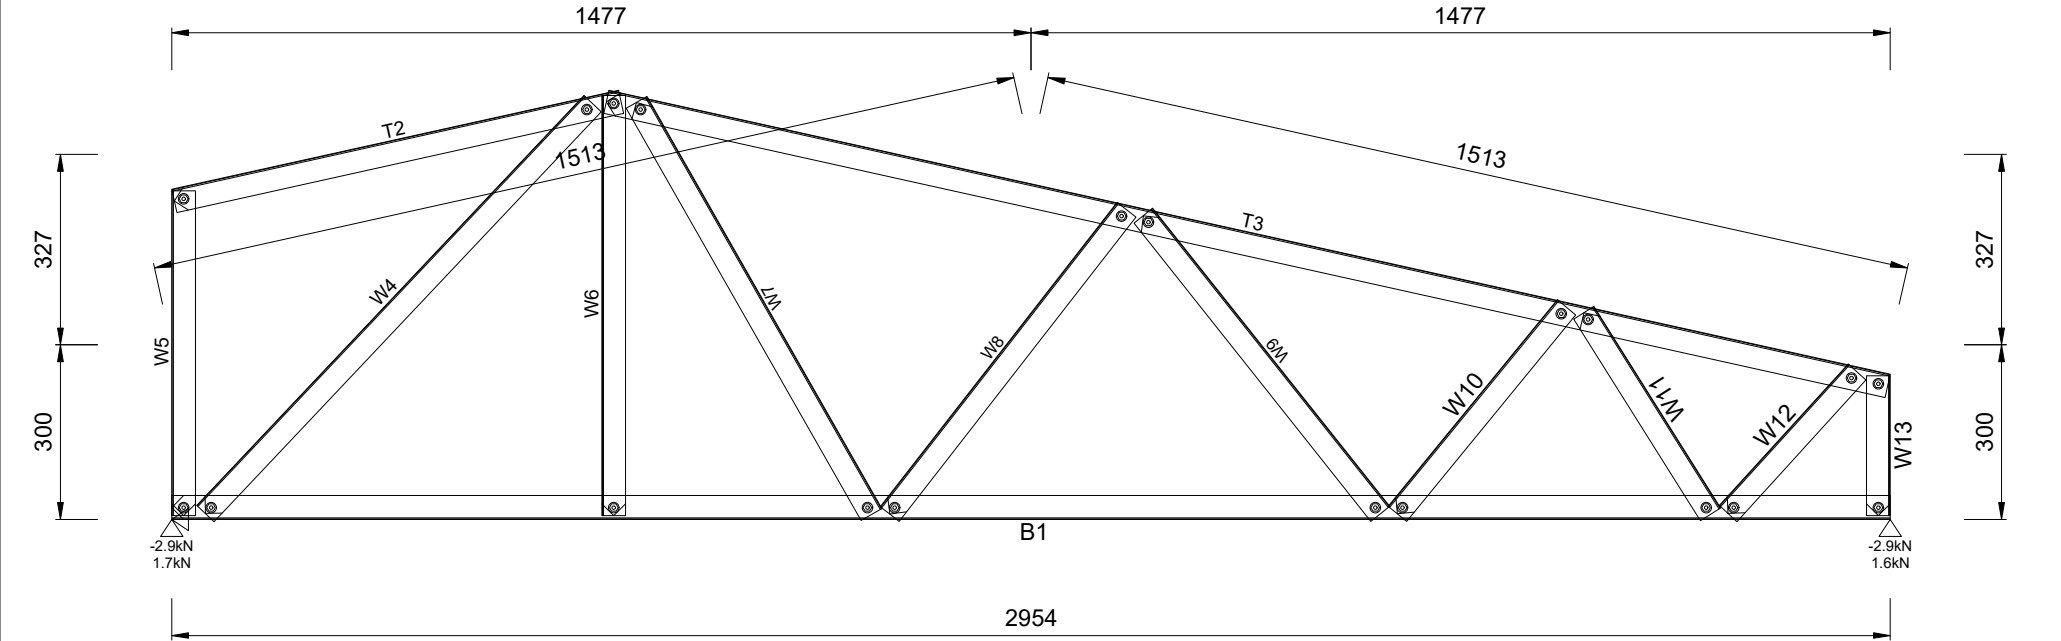


Quantity Required = 1 Mark as N107 Engineering Status = 53%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2954w				

B1	75S41-095-550	1	2922	T2	75S41-095-550	1	2179	T3	75S41-095-550	1	808	T4	75S41-095-550	1	790
H5	75S41-095-550	1	504	W6	75S41-095-550	3	463	W7	75S41-095-550	1	764	W8	75S41-095-550	1	725
W9	75S41-095-550	1	668	W10	75S41-095-550	1	675	W11	75S41-095-550	1	558	W12	75S41-095-550	1	635
W13	75S41-095-550	1	910	W14	75S41-095-550	1	577	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 10g-16mm Flathead		24	
FRAMECAD M6 Screw		58		Working Sheet: Trusses				Assembly Weight		18.2kg					

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

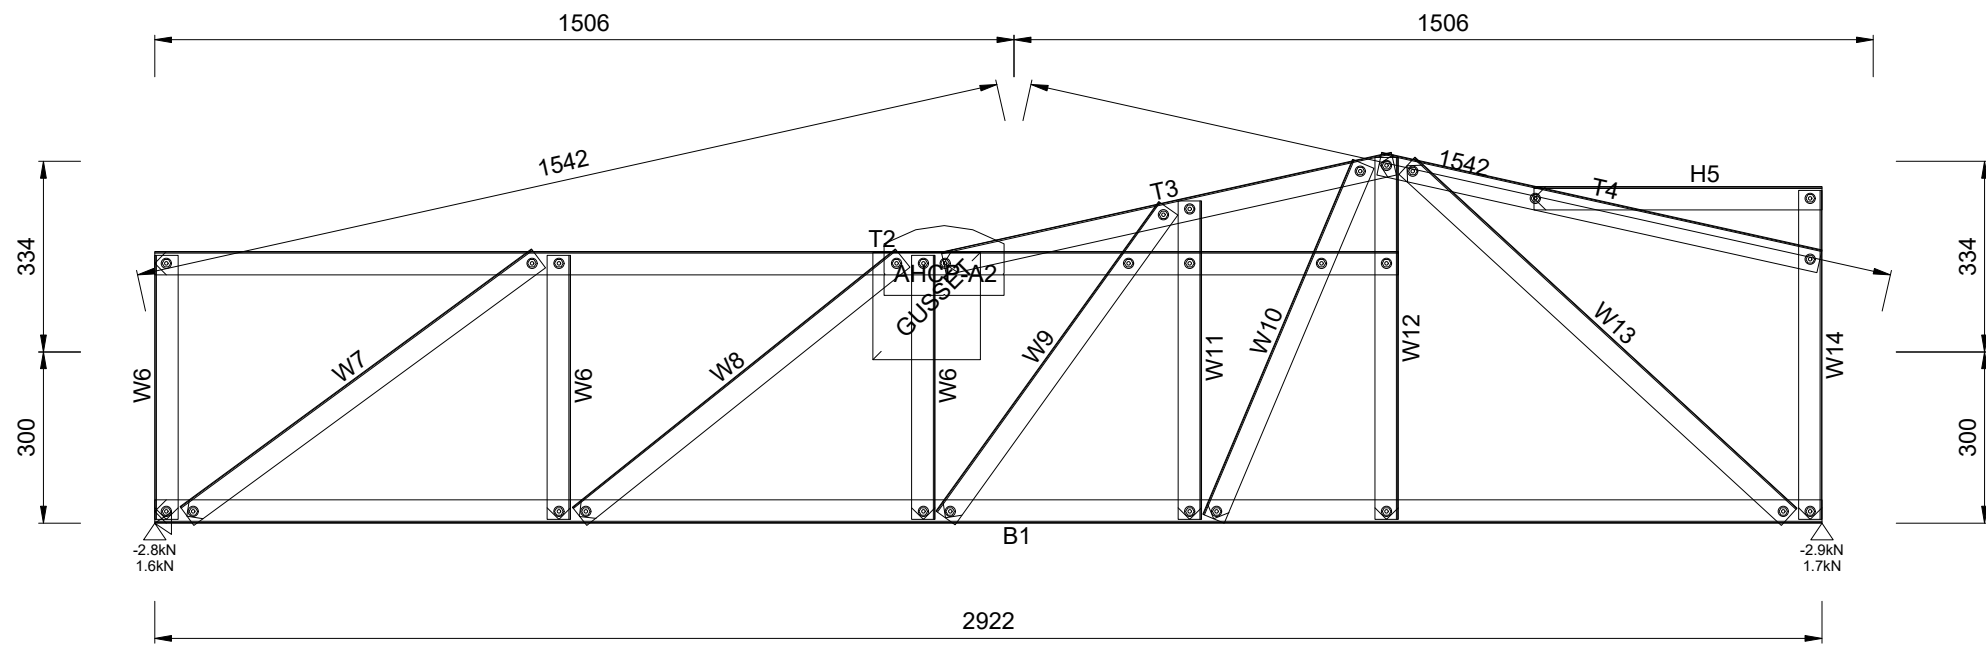


Quantity Required = 1 Mark as N108 Engineering Status = 44%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	654h x 2922w				

B1	75S41-095-550	2	3101	T2	75S41-095-550	2	2255	T3	75S41-095-550	2	938	W4	75S41-095-550	2	240	W5	75S41-095-550	2	329
W6	75S41-095-550	2	409	W7	75S41-095-550	2	459	W8	75S41-095-550	2	655	W9	75S41-095-550	2	663	W10	75S41-095-550	2	815
W11	75S41-095-550	2	722	W12	75S41-095-550	2	1076	W13	75S41-095-550	2	526	FRAMECAD M6 Screw		80	Working Sheet: Trusses				
Assembly Weight			15.7kg																

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

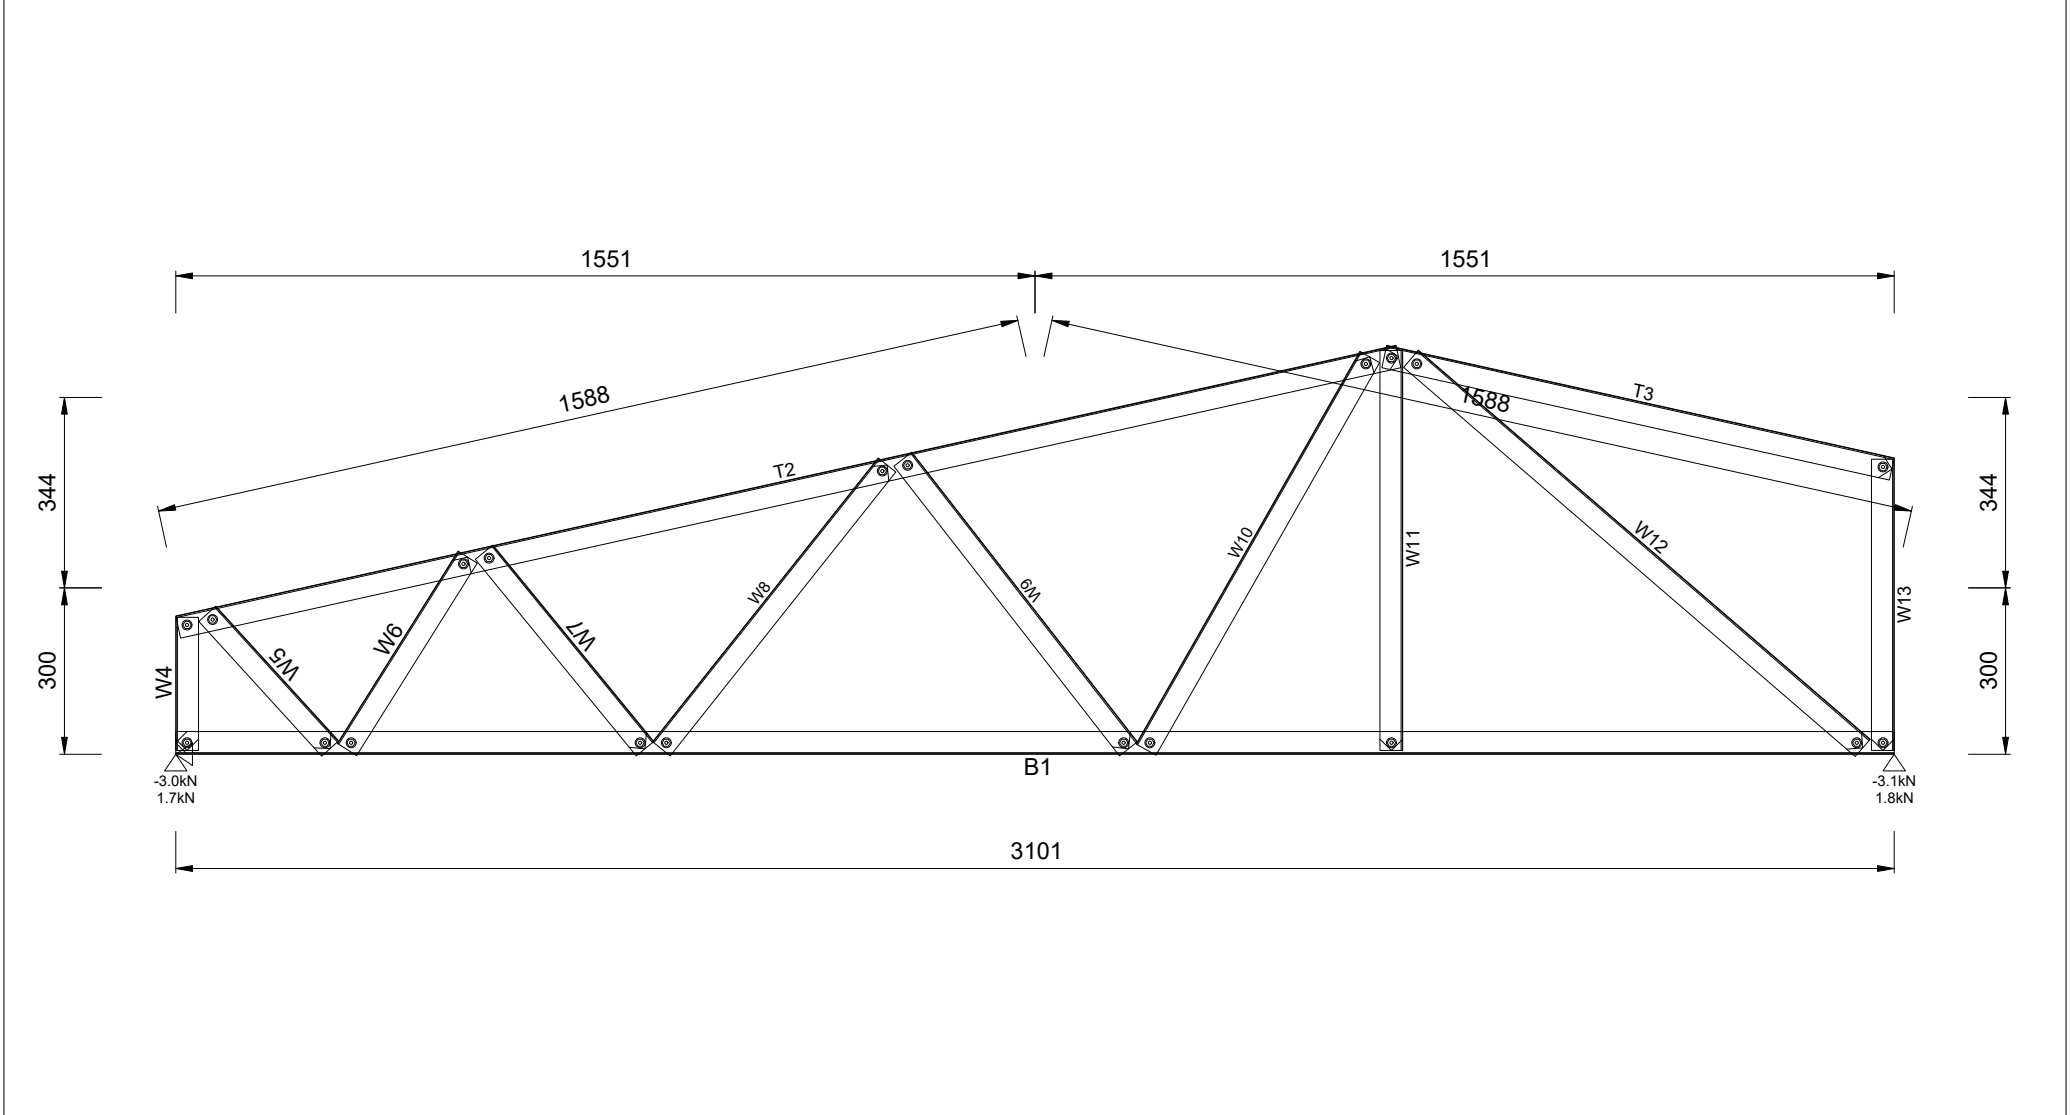


Quantity Required = 2 Mark as N109 Engineering Status = 54%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 3101w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	1094	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	492	W5	75S41-095-550	1	698
W6	75S41-095-550	1	834	W7	75S41-095-550	1	722	W8	75S41-095-550	1	815	W9	75S41-095-550	1	663	W10	75S41-095-550	1	655
W11	75S41-095-550	1	422	FRAMECAD M6 Screw			32	Working Sheet: Trusses				Assembly Weight			13.2kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

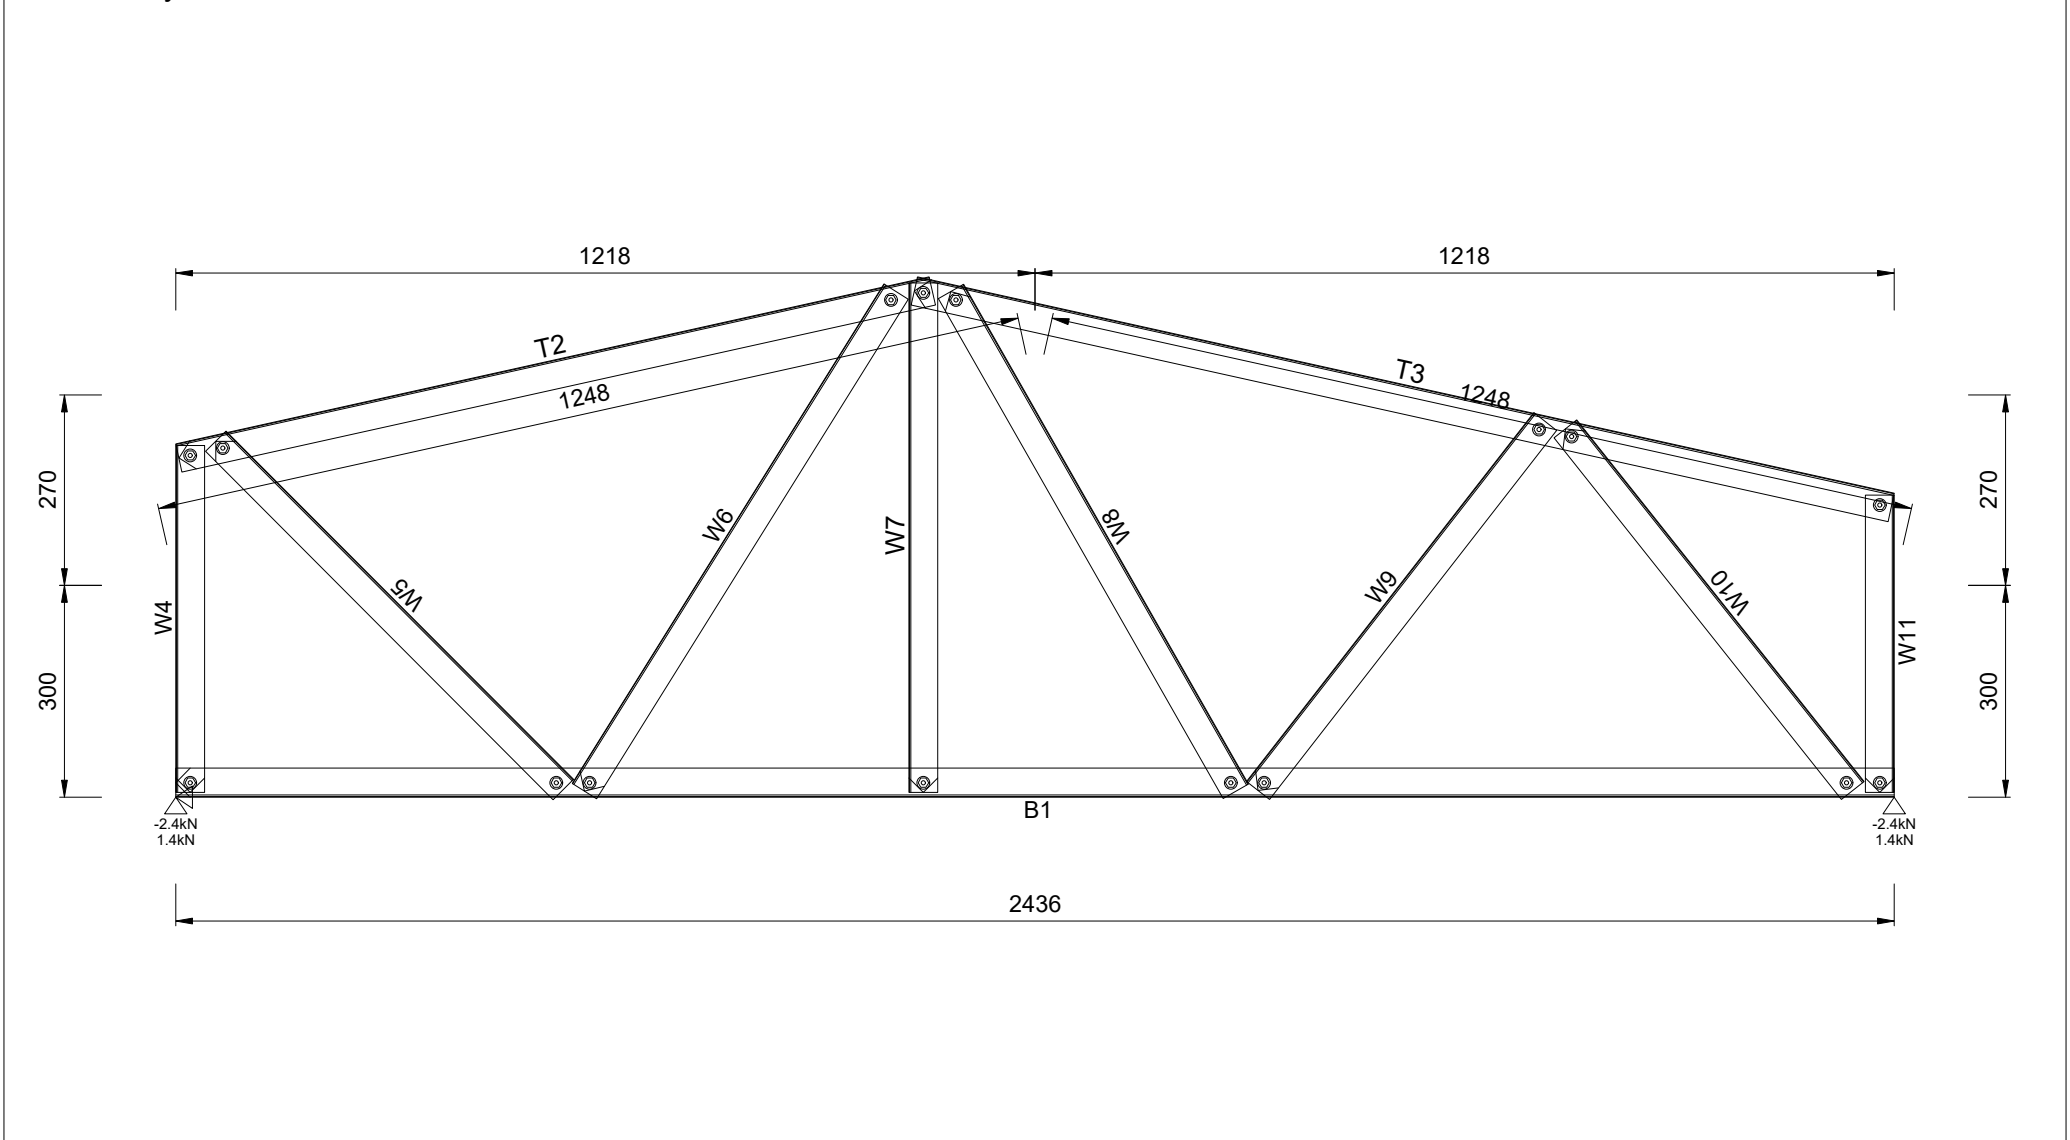


Quantity Required = 1 Mark as N194 Engineering Status = 71%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2436w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	1094	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	492	W5	75S41-095-550	1	682
W6	75S41-095-550	1	847	W7	75S41-095-550	1	722	W8	75S41-095-550	1	815	W9	75S41-095-550	1	663	W10	75S41-095-550	1	655
W11	75S41-095-550	1	422	FRAMECAD M6 Screw			32	Working Sheet: Trusses				Assembly Weight			13.2kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

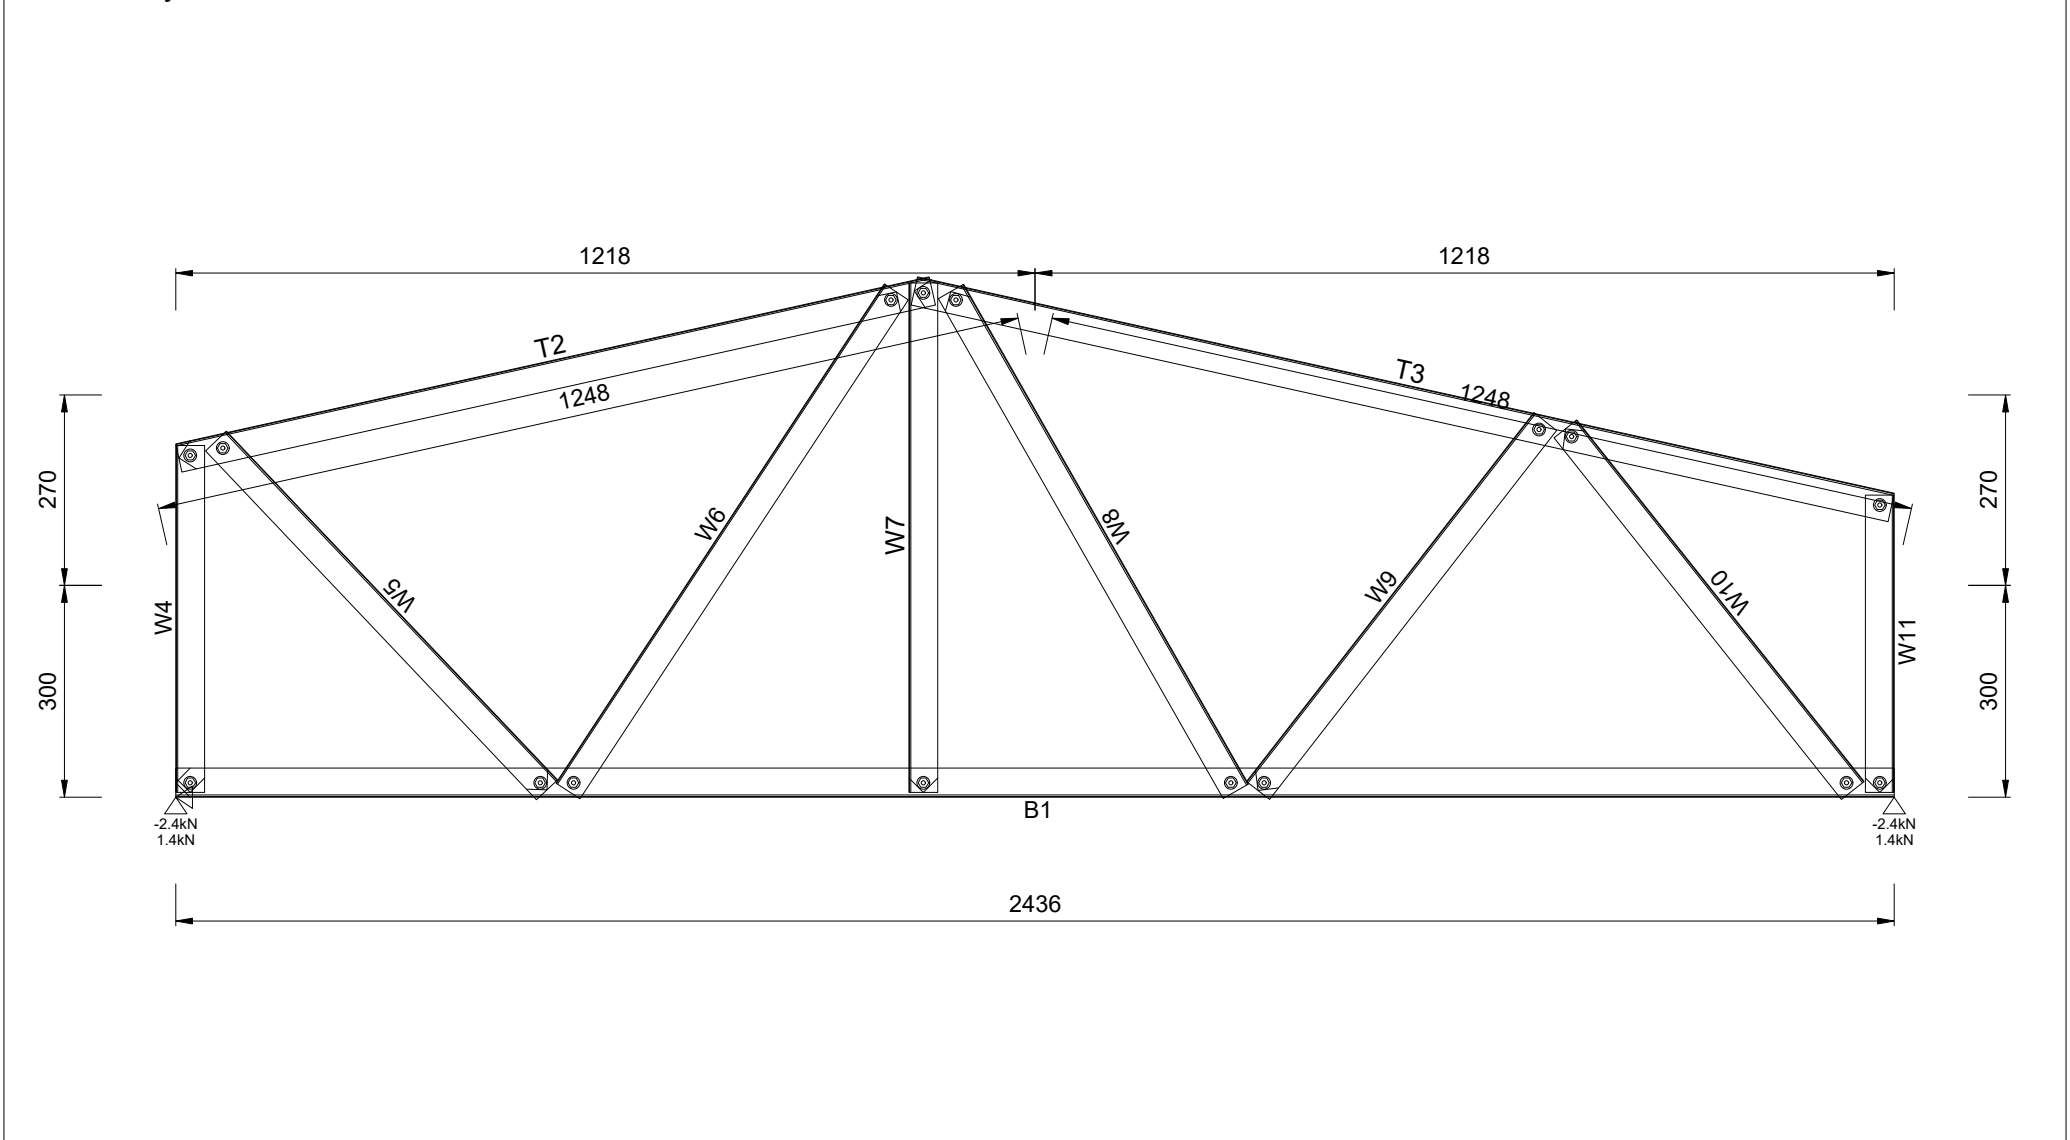


Quantity Required = 1 Mark as N195 Engineering Status = 71%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2436w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1725	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	888	W8	75S41-095-550	1	683	W9	75S41-095-550	1	676	W10	75S41-095-550	1	355
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				12.6kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

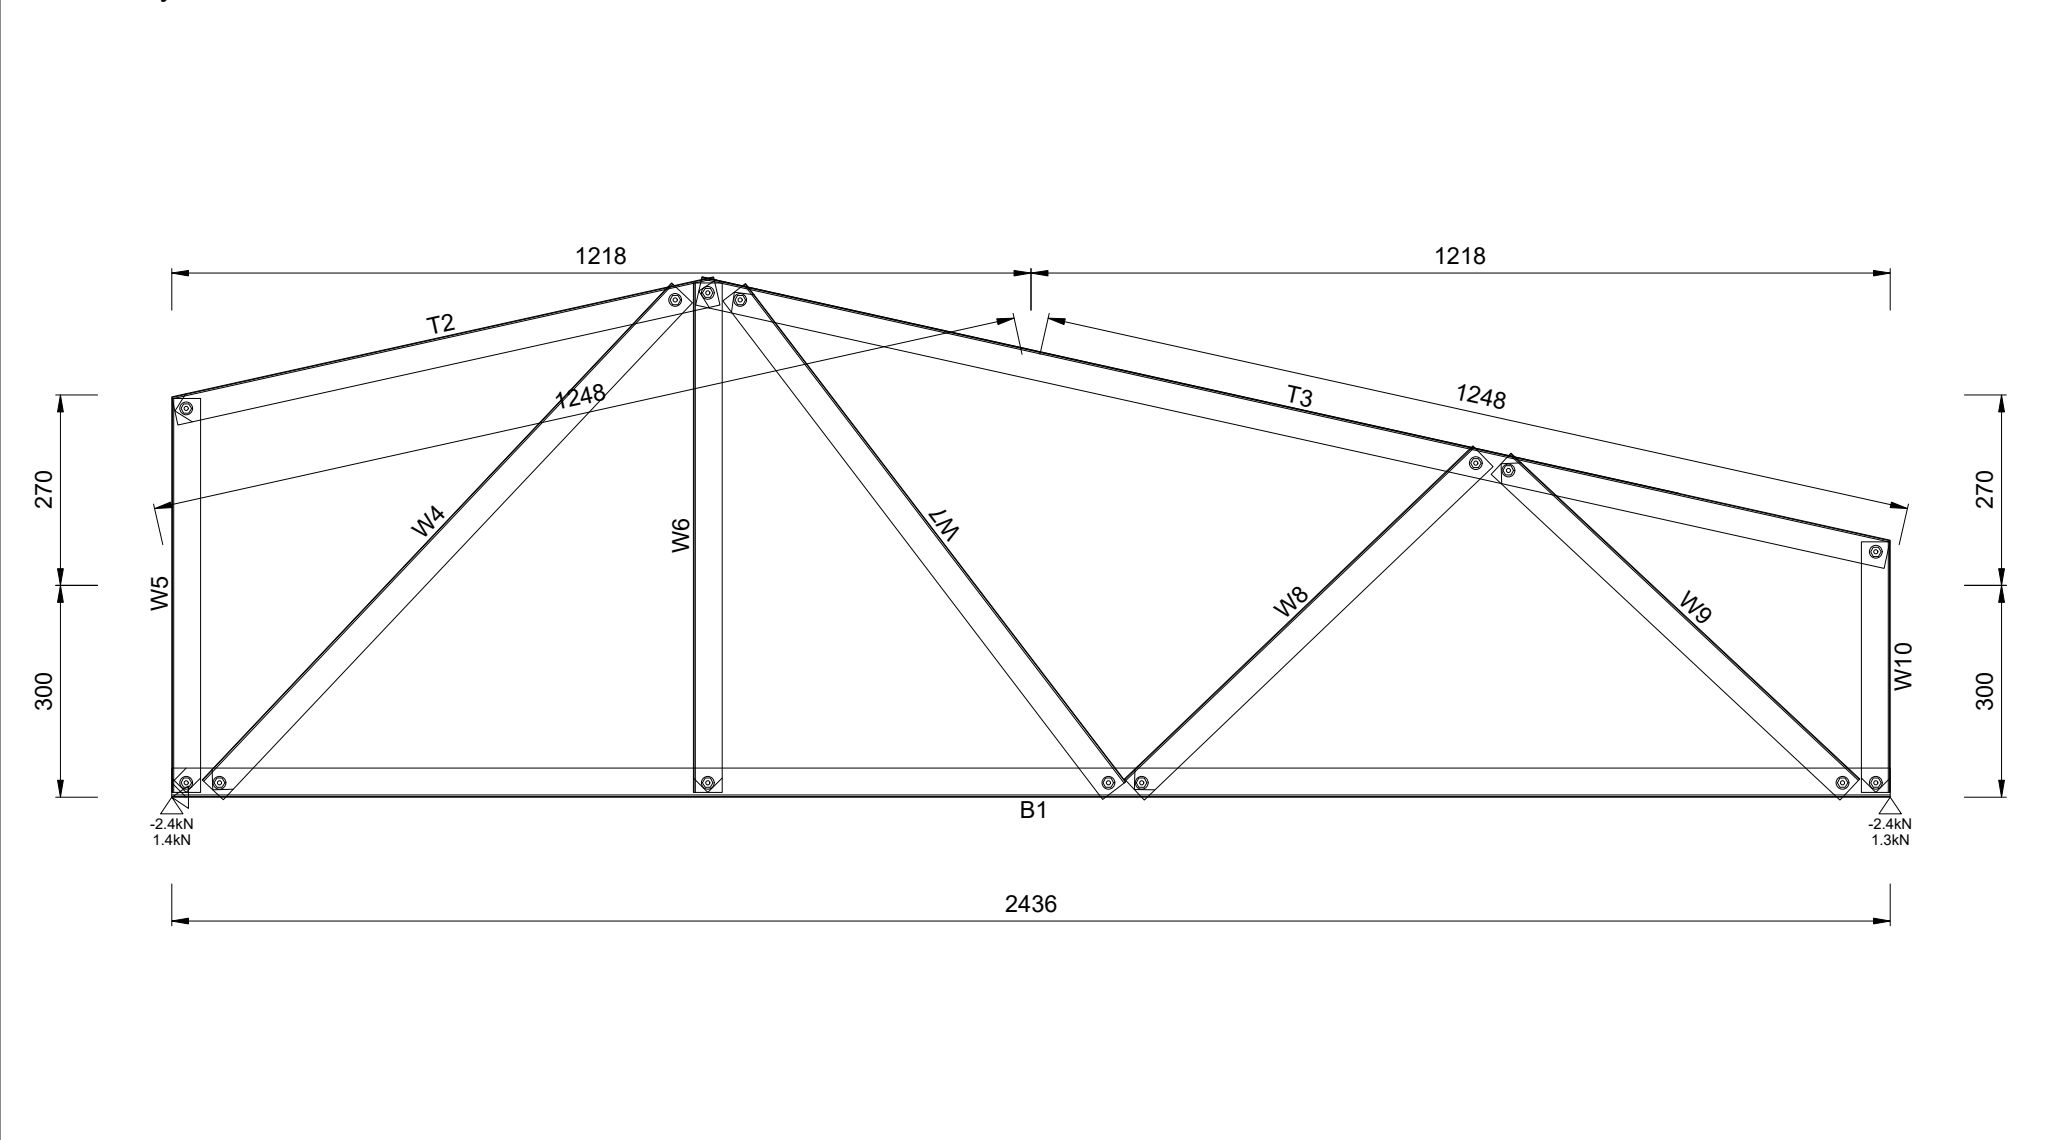


Quantity Required = 1 Mark as N196 Engineering Status = 66%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 2436w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1725	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	918	W8	75S41-095-550	1	655	W9	75S41-095-550	1	669	W10	75S41-095-550	1	355
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				12.6kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

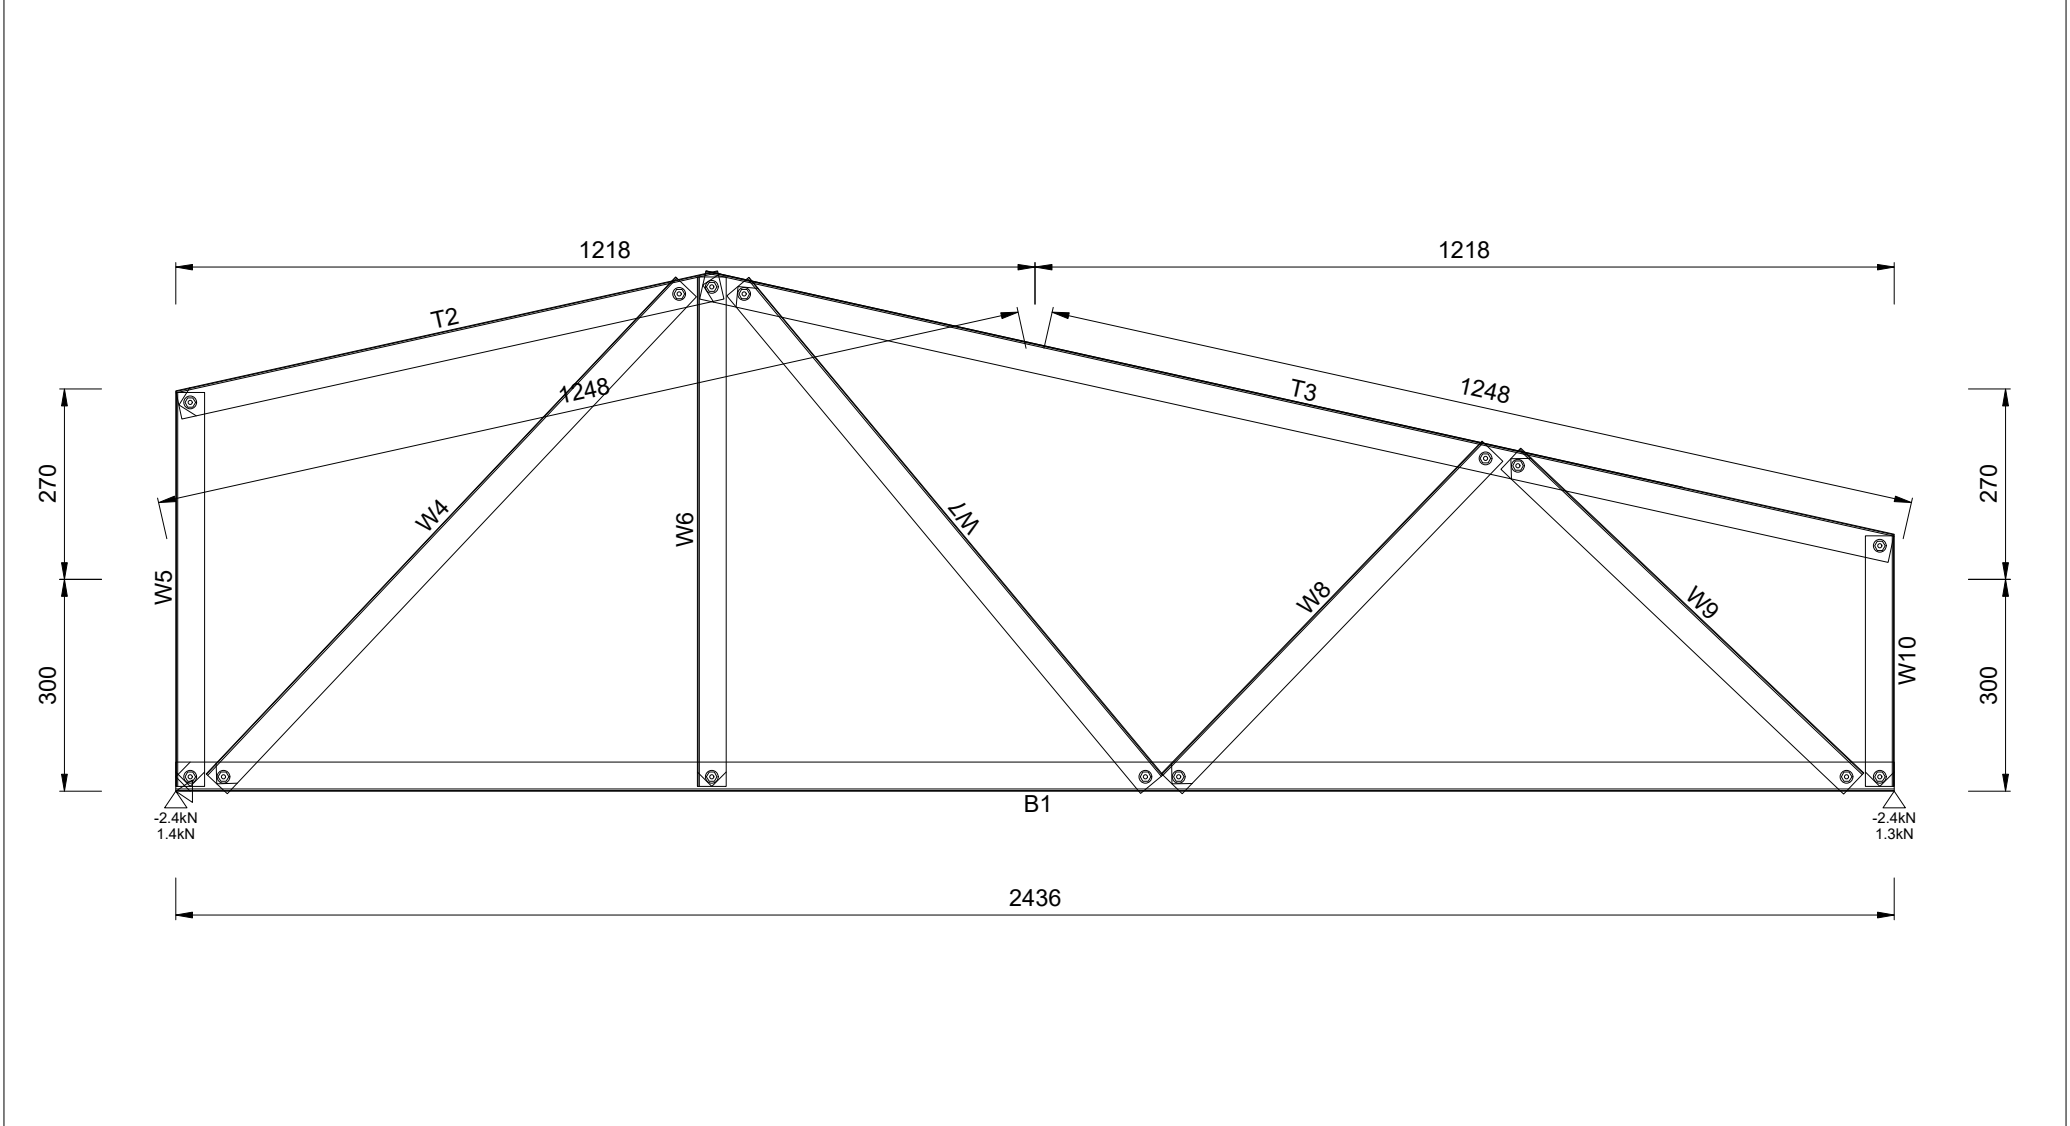


Quantity Required = 1 Mark as N197 Engineering Status = 66%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 2436w				

B1	75S41-095-550	1	2436	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1725	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	918	W8	75S41-095-550	1	655	W9	75S41-095-550	1	669	W10	75S41-095-550	1	355
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				12.6kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

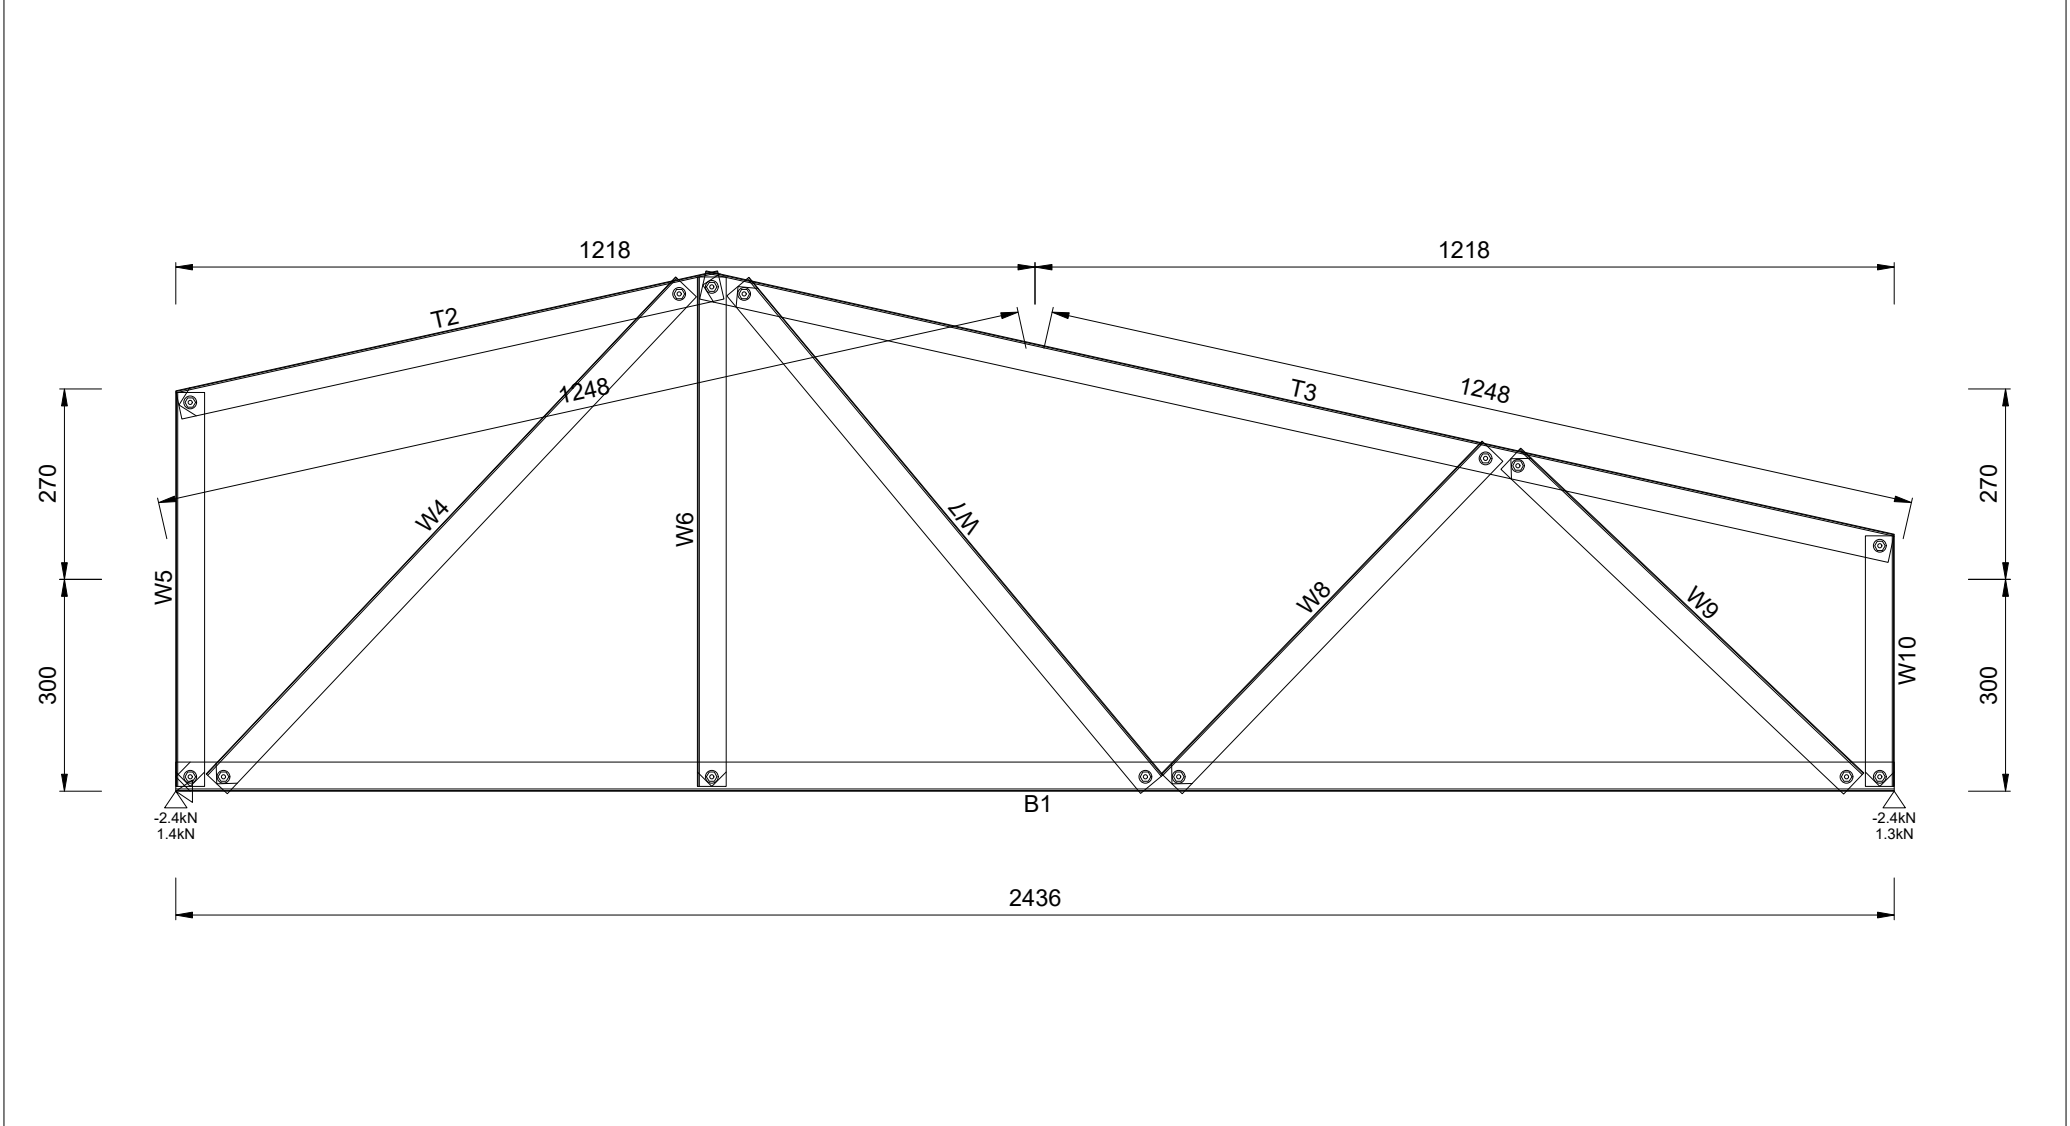


Quantity Required = 1 Mark as N198 Engineering Status = 66%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 2436w				

B1	75S41-095-550	1	2136	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	422
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

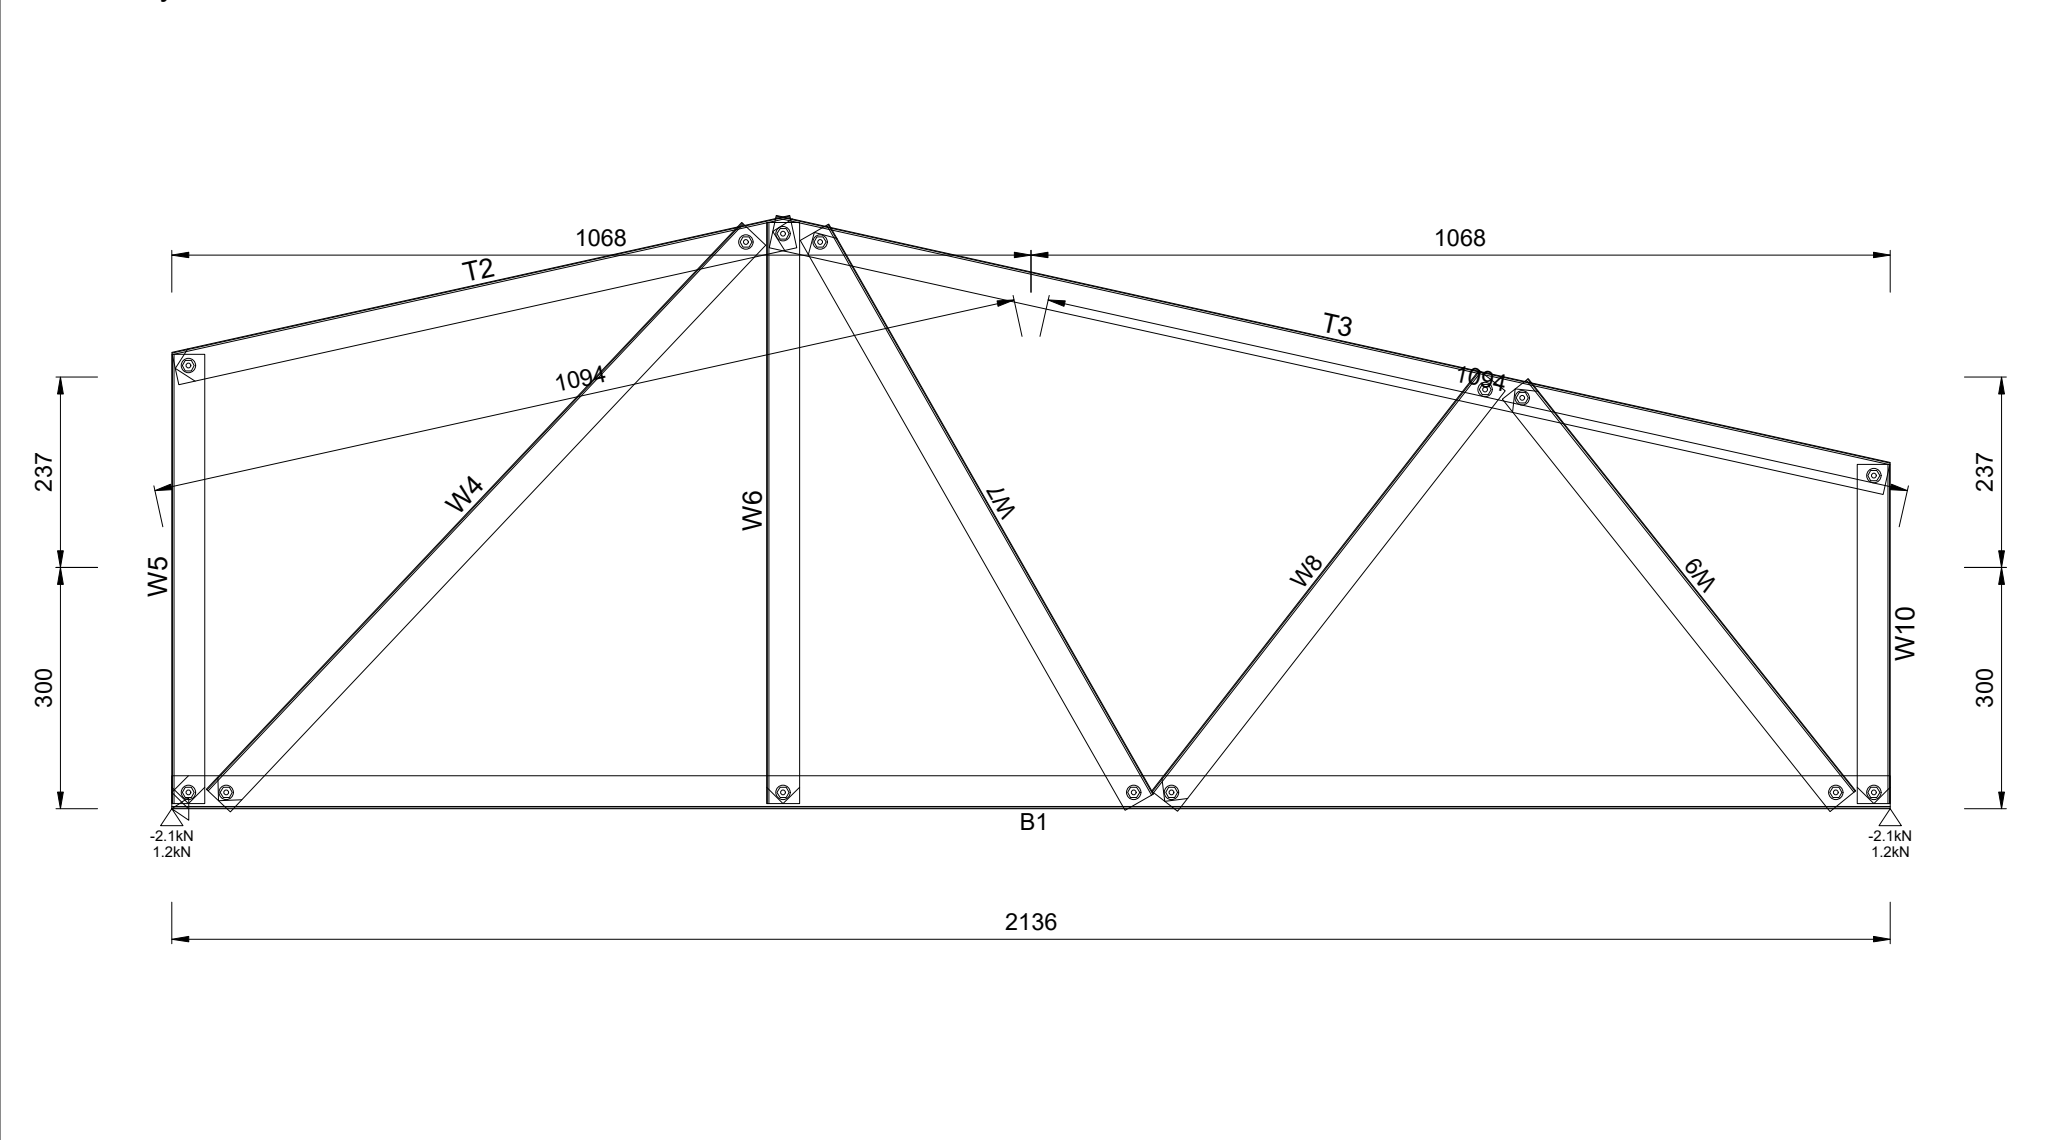


Quantity Required = 1 Mark as N199 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2136w				

B1	75S41-095-550	1	2136	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	422
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

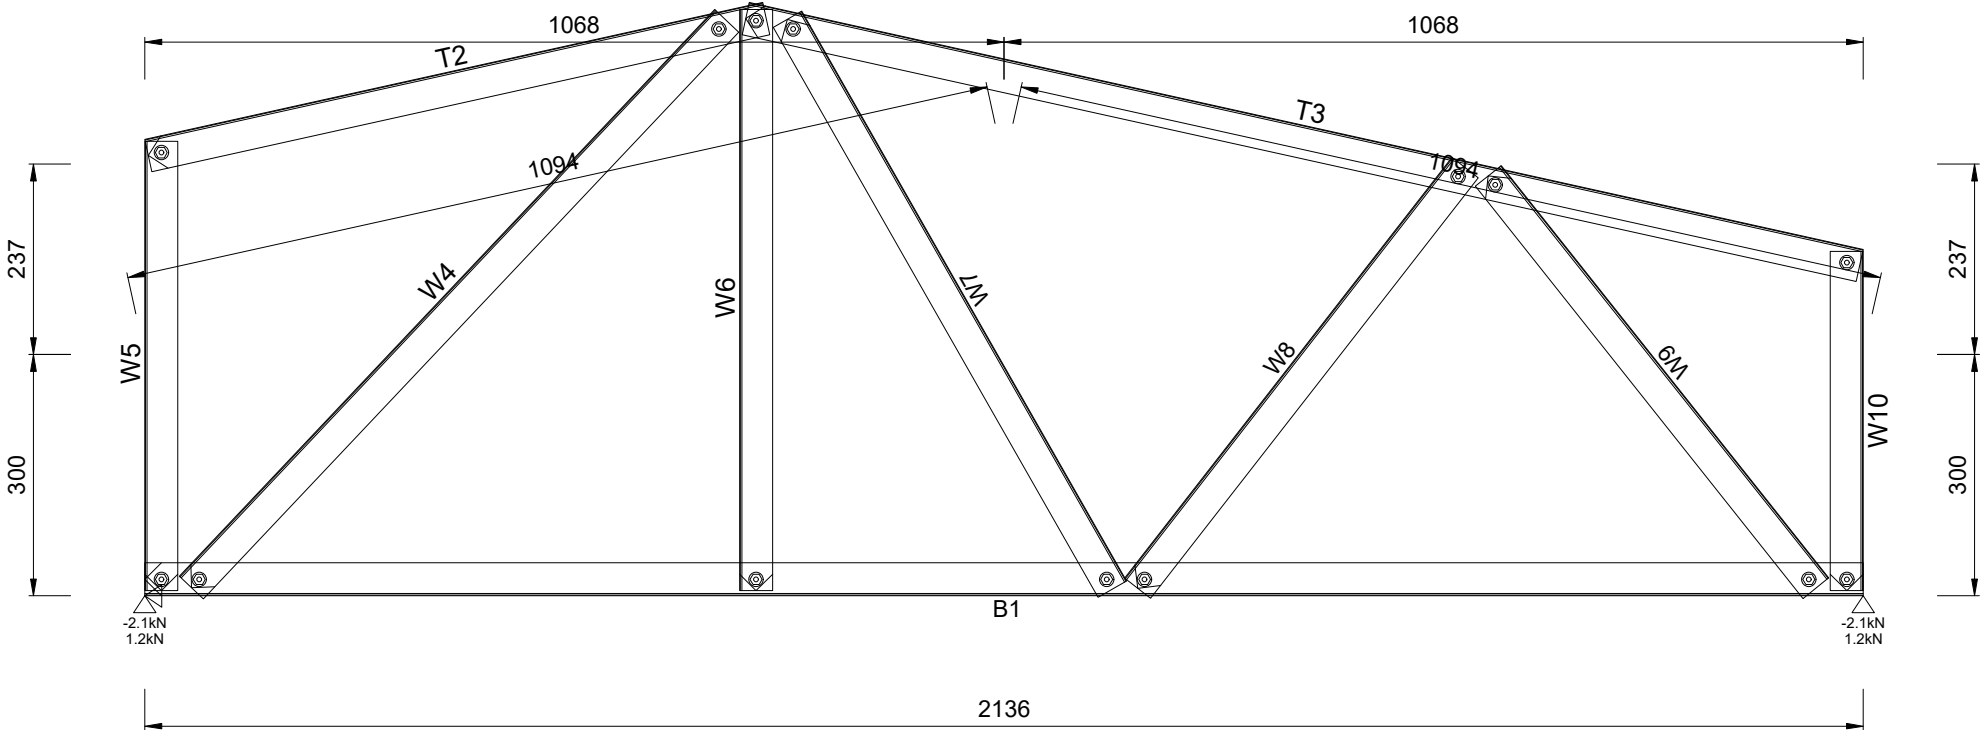


Quantity Required = 1 Mark as N200 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2136w				

B1	75S41-095-550	1	2136	T2	75S41-095-550	1	787	T3	75S41-095-550	1	1418	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	422
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

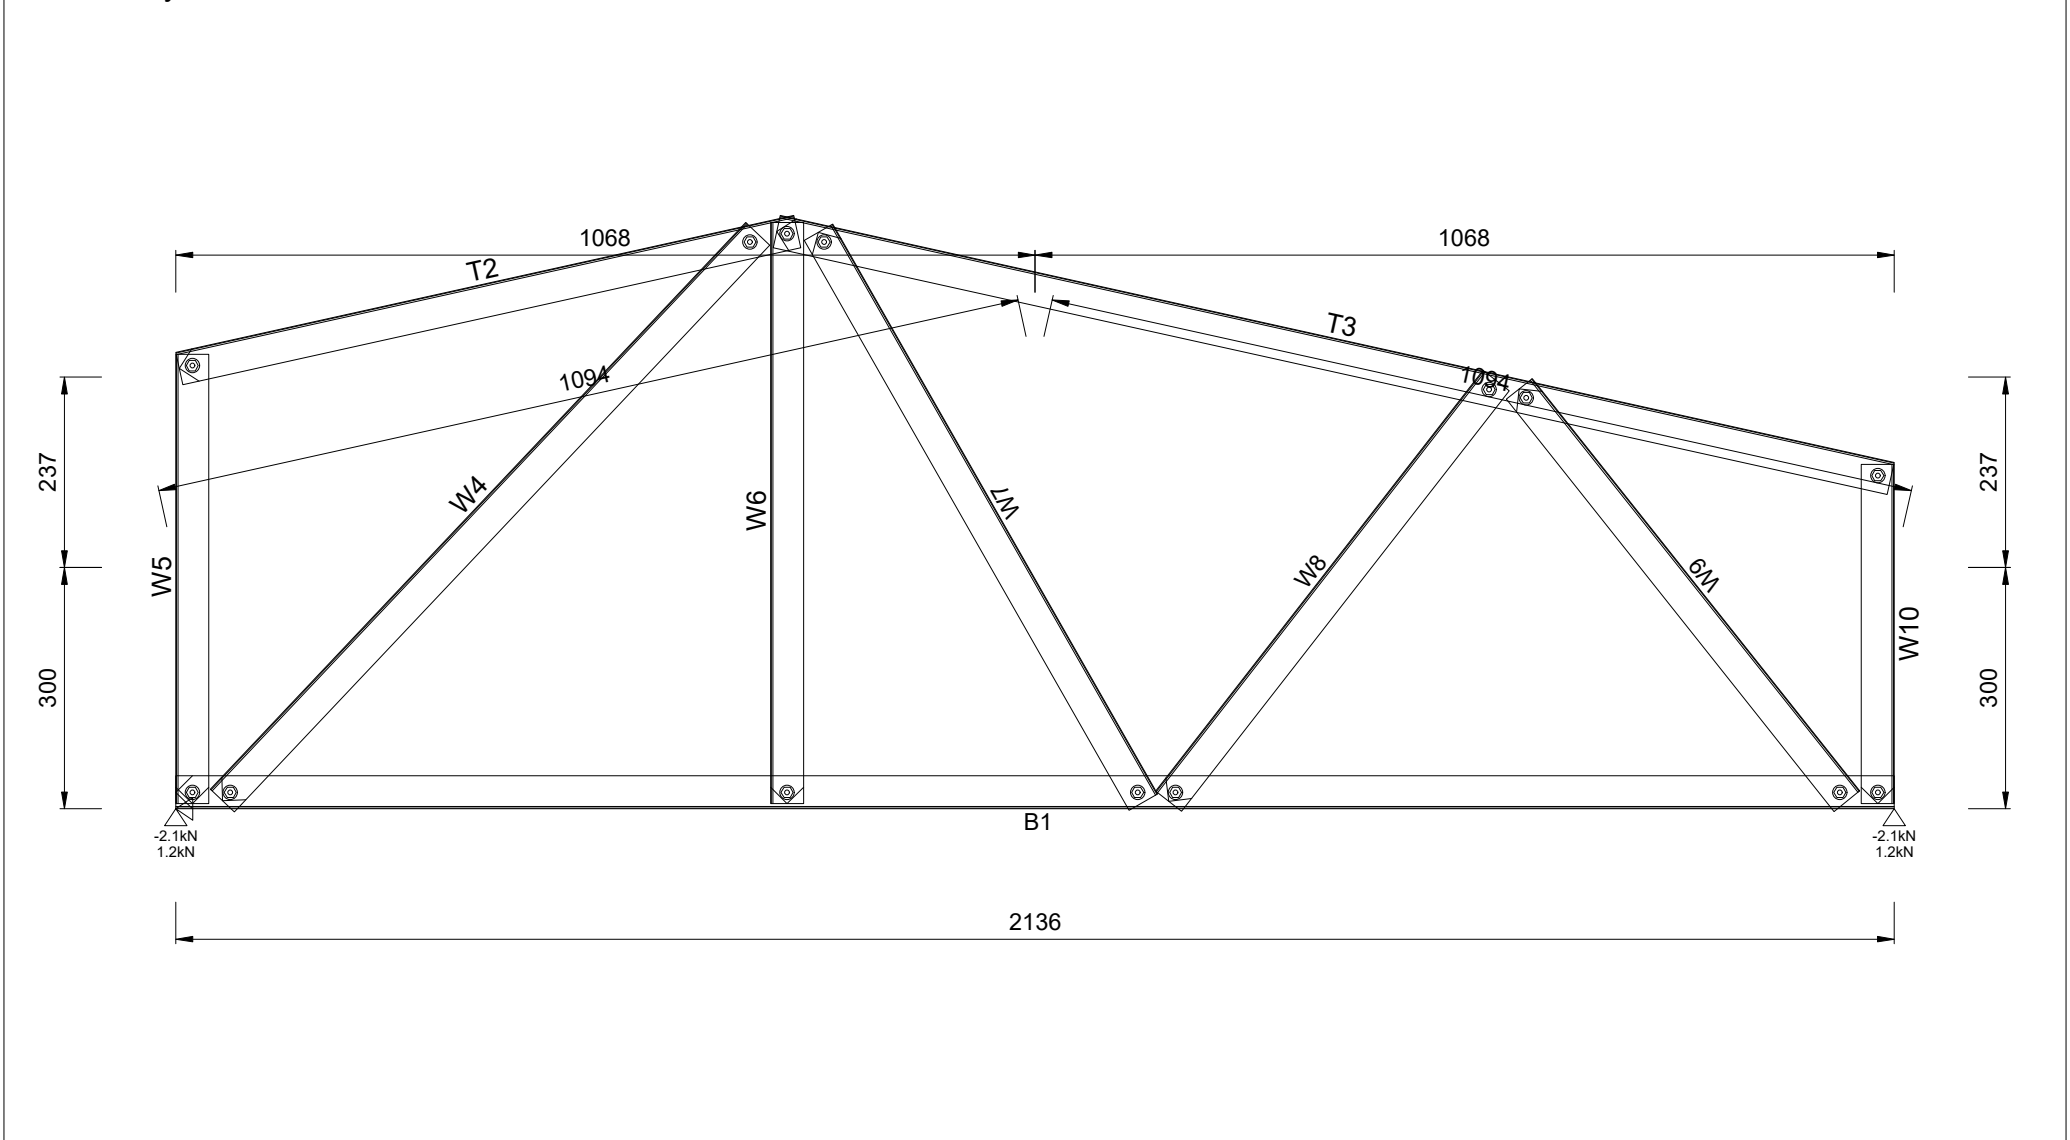

Quantity Required = 1 Mark as N201 Engineering Status = 52%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2136w				

Minimum number of fasteners required is 2 per joint



J/No. 26110

B1	75S41-095-550	1	2954	T2	75S41-095-550	1	787	T3	75S41-095-550	1	2255	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	459
W11	75S41-095-550	1	409	W12	75S41-095-550	1	329	W13	75S41-095-550	1	240	FRAMECAD M6 Screw		40	Working Sheet: Trusses				
Assembly Weight		15.2kg																	

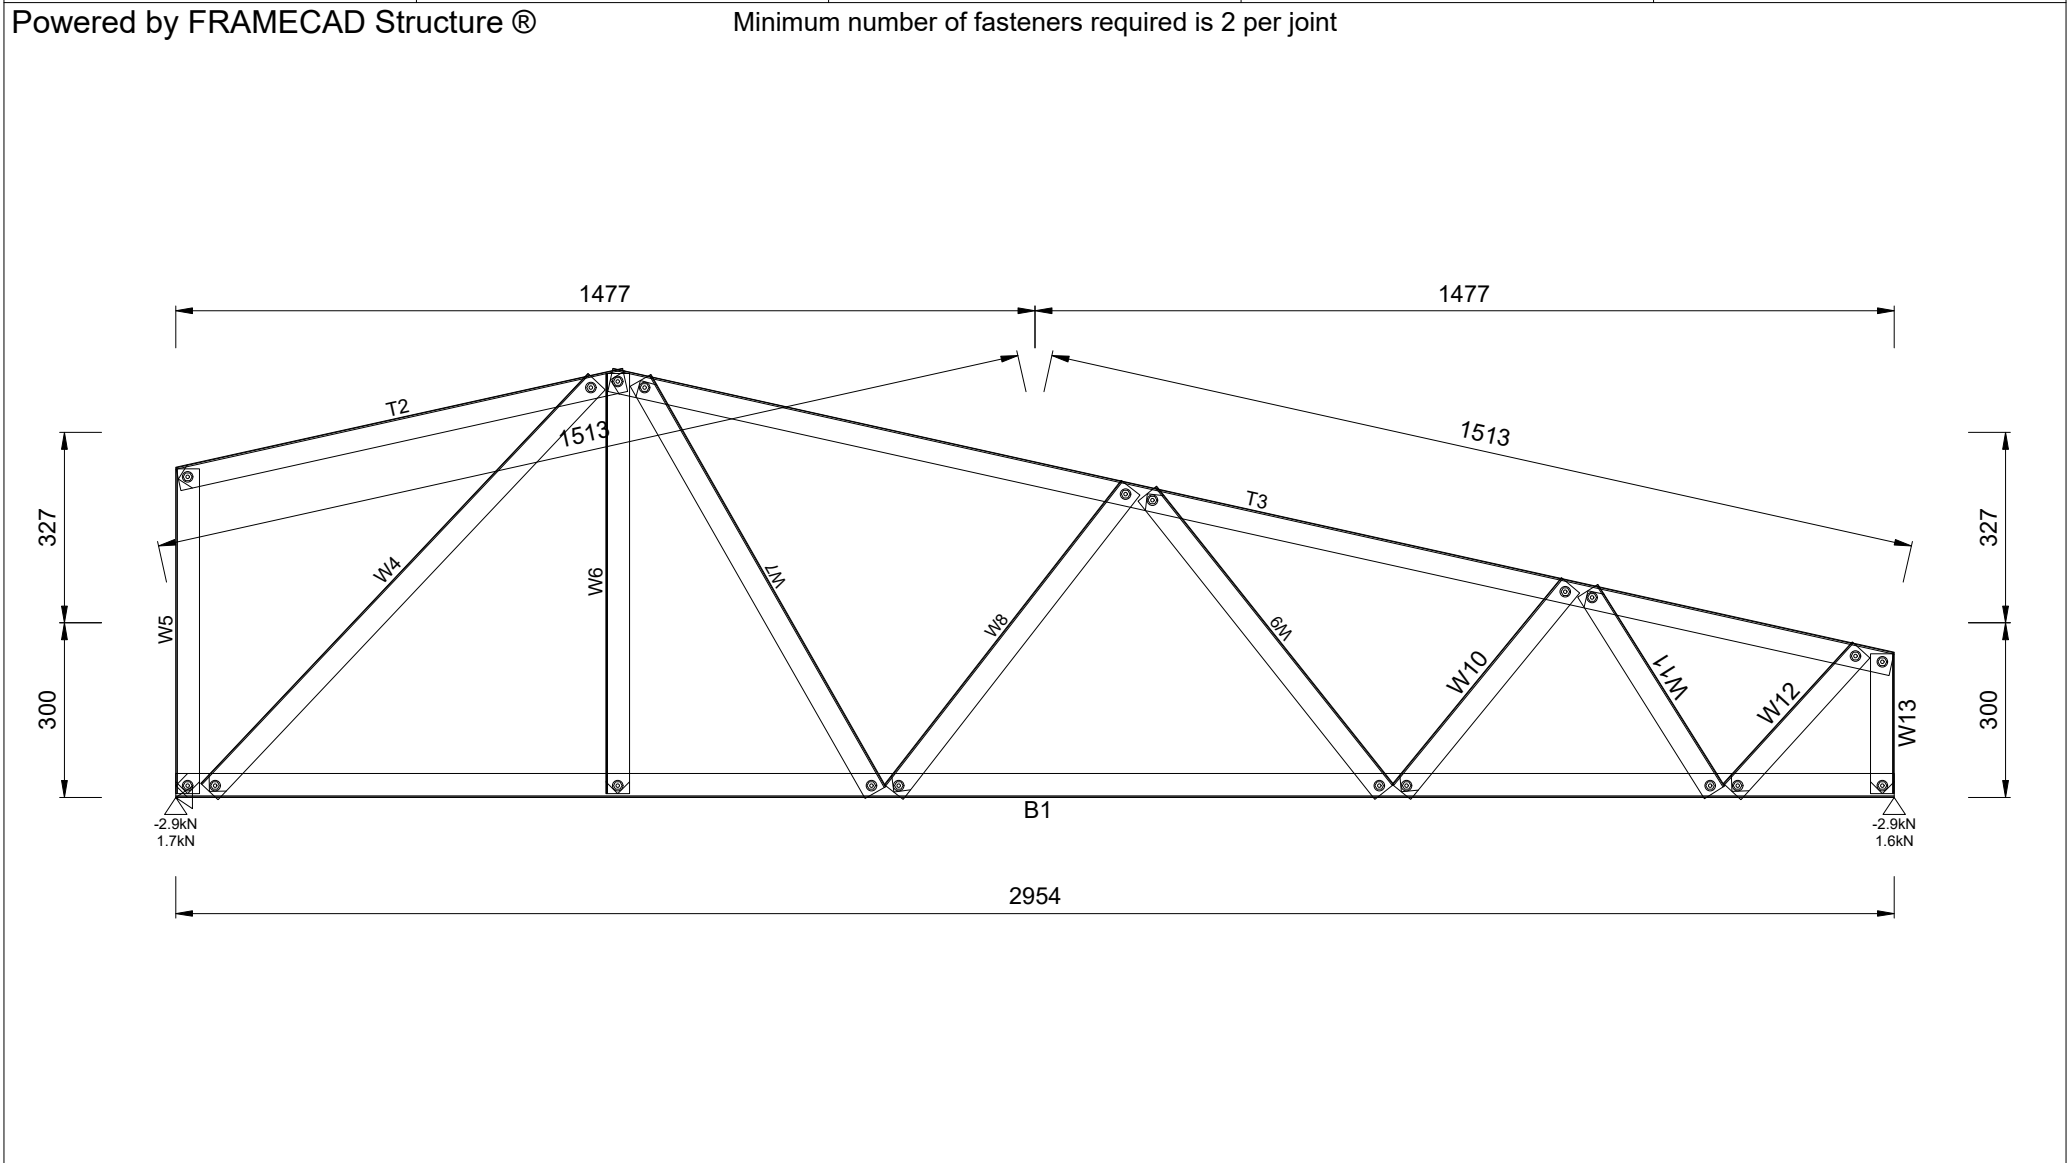


Quantity Required = 1 Mark as N203 Engineering Status = 53%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2954w				

B1	75S41-095-550	1	2954	T2	75S41-095-550	1	787	T3	75S41-095-550	1	2255	W4	75S41-095-550	1	969	W5	75S41-095-550	1	558
W6	75S41-095-550	1	722	W7	75S41-095-550	1	815	W8	75S41-095-550	1	663	W9	75S41-095-550	1	655	W10	75S41-095-550	1	459
W11	75S41-095-550	1	409	W12	75S41-095-550	1	329	W13	75S41-095-550	1	240	FRAMECAD M6 Screw		40	Working Sheet: Trusses				
Assembly Weight		15.2kg																	

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

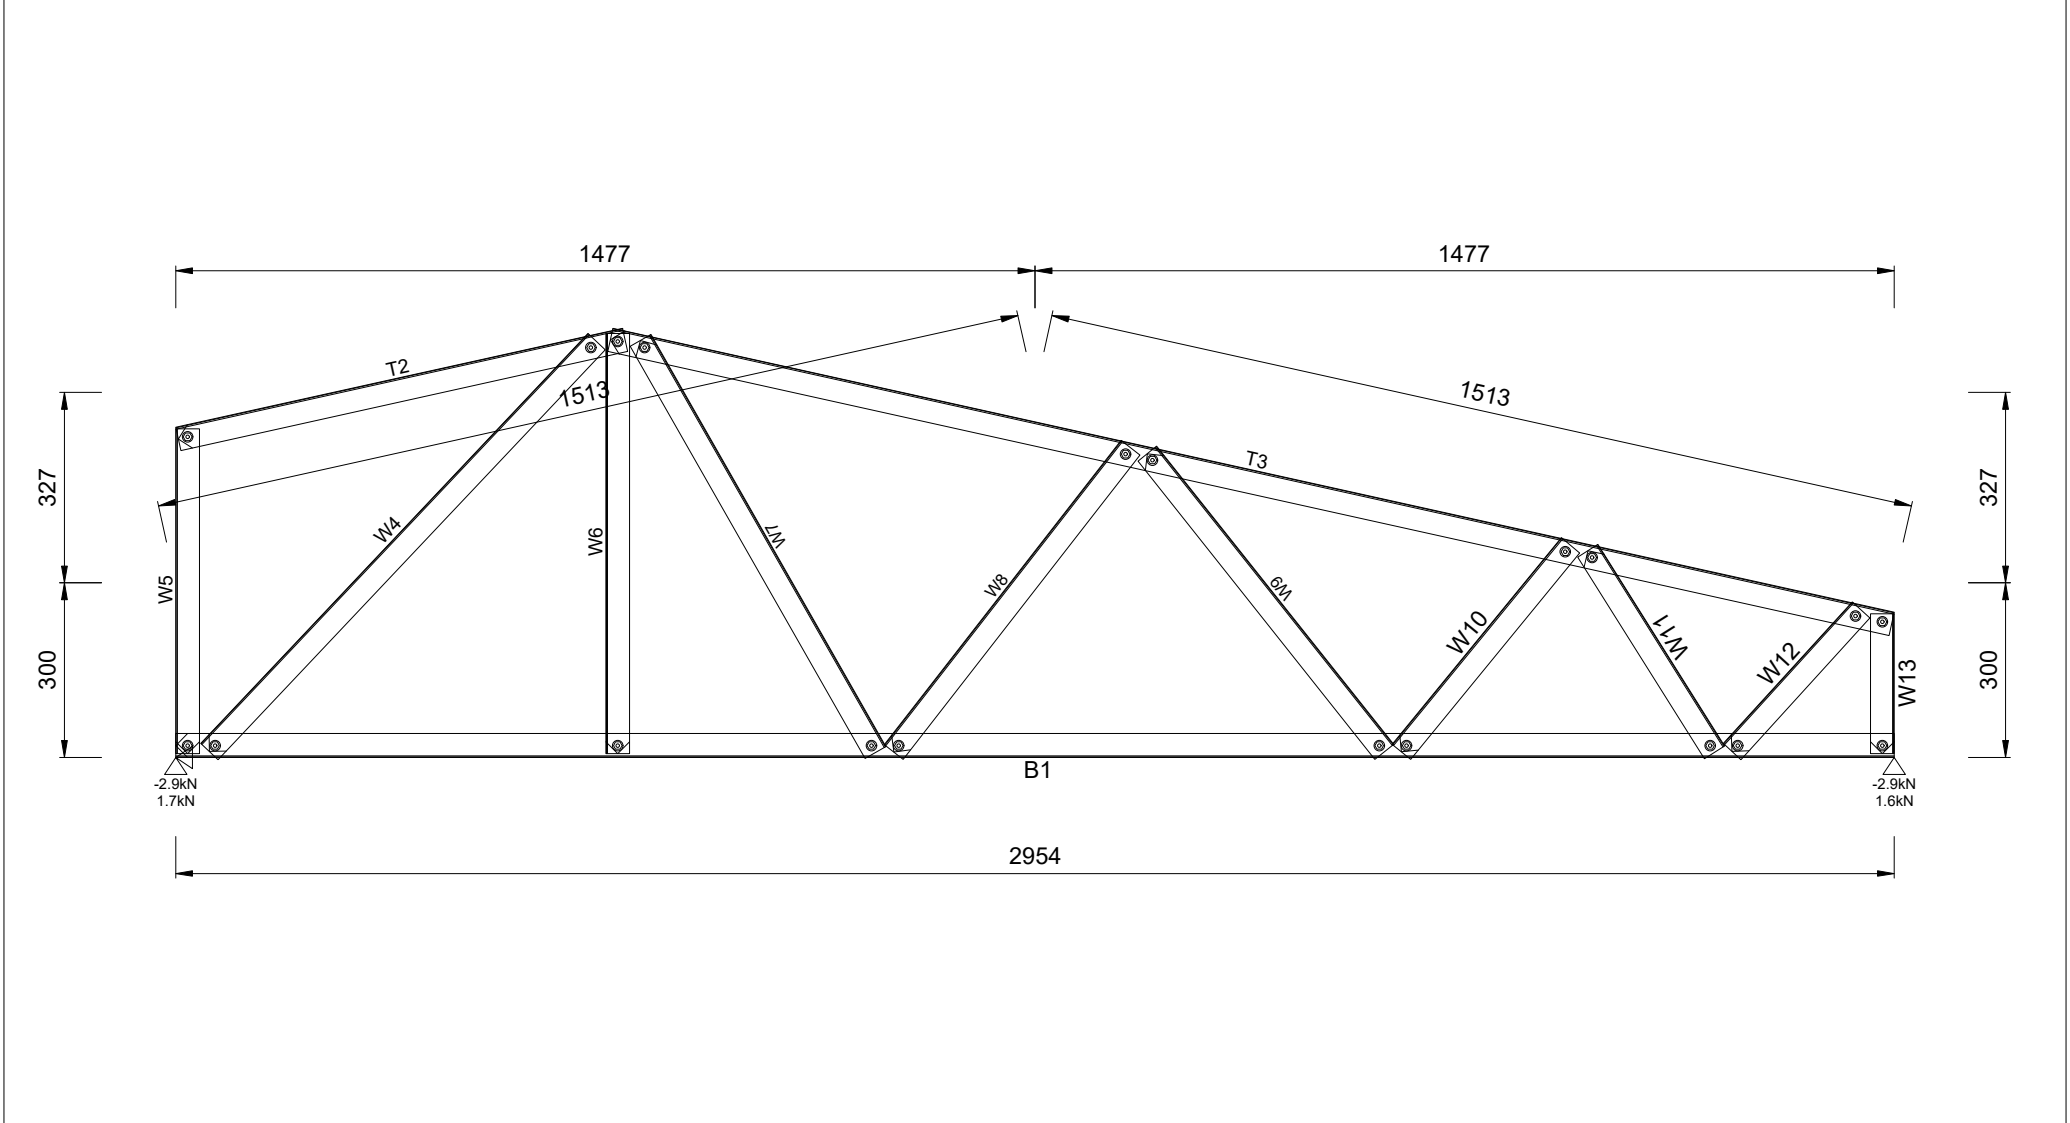


Quantity Required = 1 Mark as N204 Engineering Status = 53%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	741h x 2954w				

B1	75S41-095-550	1	2922	T2	75S41-095-550	1	1741	T3	75S41-095-550	1	790	H4	75S41-095-550	1	1046
W5	75S41-095-550	2	261	W6	75S41-095-550	1	429	W7	75S41-095-550	1	628	W8	75S41-095-550	1	383
W9	75S41-095-550	1	645	W10	75S41-095-550	1	804	W11	75S41-095-550	1	635	W12	75S41-095-550	1	910
W13	75S41-095-550	1	470	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24	FRAMECAD M6 Screw			46
Working Sheet: Trusses				Assembly Weight			15.4kg								

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

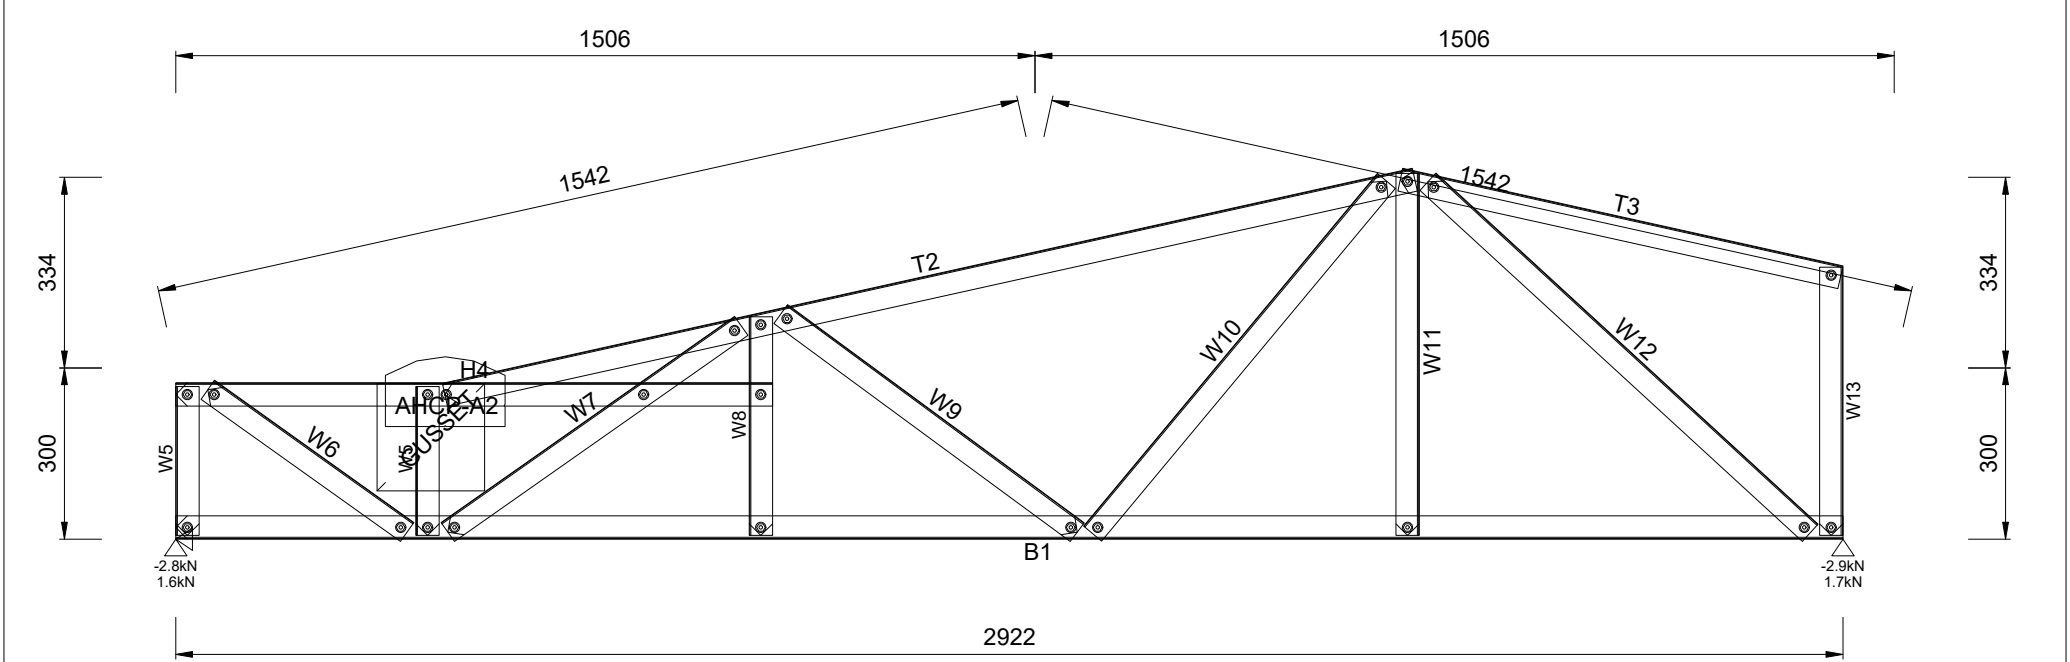

Quantity Required = 1 Mark as N205 Engineering Status = 69%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	654h x 2922w				

B1	75S41-095-550	1	3101	T2	75S41-095-550	1	2255	T3	75S41-095-550	1	938	H4	75S41-095-550	1	324	W5	75S41-095-550	1	240
W6	75S41-095-550	1	329	W7	75S41-095-550	1	409	W8	75S41-095-550	1	459	W9	75S41-095-550	1	655	W10	75S41-095-550	1	663
W11	75S41-095-550	1	815	W12	75S41-095-550	1	722	W13	75S41-095-550	1	1076	W14	75S41-095-550	1	593	FRAMECAD M6 Screw 44			
Working Sheet: Trusses				Assembly Weight 16.2kg															

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

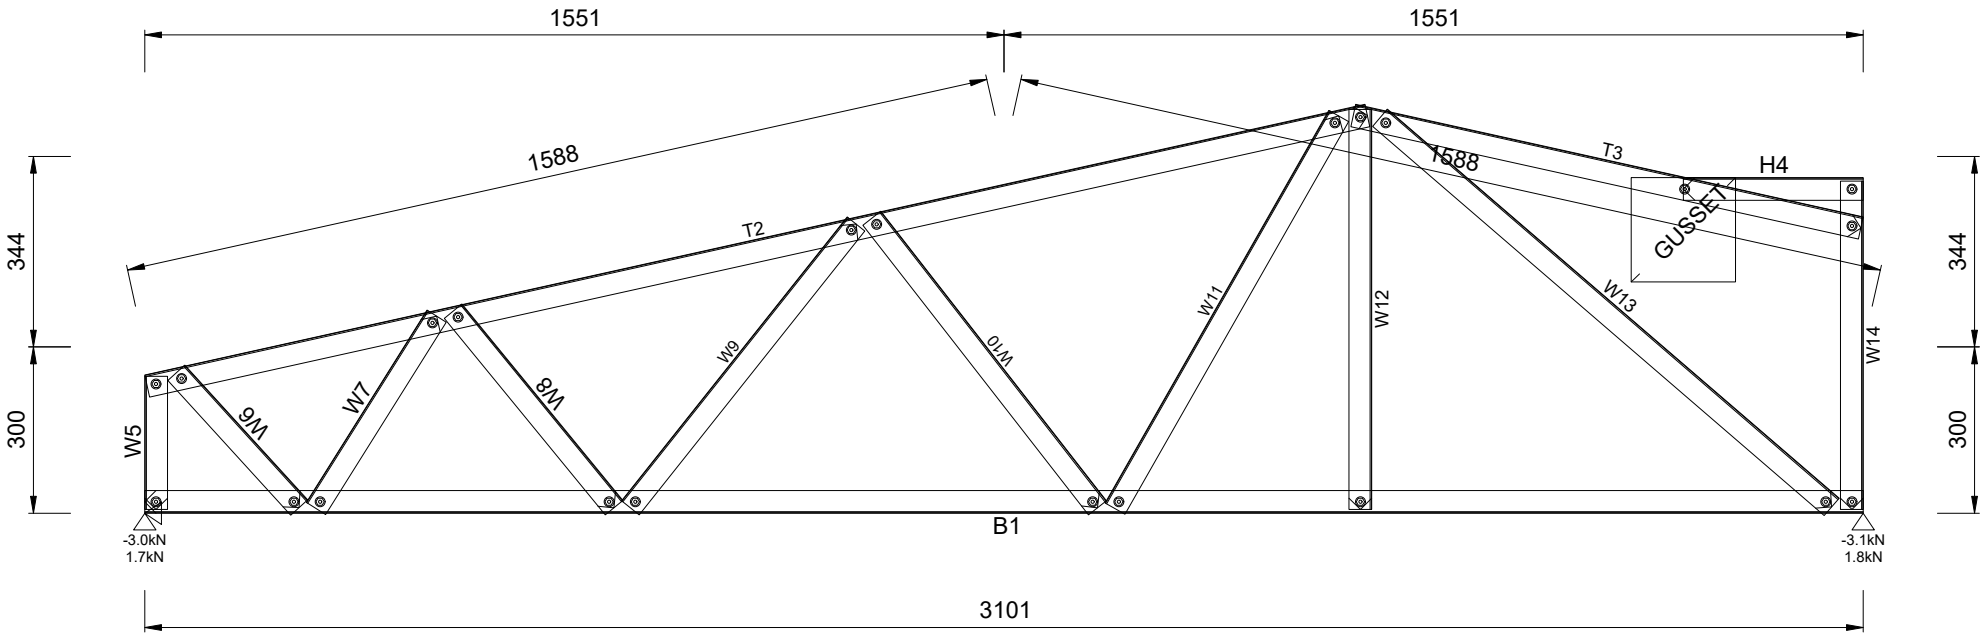

Quantity Required = 1 Mark as N206 Engineering Status = 54%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	742h x 3101w				

B1	75S41-095-550	1	1850	B2	75S41-095-550	1	4705	T3	75S41-095-550	1	1673	T4	75S41-095-550	1	4756	H5	75S41-095-550	1	6276
W6	75S41-095-550	1	2036	W7	75S41-095-550	1	2115	W8	75S41-095-550	1	2047	W9	75S41-095-550	1	2109	W10	75S41-095-550	1	2254
W11	75S41-095-550	1	2124	W12	75S41-095-550	1	2272	W13	75S41-095-550	1	2135	W14	75S41-095-550	1	2404	W15	75S41-095-550	1	2248
W16	75S41-095-550	1	2414	W17	75S41-095-550	1	2260	W18	75S41-095-550	1	2387	W19	75S41-095-550	1	2393	W20	75S41-095-550	1	2384
W21	75S41-095-550	1	2376	W22	75S41-095-550	1	2350	W23	75S41-095-550	2	2315	W24	75S41-095-550	1	2392	W25	75S41-095-550	1	2380
W26	75S41-095-550	1	2121	W27	75S41-095-550	1	2112	W28	75S41-095-550	1	2327	W29	75S41-095-550	1	1855	W30	75S41-095-550	1	1846
W31	75S41-095-550	1	2076	W32	75S41-095-550	1	2057	W33	75S41-095-550	1	1598	W34	75S41-095-550	1	1589	W35	75S41-095-550	1	1851
W36	75S41-095-550	1	1827	W37	75S41-095-550	1	1345	W38	75S41-095-550	1	1334	FRAMECAD M6 Screw		242	Working Sheet: Trusses				
Assembly Weight		117.3kg																	

STP

Quantity Required = 1 Mark as GI110 Engineering Status = 376%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	2407h x 6276w		

Dwg: Zone 16


View 23 of 135

Client :Arcare Lynbrook

J/No. 26110

B1 75S41-095-550	6	1307	B2 75S41-095-550	6	7648	T3 75S41-095-550	6	9121
H4 75S41-095-550	6	4461	W5 75S41-095-550	6	101	W6 75S41-095-550	6	270
W7 75S41-095-550	6	231	W8 75S41-095-550	6	652	W9 75S41-095-550	6	382
W10 75S41-095-550	6	648	W11 75S41-095-550	6	467	W12 75S41-095-550	6	728
W13 75S41-095-550	6	607	W14 75S41-095-550	6	841	W15 75S41-095-550	6	752
W16 75S41-095-550	6	924	W17 75S41-095-550	6	886	W18 75S41-095-550	6	1483
W19 75S41-095-550	6	1166	W20 75S41-095-550	6	1666	W21 75S41-095-550	6	1445
W22 75S41-095-550	6	1872	W23 75S41-095-550	6	1725	W24 75S41-095-550	6	2096
W25 75S41-095-550	6	2004	FRAMECAD 1.15mm Apex/Heel Plate	12		FRAMECAD 1.15mm Fix Plate	12	
FRAMECAD 10g-16mm Flathead	1788		FRAMECAD M6 Screw	612		Working Sheet: Trusses		
Assembly Weight	56.1kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

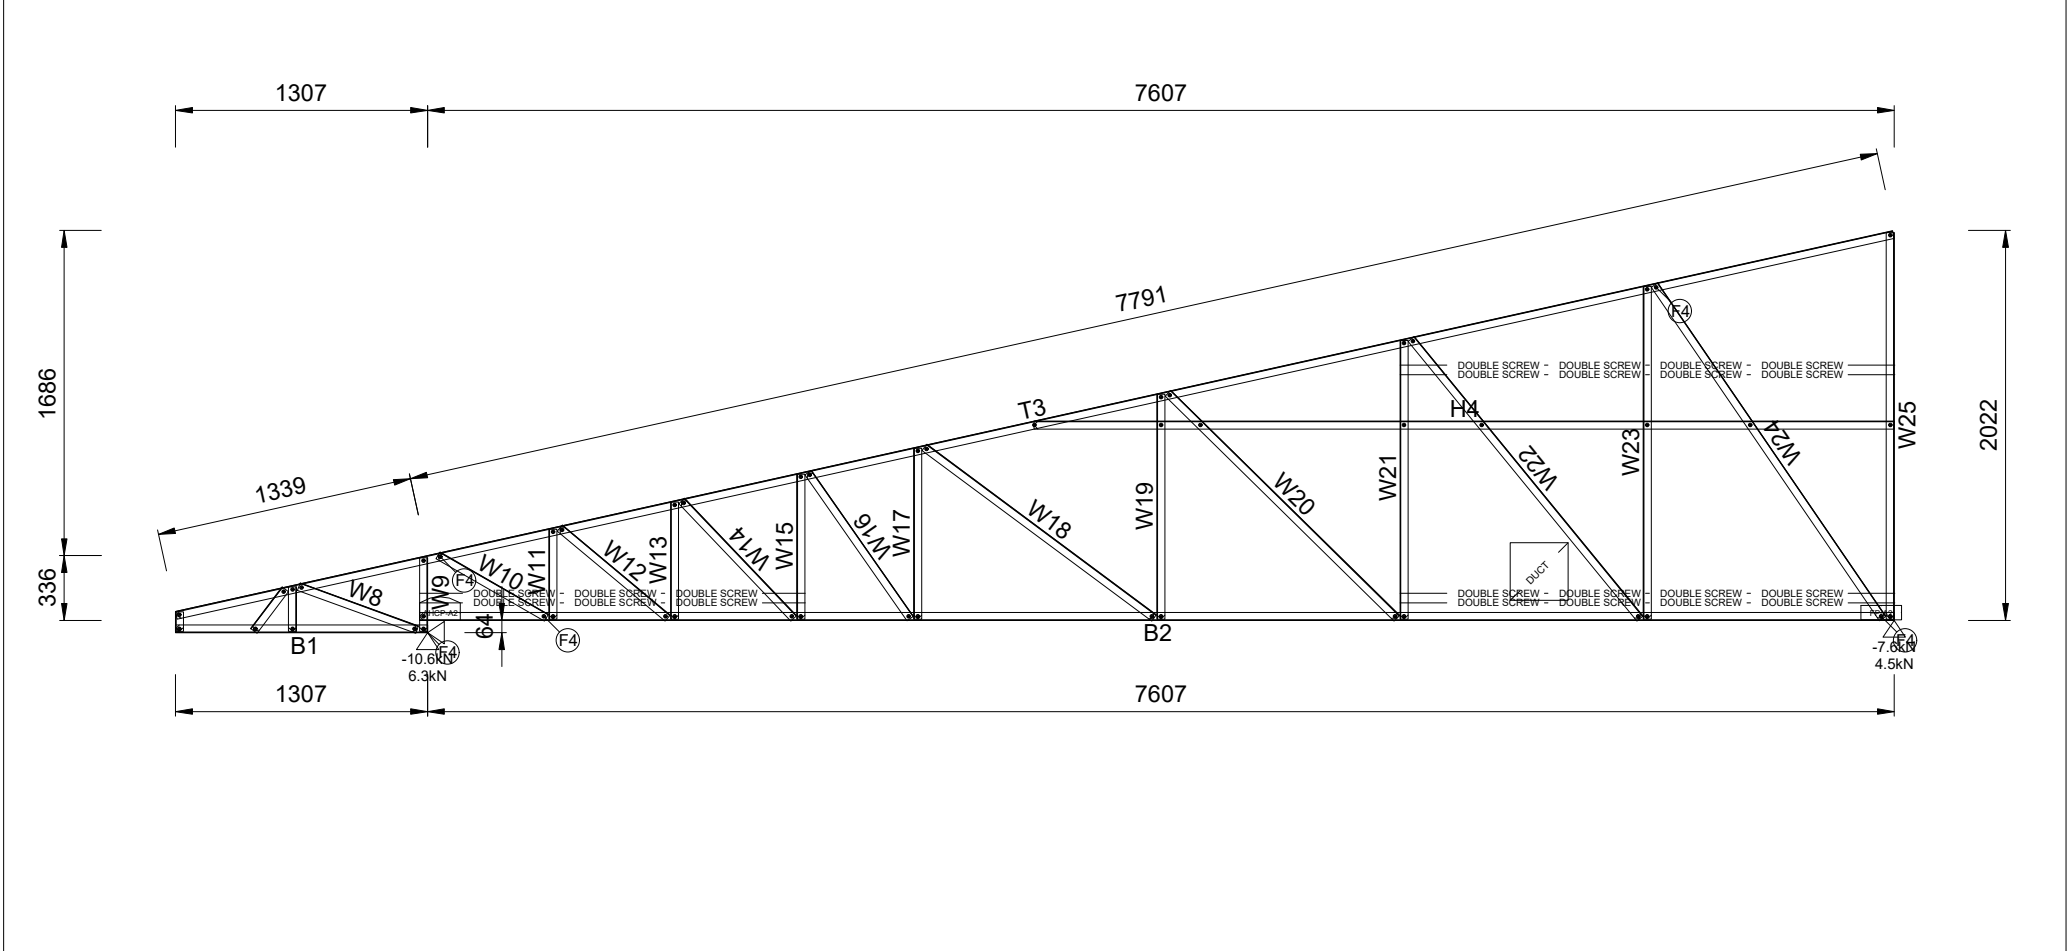


Quantity Required = 6 Mark as HN111 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2088h x 8914w				

B1 75S41-095-550	1 968	T2 75S41-095-550	1 982	W3 75S41-095-550	1 111	W4 75S41-095-550	1 227	W5 75S41-095-550	1 334	W6 75S41-095-550	1 171
W7 75S41-095-550	1 387	W8 75S41-095-550	1 316	FRAMECAD M6 Screw	24	Working Sheet: Trusses		Assembly Weight	4.5kg		

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

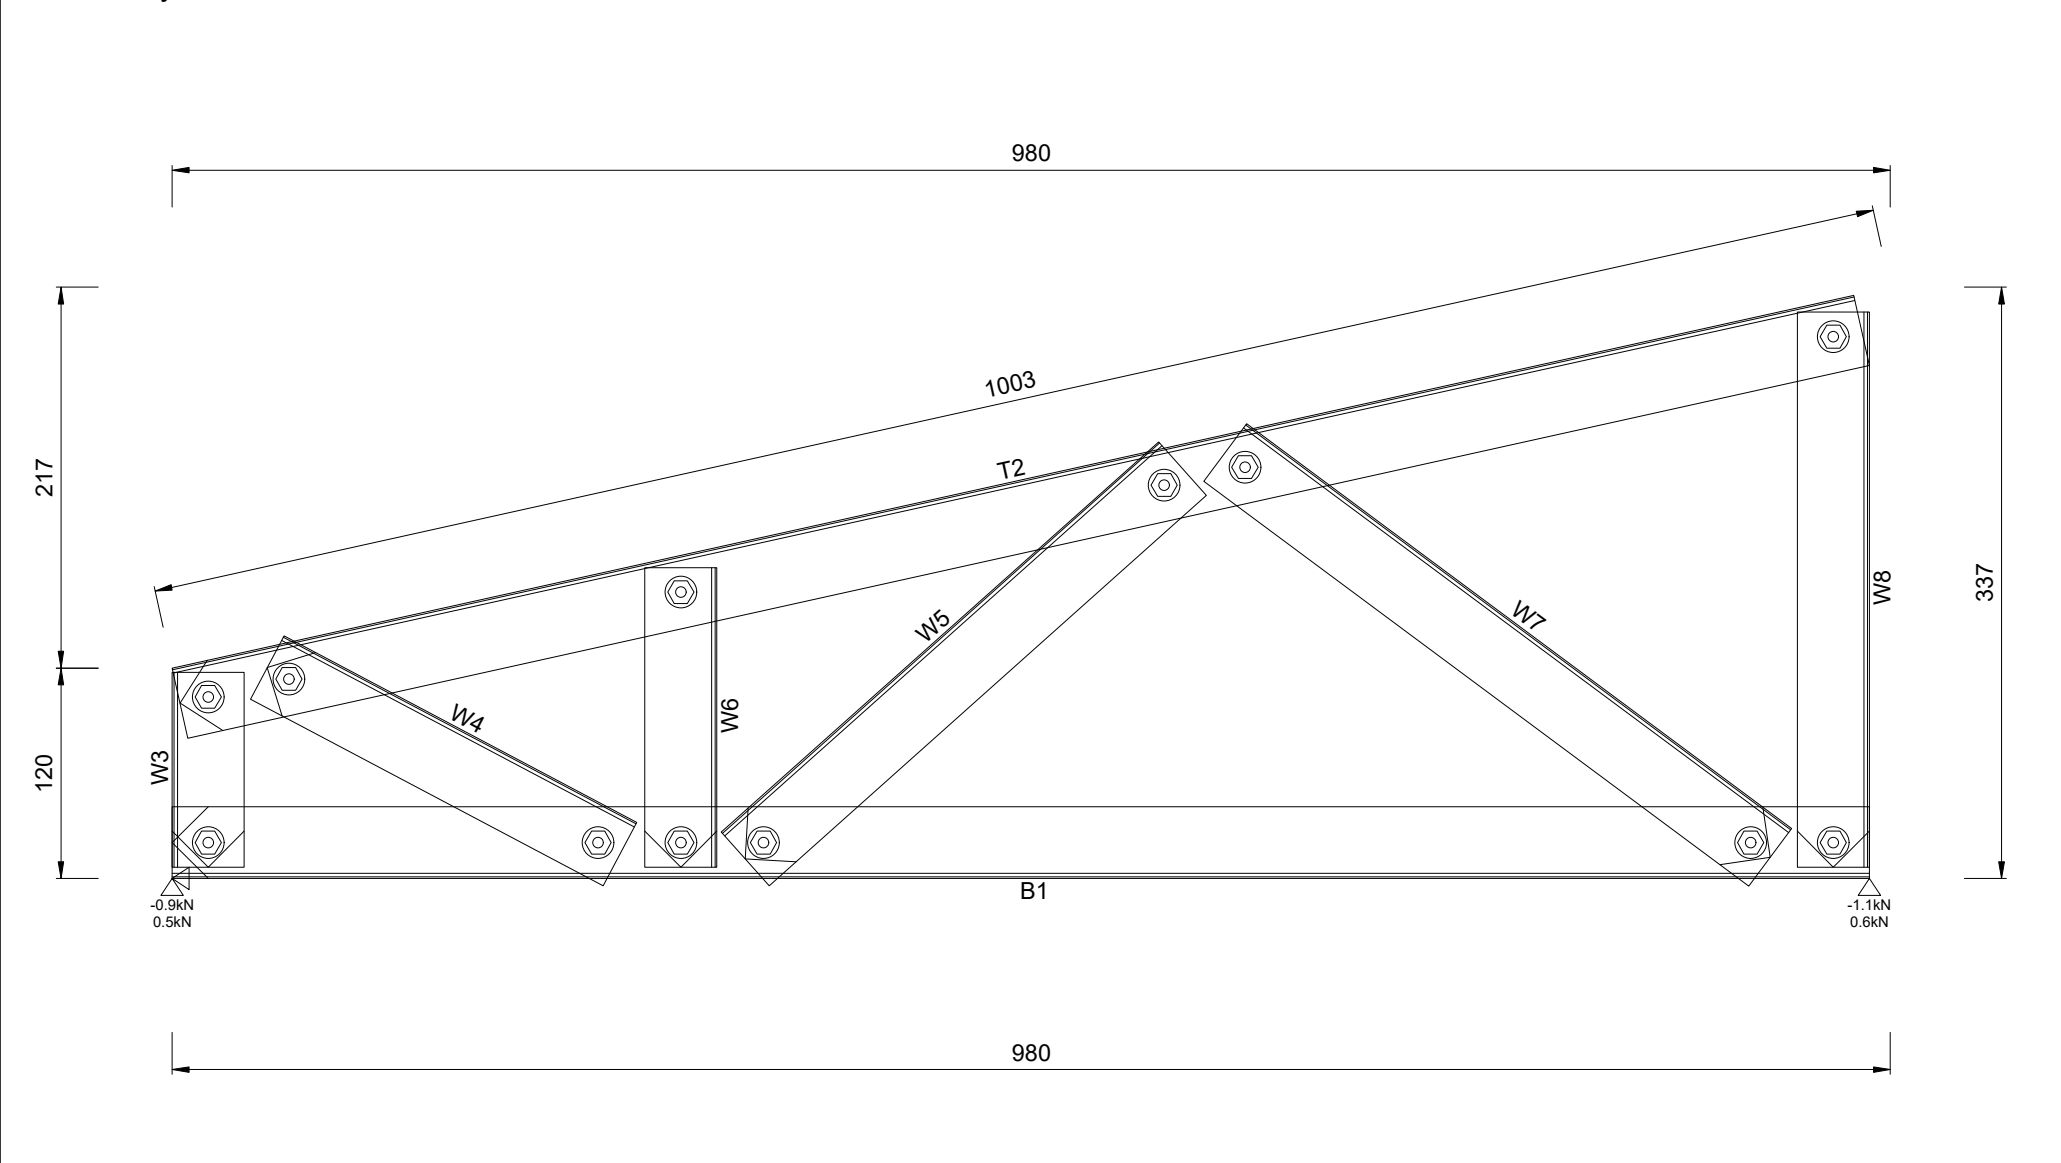


Quantity Required = 1 Mark as HN112 Engineering Status = 26%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	337h x 968w				

B1 75S41-095-550	1 968	T2 75S41-095-550	1 982	W3 75S41-095-550	1 111	W4 75S41-095-550	1 227	W5 75S41-095-550	1 334	W6 75S41-095-550	1 171
W7 75S41-095-550	1 387	W8 75S41-095-550	1 316	FRAMECAD M6 Screw	24	Working Sheet: Trusses		Assembly Weight	4.5kg		

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

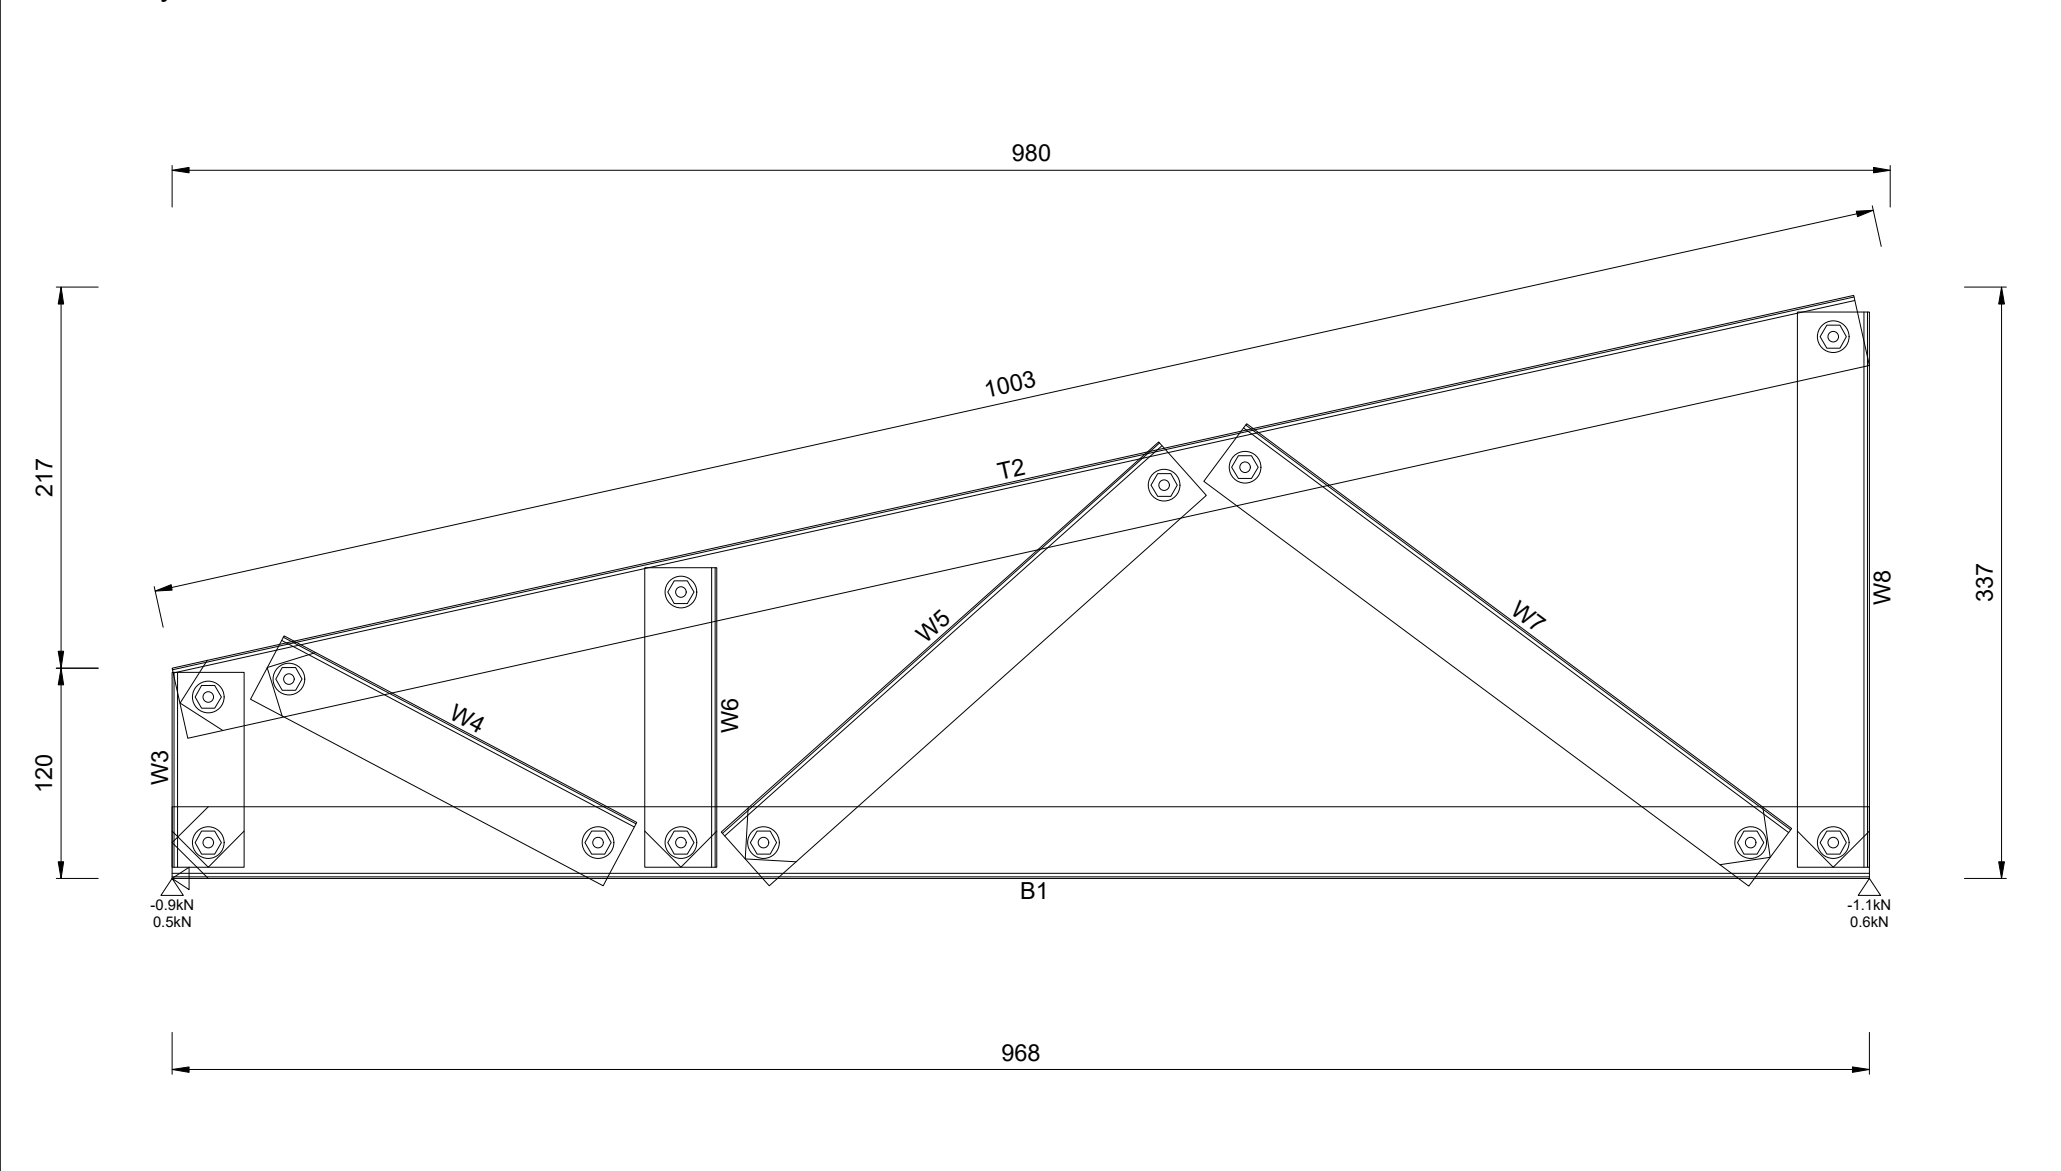


Quantity Required = 1 Mark as HN113 Engineering Status = 26%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	337h x 968w				

B1	75S41-095-550	3	1307	B2	75S41-095-550	3	7348	T3	75S41-095-550	3	8814	H4	75S41-095-550	3	3937	W5	75S41-095-550	3	101	
W6	75S41-095-550	3	330	W7	75S41-095-550	3	226	W8	75S41-095-550	3	673	W9	75S41-095-550	3	382	W10	75S41-095-550	3	790	
W11	75S41-095-550	3	494	W12	75S41-095-550	3	800	W13	75S41-095-550	3	649	W14	75S41-095-550	3	922	W15	75S41-095-550	3	810	
W16	75S41-095-550	3	1043	W17	75S41-095-550	3	971	W18	75S41-095-550	3	1689	W19	75S41-095-550	3	2218	W20	75S41-095-550	3	1294	
W21	75S41-095-550	3	1644	W22	75S41-095-550	3	2068	W23	75S41-095-550	3	1938	FRAMECAD M6 Screw		270	Working Sheet: Trusses					
Assembly Weight				52.2kg																

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

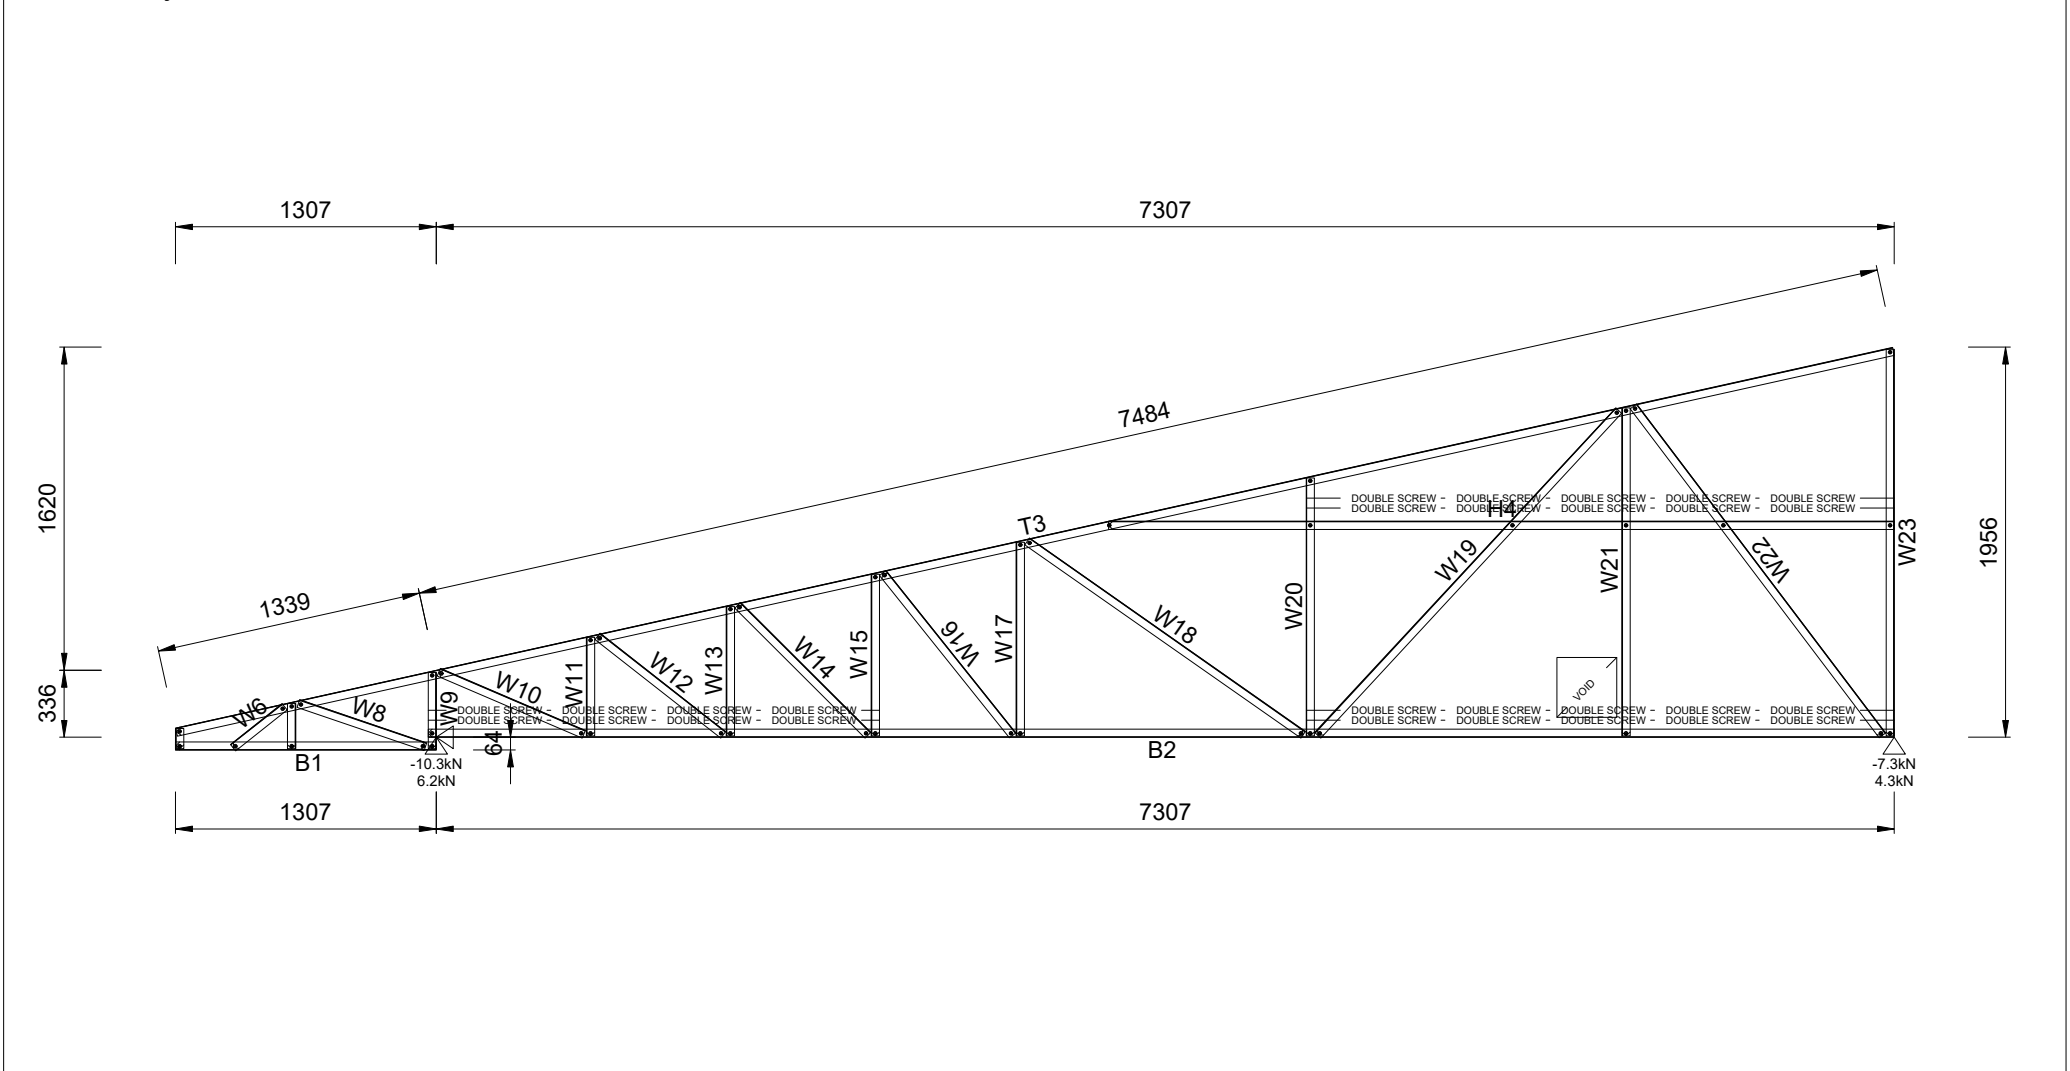


Quantity Required = 3 Mark as HN114 Engineering Status = 135%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2022h x 8614w				

B1 75S41-095-550	1	1661	T2 75S41-095-550	1	1692	W3 75S41-095-550	1	111	W4 75S41-095-550	1	227	W5 75S41-095-550	1	171
W6 75S41-095-550	1	635	W7 75S41-095-550	1	322	W8 75S41-095-550	1	679	W9 75S41-095-550	1	473	FRAMECAD M6 Screw		30
Working Sheet: Trusses			Assembly Weight			7.7kg								

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

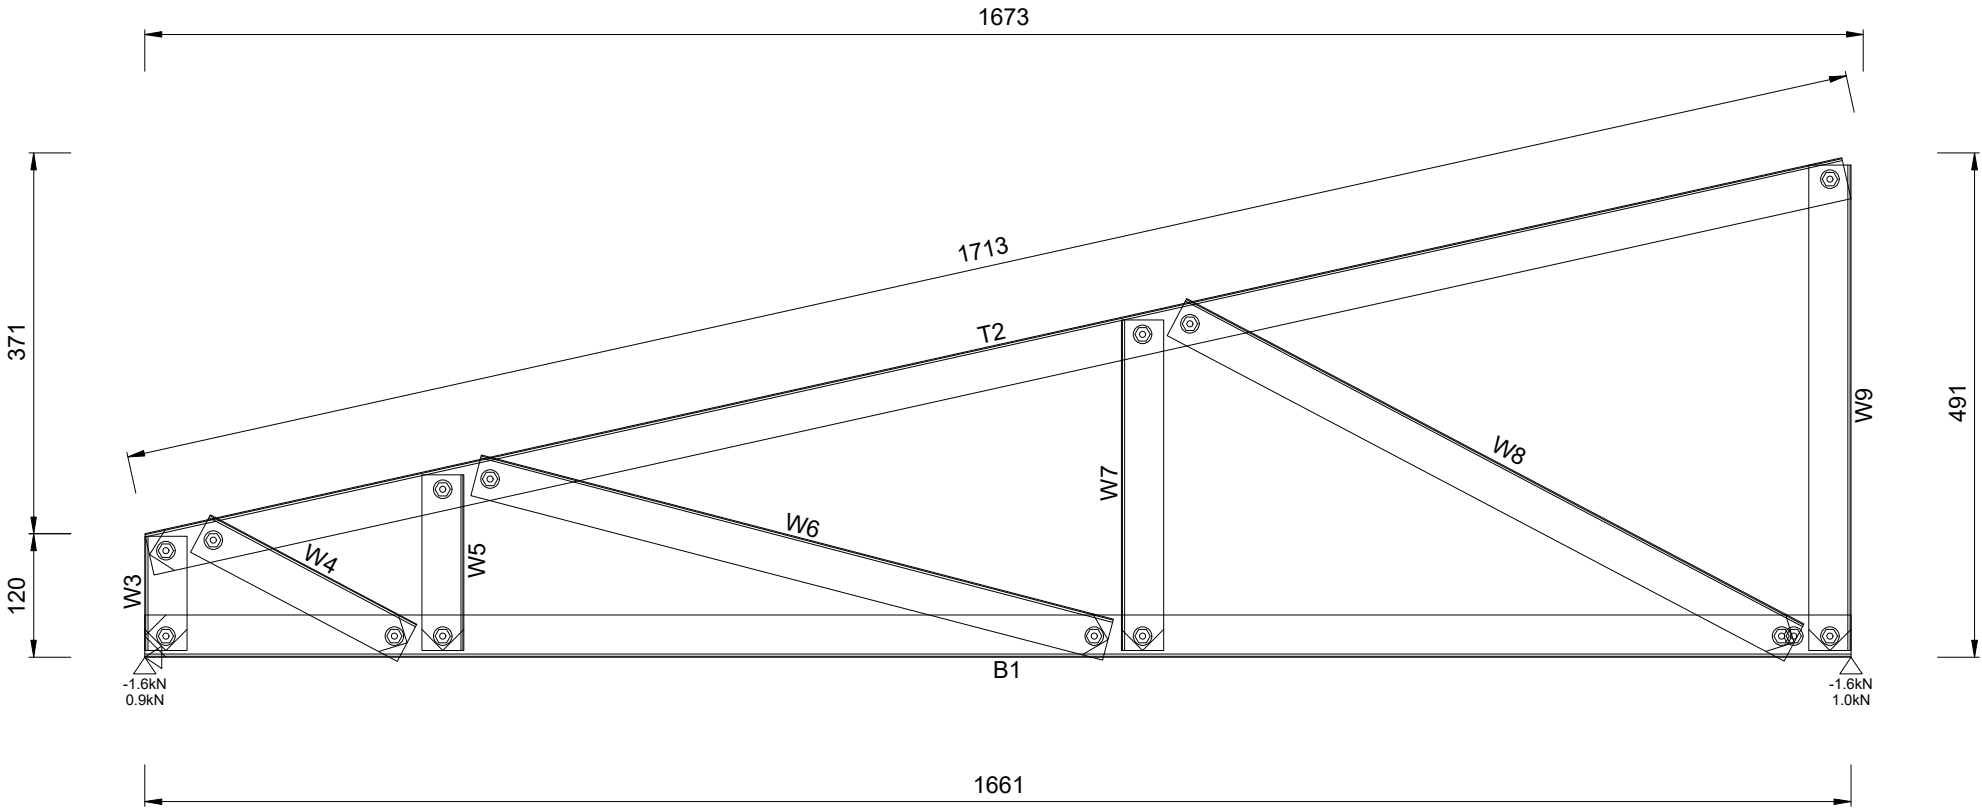


Quantity Required = 1 Mark as HN115 Engineering Status = 36%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	490h x 1661w				

B1 75S41-095-550	1	1661	T2 75S41-095-550	1	1692	W3 75S41-095-550	1	111	W4 75S41-095-550	1	227	W5 75S41-095-550	1	171
W6 75S41-095-550	1	635	W7 75S41-095-550	1	322	W8 75S41-095-550	1	679	W9 75S41-095-550	1	473	FRAMECAD M6 Screw	28	
Working Sheet: Trusses			Assembly Weight			7.7kg								


Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

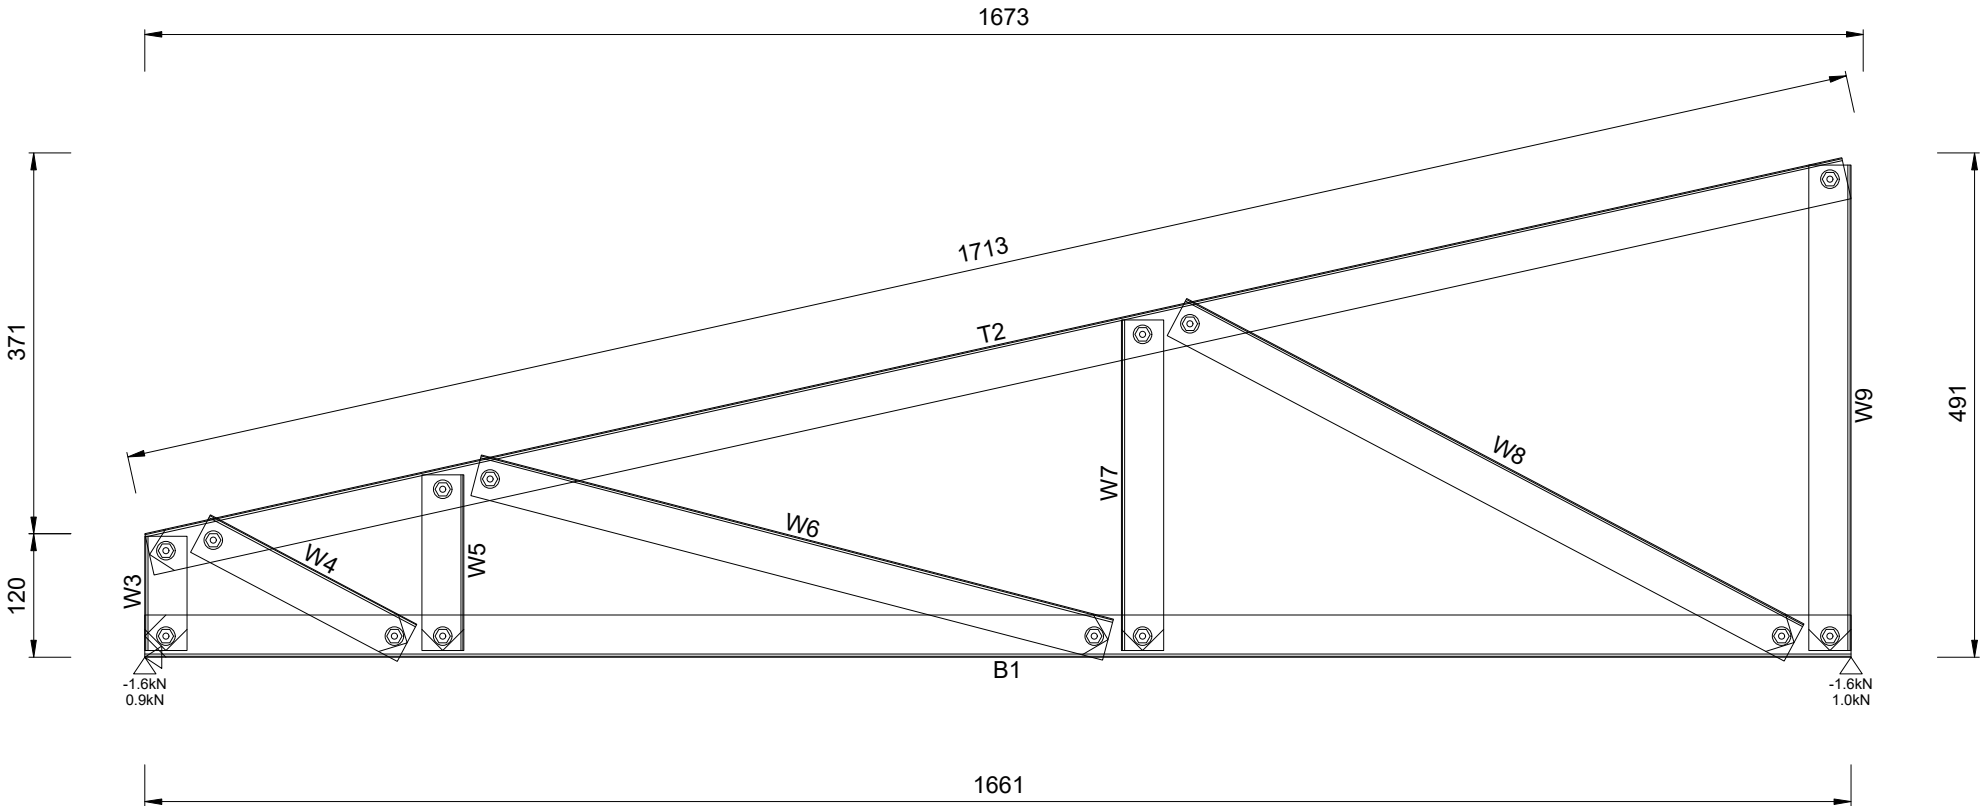

Quantity Required = 1 Mark as HN116 Engineering Status = 36%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	490h x 1661w				

B1	75S41-095-550	1	2626	B2	75S41-095-550	1	1739	T3	75S41-095-550	1	4369	W4	75S41-095-550	1	108
W5	75S41-095-550	1	567	W6	75S41-095-550	1	219	W7	75S41-095-550	1	306	W8	75S41-095-550	1	1289
W9	75S41-095-550	1	514	W10	75S41-095-550	1	947	W11	75S41-095-550	1	592	W12	75S41-095-550	1	929
W13	75S41-095-550	1	716	FRAMECAD 1.15mm Apex/Heel Plate	2			FRAMECAD 1.15mm Fix Plate	2			FRAMECAD 10g-16mm Flathead	52		
FRAMECAD M6 Screw		42		Working Sheet: Trusses				Assembly Weight		19.2kg					

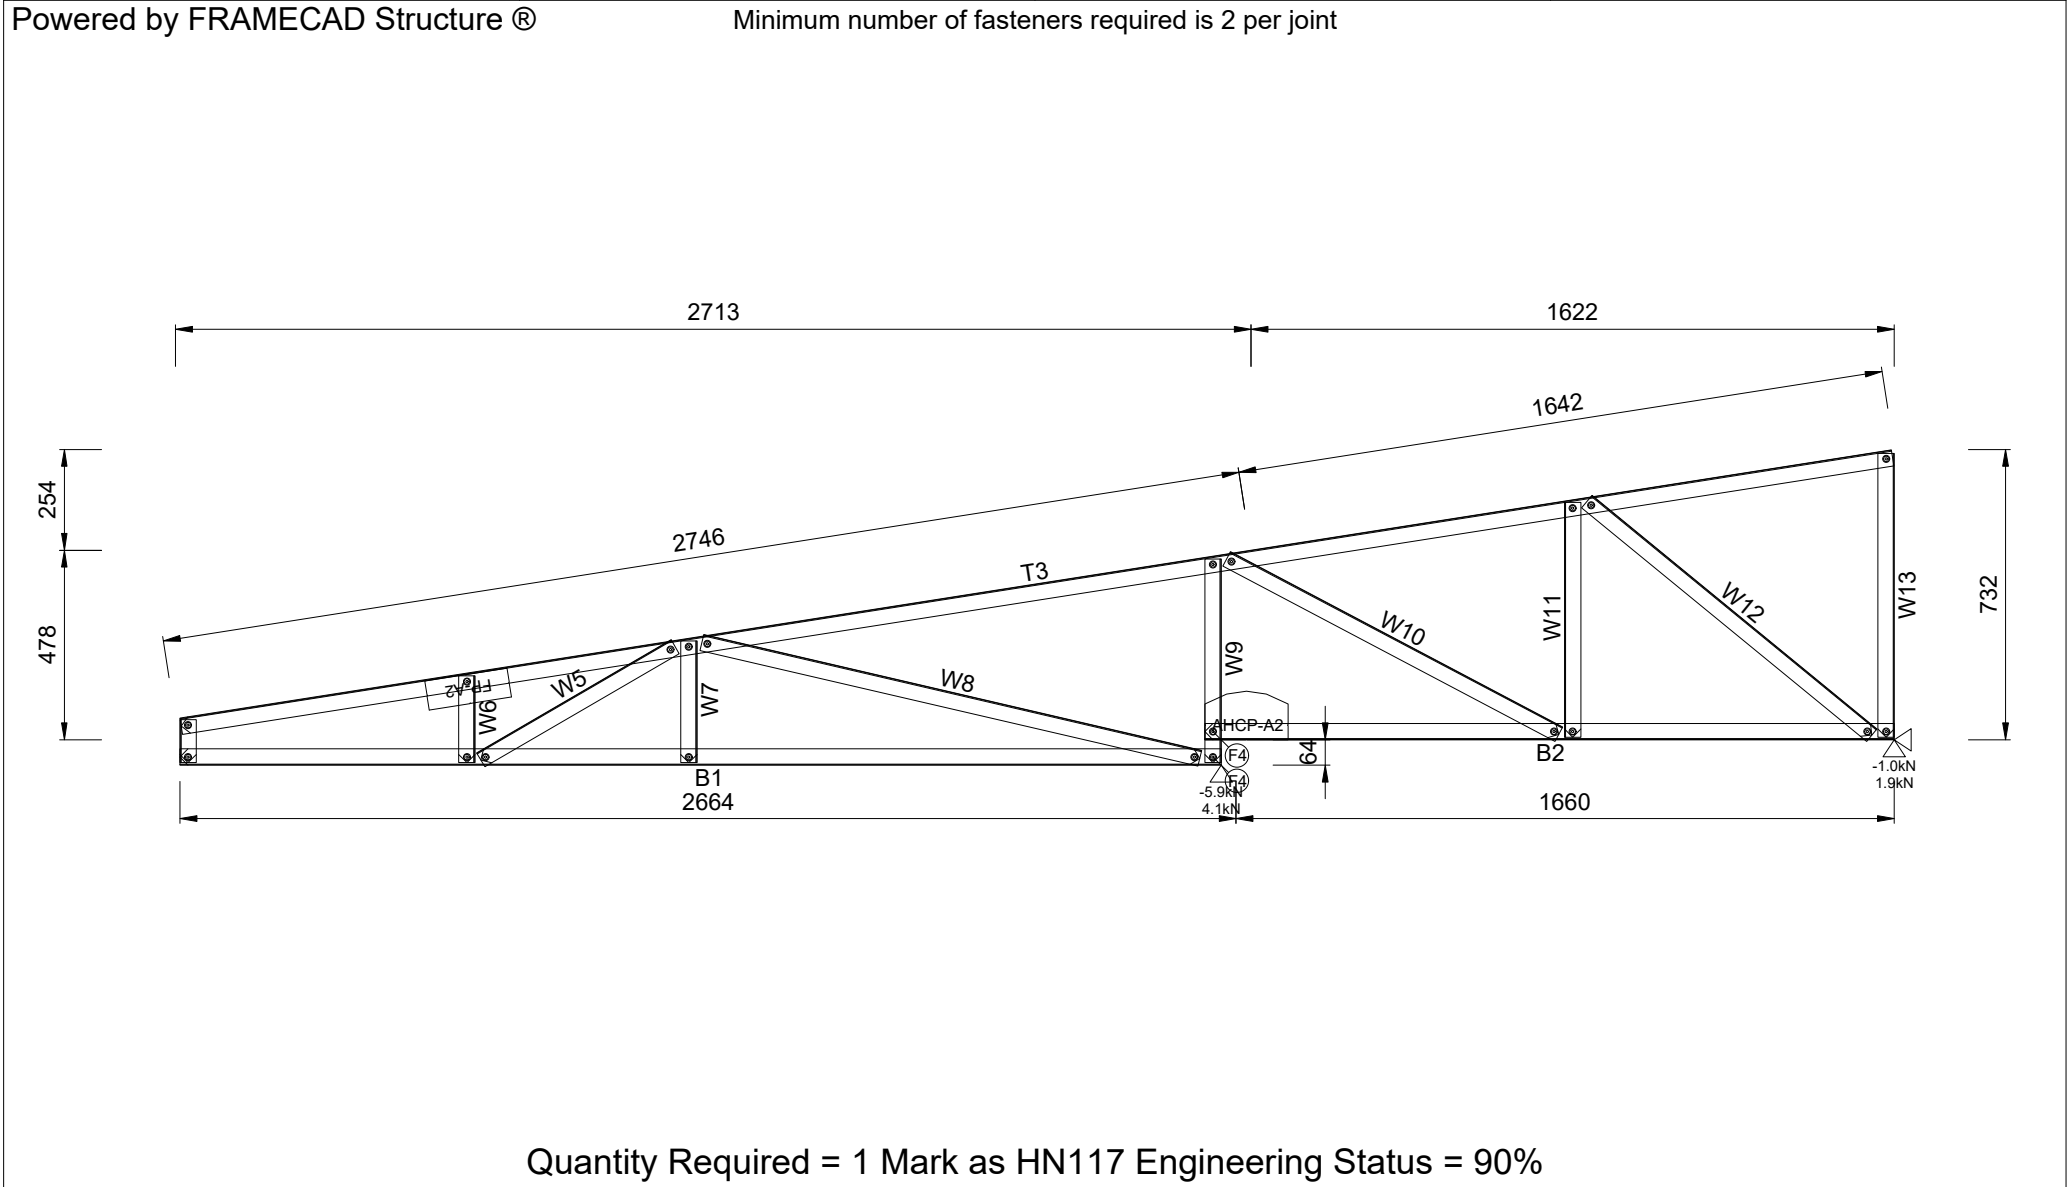


Quantity Required = 1 Mark as HN117 Engineering Status = 90%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	8.909	Truss Spacing:	582	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	799h x 4324w				

B1	75S41-095-550	1	1262	B2	75S41-095-550	1	1320	T3	75S41-095-550	1	2593	W4	75S41-095-550	1	111
W5	75S41-095-550	1	337	W6	75S41-095-550	1	237	W7	75S41-095-550	1	628	W8	75S41-095-550	1	382
W9	75S41-095-550	1	1214	W10	75S41-095-550	1	601	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		2	
FRAMECAD 10g-16mm Flathead		48		FRAMECAD M6 Screw		56		Working Sheet: Trusses				Assembly Weight			11.2kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

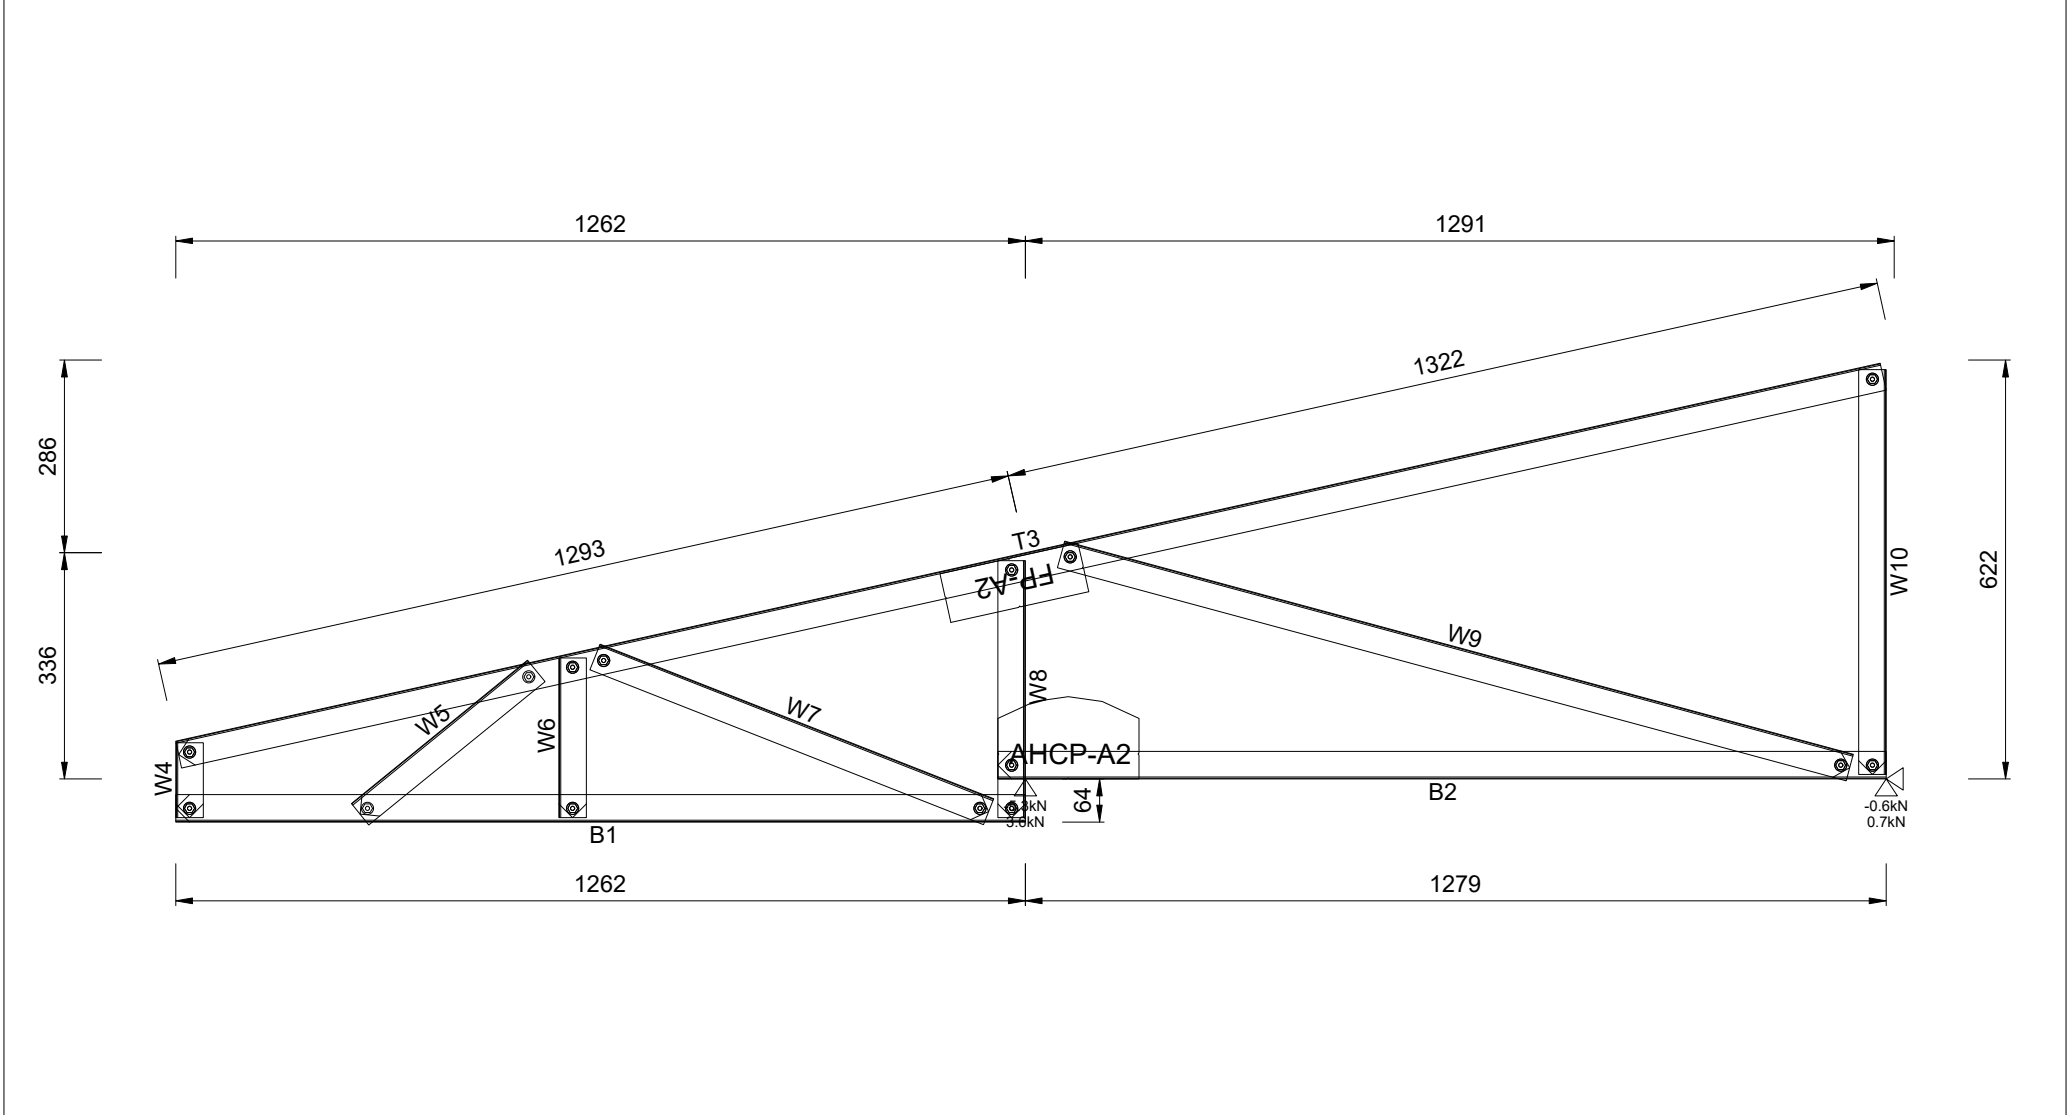


Quantity Required = 1 Mark as HN118 Engineering Status = 72%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	686h x 2541w				

B1	75S41-095-550	1	1906	B2	75S41-095-550	1	676	T3	75S41-095-550	1	2593	W4	75S41-095-550	1	111	W5	75S41-095-550	1	430
W6	75S41-095-550	1	308	W7	75S41-095-550	1	958	W8	75S41-095-550	1	525	W9	75S41-095-550	1	728	W10	75S41-095-550	1	602
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				11.4kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

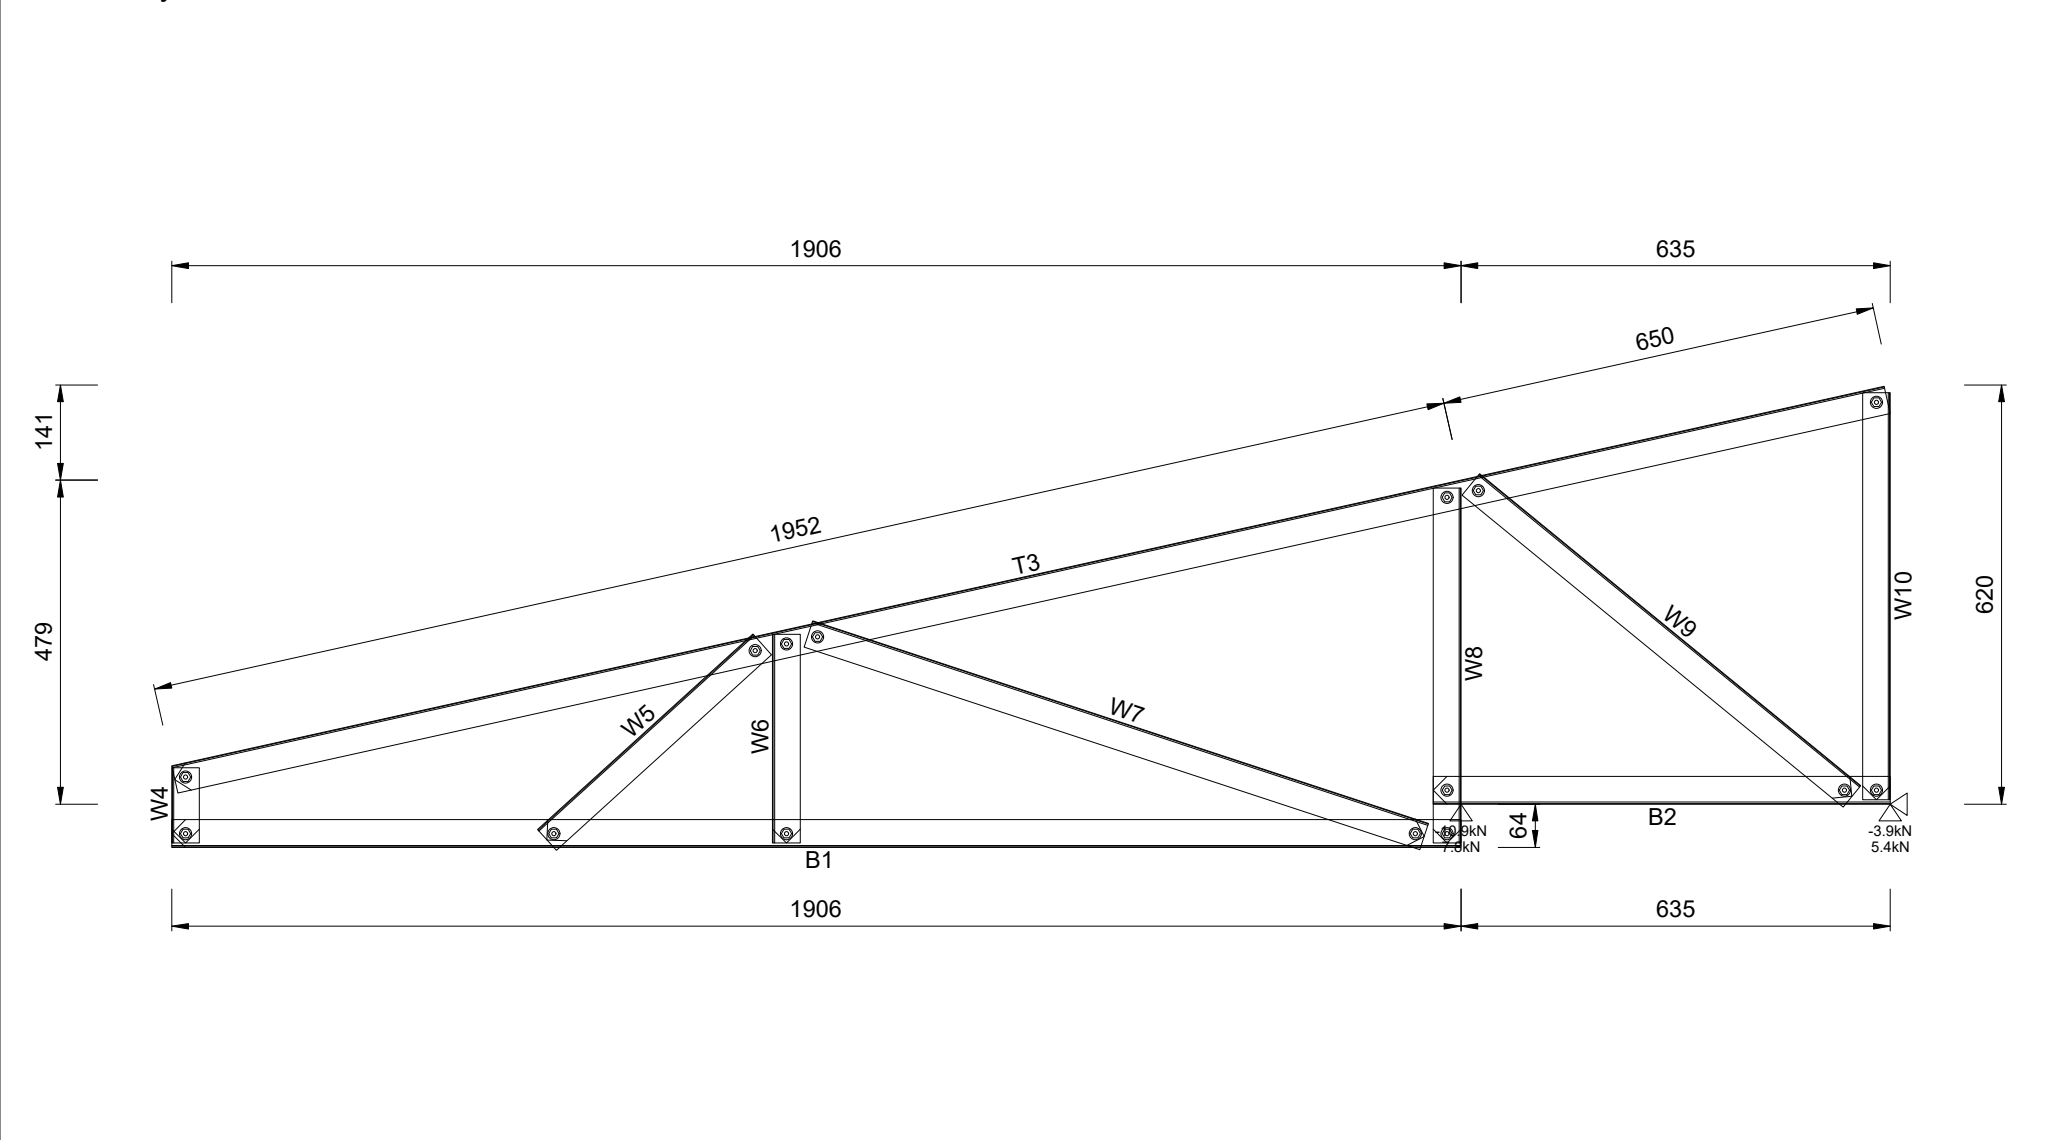


Quantity Required = 1 Mark as HN119 Engineering Status = 105%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	686h x 2541w				

B1	75S41-095-550	1	1906	B2	75S41-095-550	1	1241	T3	75S41-095-550	1	3249	W4	75S41-095-550	1	111
W5	75S41-095-550	1	430	W6	75S41-095-550	1	308	W7	75S41-095-550	1	958	W8	75S41-095-550	1	525
W9	75S41-095-550	1	1220	W10	75S41-095-550	1	727	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		4	
FRAMECAD 10g-16mm Flathead		80		FRAMECAD M6 Screw		30		Working Sheet: Trusses				Assembly Weight		13.8kg	

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

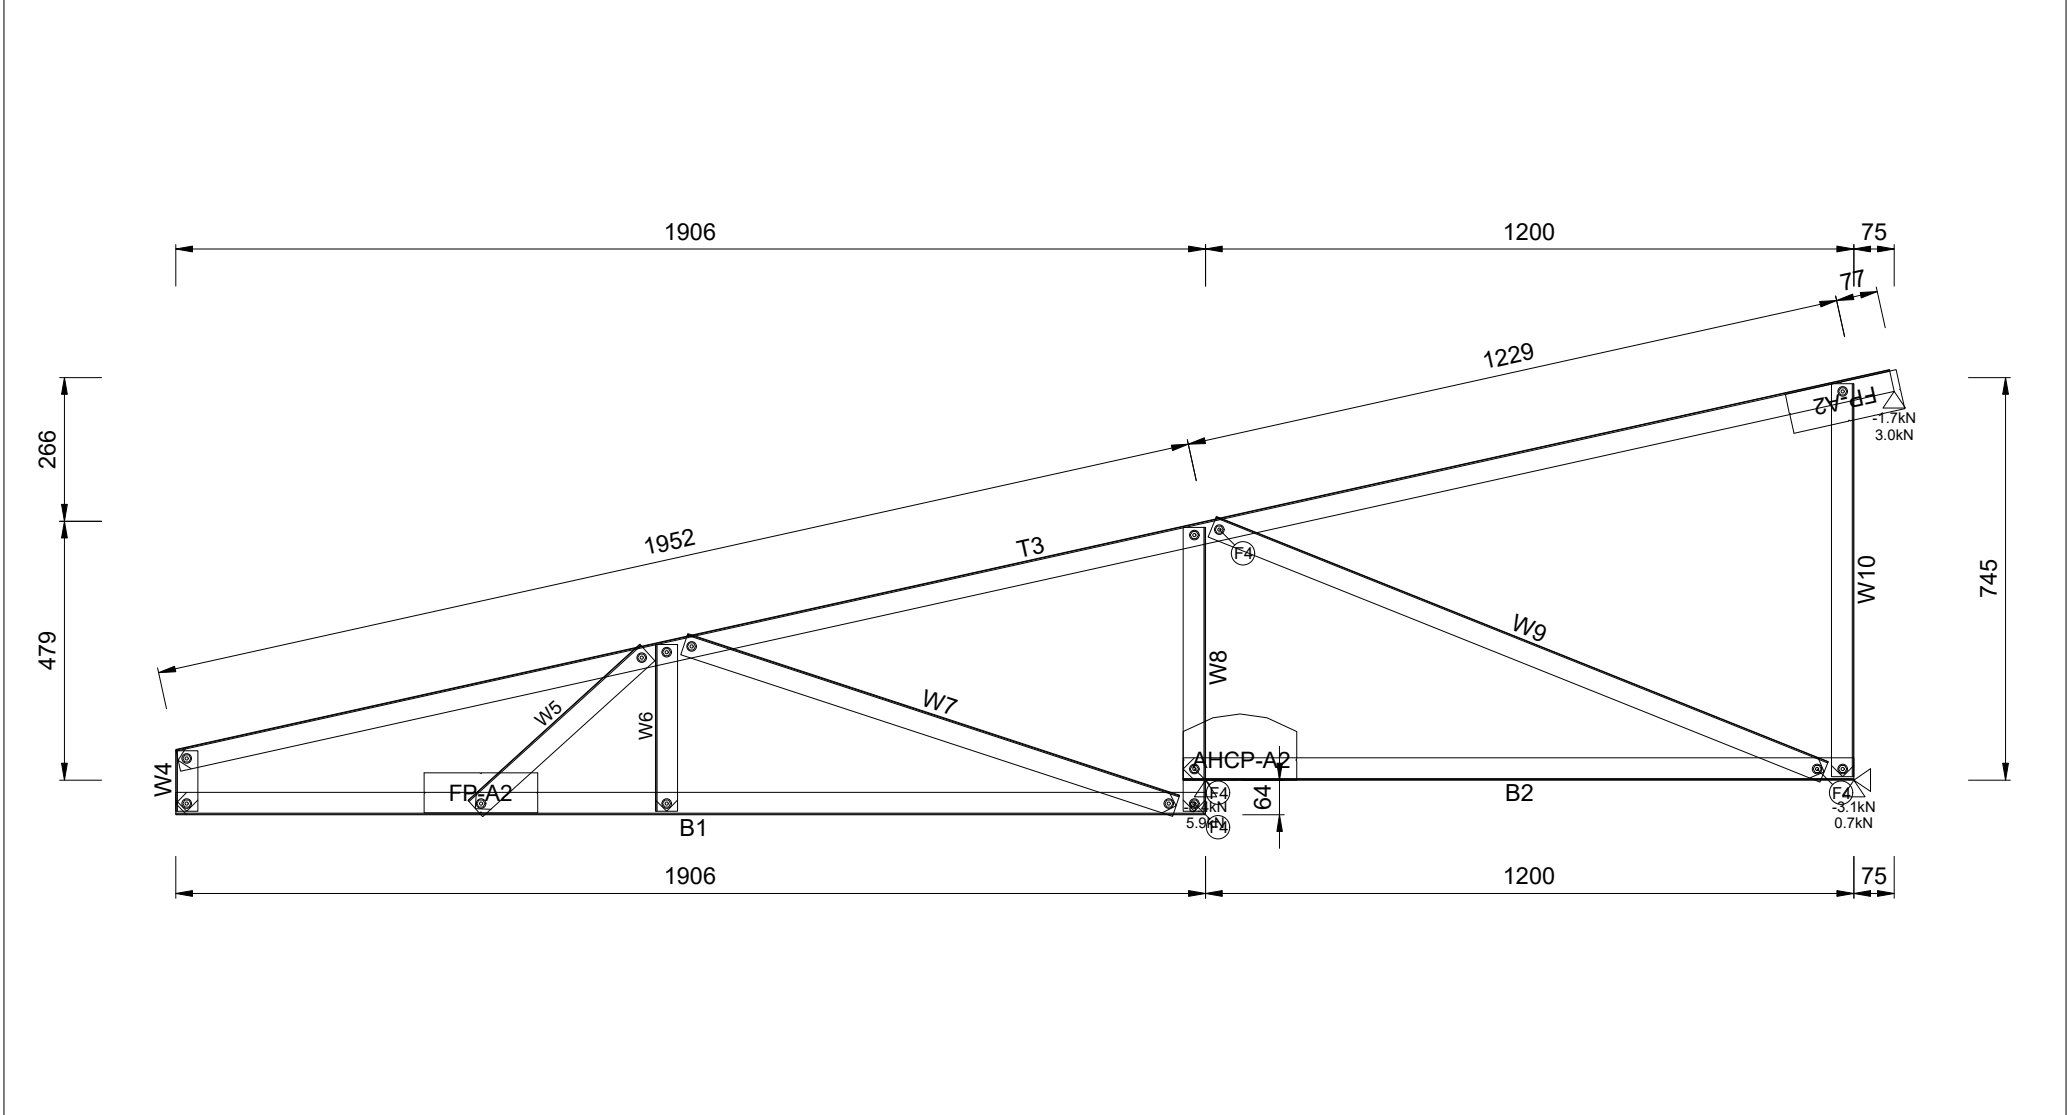


Quantity Required = 1 Mark as HN120 Engineering Status = 97%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	828h x 3181w				

B1	75S41-095-550	1	1951	B2	75S41-095-550	1	1241	T3	75S41-095-550	1	4318	W4	75S41-095-550	1	102	W5	75S41-095-550	1	423
W6	75S41-095-550	1	298	W7	75S41-095-550	1	998	W8	75S41-095-550	1	525	W9	75S41-095-550	1	1220	W10	75S41-095-550	1	727
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				15.2kg							

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

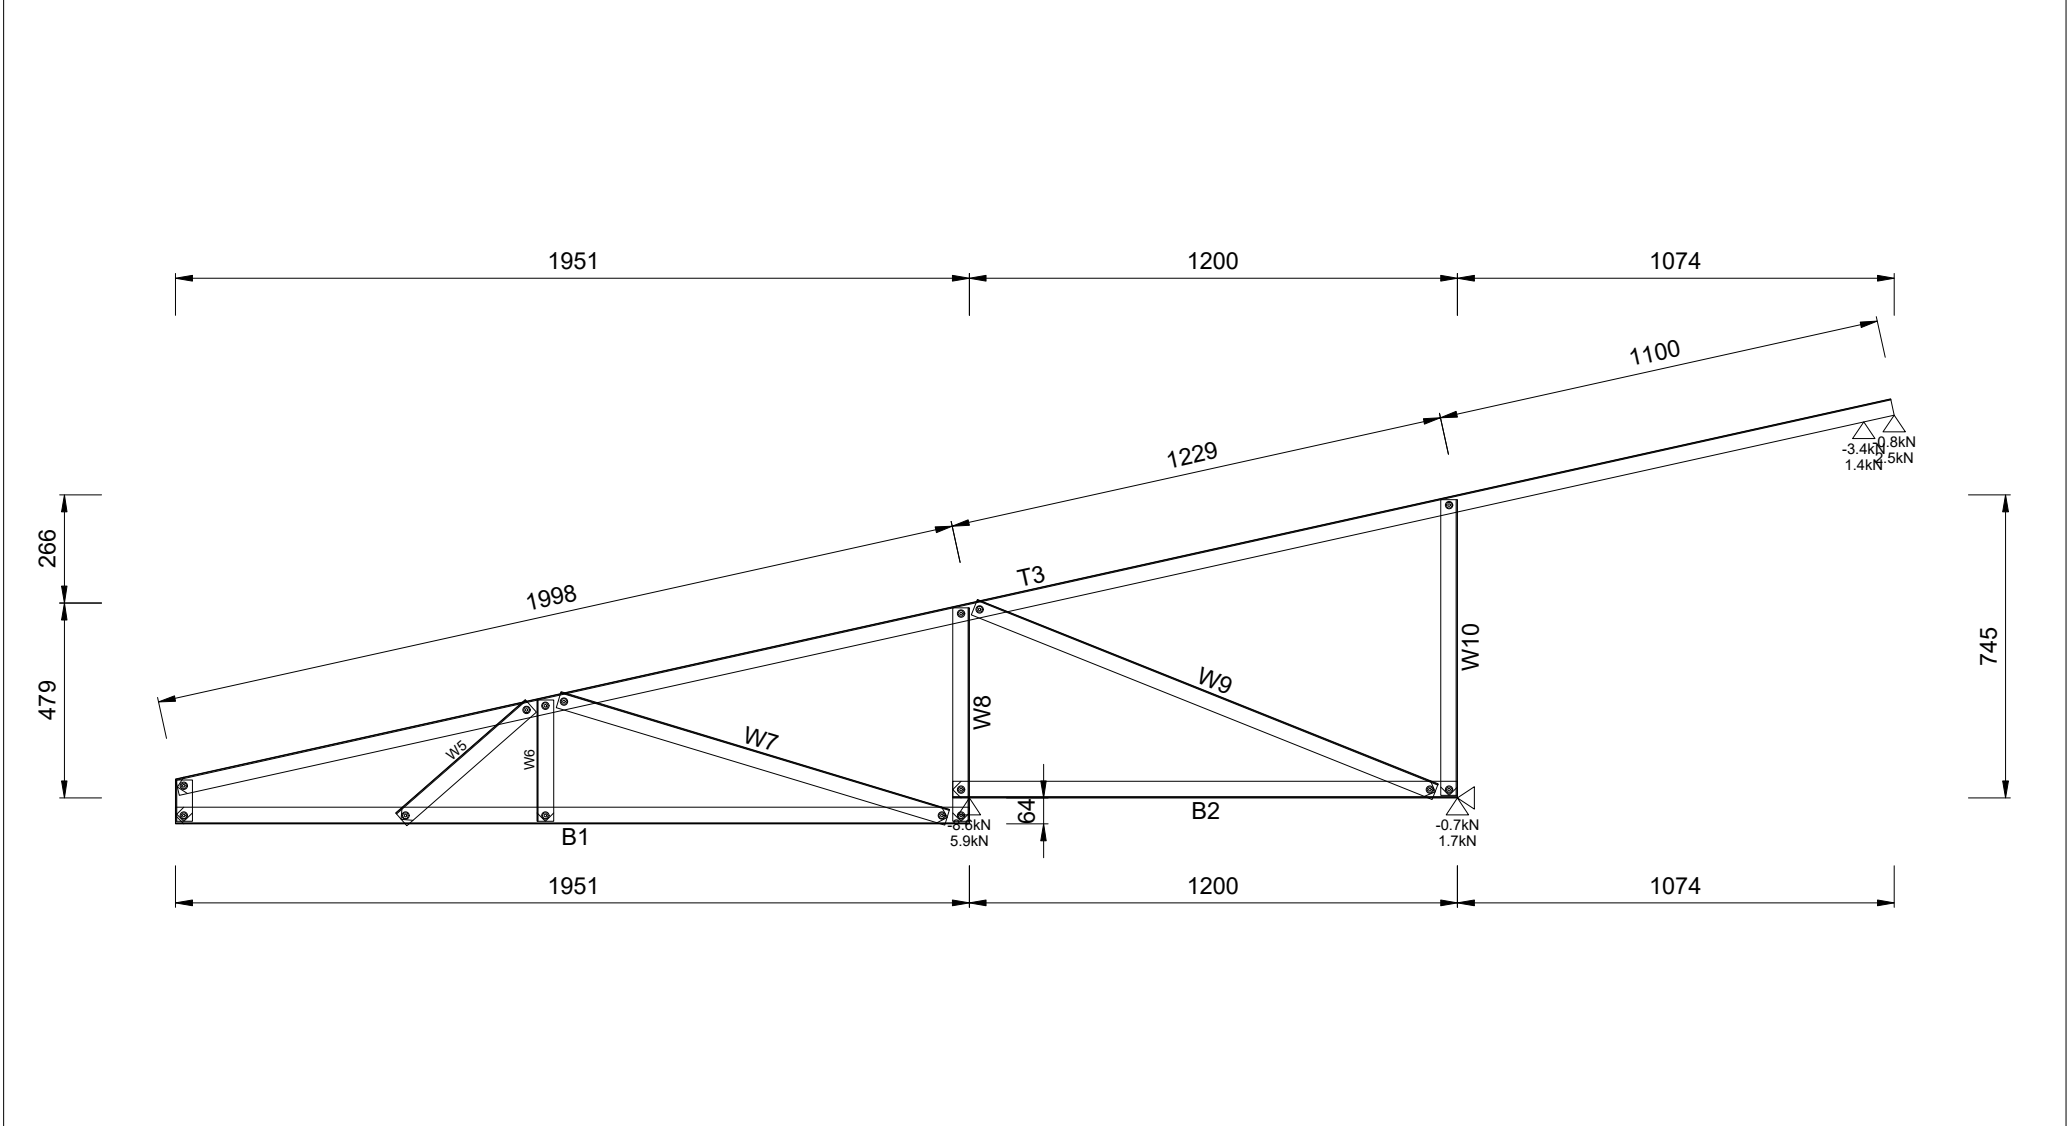


Quantity Required = 1 Mark as HN121 Engineering Status = 101%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1049h x 4225w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	5387	W4	75S41-095-550	1	102
W5	75S41-095-550	1	383	W6	75S41-095-550	1	237	W7	75S41-095-550	1	672	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate				FRAMECAD 10g-16mm Flathead				FRAMECAD M6 Screw				Working Sheet: Trusses			
Assembly Weight				2				38							
				17.4kg											

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

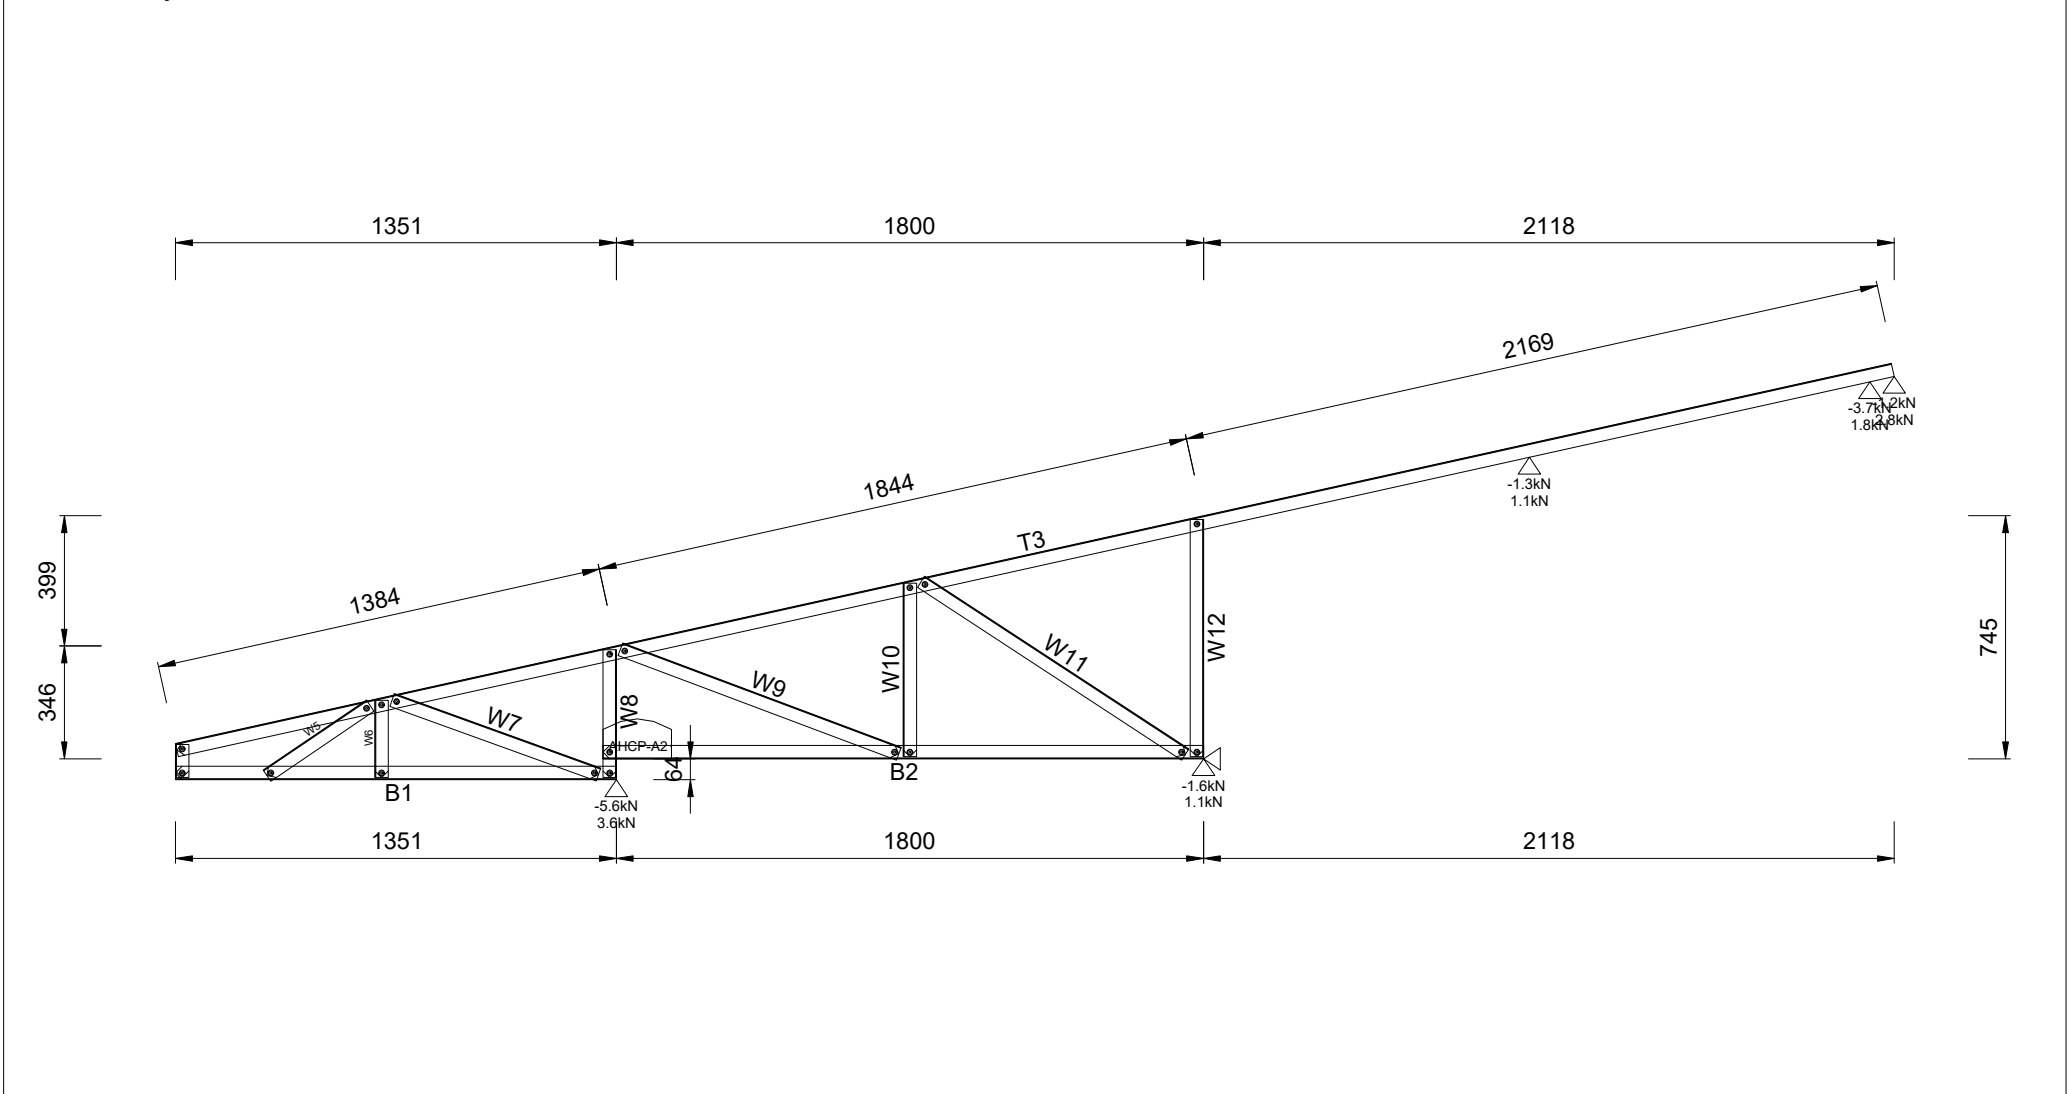


Quantity Required = 1 Mark as HN122 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1281h x 5268w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	6364	W4	75S41-095-550	1	102	
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	676	W8	75S41-095-550	1	392	
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727	
FRAMECAD 1.15mm Apex/Heel Plate				2	FRAMECAD 10g-16mm Flathead				24	FRAMECAD M6 Screw				38	Working Sheet: Trusses	
Assembly Weight				18.7kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

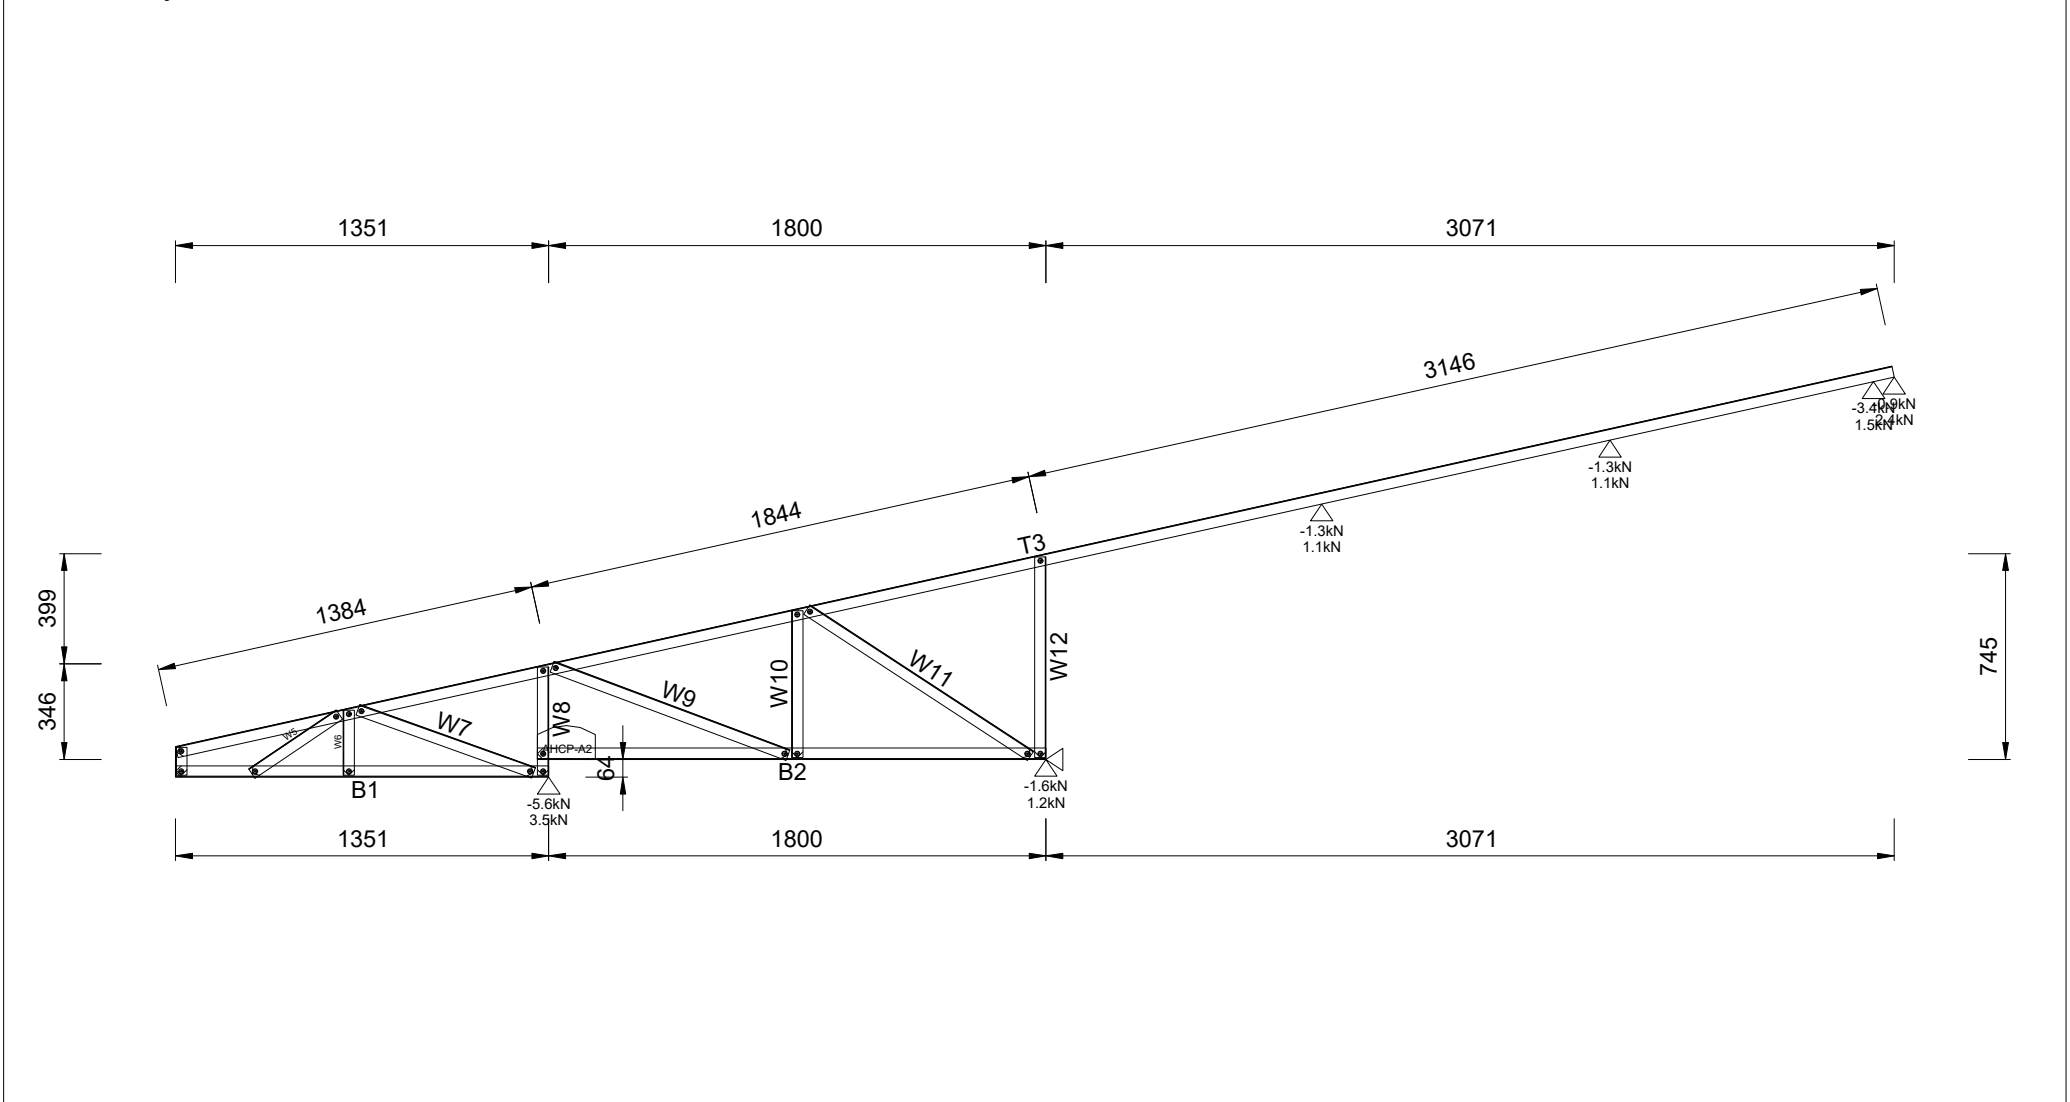


Quantity Required = 1 Mark as HN123 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1492h x 6222w				

B1	75S41-095-550	1	7607	T2	75S41-095-550	1	7782	H3	75S41-095-550	1	4462	W4	75S41-095-550	1	327	W5	75S41-095-550	1	649
W6	75S41-095-550	1	472	W7	75S41-095-550	1	713	W8	75S41-095-550	1	607	W9	75S41-095-550	1	825	W10	75S41-095-550	1	746
W11	75S41-095-550	1	933	W12	75S41-095-550	1	886	W13	75S41-095-550	1	1483	W14	75S41-095-550	1	1166	W15	75S41-095-550	1	1666
W16	75S41-095-550	1	1445	W17	75S41-095-550	1	1872	W18	75S41-095-550	1	1725	W19	75S41-095-550	1	2096	W20	75S41-095-550	1	2004
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				50.9kg							

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

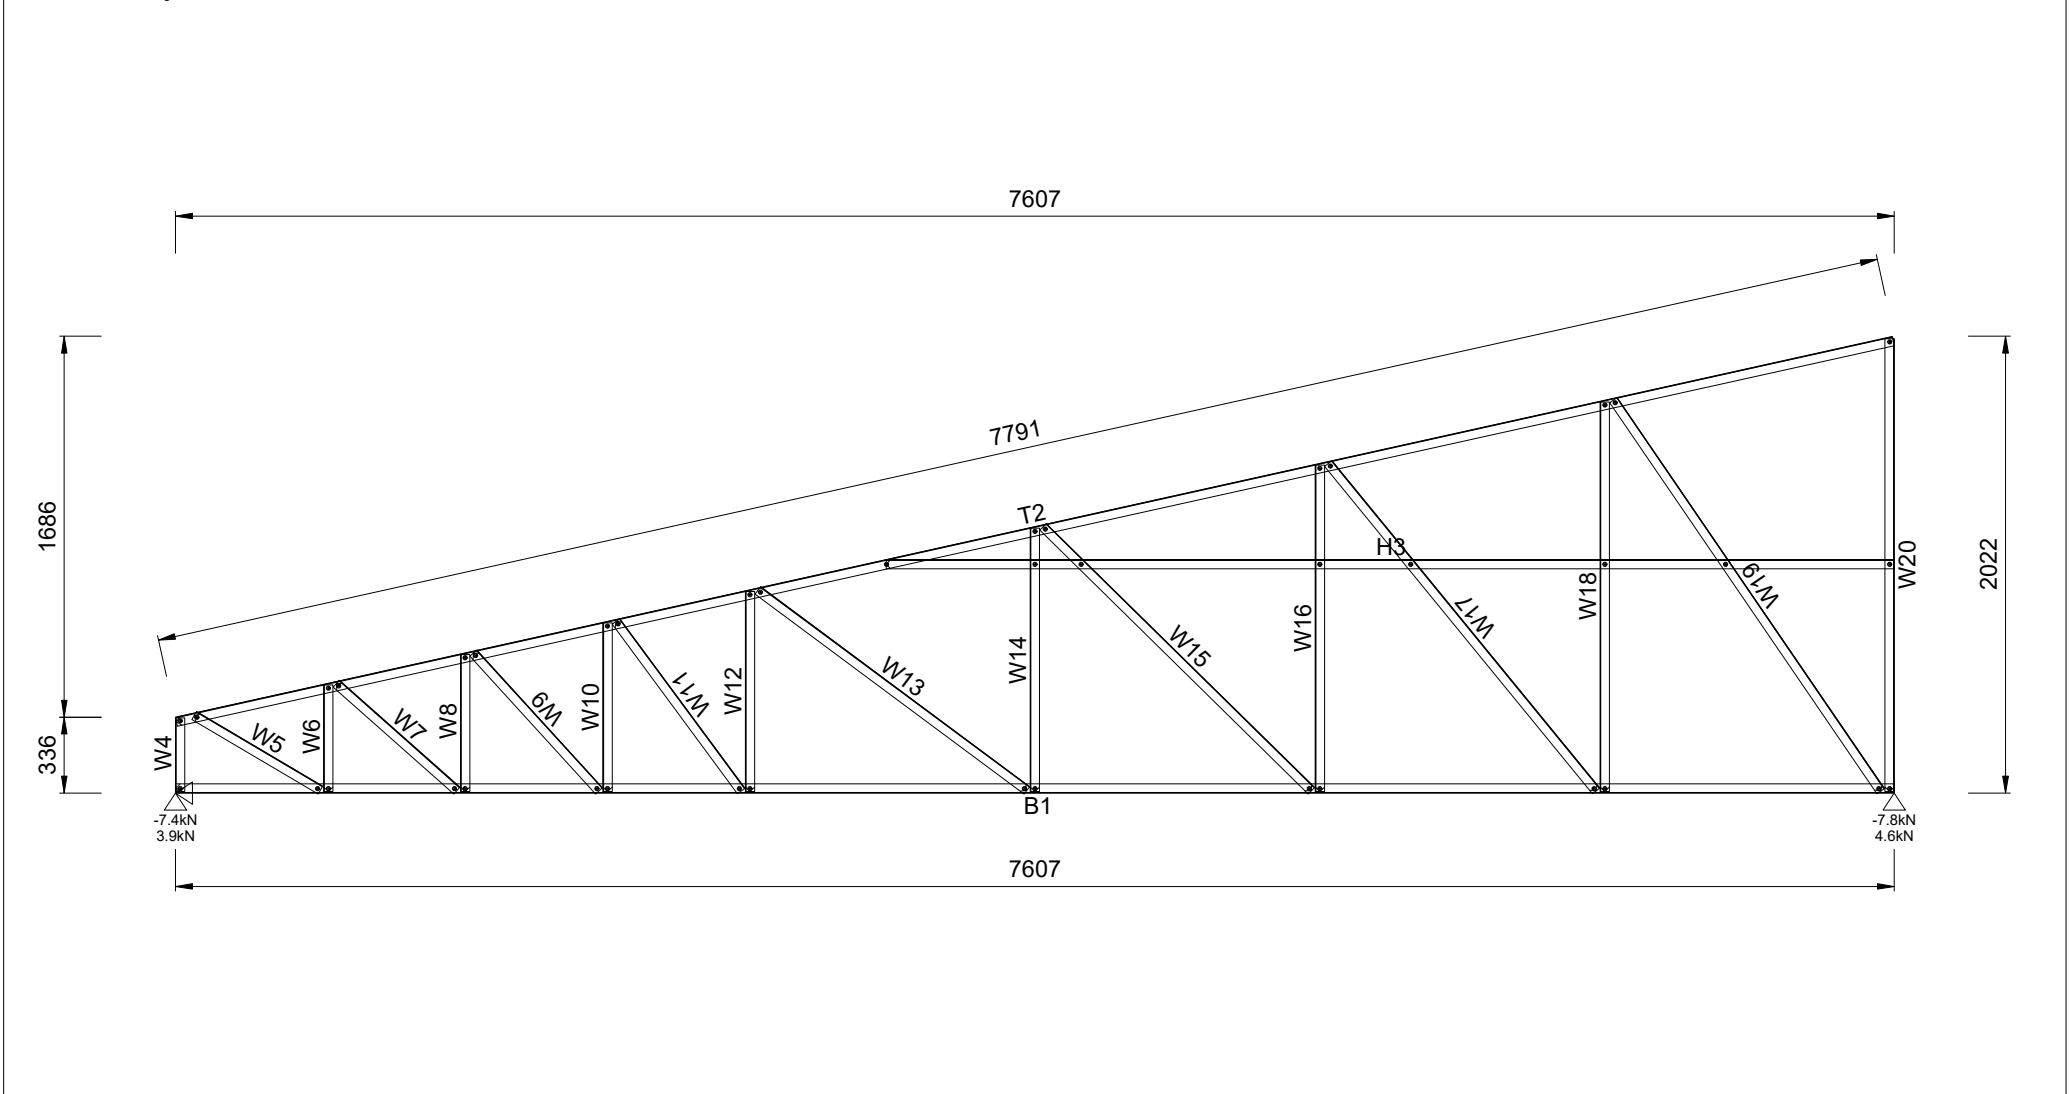


Quantity Required = 1 Mark as HN124 Engineering Status = 117%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2025h x 7607w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	7291	W4	75S41-095-550	1	102
W5	75S41-095-550	1	374	W6	75S41-095-550	1	238	W7	75S41-095-550	1	668	W8	75S41-095-550	1	392
W9	75S41-095-550	1	877	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 10g-16mm Flathead		24		FRAMECAD M6 Screw		38		Working Sheet: Trusses			
Assembly Weight			19.8kg												

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

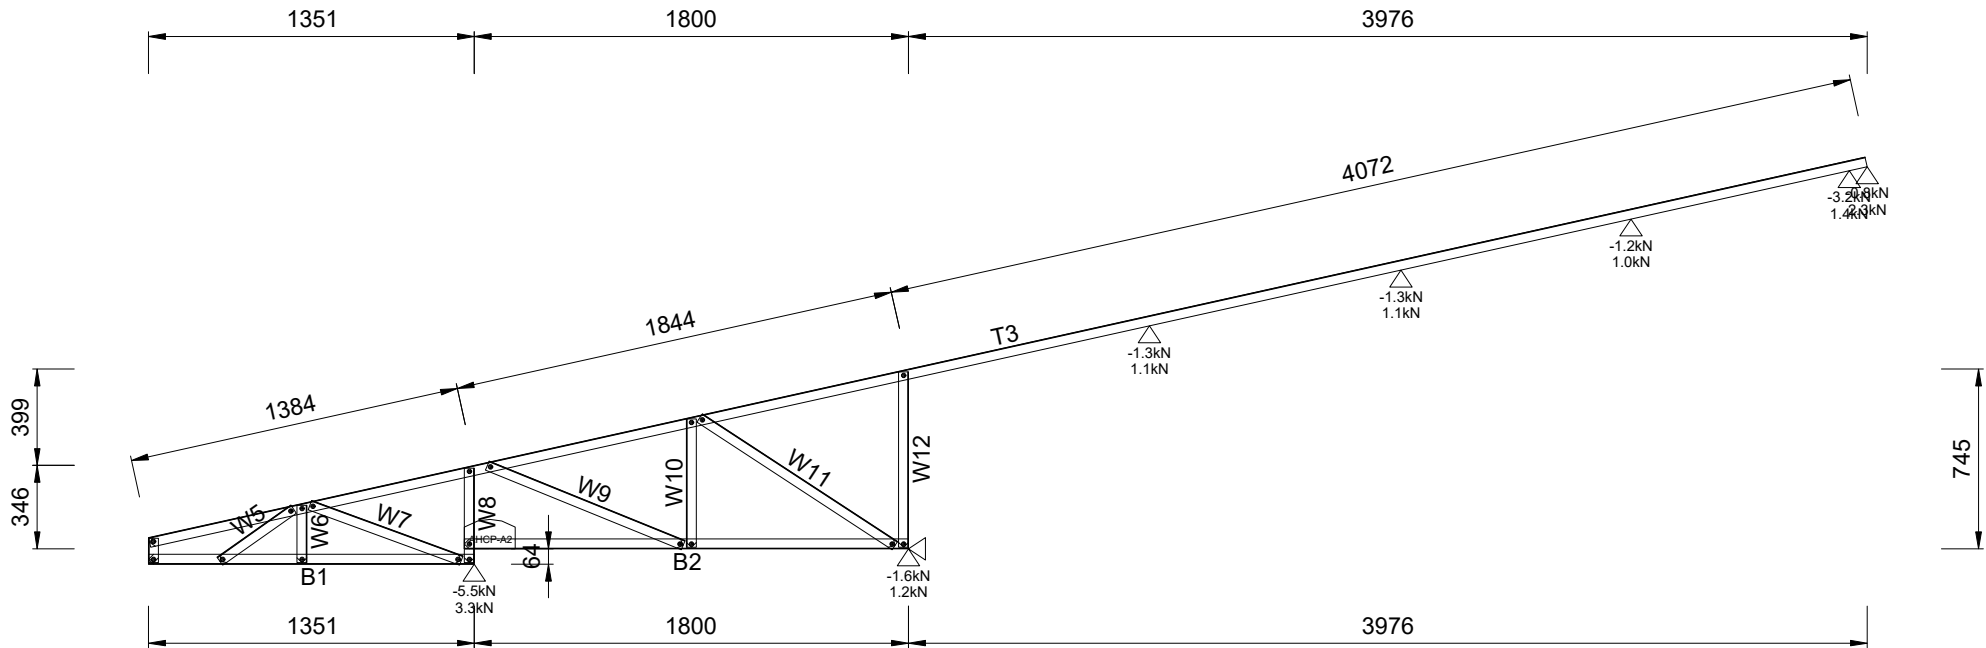


Quantity Required = 1 Mark as HN125 Engineering Status = 97%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1693h x 7127w				

B1	75S41-095-550	7	1307	B2	75S41-095-550	7	7031	T3	75S41-095-550	7	8489
H4	75S41-095-550	7	4510	W5	75S41-095-550	7	101	W6	75S41-095-550	7	378
W7	75S41-095-550	7	230	W8	75S41-095-550	7	656	W9	75S41-095-550	7	382
W10	75S41-095-550	7	704	W11	75S41-095-550	7	481	W12	75S41-095-550	7	788
W13	75S41-095-550	7	635	W14	75S41-095-550	7	1464	W15	75S41-095-550	7	943
W16	75S41-095-550	7	1621	W17	75S41-095-550	7	1251	W18	75S41-095-550	7	1818
W19	75S41-095-550	7	1559	W20	75S41-095-550	7	2042	W21	75S41-095-550	7	1868
FRAMECAD 1.15mm Apex/Heel Plate		14		FRAMECAD 1.15mm Fix Plate		42		FRAMECAD 10g-16mm Flathead		4788	
FRAMECAD M6 Screw		602		Working Sheet: Trusses				Assembly Weight			49.4kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

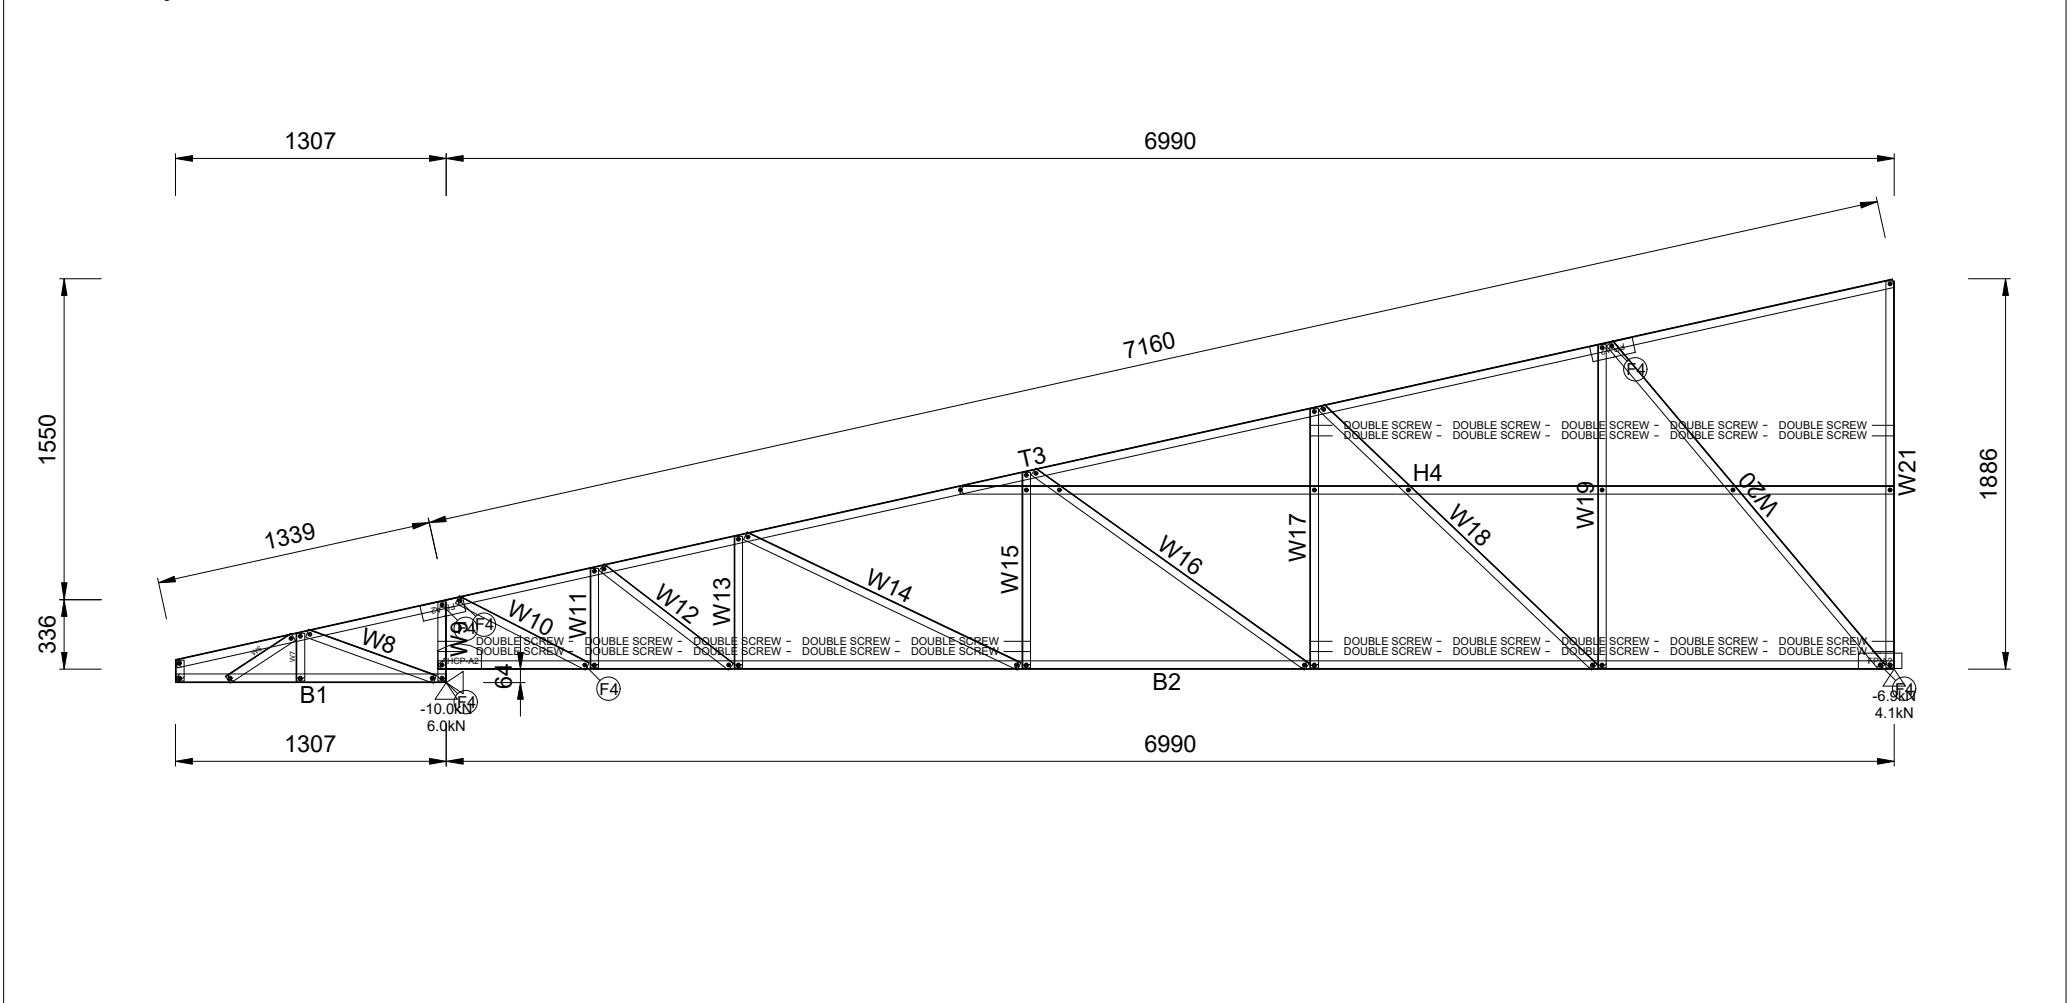

Quantity Required = 7 Mark as HN126 Engineering Status = 89%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1952h x 8297w				

Minimum number of fasteners required is 2 per joint




Client :Arcare Lynbrook J/No. 26110

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	8856	W4	75S41-095-550	1	102
W5	75S41-095-550	1	408	W6	75S41-095-550	1	238	W7	75S41-095-550	1	670	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24	FRAMECAD M6 Screw			38	Working Sheet: Trusses			
Assembly Weight			21.9kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

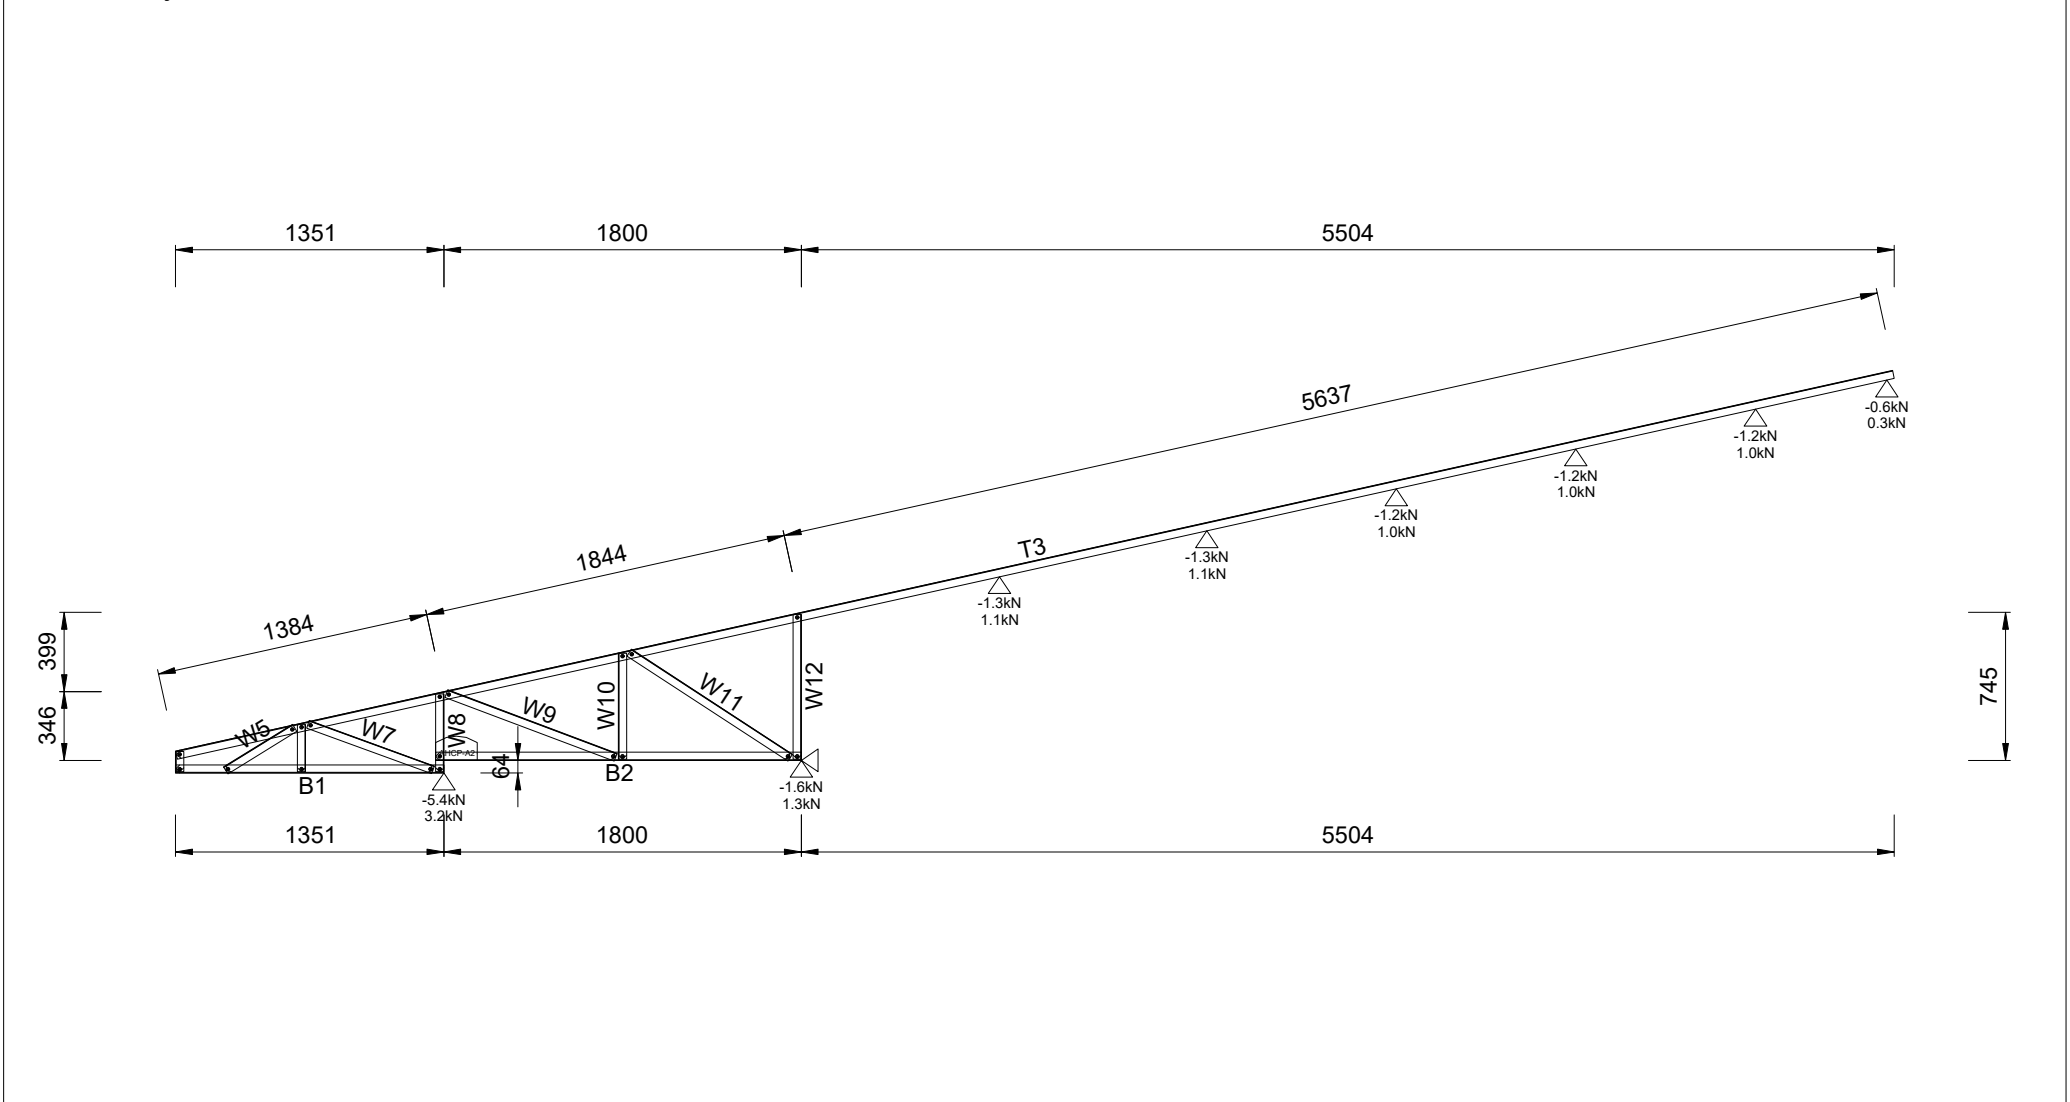


Quantity Required = 1 Mark as HN128 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2032h x 8655w				

B1 75S41-095-550	2	1307	B2 75S41-095-550	2	6731	T3 75S41-095-550	2	8182	H4 75S41-095-550	2	3713
W5 75S41-095-550	2	101	W6 75S41-095-550	4	382	W7 75S41-095-550	2	236	W8 75S41-095-550	2	635
W9 75S41-095-550	2	710	W10 75S41-095-550	2	474	W11 75S41-095-550	2	760	W12 75S41-095-550	2	622
W13 75S41-095-550	2	1404	W14 75S41-095-550	2	917	W15 75S41-095-550	2	1557	W16 75S41-095-550	2	1211
W17 75S41-095-550	2	1747	W18 75S41-095-550	2	1506	W19 75S41-095-550	2	1963	W20 75S41-095-550	2	1801
FRAMECAD 1.15mm Apex/Heel Plate	4		FRAMECAD 1.15mm Fix Plate	4		FRAMECAD 10g-16mm Flathead	208		FRAMECAD M6 Screw	164	
Working Sheet: Trusses			Assembly Weight		46.9kg						

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

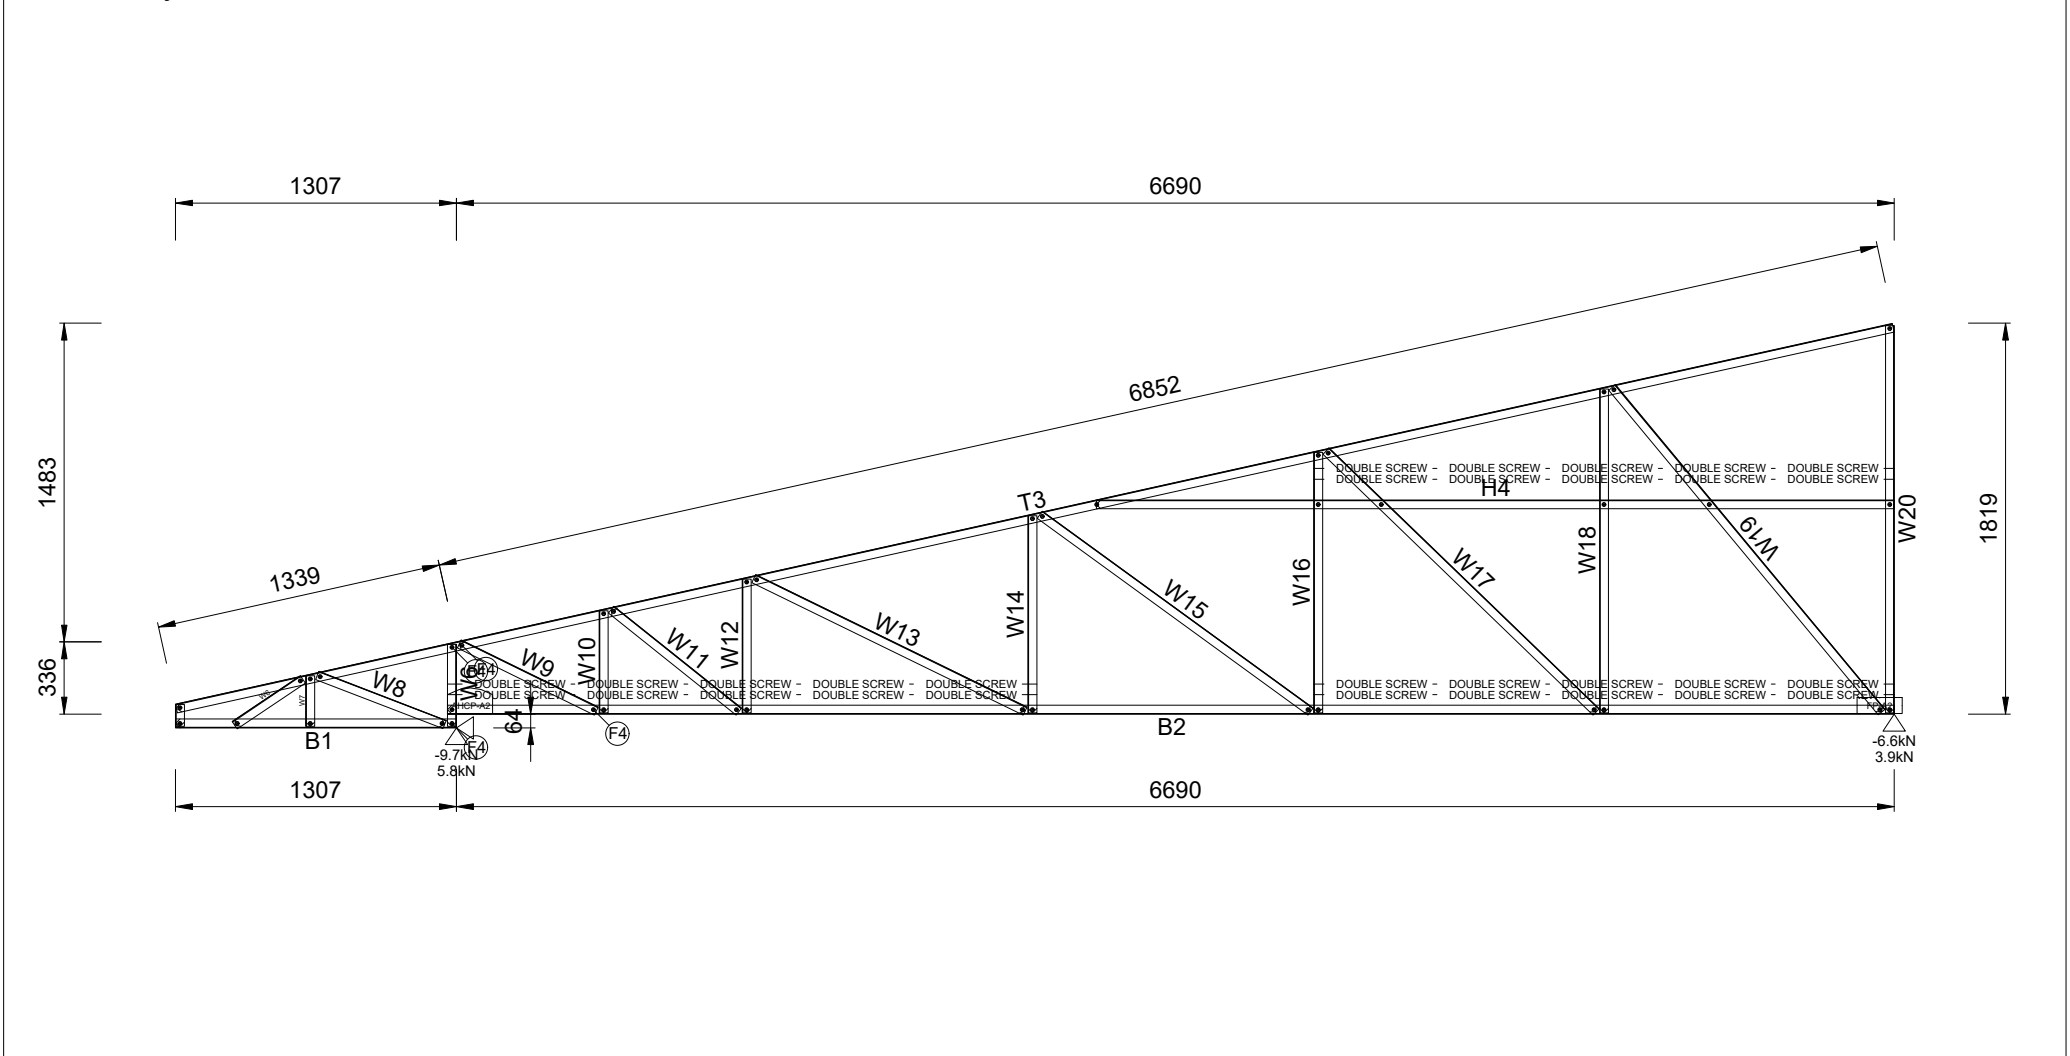


Quantity Required = 2 Mark as HN129 Engineering Status = 97%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1885h x 7997w				

B1 75S41-095-550	3	1307	B2 75S41-095-550	3	6731	T3 75S41-095-550	3	8182	H4 75S41-095-550	3	3778
W5 75S41-095-550	3	101	W6 75S41-095-550	6	382	W7 75S41-095-550	3	236	W8 75S41-095-550	3	635
W9 75S41-095-550	3	678	W10 75S41-095-550	3	474	W11 75S41-095-550	3	760	W12 75S41-095-550	3	622
W13 75S41-095-550	3	1404	W14 75S41-095-550	3	917	W15 75S41-095-550	3	1557	W16 75S41-095-550	3	1211
W17 75S41-095-550	3	1747	W18 75S41-095-550	3	1506	W19 75S41-095-550	3	1963	W20 75S41-095-550	3	1801
FRAMECAD 1.15mm Apex/Heel Plate	6		FRAMECAD 1.15mm Fix Plate	6		FRAMECAD 10g-16mm Flathead	450		FRAMECAD M6 Screw	246	
Working Sheet: Trusses			Assembly Weight		46.9kg						

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

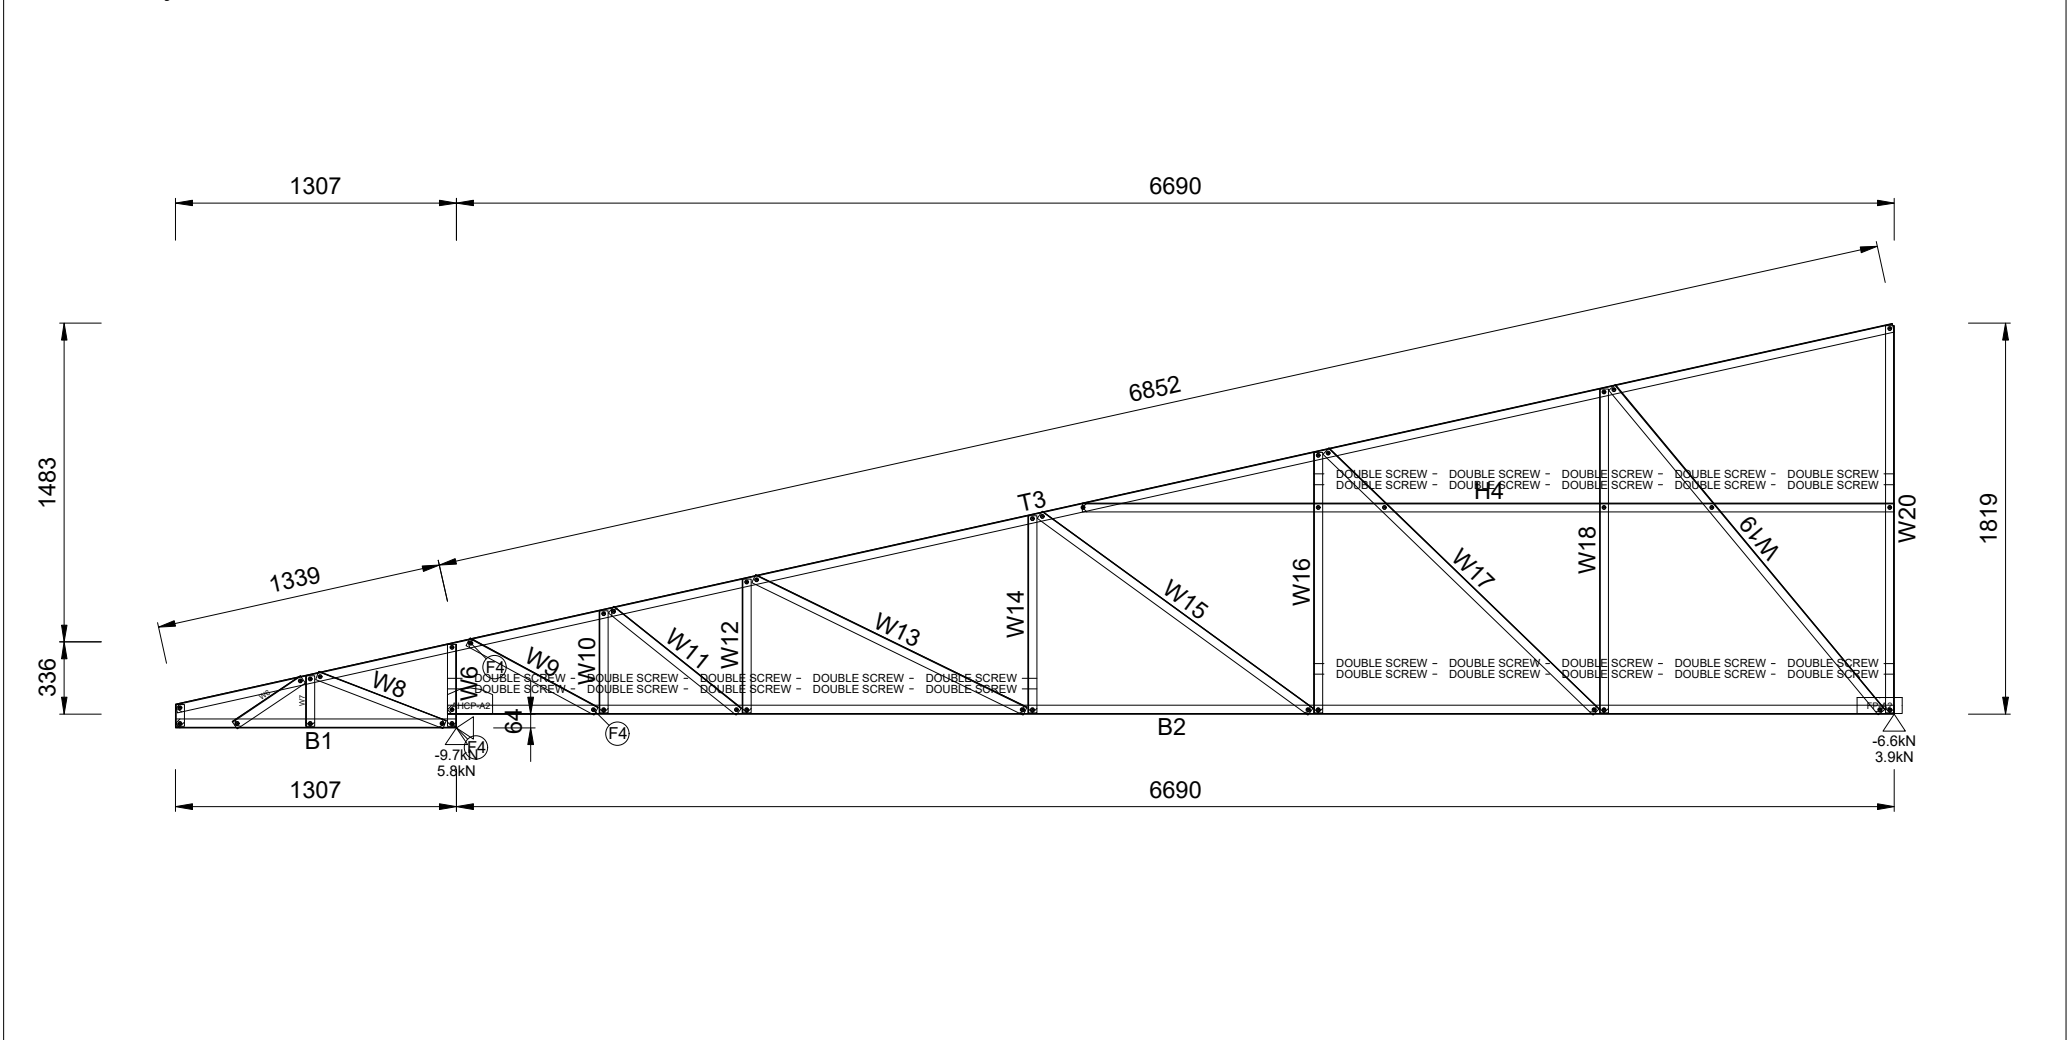


Quantity Required = 3 Mark as HN130 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1885h x 7997w				

B1 75S41-095-550	1	1351	B2 75S41-095-550	1	1841	T3 75S41-095-550	1	8856	W4 75S41-095-550	1	102
W5 75S41-095-550	1	382	W6 75S41-095-550	1	236	W7 75S41-095-550	1	676	W8 75S41-095-550	1	392
W9 75S41-095-550	1	912	W10 75S41-095-550	1	532	W11 75S41-095-550	1	968	W12 75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 10g-16mm Flathead	24		FRAMECAD M6 Screw	38		Working Sheet: Trusses		
Assembly Weight		21.9kg									

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

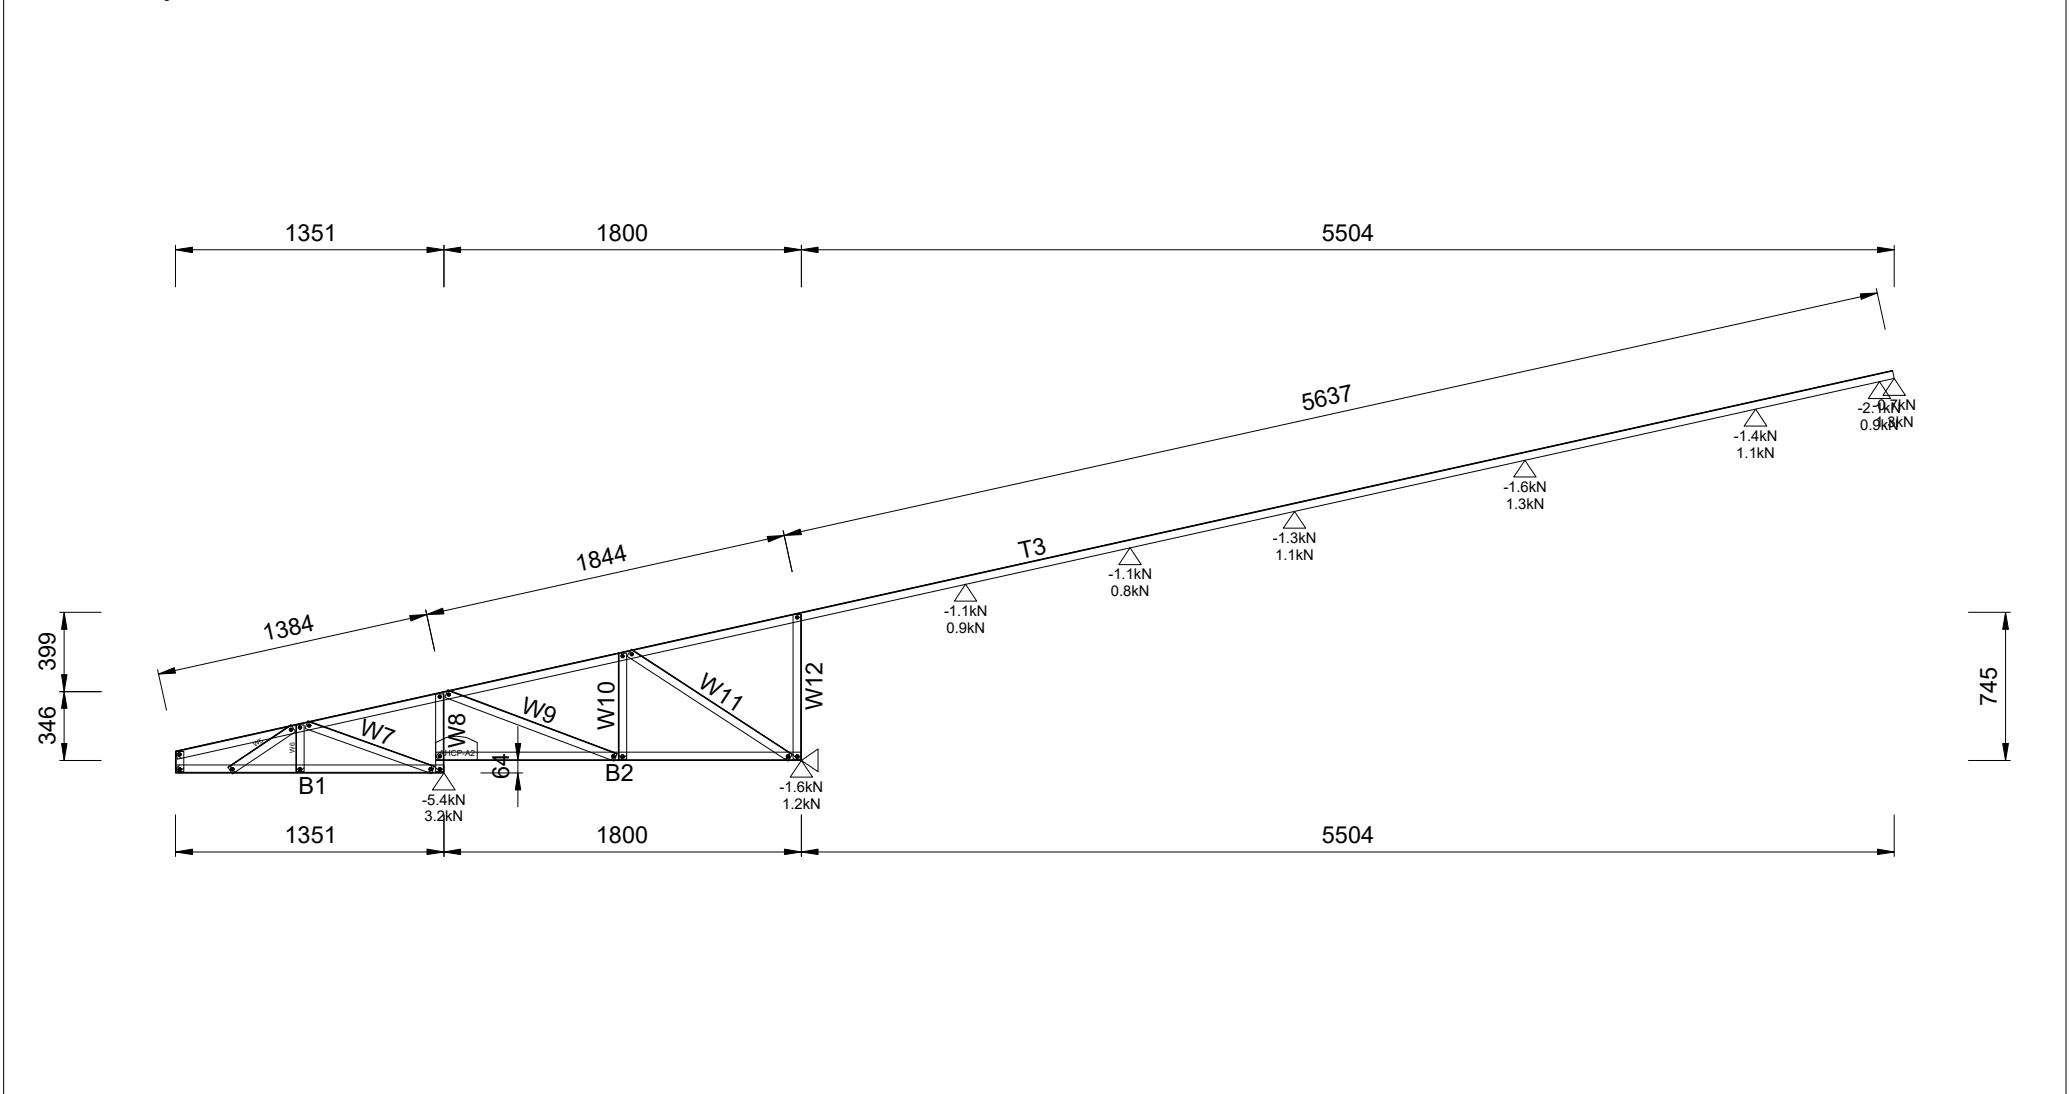


Quantity Required = 1 Mark as HN131 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2032h x 8655w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	8217	W4	75S41-095-550	1	102
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	676	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate				FRAMECAD 10g-16mm Flathead				FRAMECAD M6 Screw				Working Sheet: Trusses			
Assembly Weight				21.1kg				38							

Powered by FRAMECAD Structure ®


Minimum number of fasteners required is 2 per joint

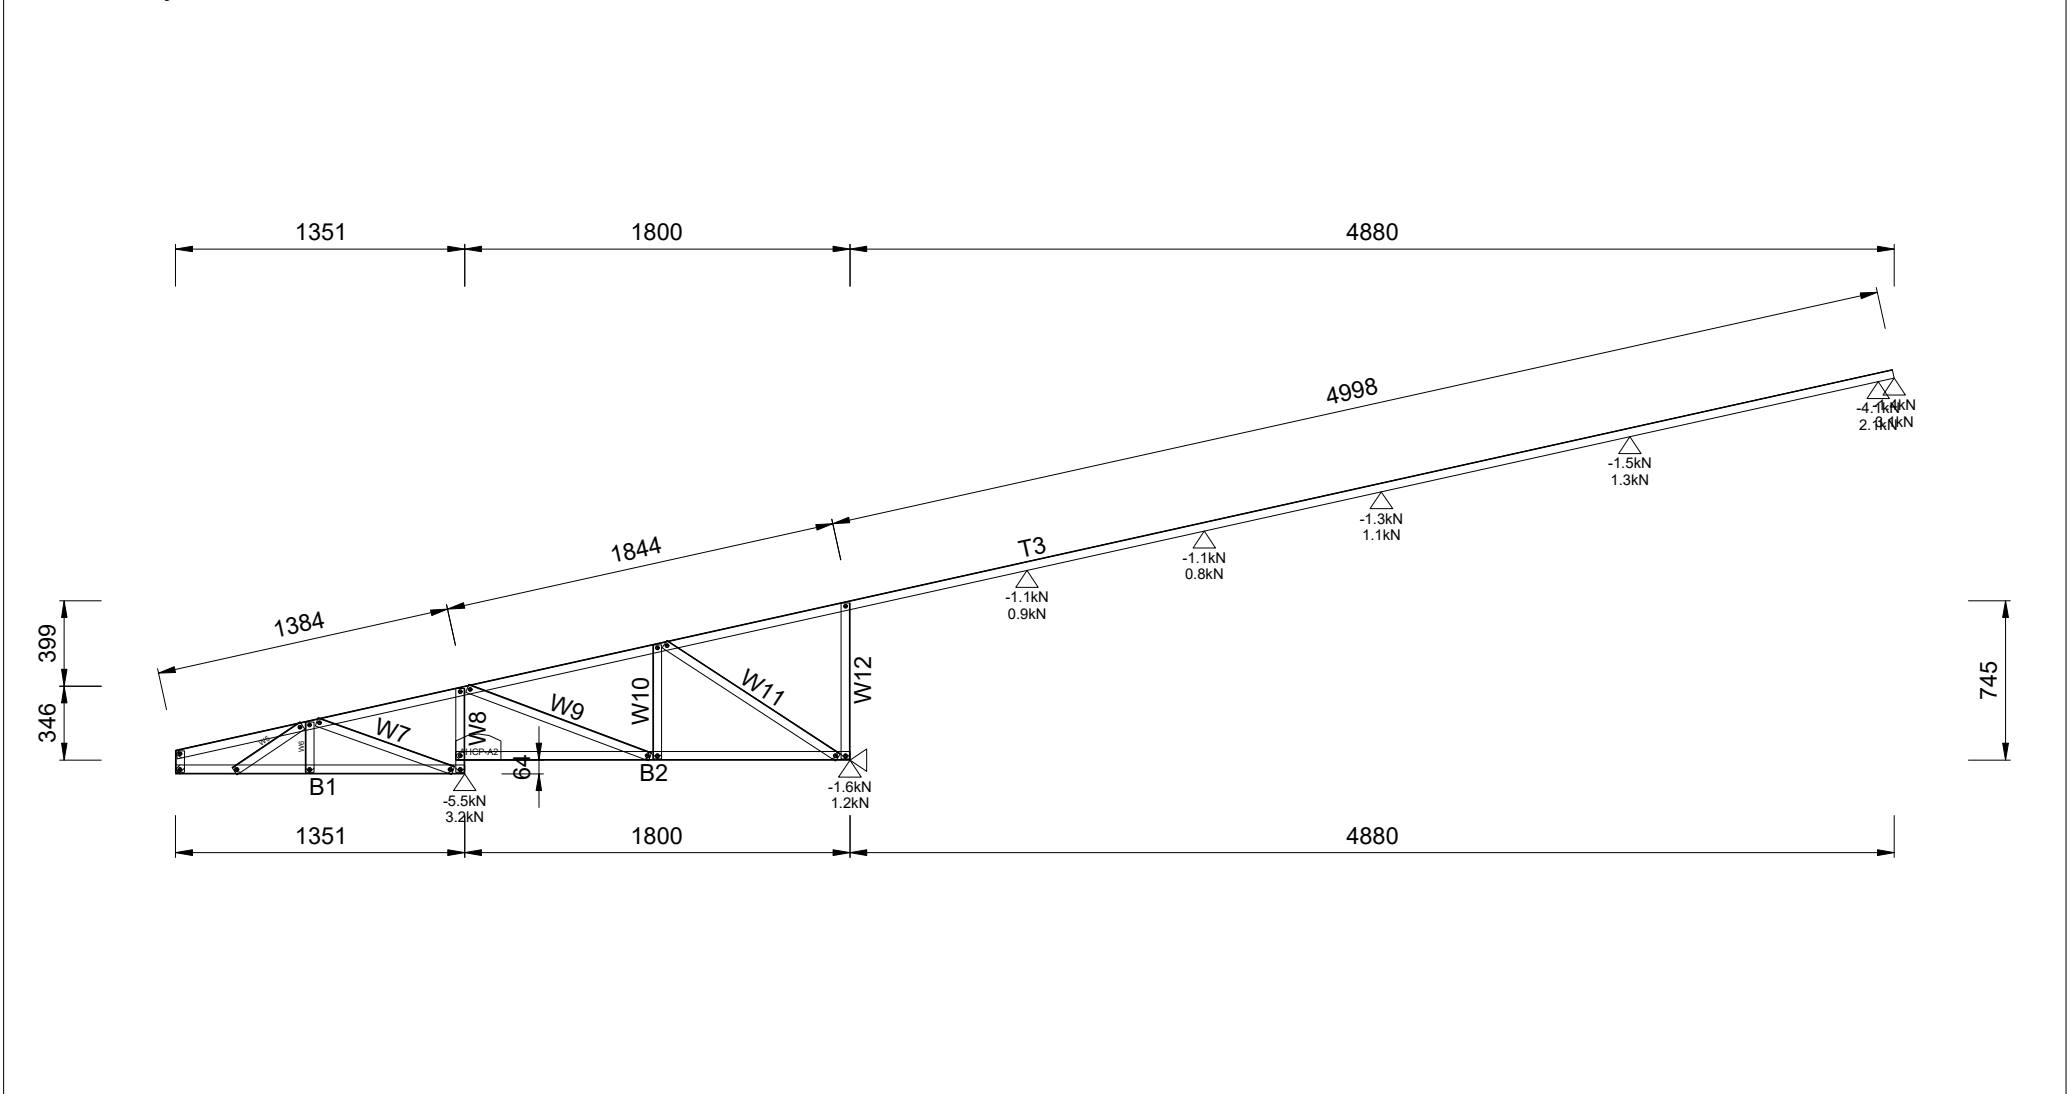

Quantity Required = 1 Mark as HN132 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1893h x 8031w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	7028	W4	75S41-095-550	1	102
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	676	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24	FRAMECAD M6 Screw			38	Working Sheet: Trusses			
Assembly Weight			19.5kg												

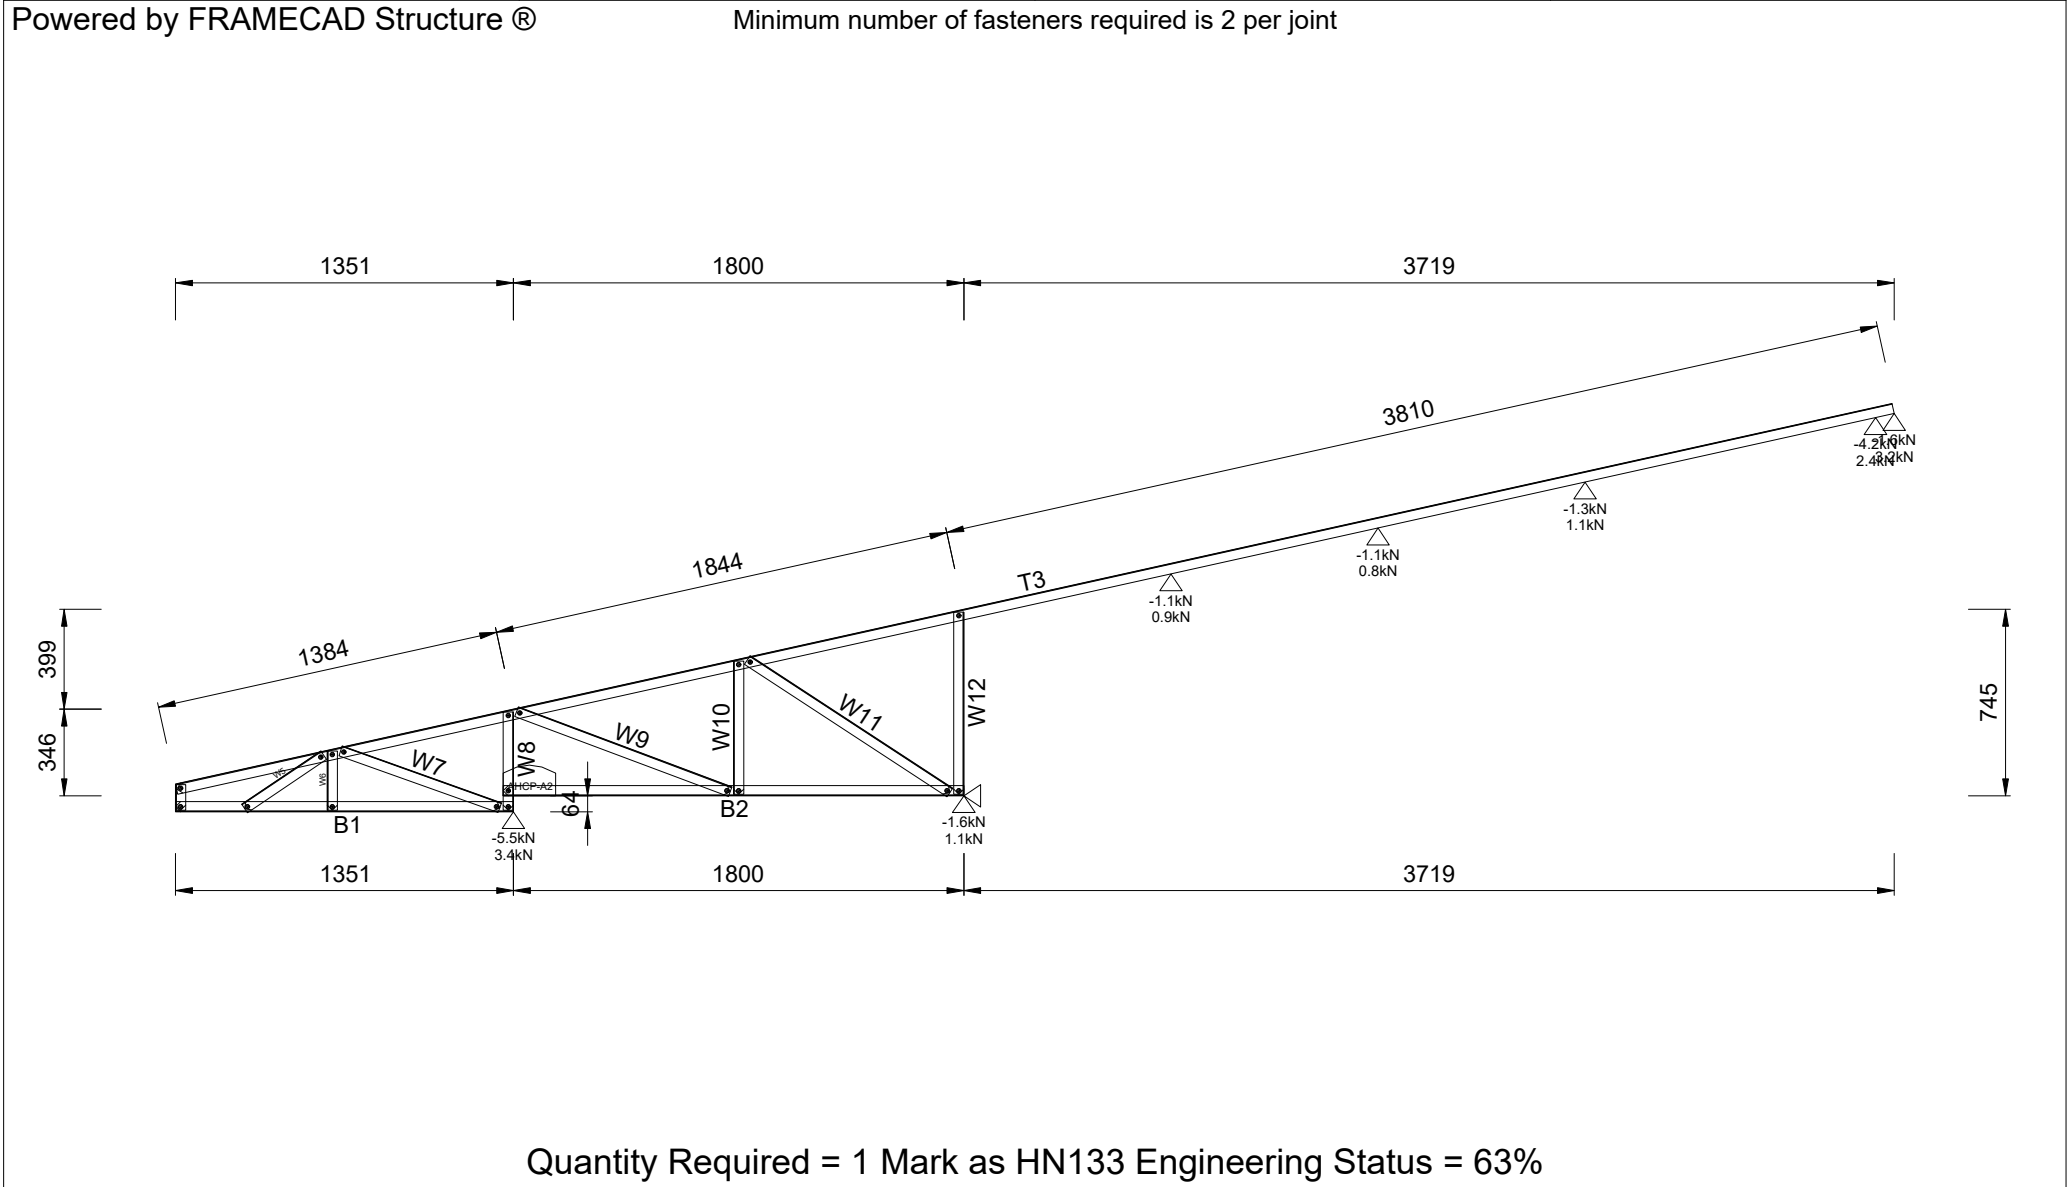


Quantity Required = 1 Mark as HN133 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1636h x 6870w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	5839	W4	75S41-095-550	1	102
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	676	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 10g-16mm Flathead		24		FRAMECAD M6 Screw		38		Working Sheet: Trusses			
Assembly Weight			18.0kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

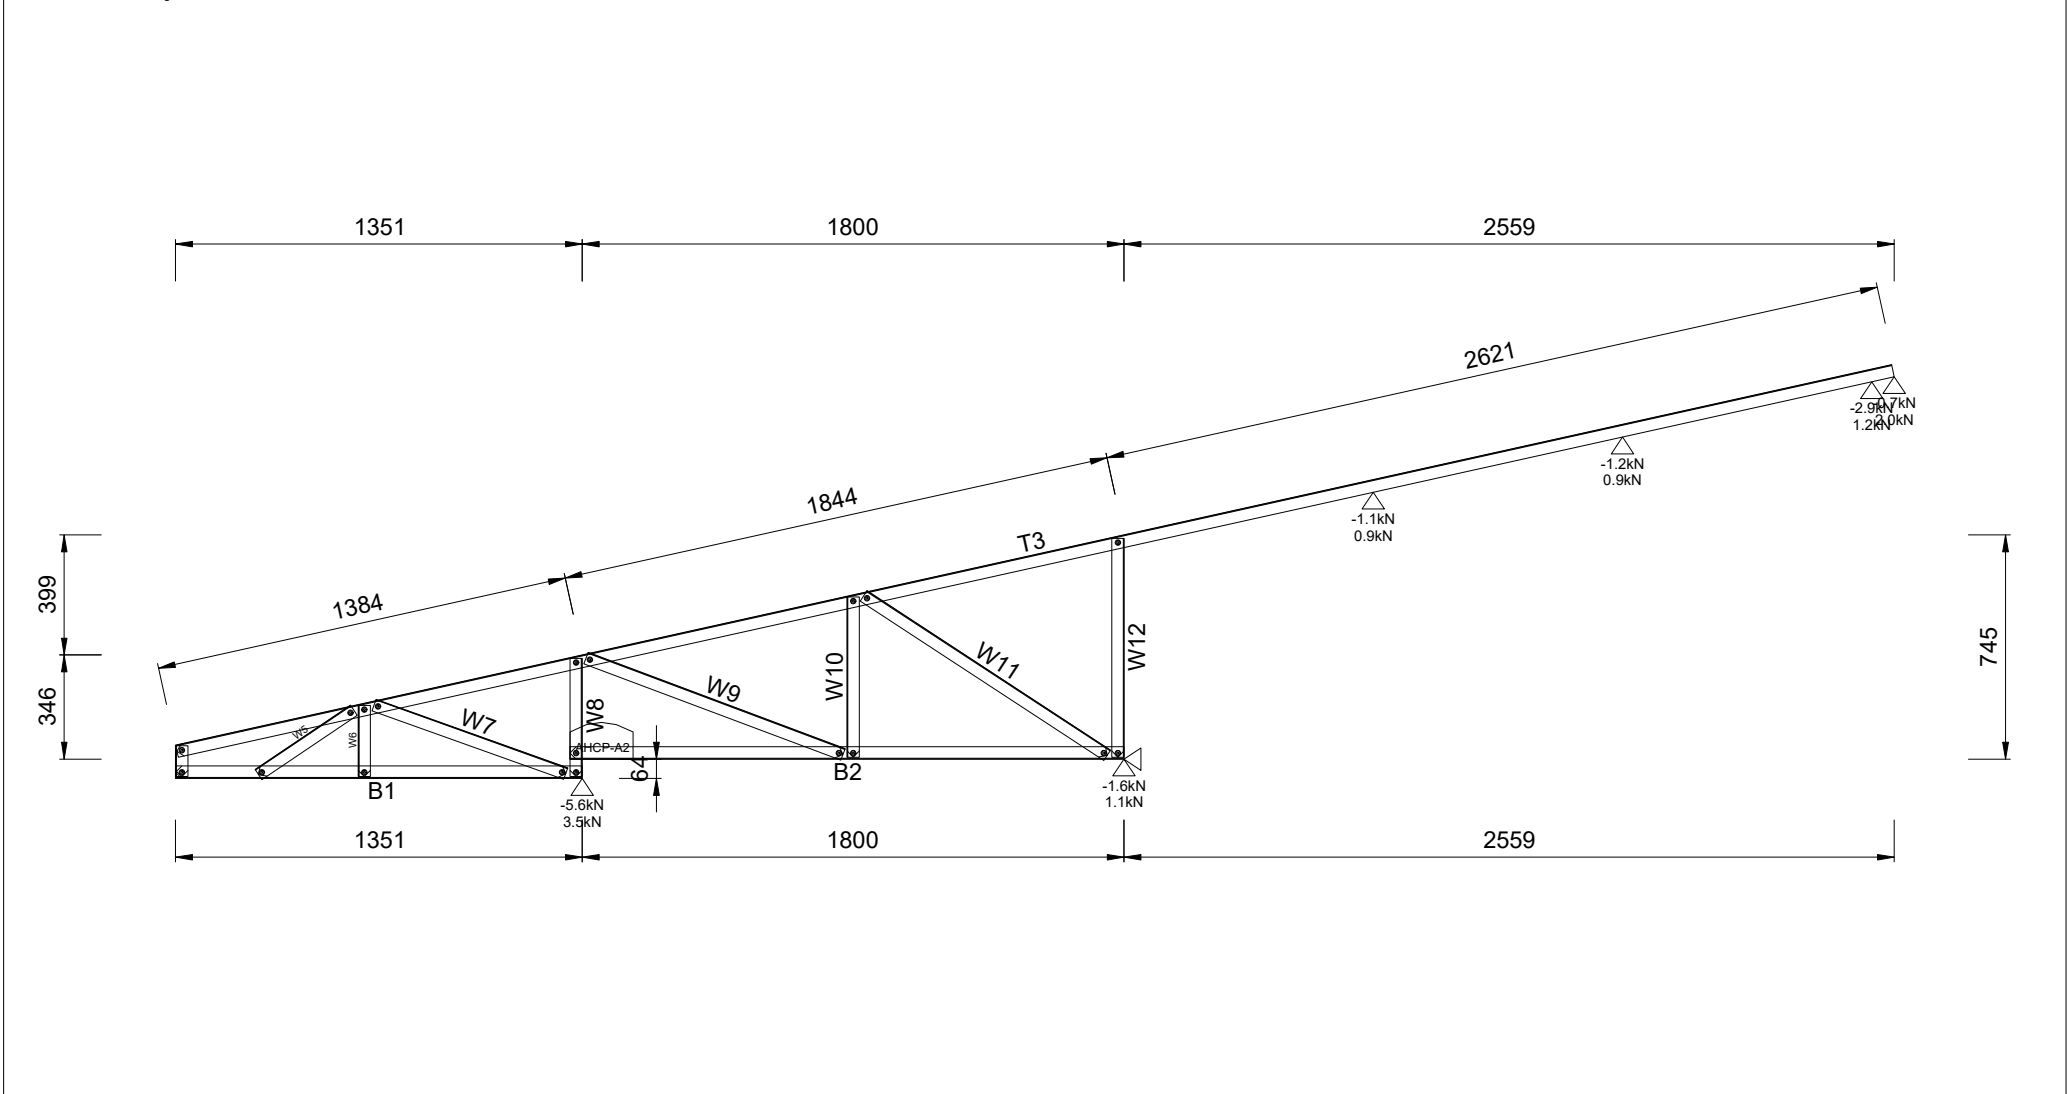


Quantity Required = 1 Mark as HN134 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1379h x 5710w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	4991	W4	75S41-095-550	1	102
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	676	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24	FRAMECAD M6 Screw			38	Working Sheet: Trusses			
Assembly Weight			16.9kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

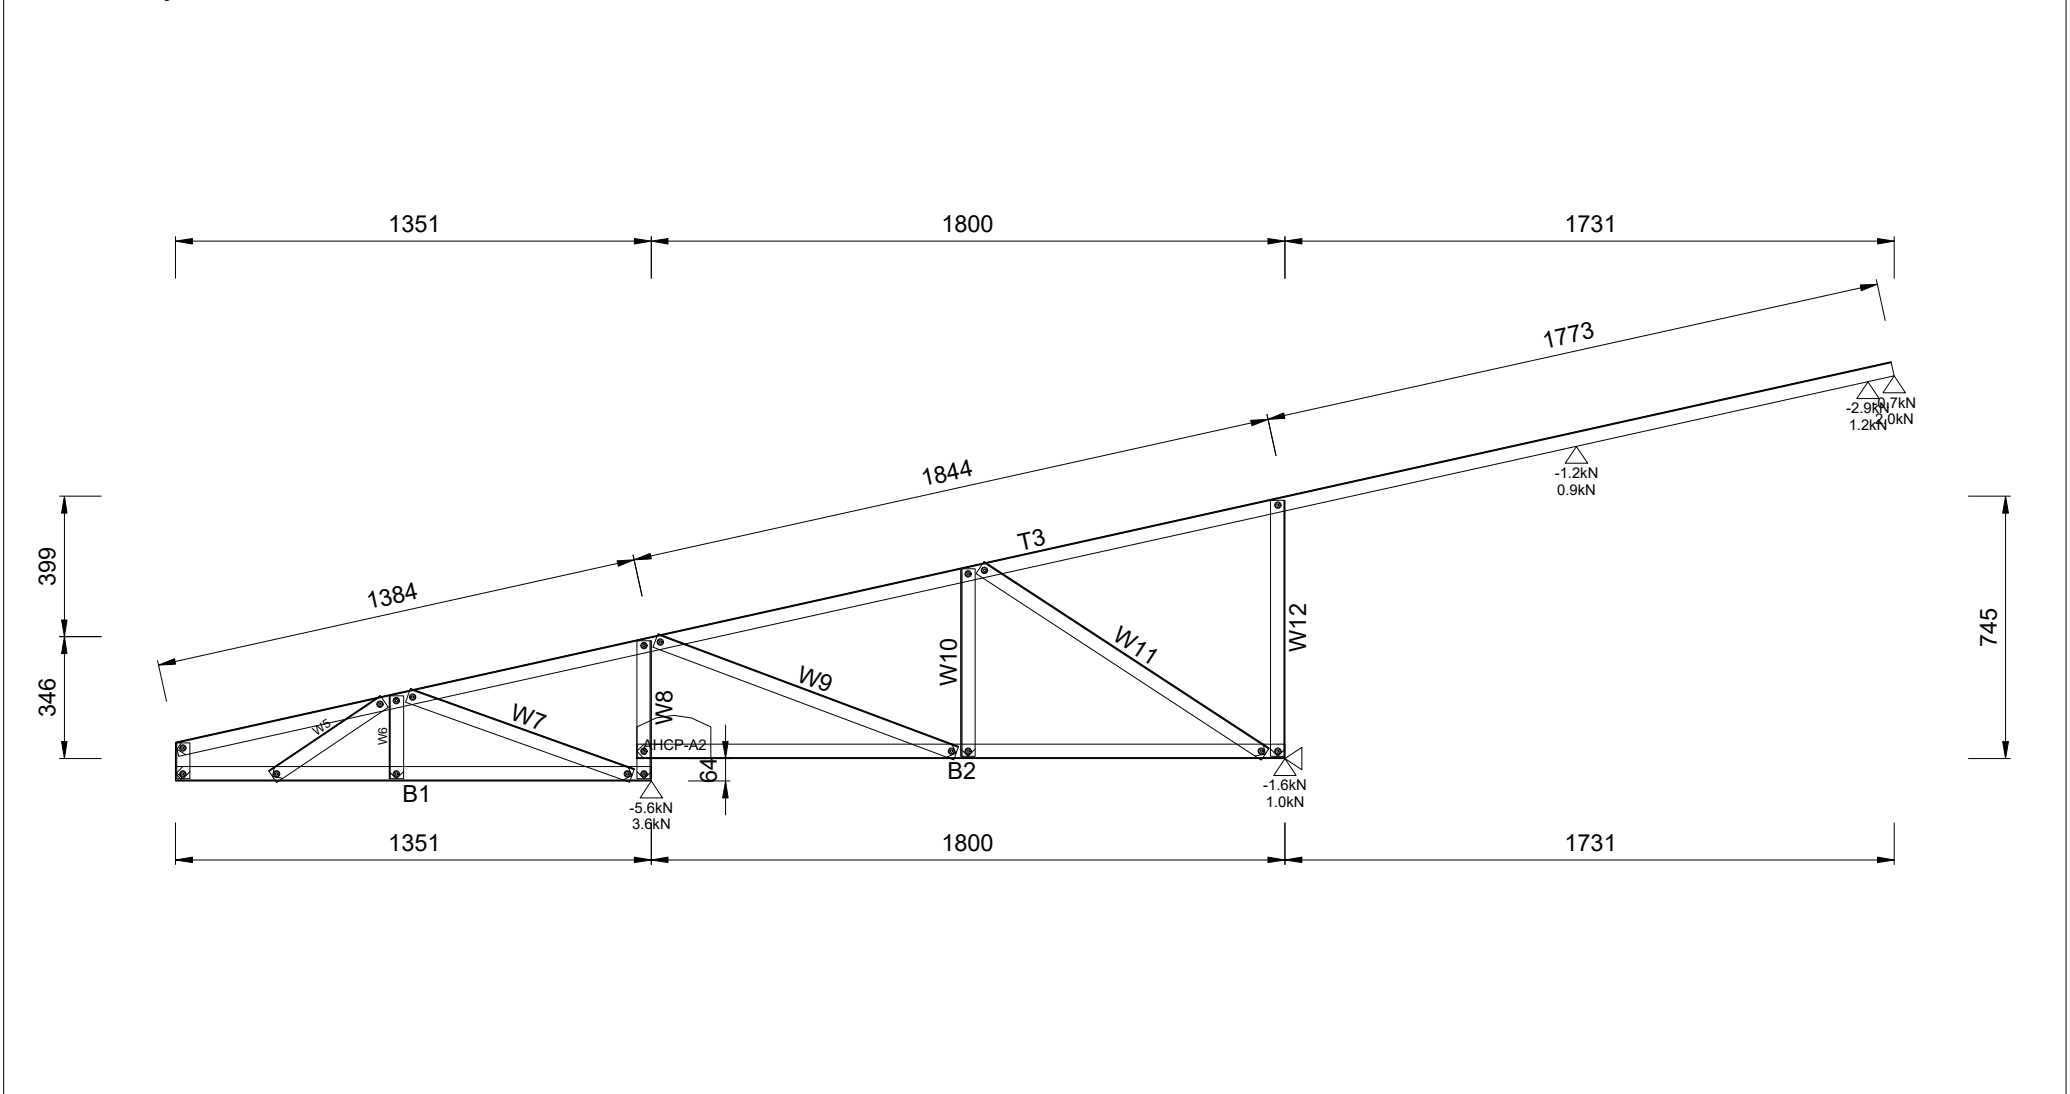


Quantity Required = 1 Mark as HN135 Engineering Status = 63%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1195h x 4882w				

B1	75S41-095-550	1	1351	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	4143	W4	75S41-095-550	1	102
W5	75S41-095-550	1	382	W6	75S41-095-550	1	236	W7	75S41-095-550	1	675	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24	FRAMECAD M6 Screw			38	Working Sheet: Trusses			
Assembly Weight			15.8kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

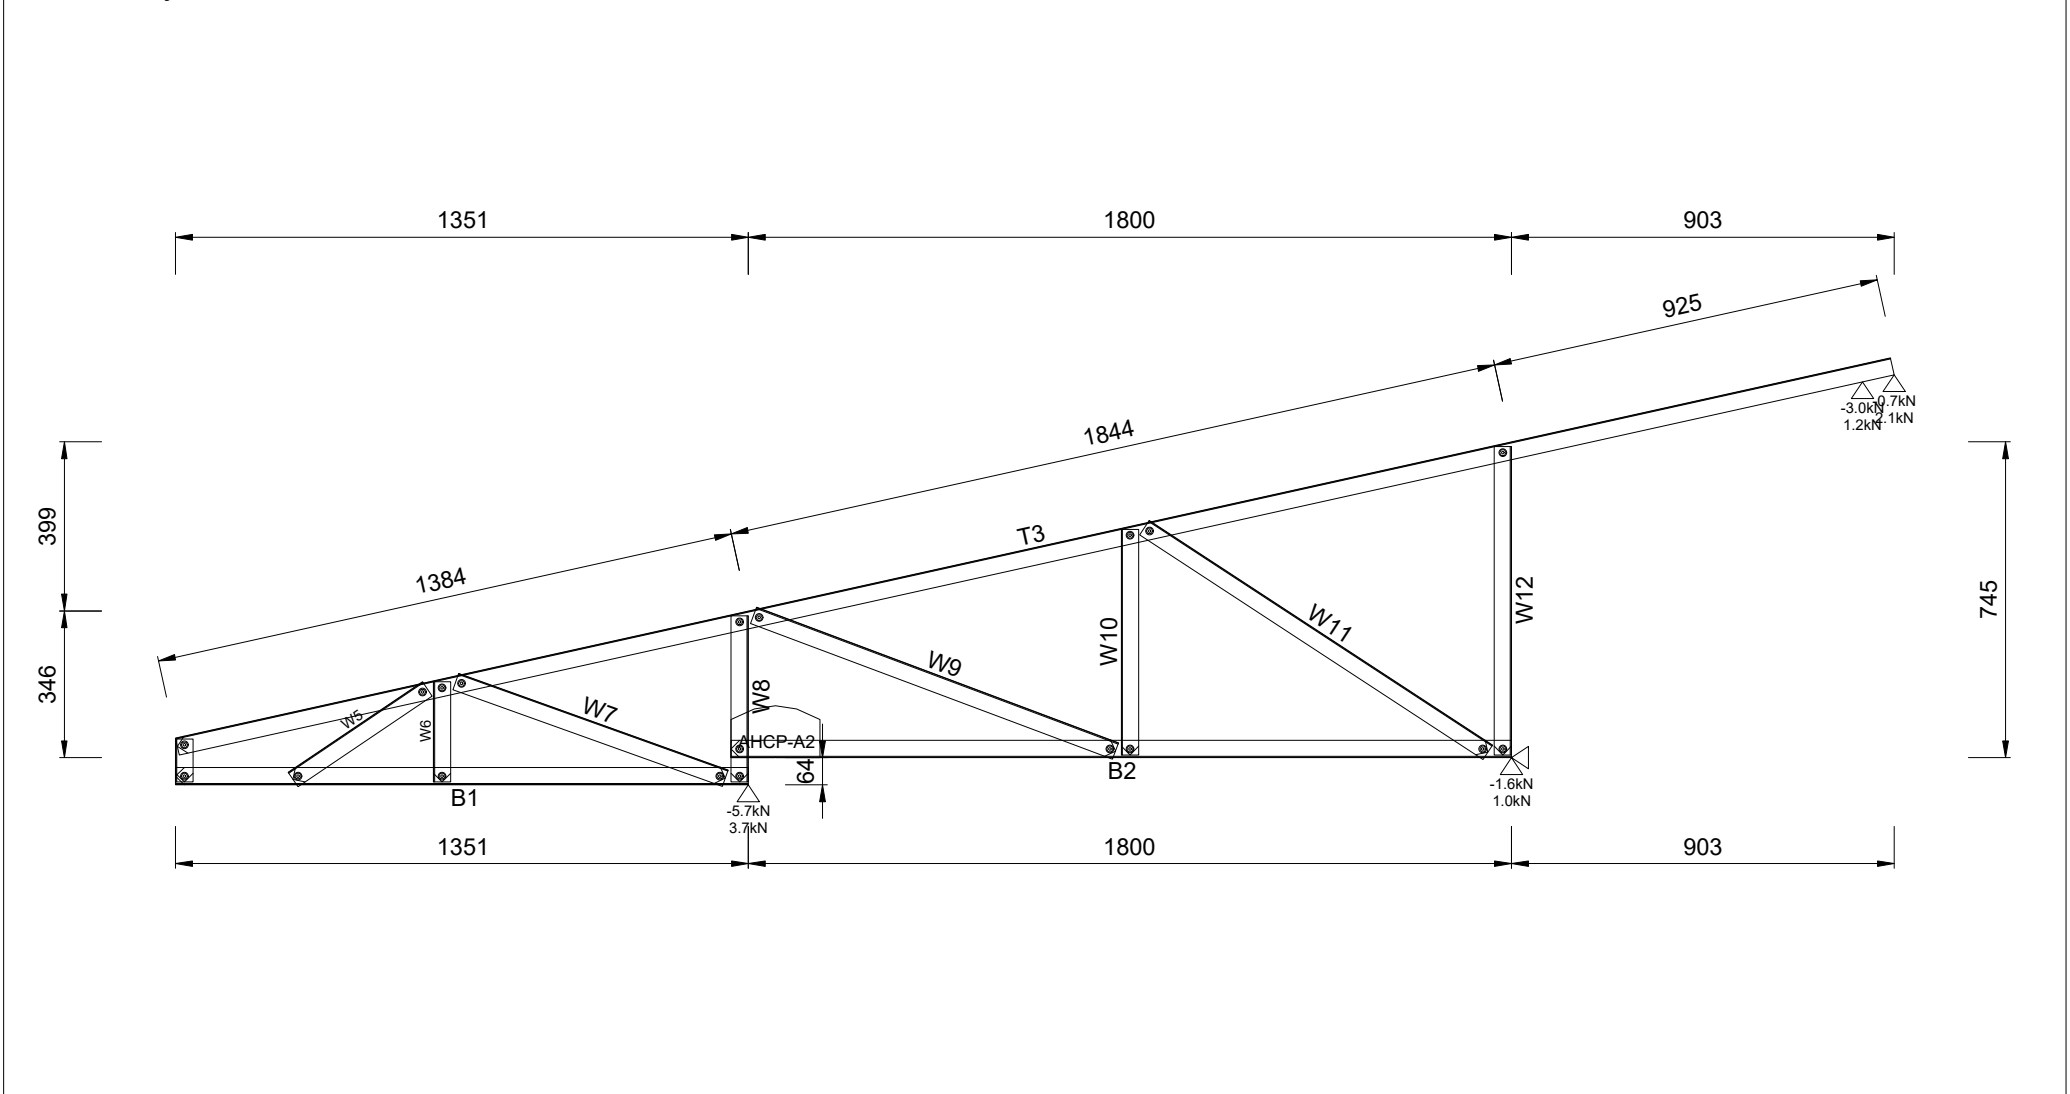


Quantity Required = 1 Mark as HN136 Engineering Status = 64%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1012h x 4054w				

B1	75S41-095-550	1	1306	B2	75S41-095-550	1	1841	T3	75S41-095-550	1	3249	W4	75S41-095-550	1	112
W5	75S41-095-550	1	385	W6	75S41-095-550	1	241	W7	75S41-095-550	1	655	W8	75S41-095-550	1	392
W9	75S41-095-550	1	912	W10	75S41-095-550	1	532	W11	75S41-095-550	1	968	W12	75S41-095-550	1	727
FRAMECAD 1.15mm Apex/Heel Plate				FRAMECAD 10g-16mm Flathead				FRAMECAD M6 Screw				Working Sheet: Trusses			
Assembly Weight				2				38							
				14.6kg											

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

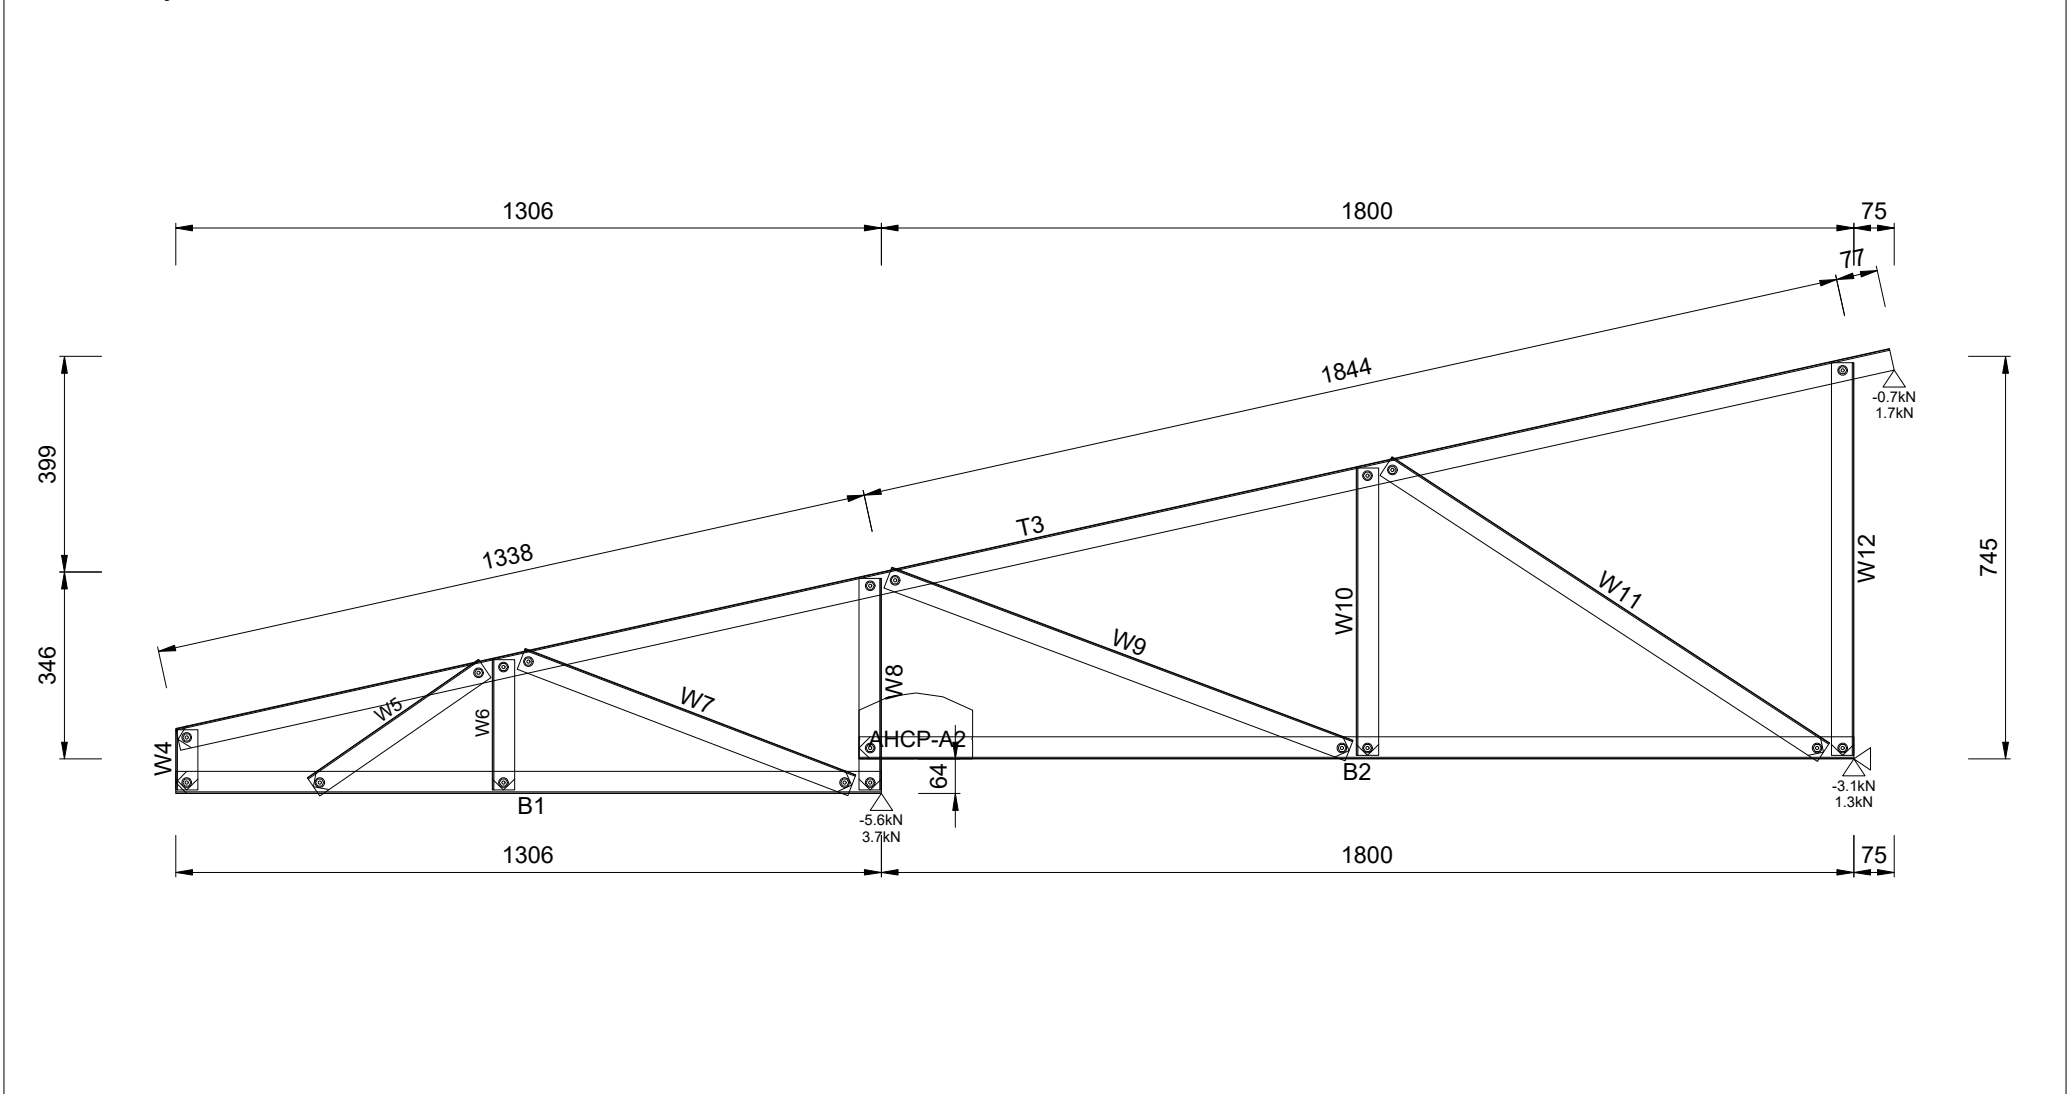

Quantity Required = 1 Mark as HN137 Engineering Status = 60%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	828h x 3181w				


Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint



Dwg: Zone 16 View 51 of 135 Client :Arcare Lynbrook J/No. 26110

B1 75S41-095-550	1 907	T2 75S41-095-550	1 920	W3 75S41-095-550	1 111	W4 75S41-095-550	1 204	W5 75S41-095-550	1 272	W6 75S41-095-550	1 171
W7 75S41-095-550	1 387	W8 75S41-095-550	1 303	FRAMECAD M6 Screw	24	Working Sheet: Trusses		Assembly Weight	4.2kg		

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

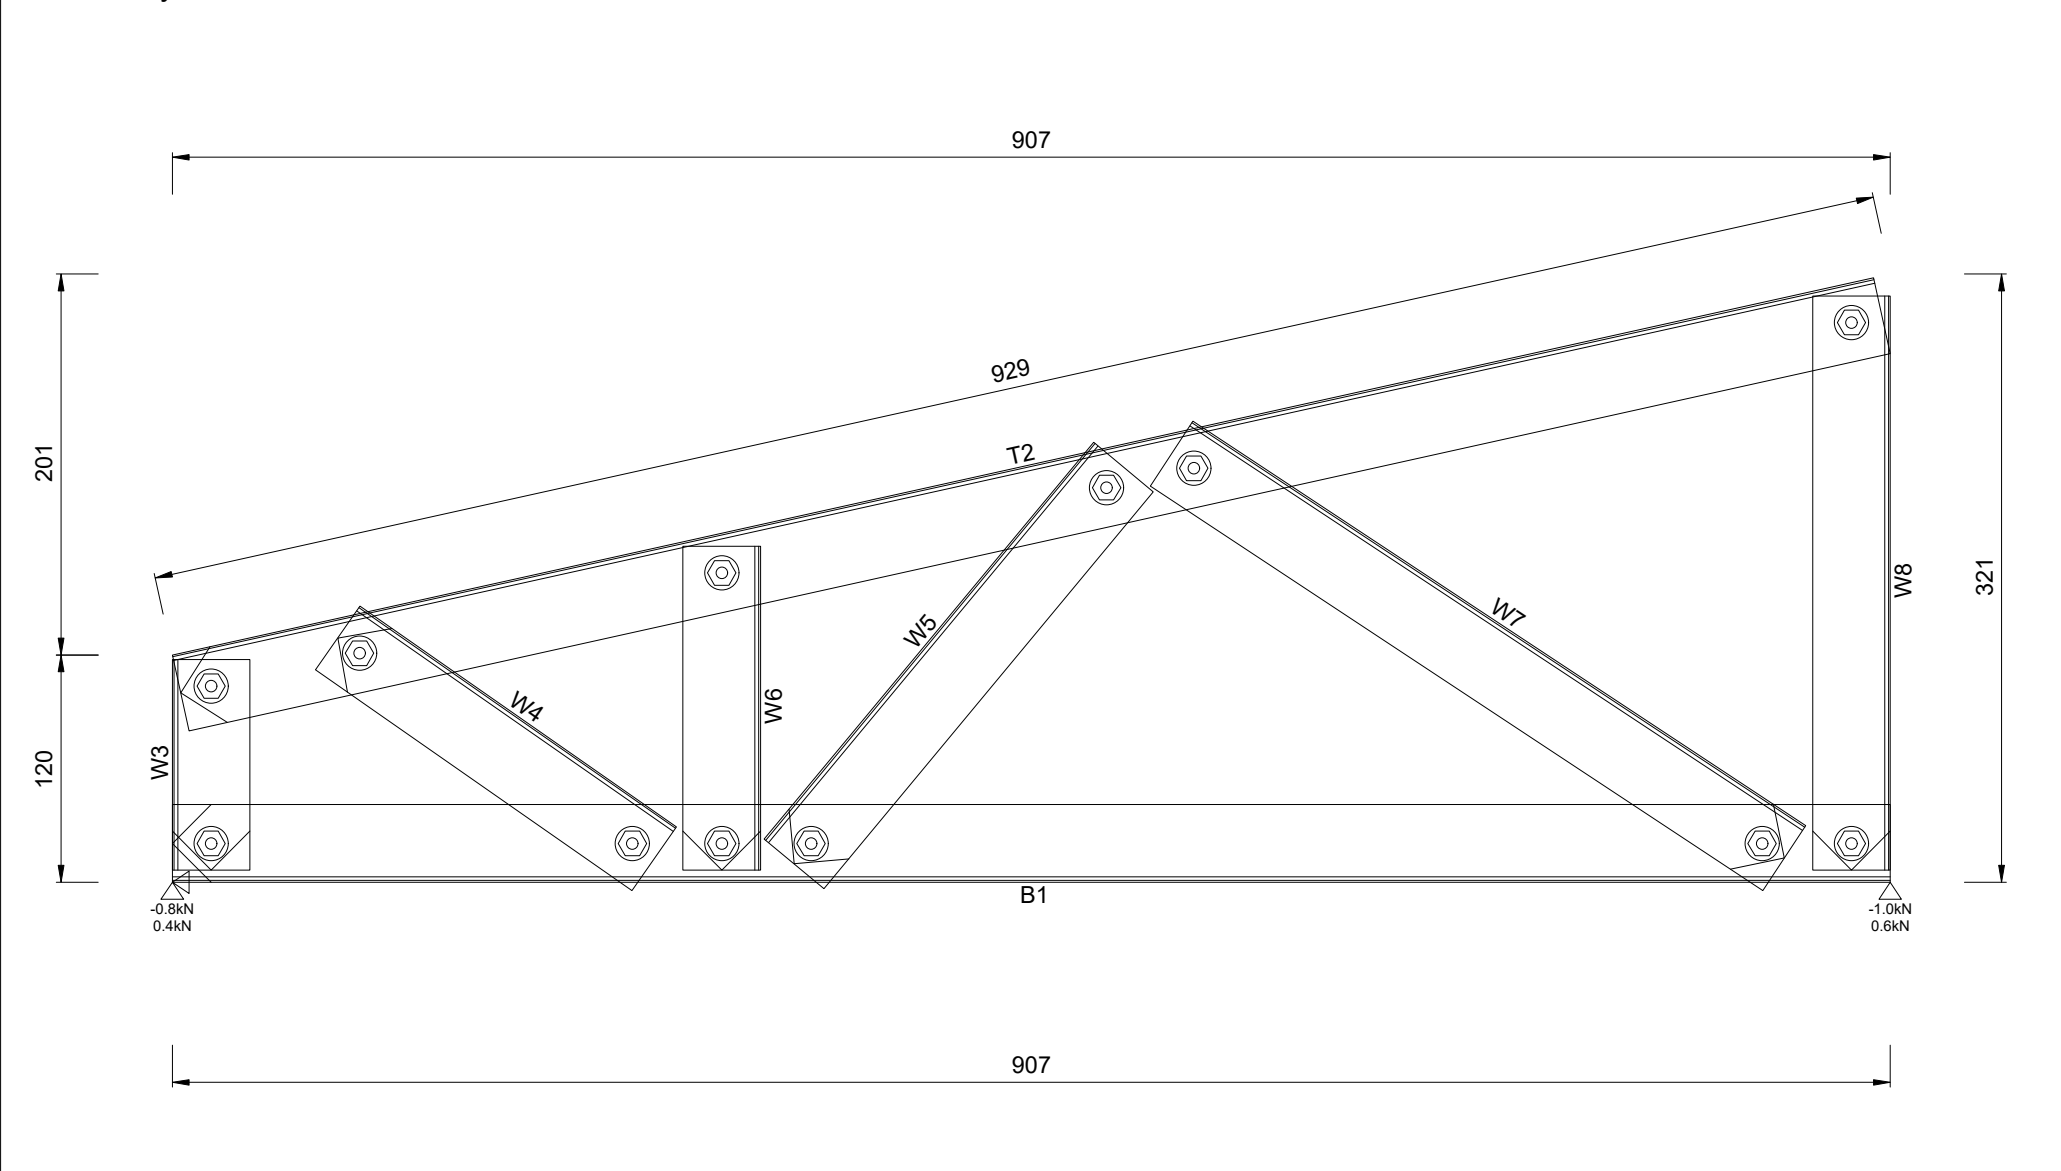


Quantity Required = 1 Mark as HN139 Engineering Status = 24%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	323h x 907w				

B1	75S41-095-550	1	1305	B2	75S41-095-550	1	843	T3	75S41-095-550	1	2149	W4	75S41-095-550	1	111
W5	75S41-095-550	1	367	W6	75S41-095-550	1	239	W7	75S41-095-550	1	658	W8	75S41-095-550	1	391
W9	75S41-095-550	1	801	W10	75S41-095-550	1	505	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24
FRAMECAD M6 Screw			30	Working Sheet: Trusses				Assembly Weight			9.5kg				

Powered by FRAMECAD Structure ®


Minimum number of fasteners required is 2 per joint

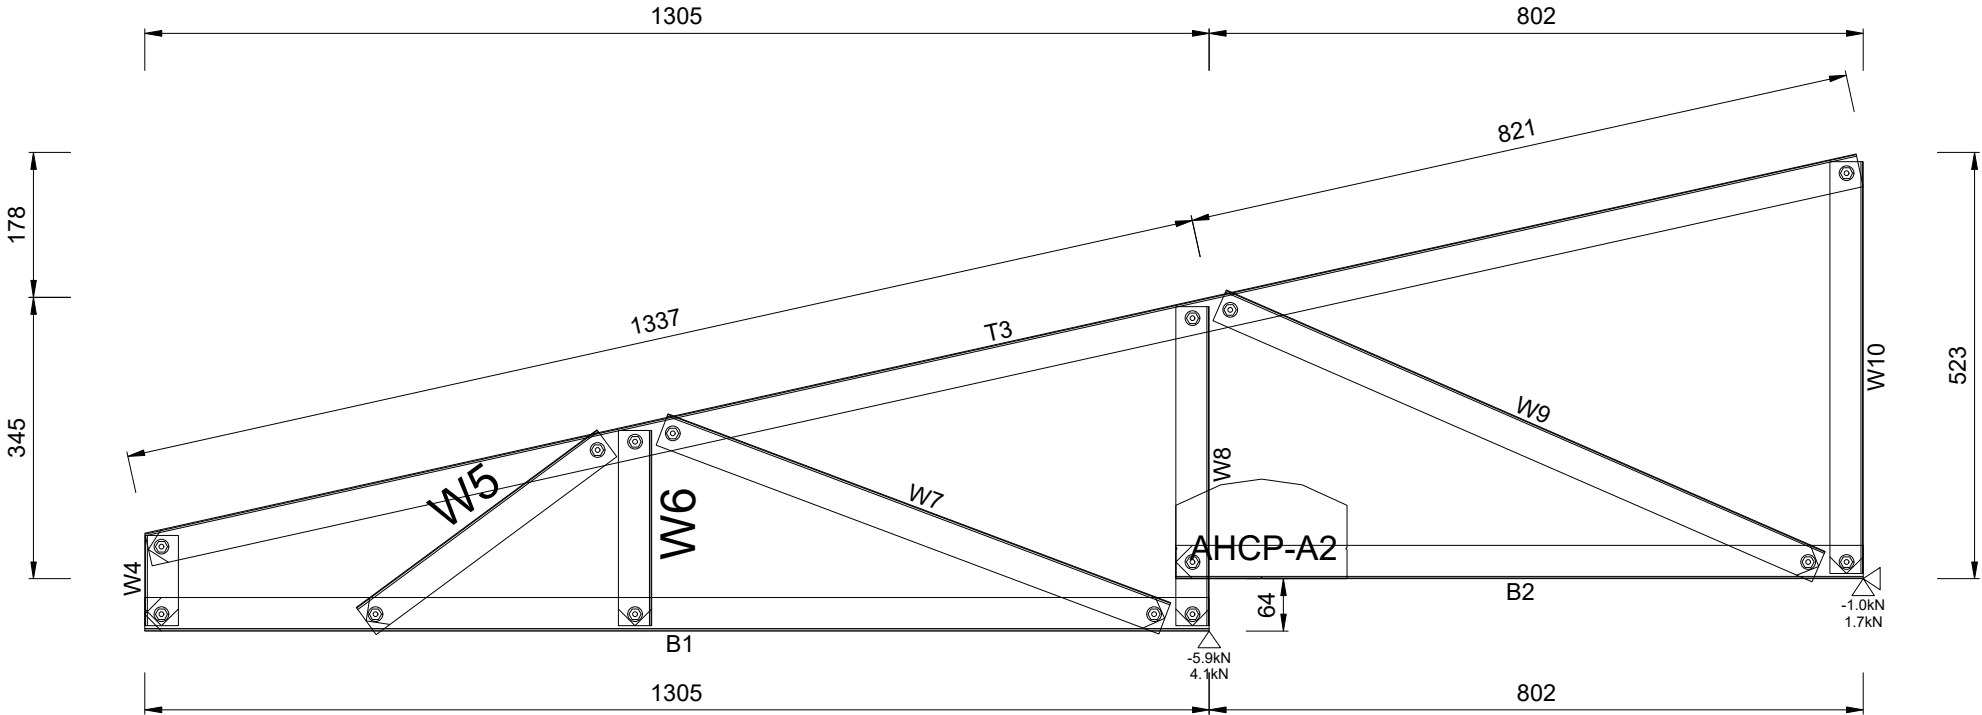

Quantity Required = 1 Mark as HN140 Engineering Status = 60%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	589h x 2107w				

B1	75S41-095-550	1	1305	B2	75S41-095-550	1	843	T3	75S41-095-550	1	2149	W4	75S41-095-550	1	111
W5	75S41-095-550	1	367	W6	75S41-095-550	1	239	W7	75S41-095-550	1	658	W8	75S41-095-550	1	391
W9	75S41-095-550	1	801	W10	75S41-095-550	1	505	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 10g-16mm Flathead		24	
FRAMECAD M6 Screw		30		Working Sheet: Trusses				Assembly Weight		9.5kg					

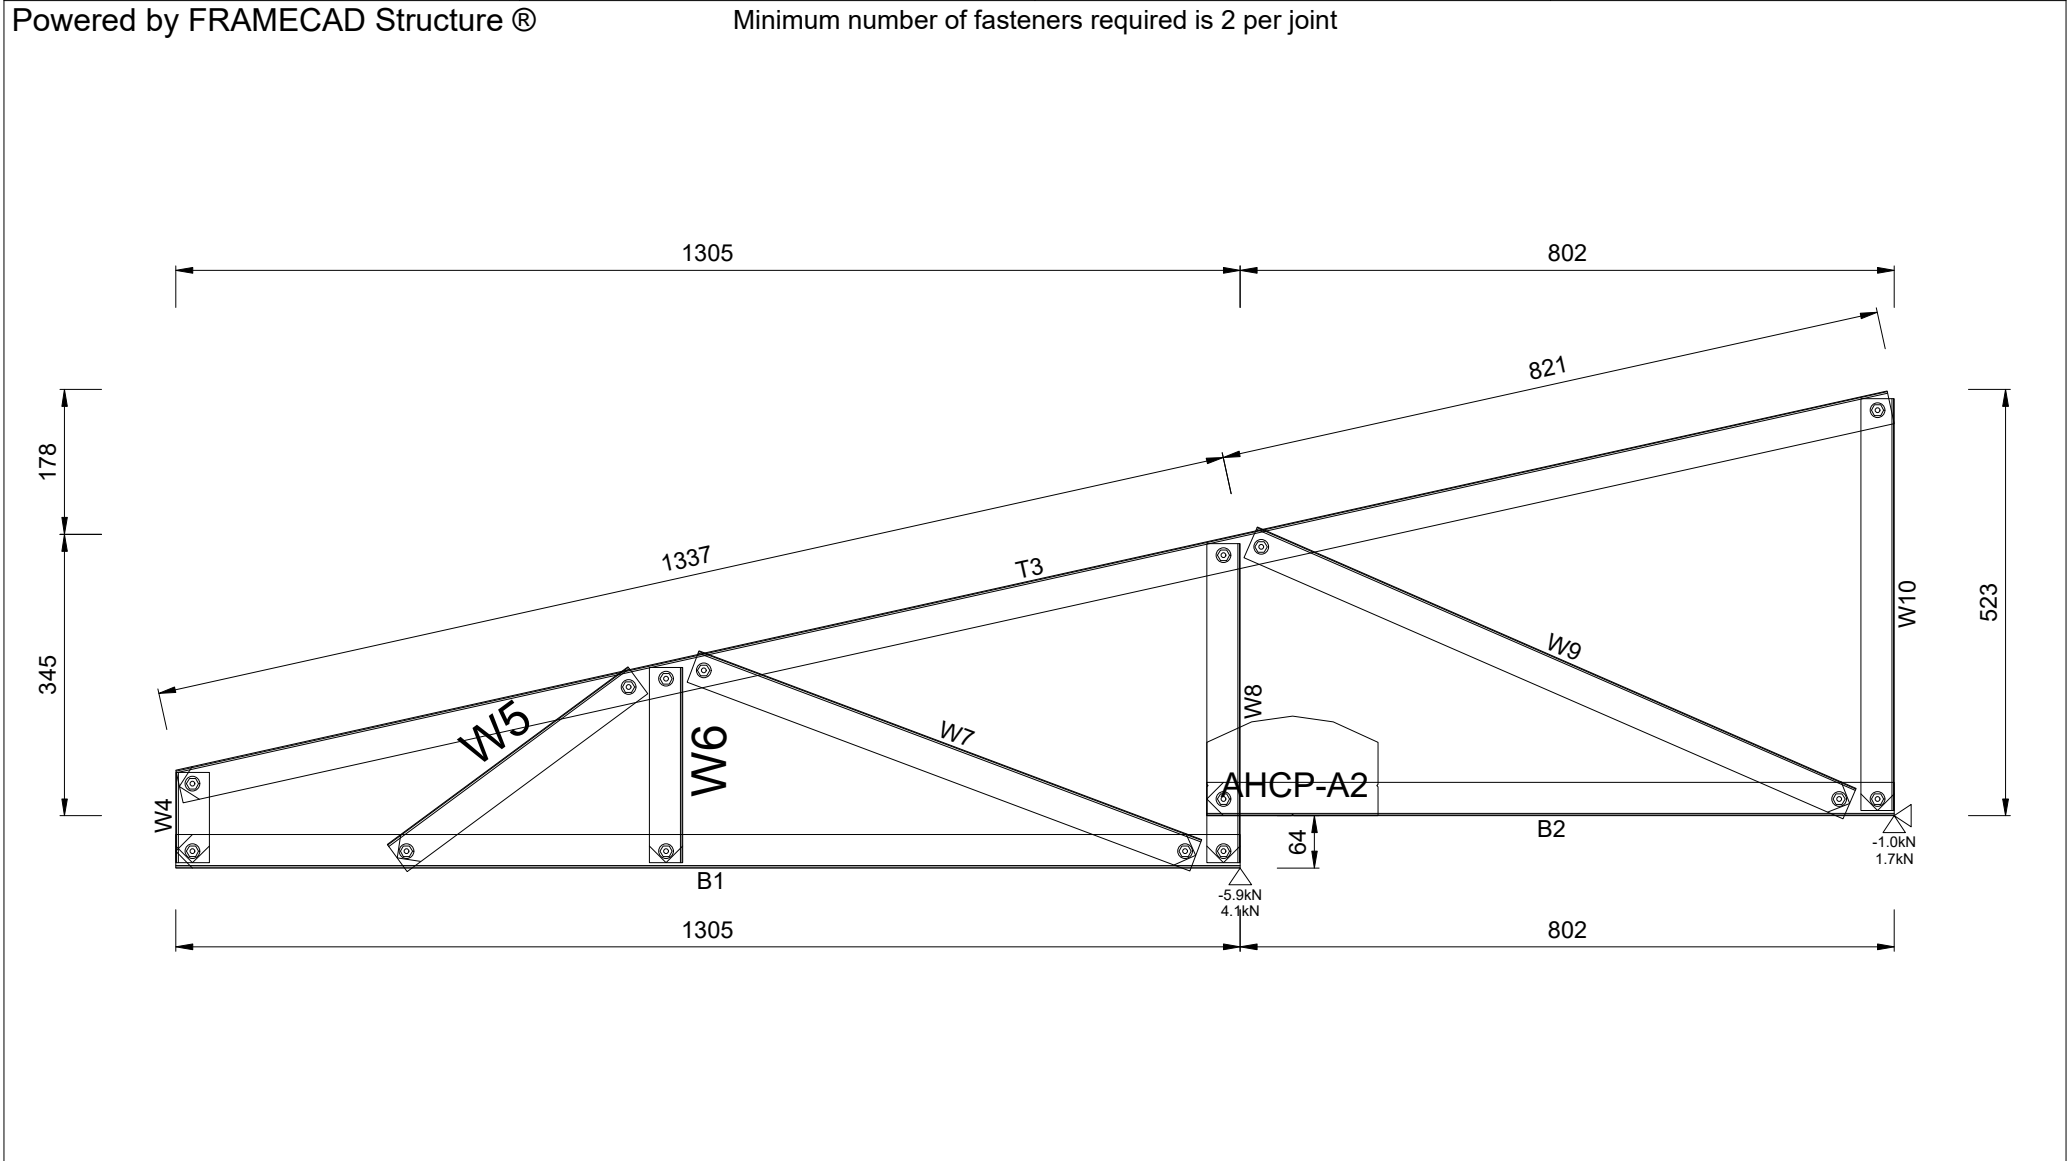


Quantity Required = 1 Mark as HN141 Engineering Status = 60%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	589h x 2107w				

B1 75S41-095-550	1 907	T2 75S41-095-550	1 920	W3 75S41-095-550	1 111	W4 75S41-095-550	1 205	W5 75S41-095-550	1 272	W6 75S41-095-550	1 171
W7 75S41-095-550	1 387	W8 75S41-095-550	1 303	FRAMECAD M6 Screw	24	Working Sheet: Trusses		Assembly Weight	4.2kg		

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

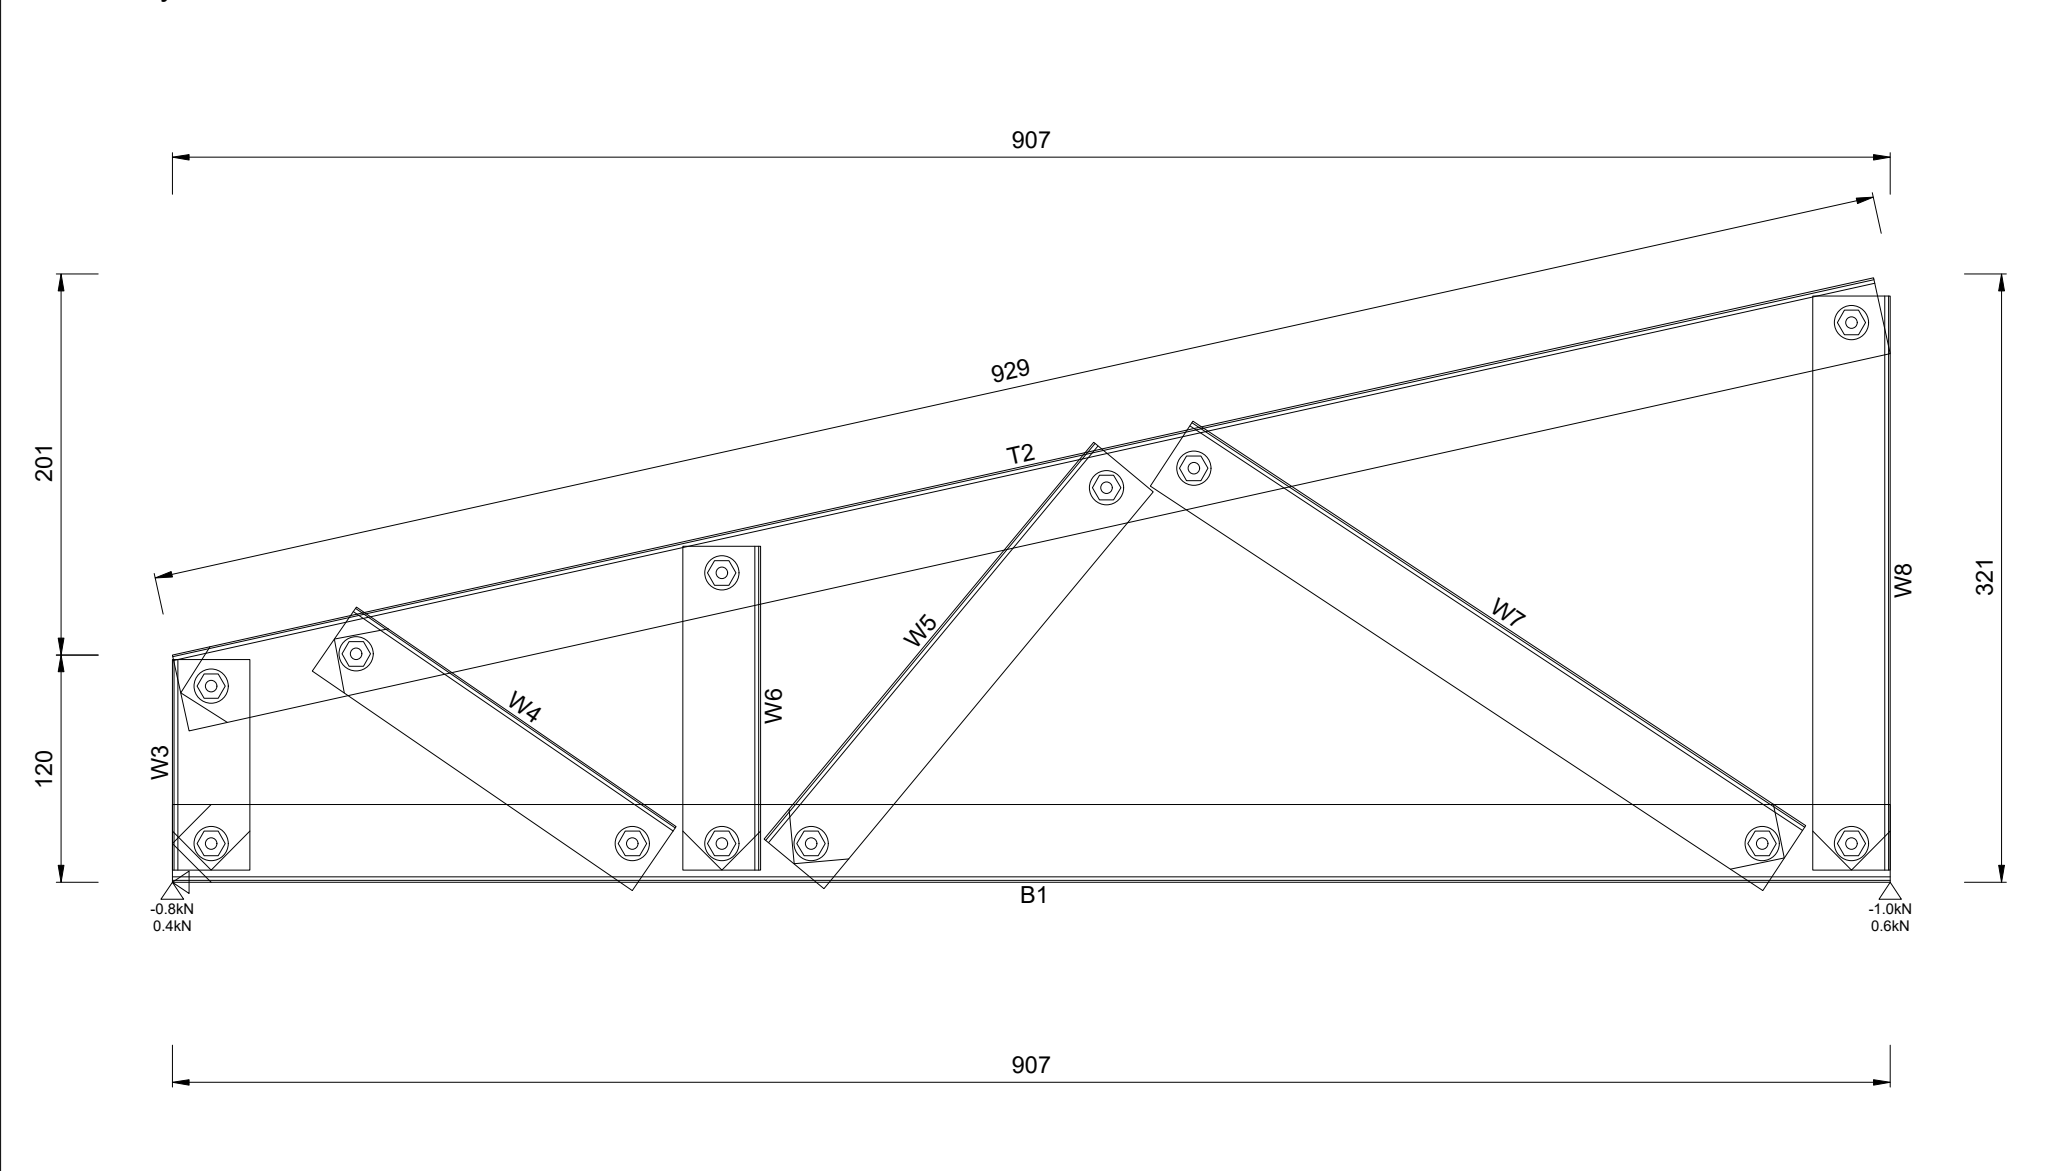


Quantity Required = 1 Mark as HN142 Engineering Status = 24%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	323h x 907w				

B1	75S41-095-550	1	5926	T2	75S41-095-550	1	4795	H3	75S41-095-550	1	2984	W4	75S41-095-550	3	627
W5	75S41-095-550	1	794	W6	75S41-095-550	1	823	W7	75S41-095-550	1	918	W8	75S41-095-550	1	1452
W9	75S41-095-550	1	757	W10	75S41-095-550	1	1008	W11	75S41-095-550	1	1725	W12	75S41-095-550	1	1335
W13	75S41-095-550	1	1934	W14	75S41-095-550	1	1661	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		2	
FRAMECAD 10g-16mm Flathead		54		FRAMECAD M6 Screw		62		Working Sheet: Trusses				Assembly Weight			36.1kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

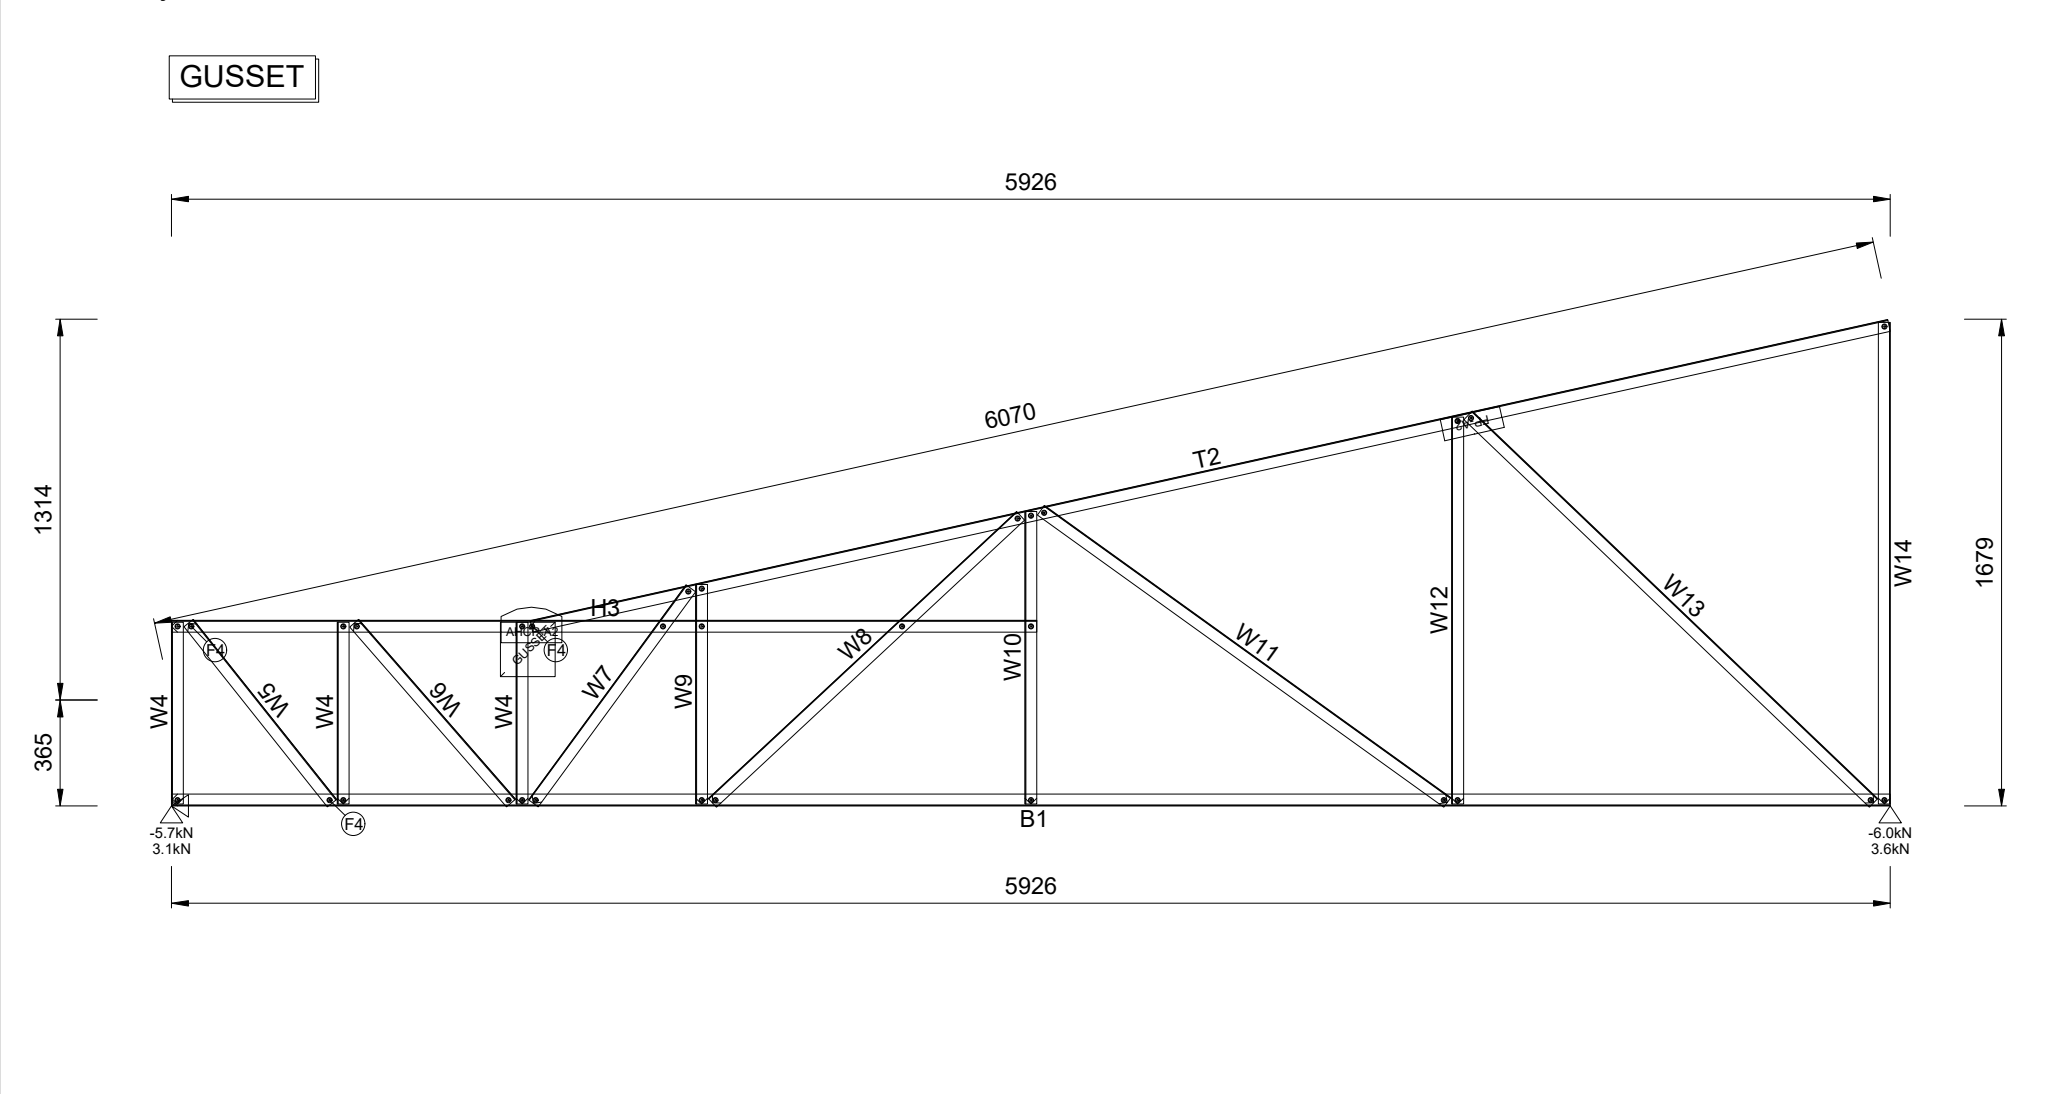


Quantity Required = 1 Mark as HN143 Engineering Status = 91%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1681h x 5926w				

B1	75S41-095-550	1	6987	T2	75S41-095-550	1	4015	H3	75S41-095-550	1	4455	W4	75S41-095-550	4	831
W5	75S41-095-550	1	1622	W6	75S41-095-550	1	1130	W7	75S41-095-550	1	1029	W8	75S41-095-550	1	1033
W9	75S41-095-550	1	1371	W10	75S41-095-550	1	942	W11	75S41-095-550	1	1464	W12	75S41-095-550	1	1135
W13	75S41-095-550	1	1575	W14	75S41-095-550	1	1305	W15	75S41-095-550	1	1947	W16	75S41-095-550	1	1461
W17	75S41-095-550	1	1696	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		2		FRAMECAD 10g-16mm Flathead		62	
FRAMECAD M6 Screw		78		Working Sheet: Trusses				Assembly Weight		47.1kg					

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

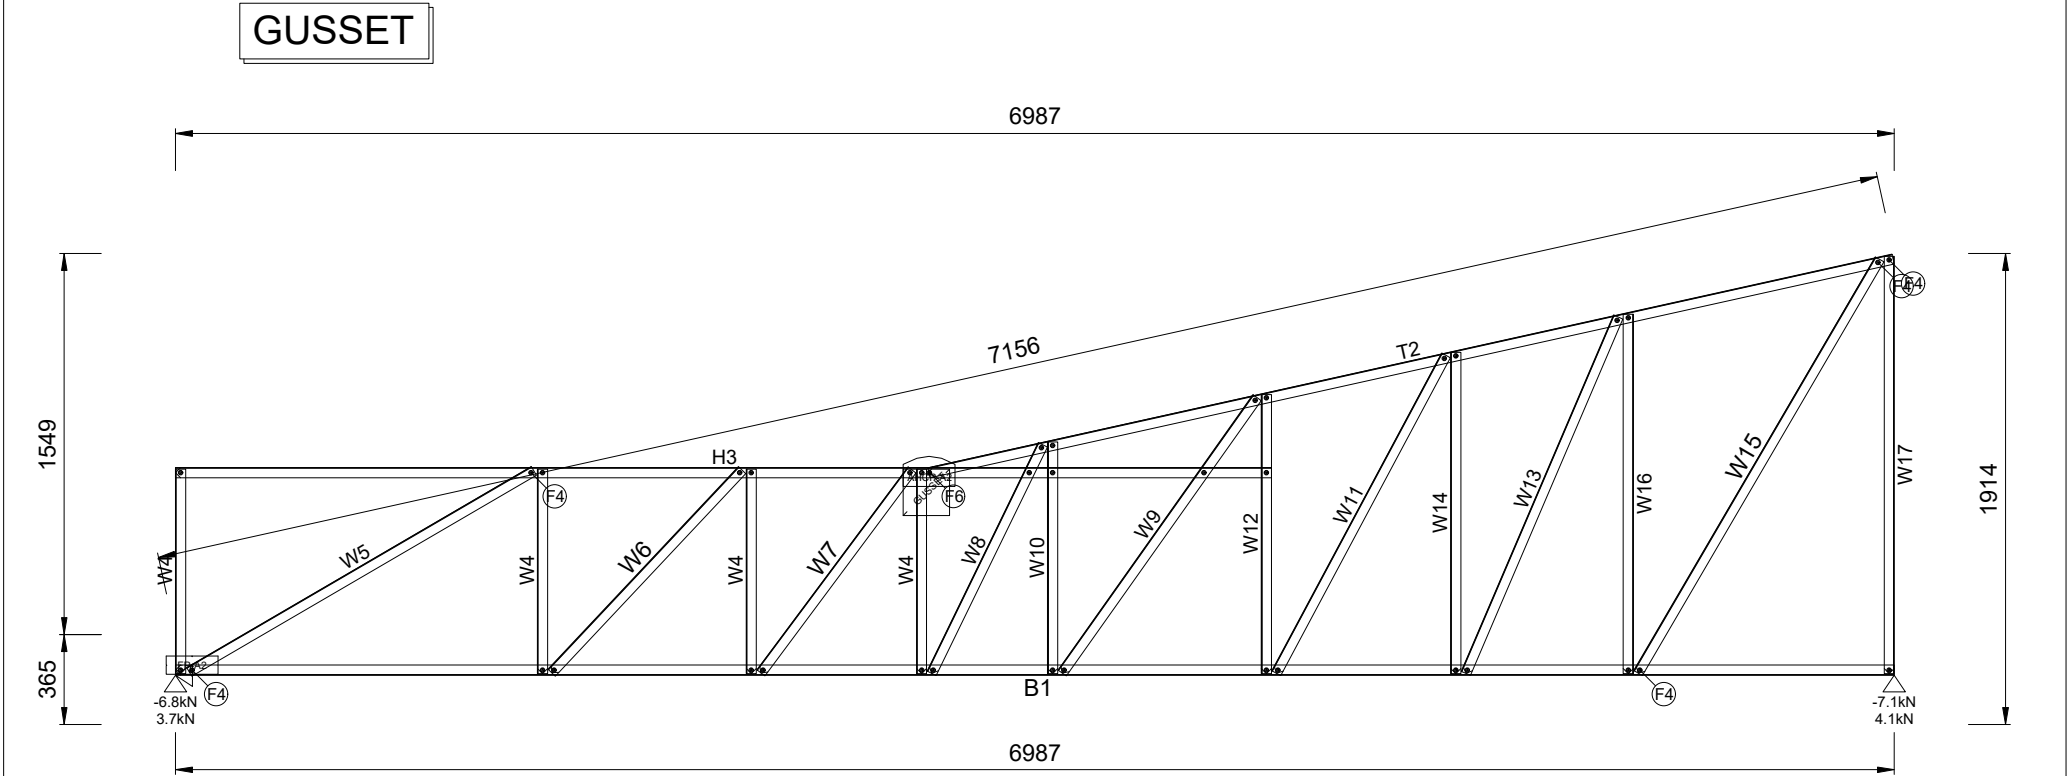


Quantity Required = 1 Mark as HN144 Engineering Status = 97%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1716h x 6987w				

B1 75S41-095-550	1	1307	B2 75S41-095-550	1	6214	T3 75S41-095-550	1	7652	H4 75S41-095-550	1	3356
W5 75S41-095-550	1	101	W6 75S41-095-550	1	333	W7 75S41-095-550	1	231	W8 75S41-095-550	1	654
W9 75S41-095-550	1	382	W10 75S41-095-550	1	1240	W11 75S41-095-550	1	599	W12 75S41-095-550	1	1302
W13 75S41-095-550	1	871	W14 75S41-095-550	1	1411	W15 75S41-095-550	1	1133	W16 75S41-095-550	1	1616
W17 75S41-095-550	1	1404	W18 75S41-095-550	1	1849	W19 75S41-095-550	1	1686	FRAMECAD 1.15mm Apex/Heel Plate	2	
FRAMECAD 1.15mm Fix Plate	2		FRAMECAD 10g-16mm Flathead	56		FRAMECAD M6 Screw	74		Working Sheet: Trusses		
Assembly Weight		43.0kg									

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

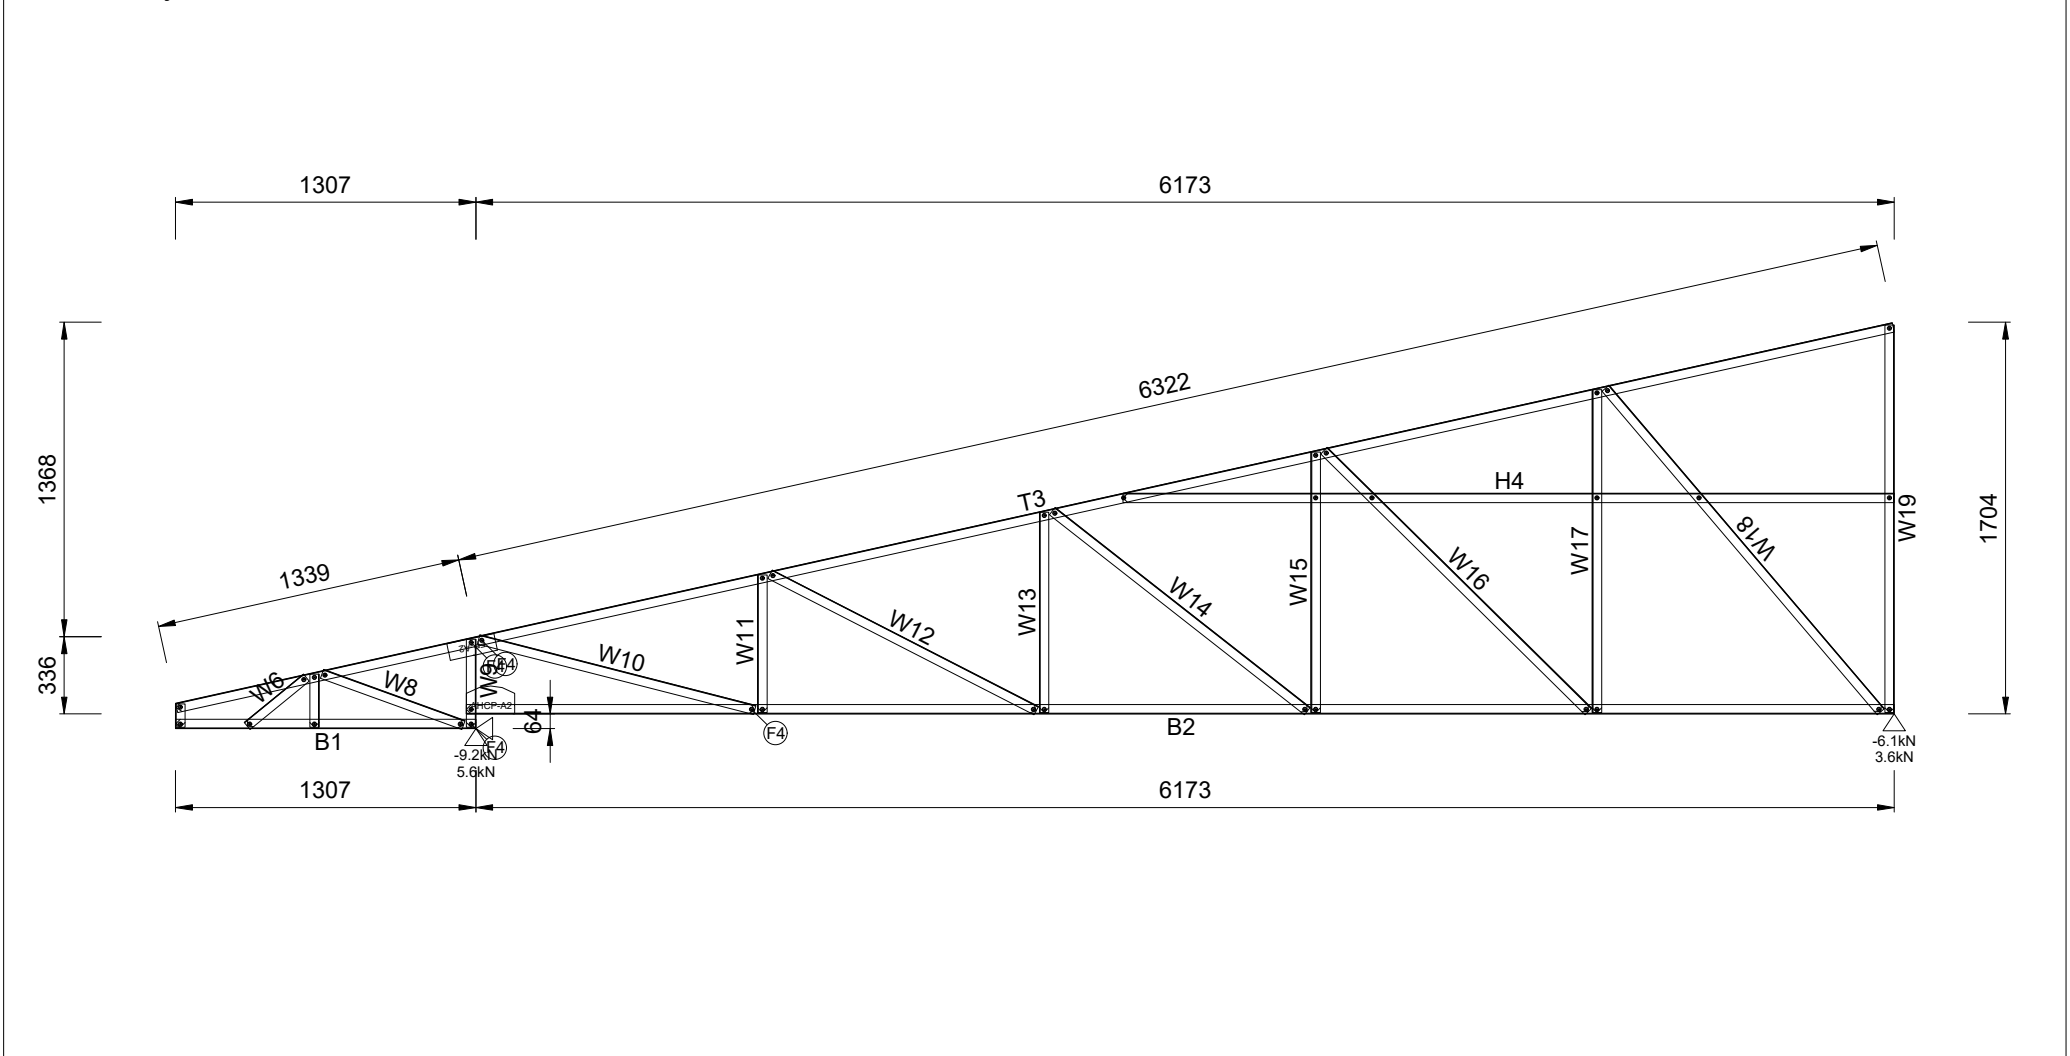


Quantity Required = 1 Mark as HN145 Engineering Status = 93%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1771h x 7480w				

B1	75S41-095-550	1	3617	B2	75S41-095-550	1	1150	B3	75S41-095-550	1	1255	T4	75S41-095-550	1	3773	T5	75S41-095-550	1	1169
T6	75S41-095-550	1	1363	H7	75S41-095-550	1	1613	H8	75S41-095-550	1	1255	W9	75S41-095-550	1	327	W10	75S41-095-550	1	633
W11	75S41-095-550	1	463	W12	75S41-095-550	1	713	W13	75S41-095-550	1	599	W14	75S41-095-550	1	1302	W15	75S41-095-550	1	871
W16	75S41-095-550	1	1365	W17	75S41-095-550	1	1120	W18	75S41-095-550	1	681	W19	75S41-095-550	1	347	W20	75S41-095-550	1	734
W21	75S41-095-550	1	475	W22	75S41-095-550	1	592	W23	75S41-095-550	1	1417	W24	75S41-095-550	1	1821	W25	75S41-095-550	1	1686
FRAMECAD M6 Screw			82	Working Sheet: Trusses				Assembly Weight			39.1kg								

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

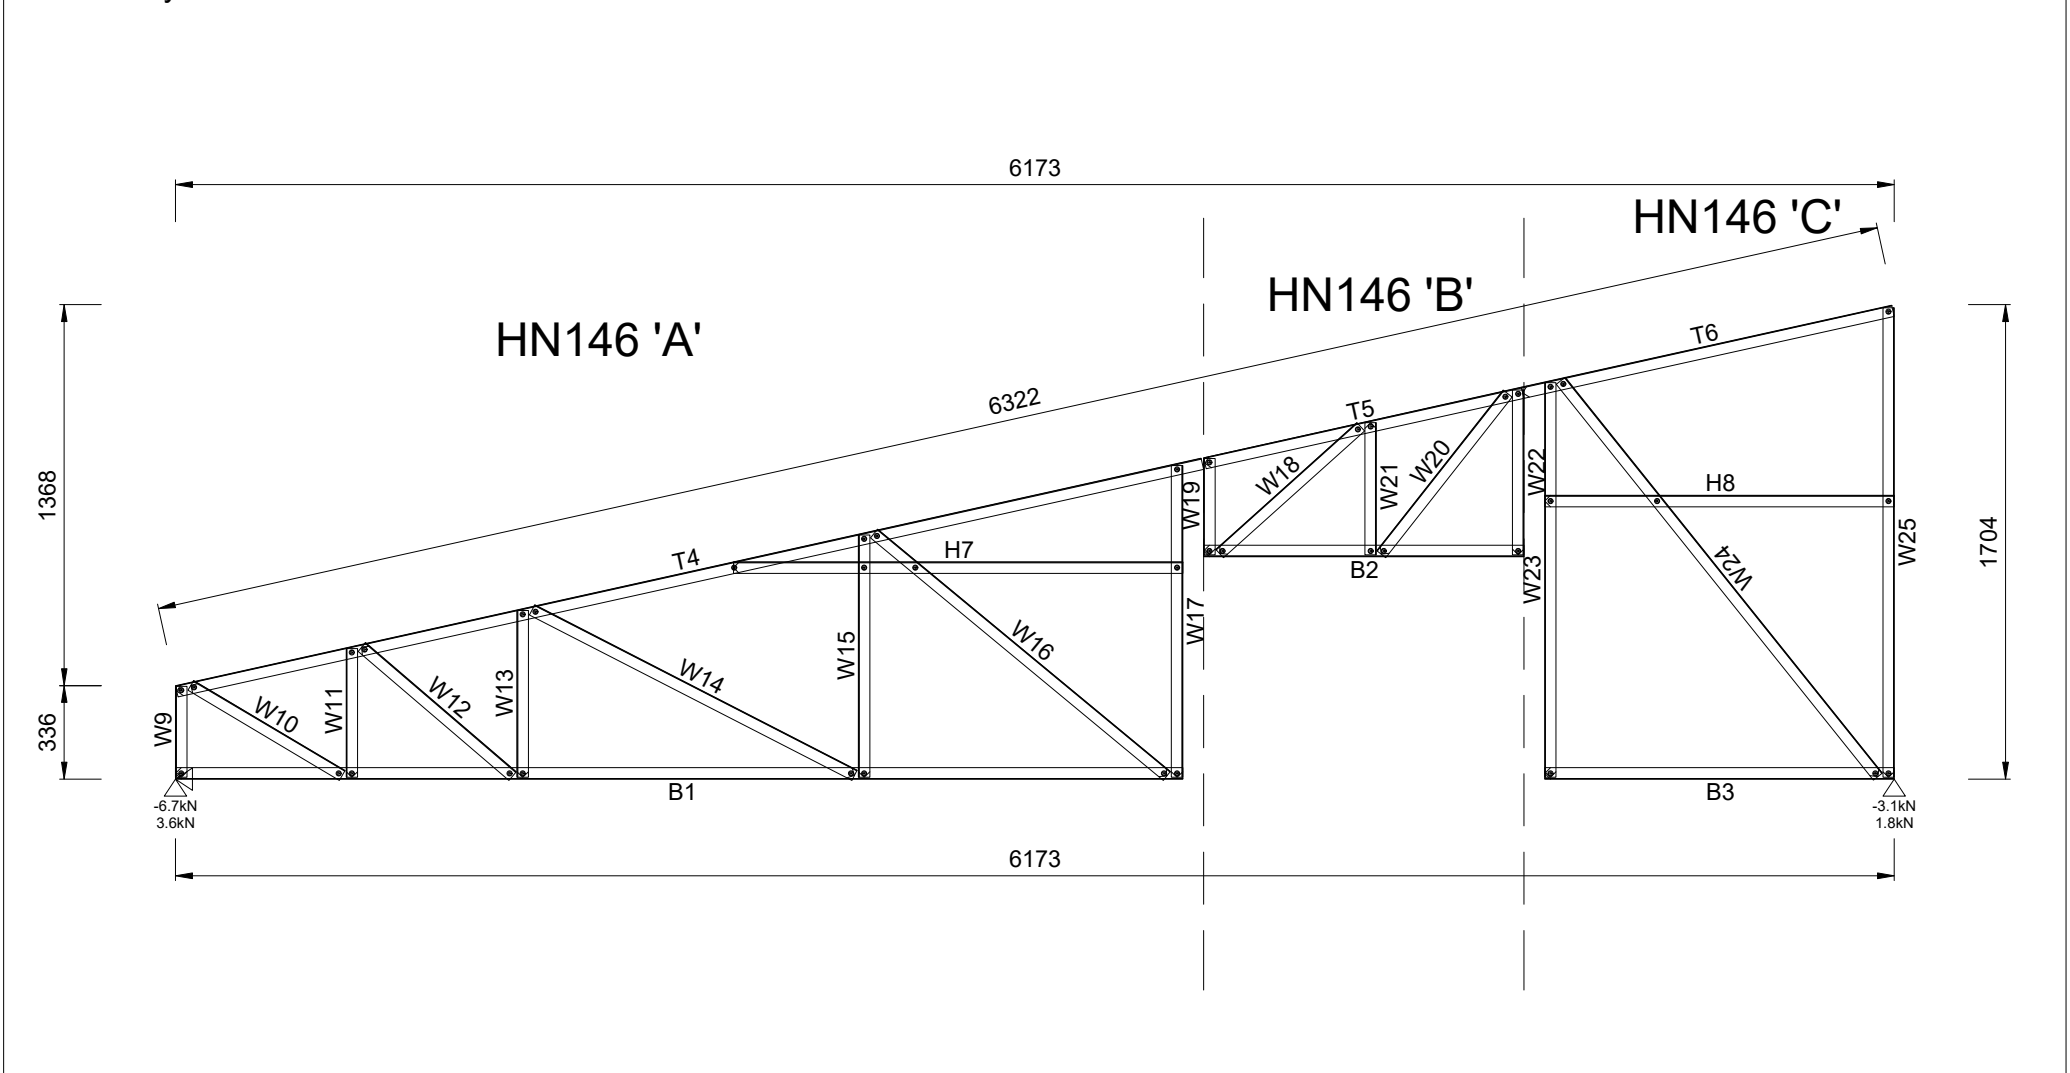

Quantity Required = 1 Mark as HN146 Engineering Status = 500%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1707h x 6173w				

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint


The diagram shows a truss bridge structure with the following dimensions and labels:

- Overall Dimensions:**
 - Span: 5361
 - Height: 1704
 - Top Chord Slope: 5491
- Labels:**
 - W4, W5, W6, W7, W8, W9, W10, W11, W12, W13, W14, W15:** Vertical members.
 - H3:** Horizontal member.
 - T2:** Top chord member.
 - M8:** Diagonal member.
- Supports and Loads:**
 - Left Support:** -5.2kN, 2.7kN.
 - Right Support:** -5.5kN, 3.3kN.
 - Internal Load:** -5.2kN, 2.7kN.

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1707h x 5361w				

B1	75S41-095-550	1	6425	T2	75S41-095-550	1	3742	T3	75S41-095-550	1	145	H4	75S41-095-550	1	6425	W5	75S41-095-550	4	1400
W6	75S41-095-550	2	1578	W7	75S41-095-550	1	1644	W8	75S41-095-550	1	2029	W9	75S41-095-550	1	1669	W10	75S41-095-550	1	2060
W11	75S41-095-550	1	2444	W12	75S41-095-550	1	1952	W13	75S41-095-550	1	2208	W14	75S41-095-550	1	2198	W15	75S41-095-550	1	2181
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				56.6kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

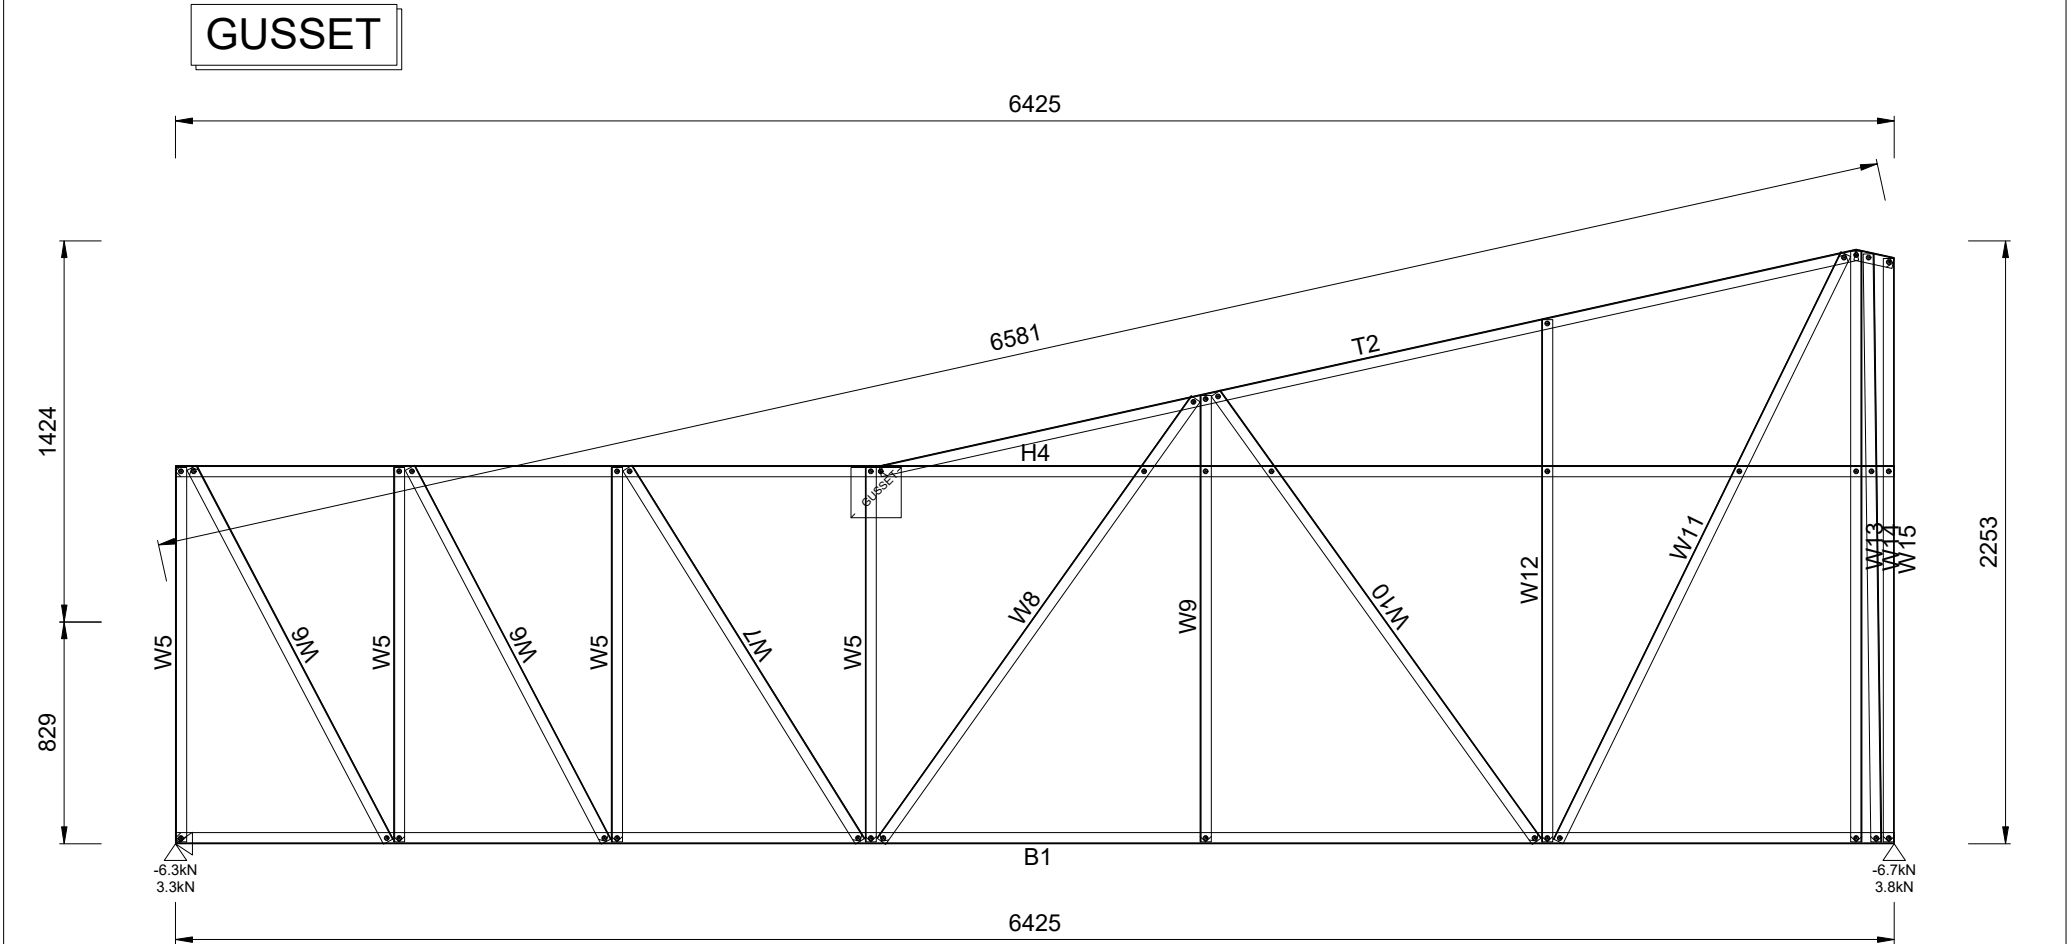


Quantity Required = 1 Mark as HN148 Engineering Status = 106%

System Name:	FC_AusTruss	Roof Type:	In-plane Truss	SHEET	12.5	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	NASH AS 2010	Truss Pitch:	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Design Code:	AS/NZS 4600:2018	
Loading Code:	Bottom Chord Dead Load (kPa):	0.14	Envelope:	2225h x 6425w			Top Chord Dead Load (kPa):	0.40	

B1	75S41-095-550	1	1811	B2	75S41-095-550	1	2338	T3	75S41-095-550	1	4151	W4	75S41-095-550	1	100
W5	75S41-095-550	1	394	W6	75S41-095-550	1	231	W7	75S41-095-550	1	893	W8	75S41-095-550	1	378
W9	75S41-095-550	1	1160	W10	75S41-095-550	1	500	W11	75S41-095-550	1	1151	W12	75S41-095-550	1	674
FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 10g-16mm Flathead		24		FRAMECAD M6 Screw		38		Working Sheet: Trusses			
Assembly Weight		17.8kg													

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

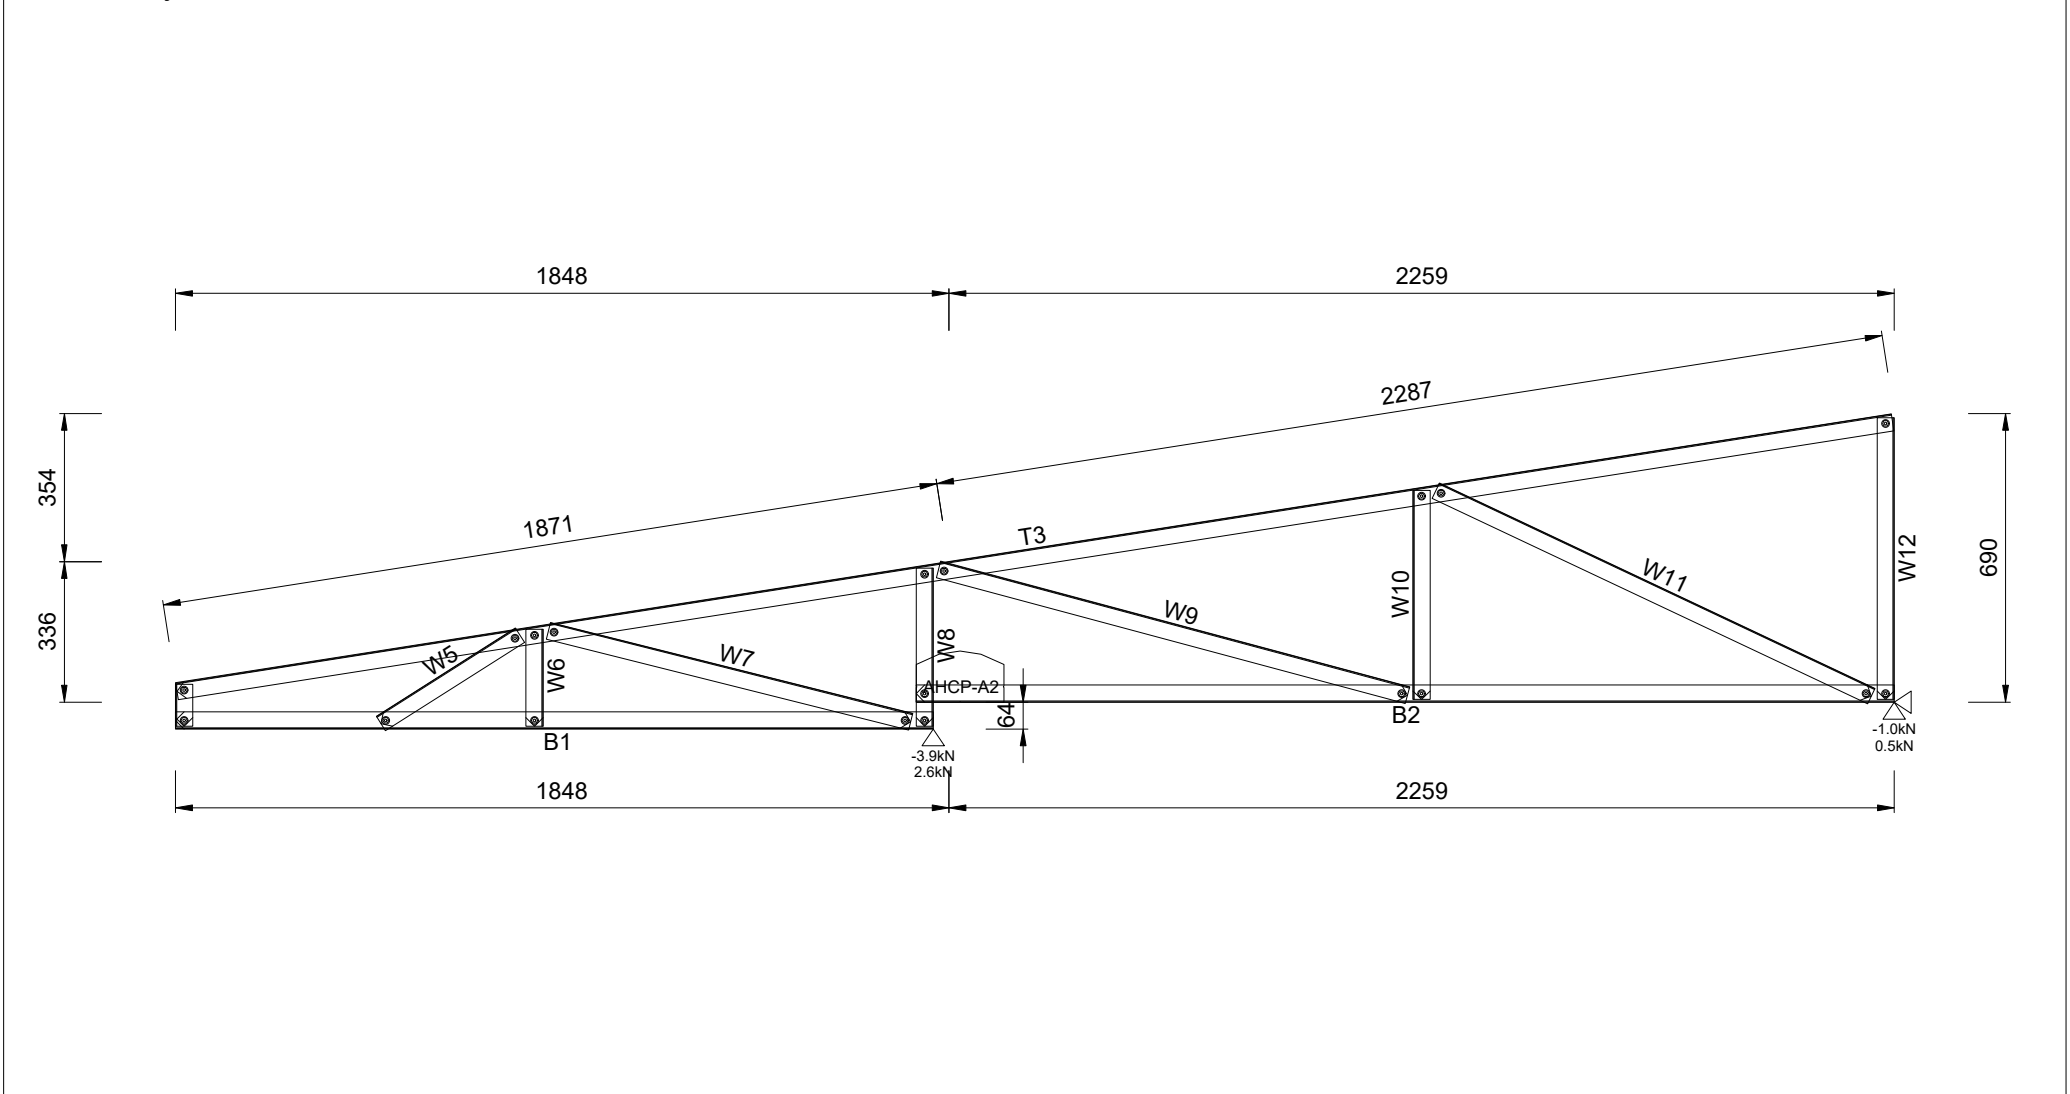


Quantity Required = 1 Mark as HN149 Engineering Status = 77%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	8.909	Truss Spacing:	582	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	757h x 4108w				

B1	75S41-095-550	1	6425	T2	75S41-095-550	1	4870	T3	75S41-095-550	1	150	H4	75S41-095-550	1	6425	W5	75S41-095-550	3	1157
W6	75S41-095-550	1	1294	W7	75S41-095-550	1	1371	W8	75S41-095-550	1	1632	W9	75S41-095-550	1	1369	W10	75S41-095-550	1	1791
W11	75S41-095-550	1	1641	W12	75S41-095-550	1	2115	W13	75S41-095-550	1	2444	W14	75S41-095-550	1	1952	W15	75S41-095-550	1	2208
W16	75S41-095-550	1	2198	W17	75S41-095-550	1	2181	FRAMECAD M6 Screw		82		Working Sheet: Trusses				Assembly Weight		56.2kg	

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

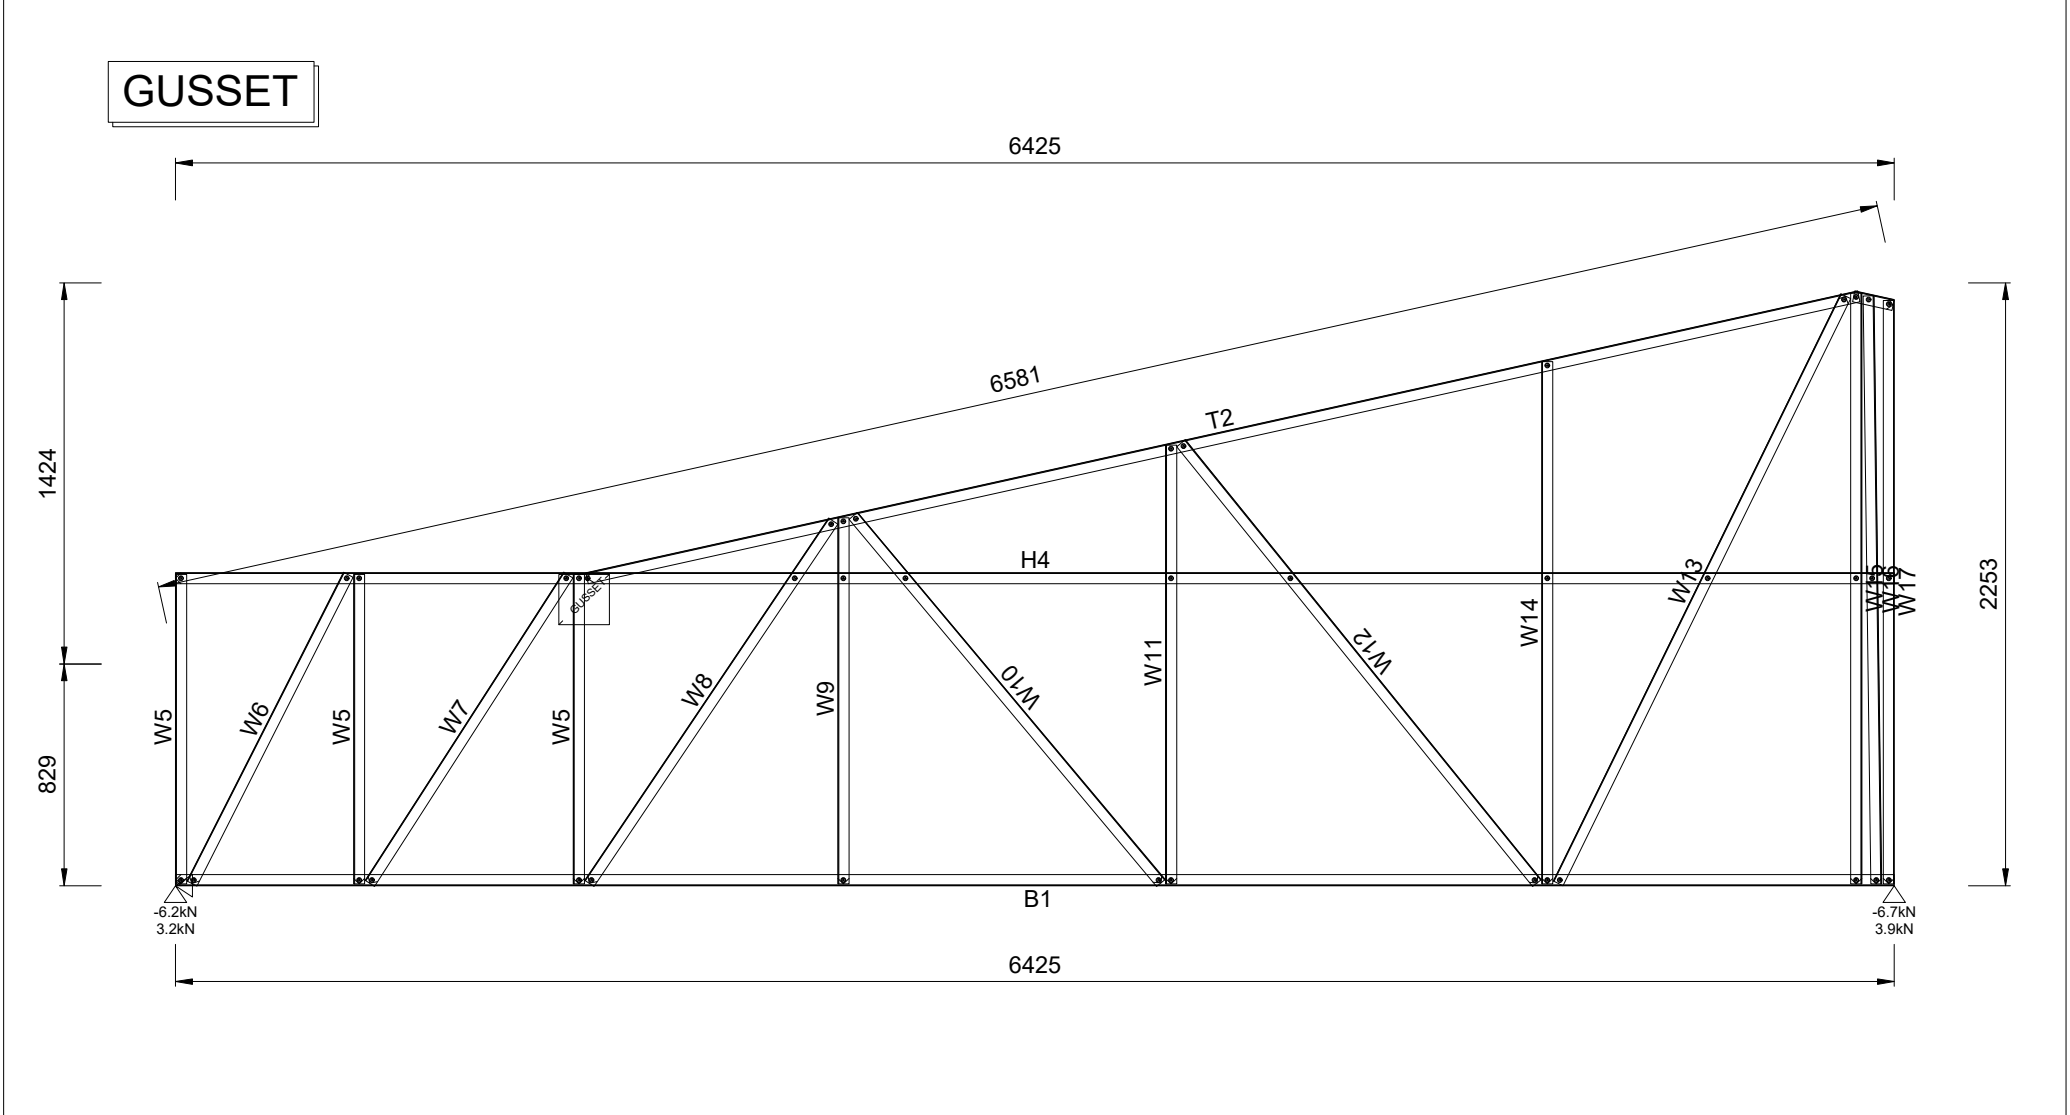


Quantity Required = 1 Mark as HN150 Engineering Status = 107%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2226h x 6425w				

B1 75S41-095-550	1	954	T2 75S41-095-550	1	968	W3 75S41-095-550	1	111	W4 75S41-095-550	1	193	W5 75S41-095-550	1	312	W6 75S41-095-550	1	171
W7 75S41-095-550	1	393	W8 75S41-095-550	1	313	FRAMECAD M6 Screw	24		Working Sheet: Trusses			Assembly Weight	4.4kg				

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

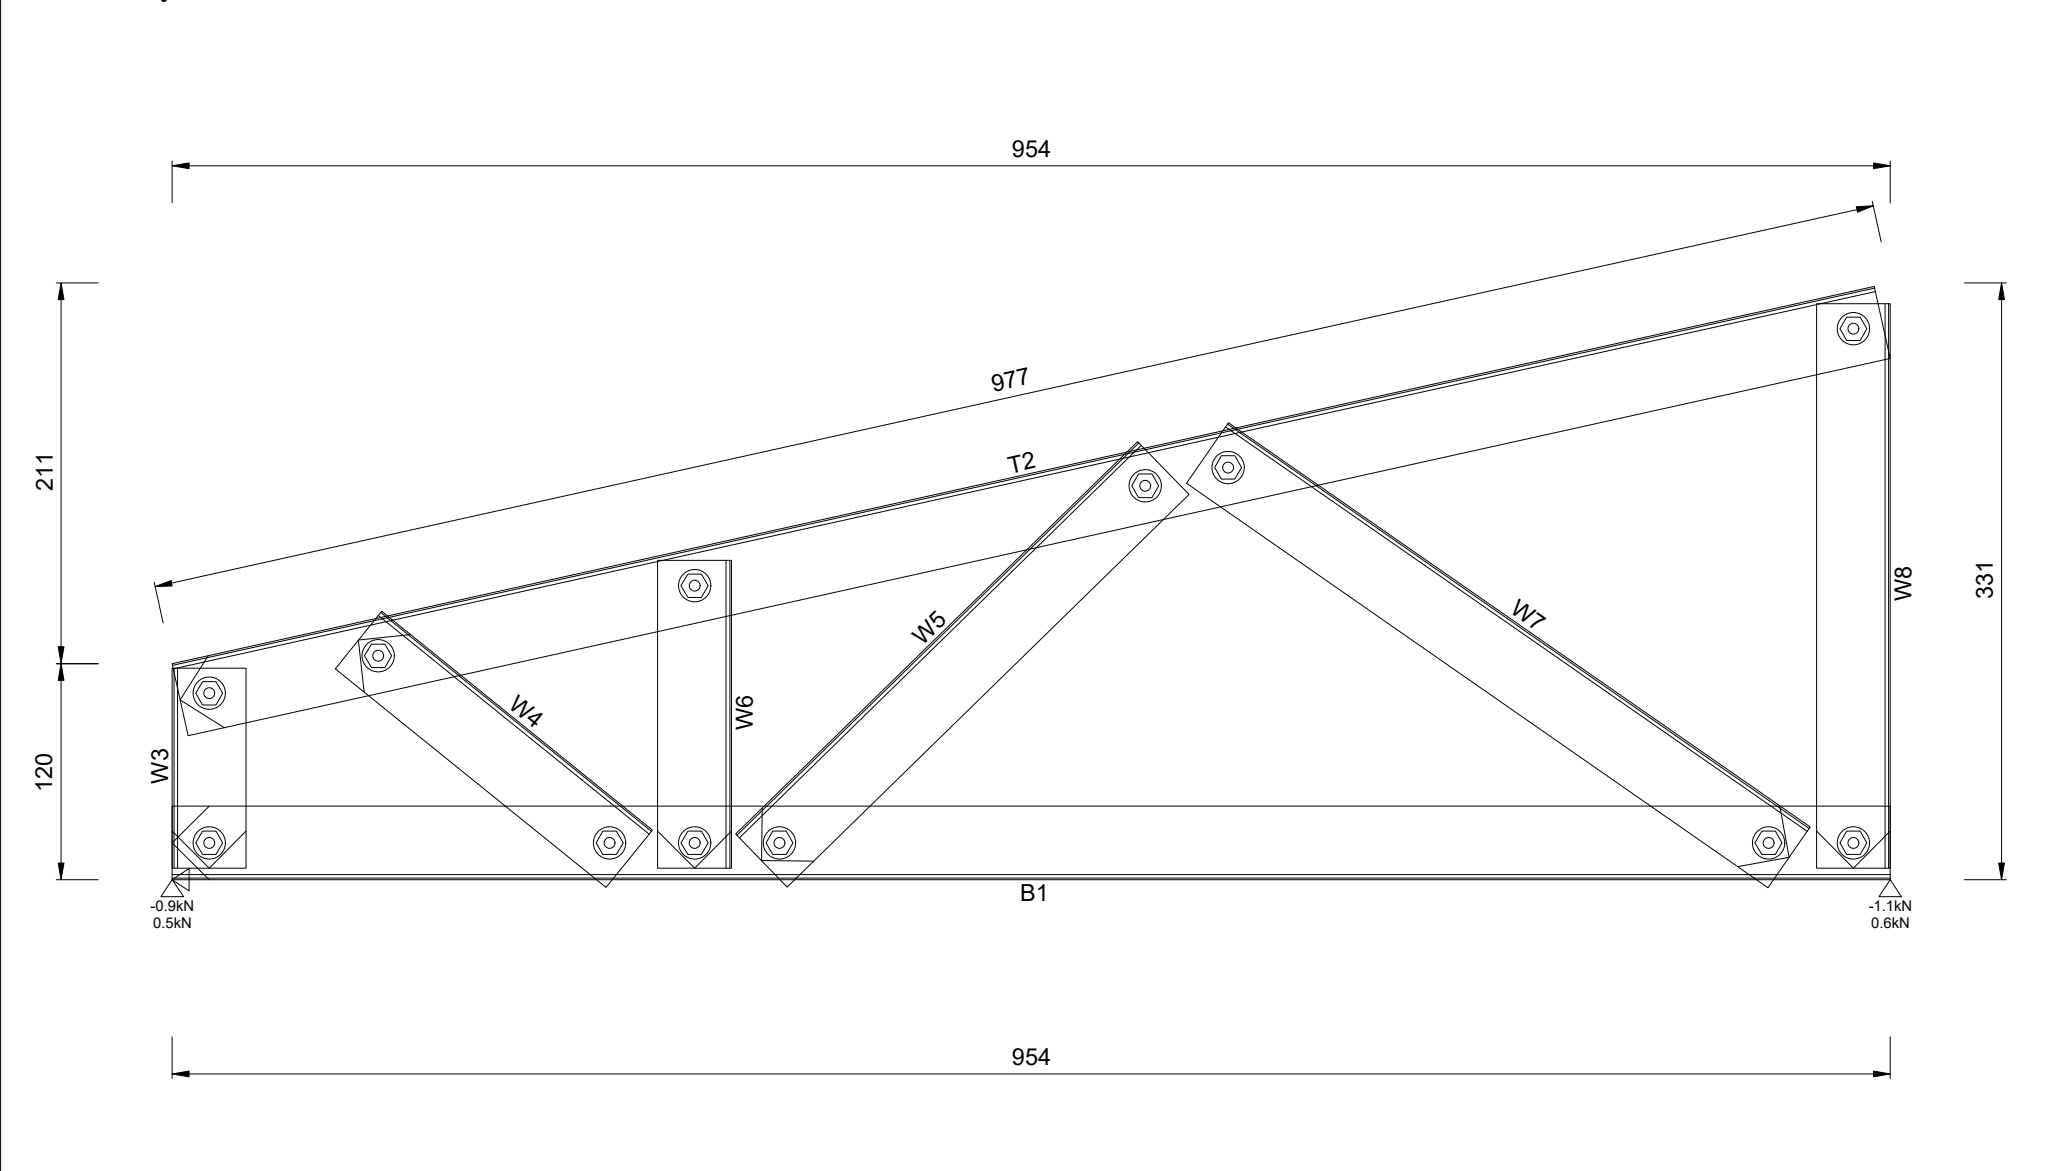


Quantity Required = 1 Mark as HN152 Engineering Status = 26%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	334h x 954w				

B1 75S41-095-550	1 2126	T2 75S41-095-550	1 2126	W3 75S41-095-550	3 287	W4 75S41-095-550	2 1011	FRAMECAD M6 Screw	20
Working Sheet: Trusses		Assembly Weight		9.2kg					

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

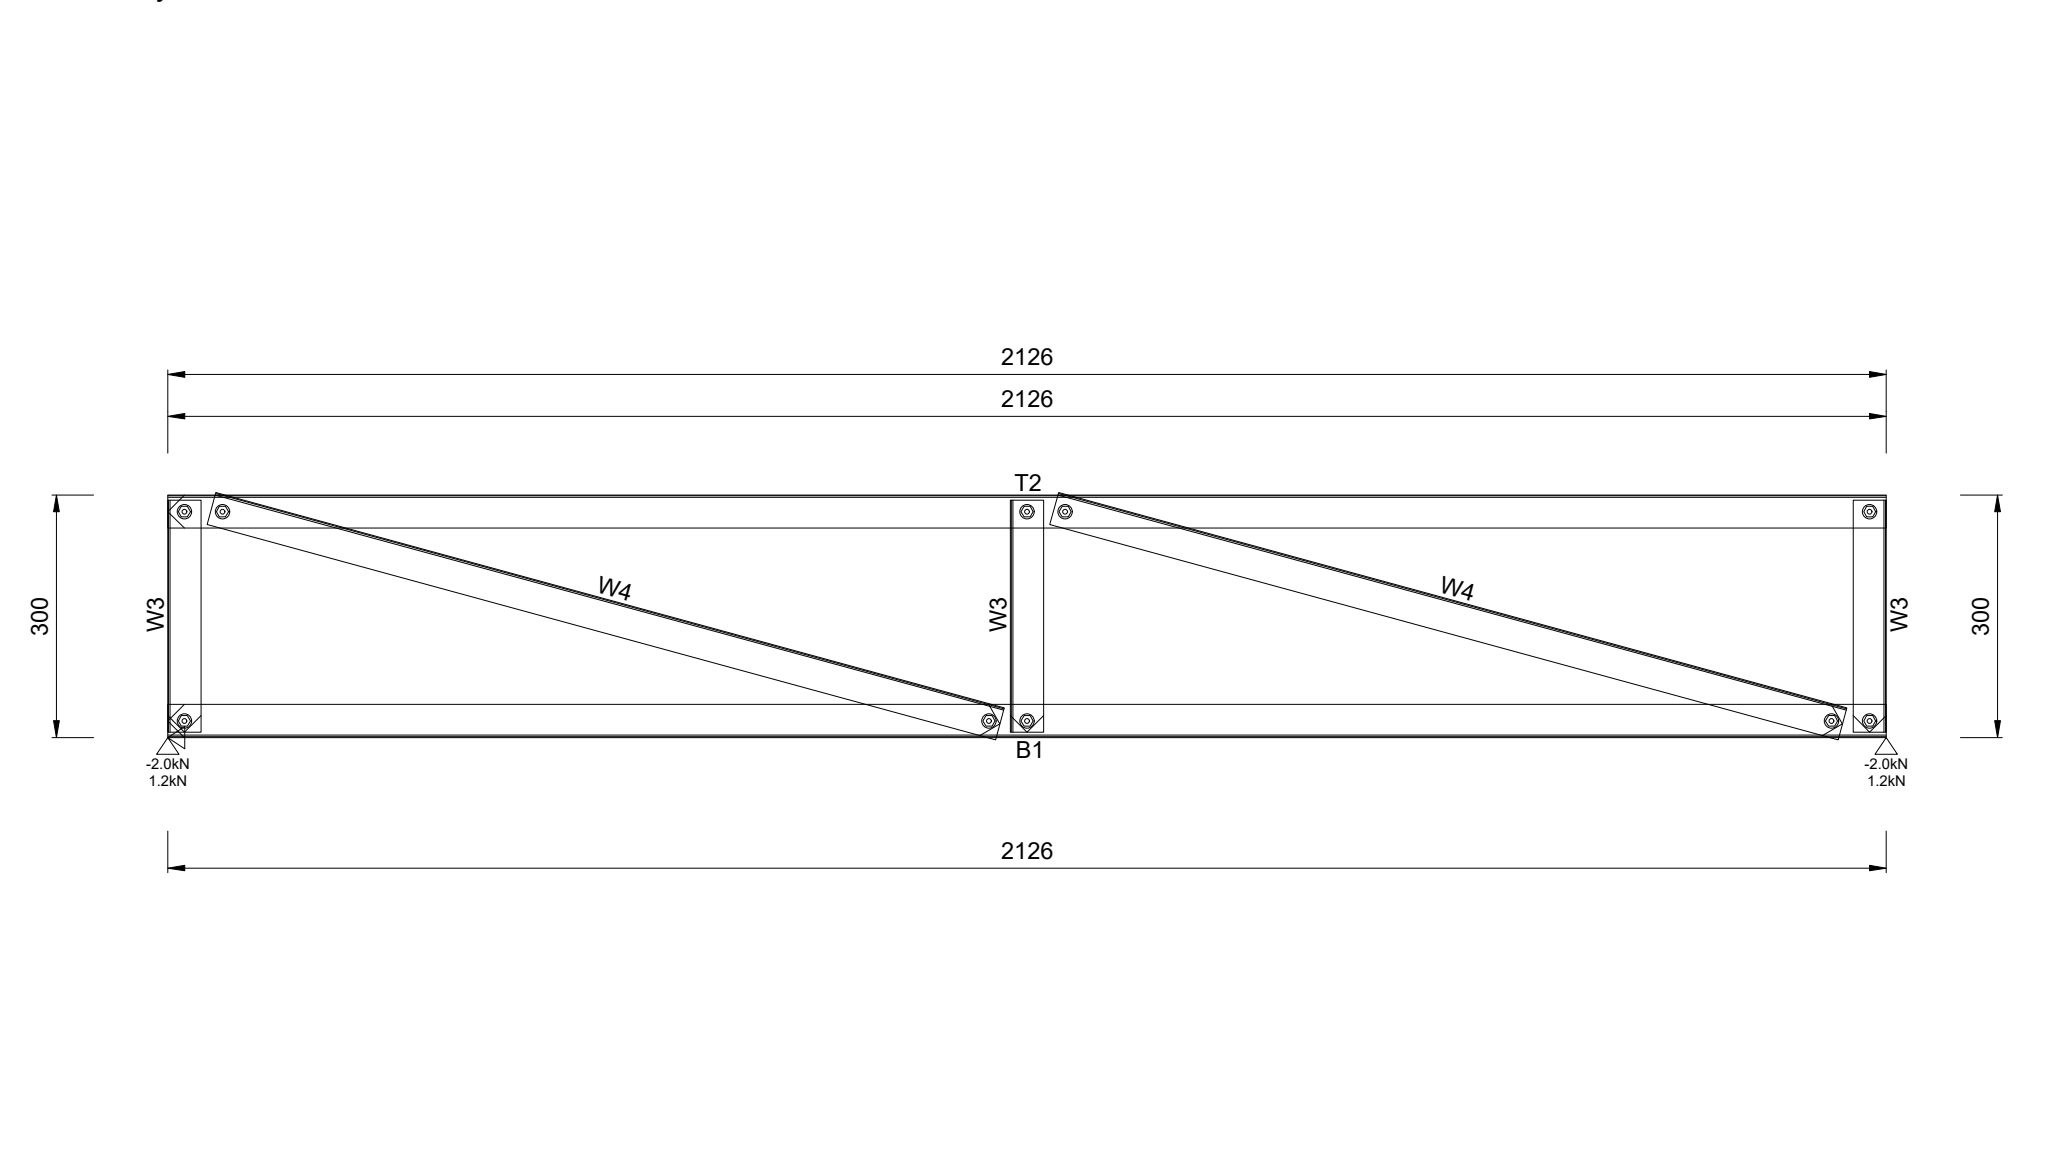

Quantity Required = 1 Mark as HN153 Engineering Status = 67%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	306h x 2126w				


Minimum number of fasteners required is 2 per joint



J/No. 26110

B1	75S41-095-550	1	1262	B2	75S41-095-550	1	697	T3	75S41-095-550	1	1955	W4	75S41-095-550	1	111
W5	75S41-095-550	1	295	W6	75S41-095-550	1	237	W7	75S41-095-550	1	629	W8	75S41-095-550	1	382
W9	75S41-095-550	1	666	W10	75S41-095-550	1	463	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24
FRAMECAD M6 Screw			30	Working Sheet: Trusses				Assembly Weight			8.6kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

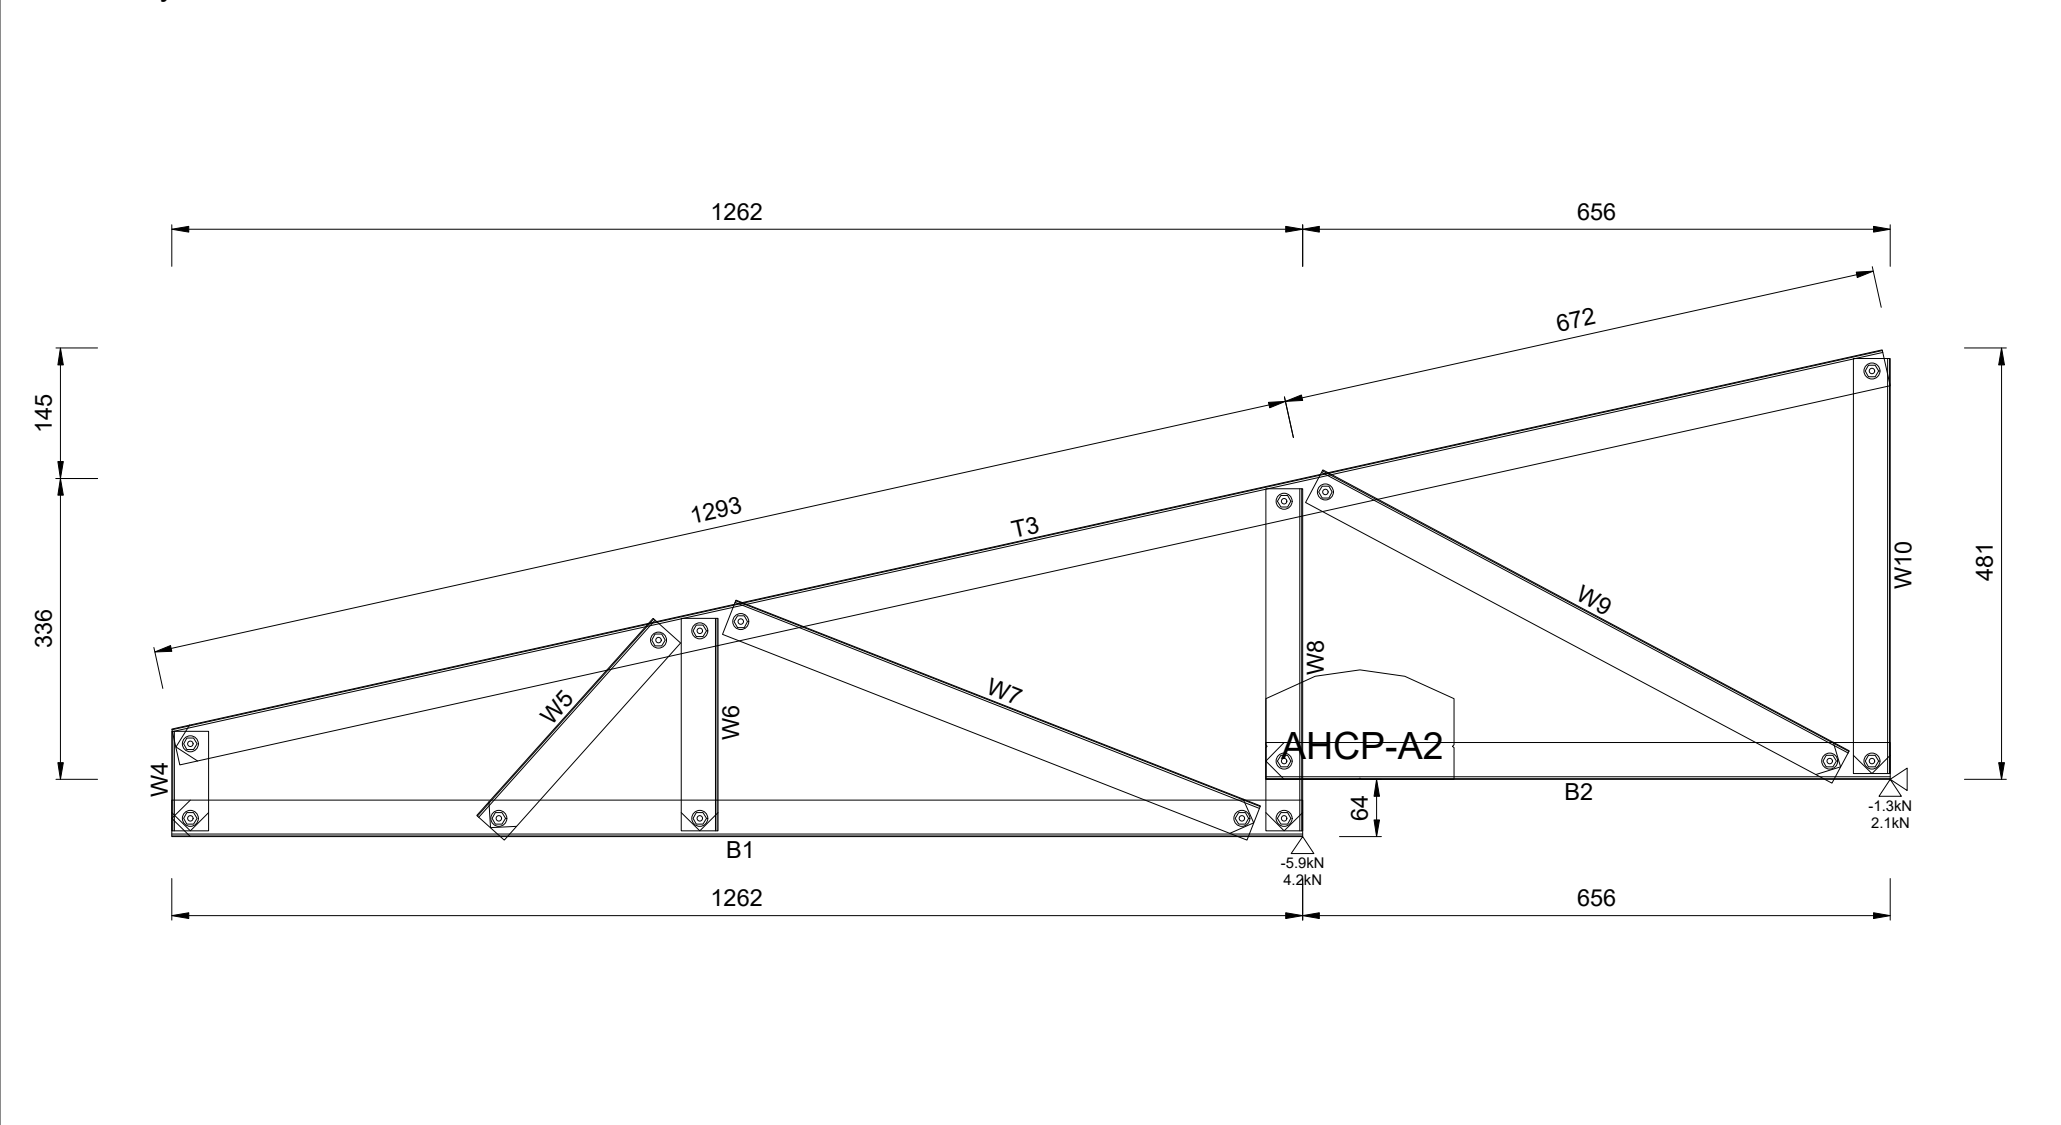


Quantity Required = 1 Mark as HN155 Engineering Status = 69%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	547h x 1918w				

B1 75S41-095-550	1 954	T2 75S41-095-550	1 968	W3 75S41-095-550	1 111	W4 75S41-095-550	1 202	W5 75S41-095-550	1 312	W6 75S41-095-550	1 171
W7 75S41-095-550	1 393	W8 75S41-095-550	1 313	FRAMECAD M6 Screw	24	Working Sheet: Trusses		Assembly Weight	4.4kg		


Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

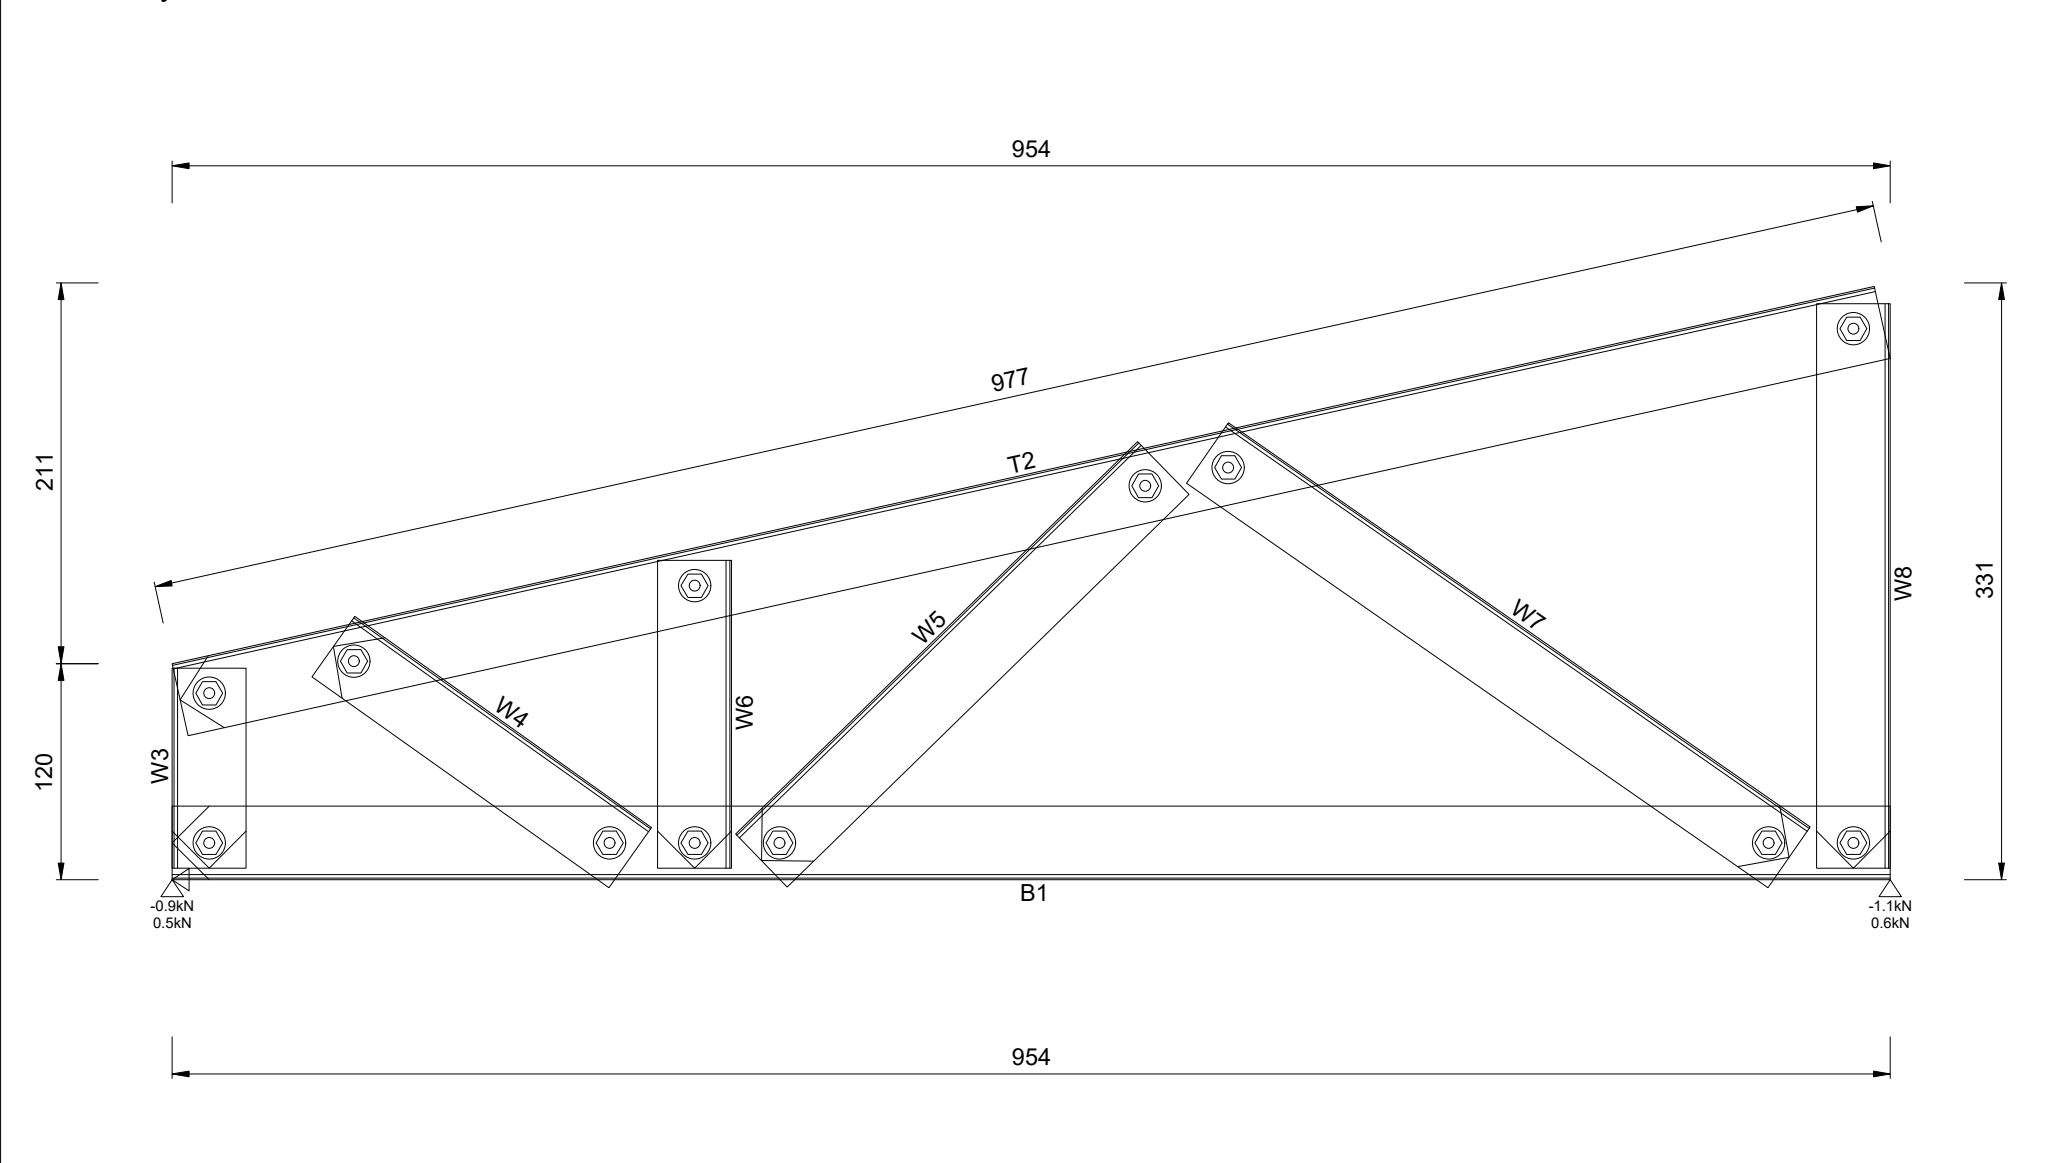

Quantity Required = 1 Mark as HN156 Engineering Status = 26%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	334h x 954w				

B1	75S41-095-550	1	1262	B2	75S41-095-550	1	1692	T3	75S41-095-550	1	3051	W4	75S41-095-550	1	111
W5	75S41-095-550	1	340	W6	75S41-095-550	1	236	W7	75S41-095-550	1	634	W8	75S41-095-550	1	382
W9	75S41-095-550	1	838	W10	75S41-095-550	1	506	W11	75S41-095-550	1	891	W12	75S41-095-550	1	684
FRAMECAD 1.15mm Apex/Heel Plate				FRAMECAD 10g-16mm Flathead				FRAMECAD M6 Screw				Working Sheet: Trusses			
Assembly Weight				2				13.7kg							

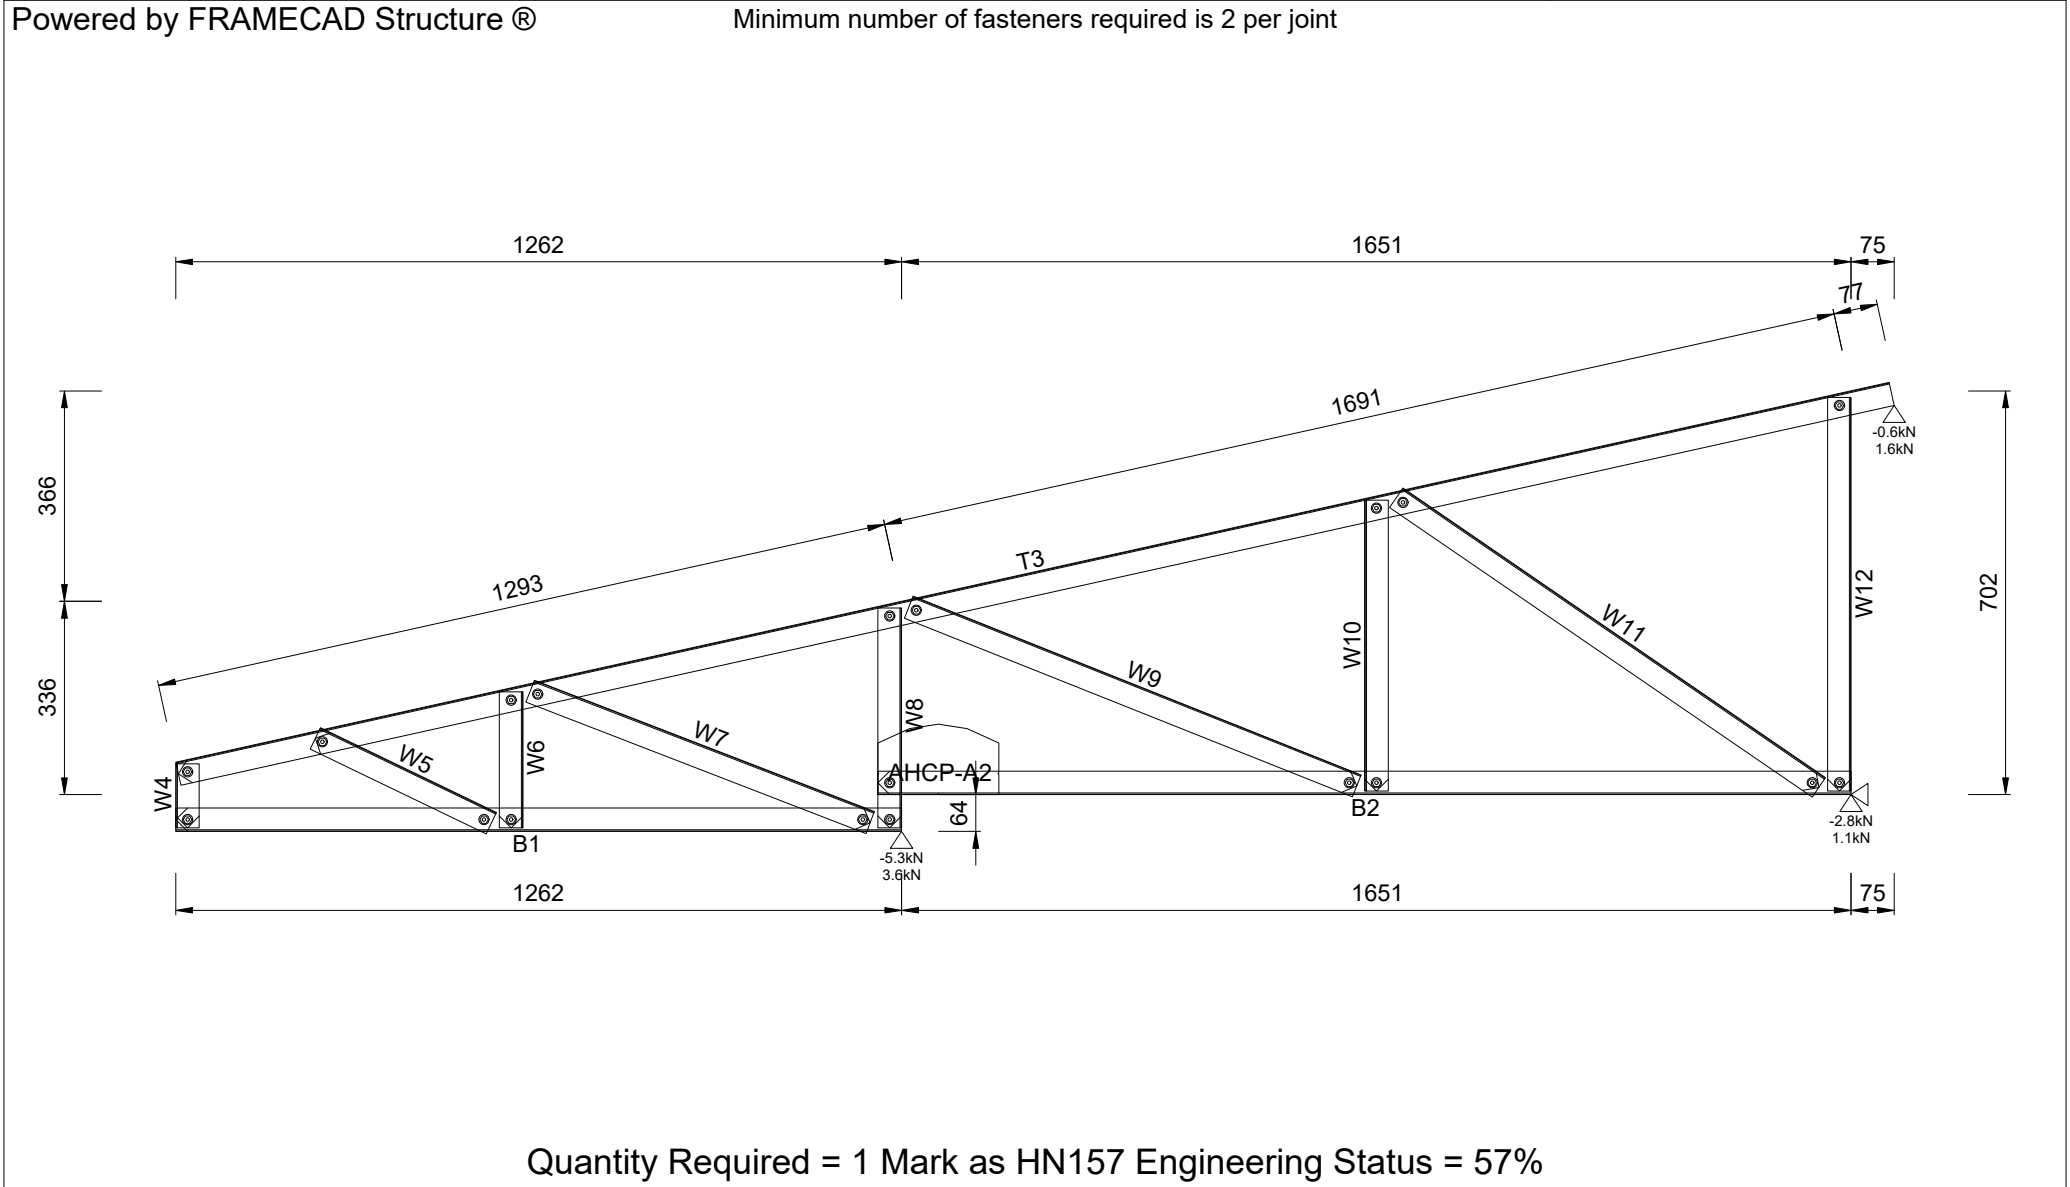


Quantity Required = 1 Mark as HN157 Engineering Status = 57%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	785h x 2988w				

B1 75S41-095-550	1	1651	T2 75S41-095-550	1	2552	W3 75S41-095-550	1	327	W4 75S41-095-550	1	1576
W5 75S41-095-550	1	684	FRAMECAD 1.15mm Fix Plate	2		FRAMECAD 10g-16mm Flathead	24		FRAMECAD M6 Screw	12	
Working Sheet: Trusses			Assembly Weight			8.8kg					

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

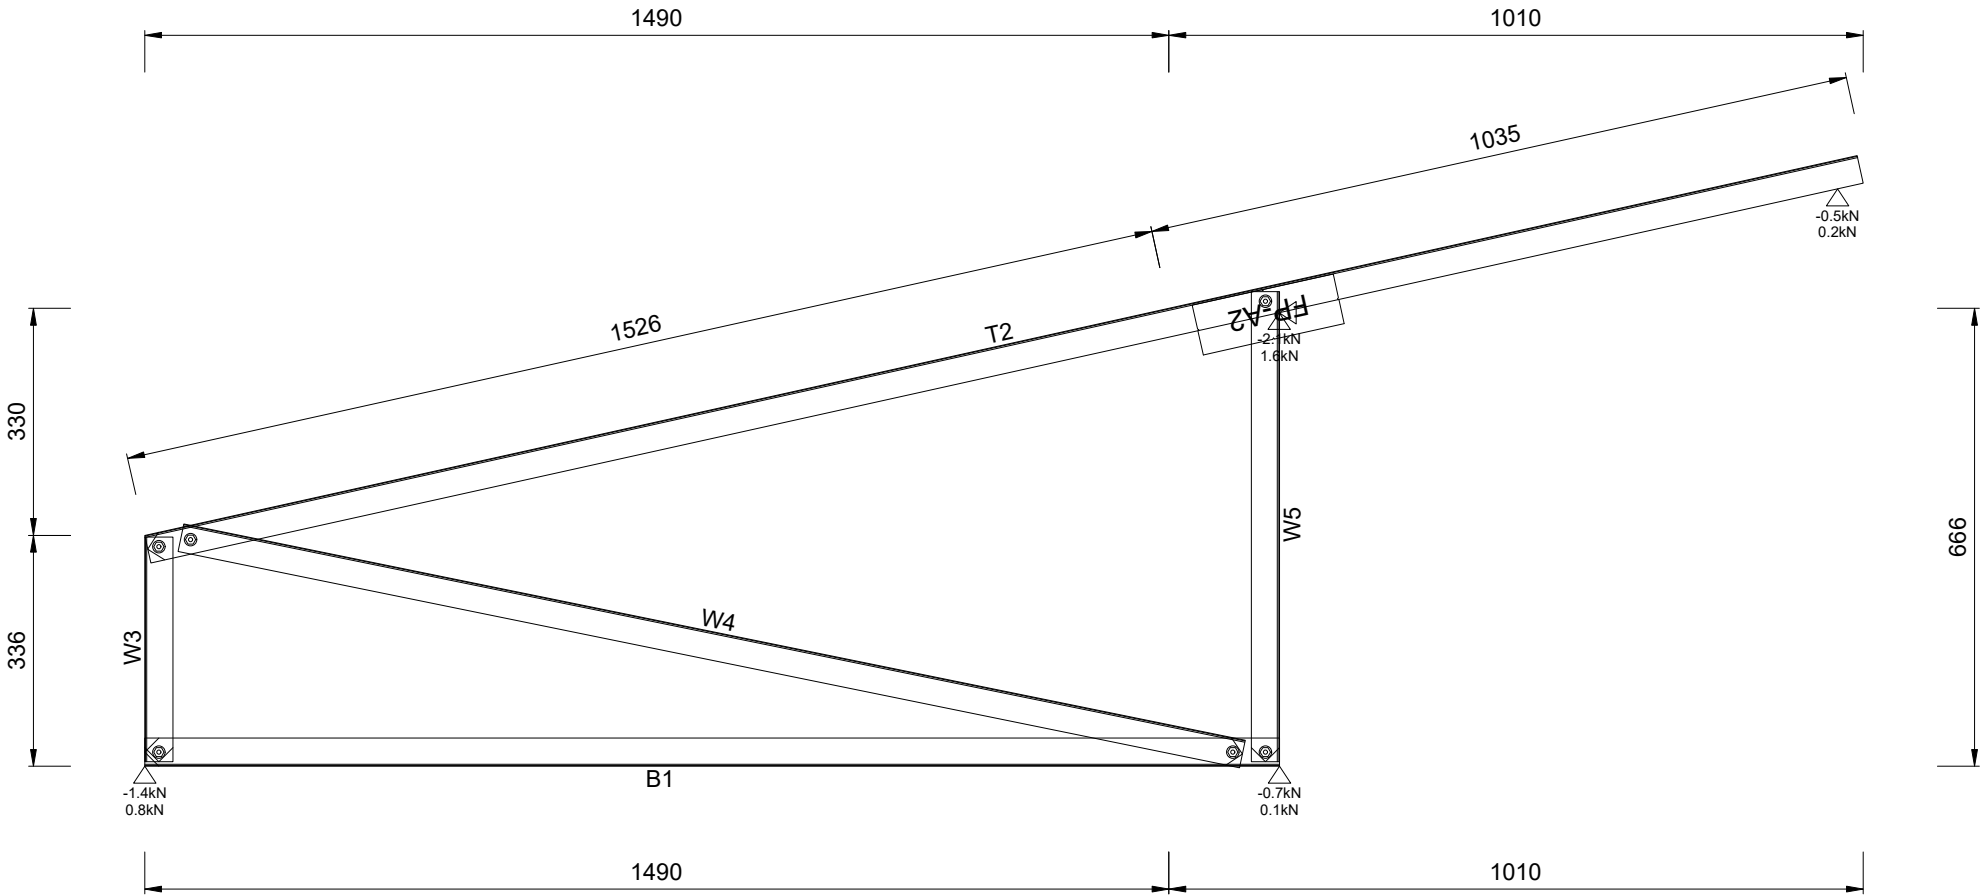


Quantity Required = 1 Mark as HN158 Engineering Status = 86%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	891h x 2501w				

B1 75S41-095-550	3 2160	T2 75S41-095-550	3 2204	W3 75S41-095-550	3 230	W4 75S41-095-550	3 1017	W5 75S41-095-550	3 465
W6 75S41-095-550	3 1093	W7 75S41-095-550	3 700	FRAMECAD M6 Screw	60	Working Sheet: Trusses		Assembly Weight	10.2kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

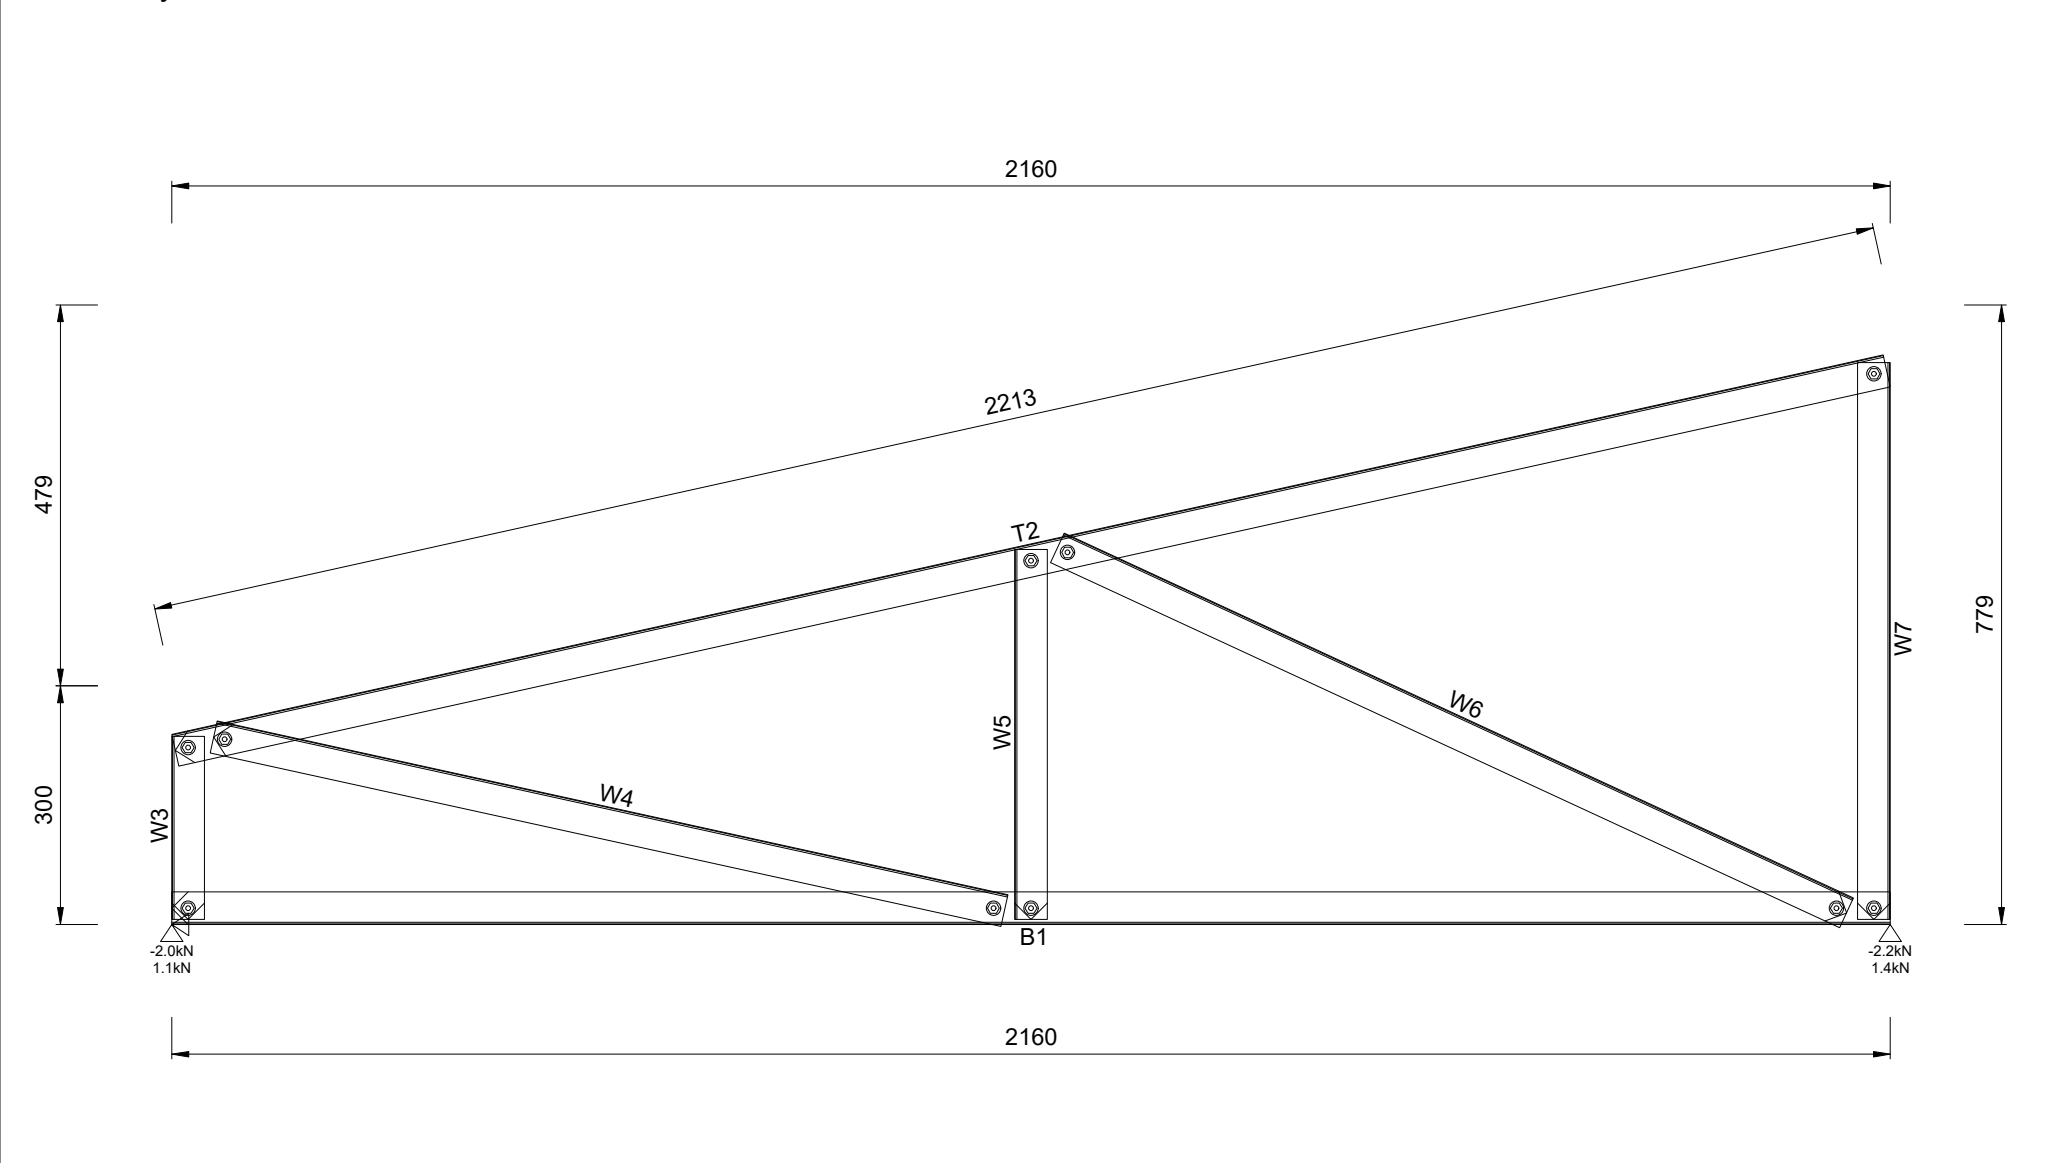


Quantity Required = 3 Mark as HN159 Engineering Status = 66%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	720h x 2160w				

B1	75S41-095-550	1	2126	T2	75S41-095-550	1	2126	T3	75S41-095-550	1	557	T4	75S41-095-550	1	555
W5	75S41-095-550	4	287	W6	75S41-095-550	1	495	W7	75S41-095-550	1	611	W8	75S41-095-550	1	345
W9	75S41-095-550	1	608	W10	75S41-095-550	1	454	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			24
FRAMECAD M6 Screw			46	Working Sheet: Trusses				Assembly Weight			11.6kg				

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

GUSSET

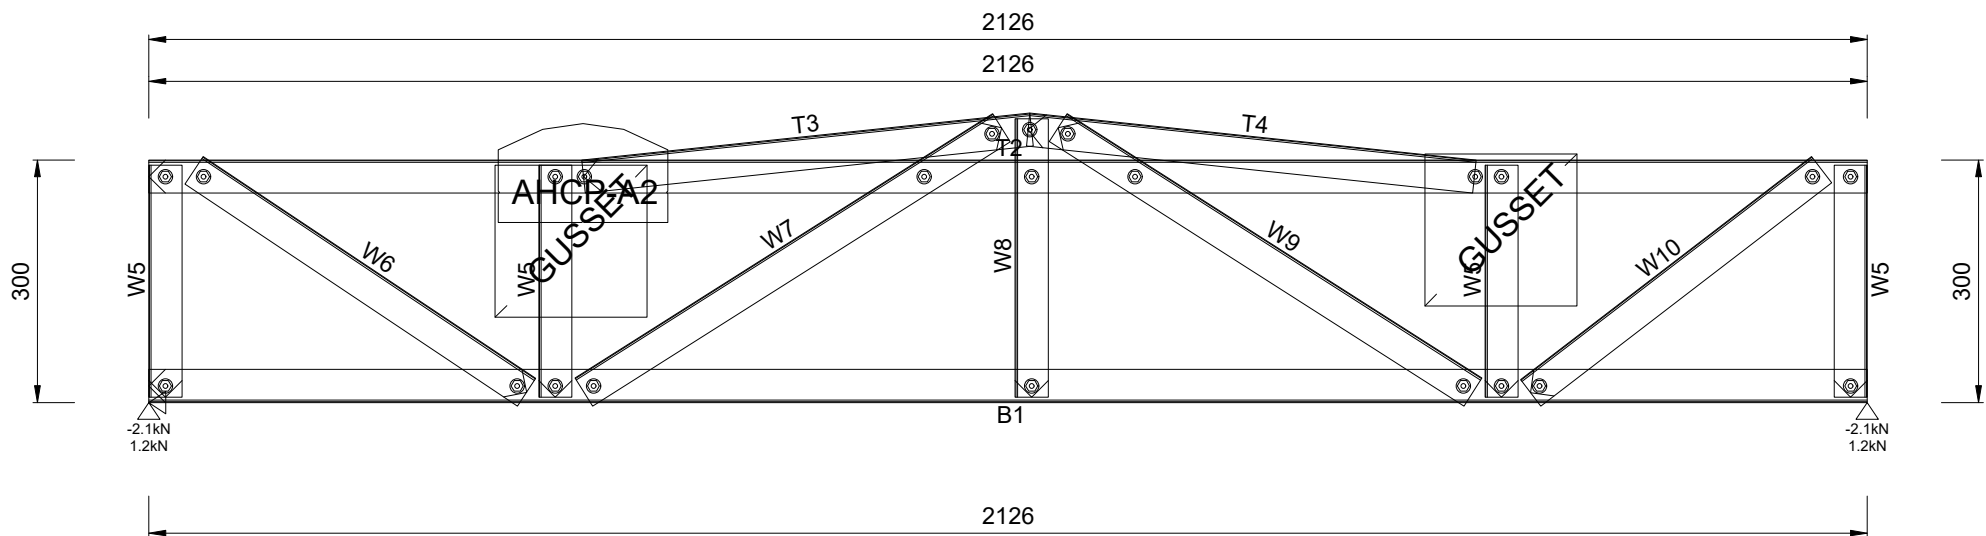


Quantity Required = 1 Mark as HN160 Engineering Status = 34%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	362h x 2126w				

B1 75S41-095-550	1	2278	T2 75S41-095-550	1	2324	W3 75S41-095-550	1	1180	W4 75S41-095-550	1	1578	W5 75S41-095-550	1	1428
W6 75S41-095-550	1	1772	W7 75S41-095-550	1	1676	FRAMECAD M6 Screw	20		Working Sheet: Trusses			Assembly Weight		15.8kg

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

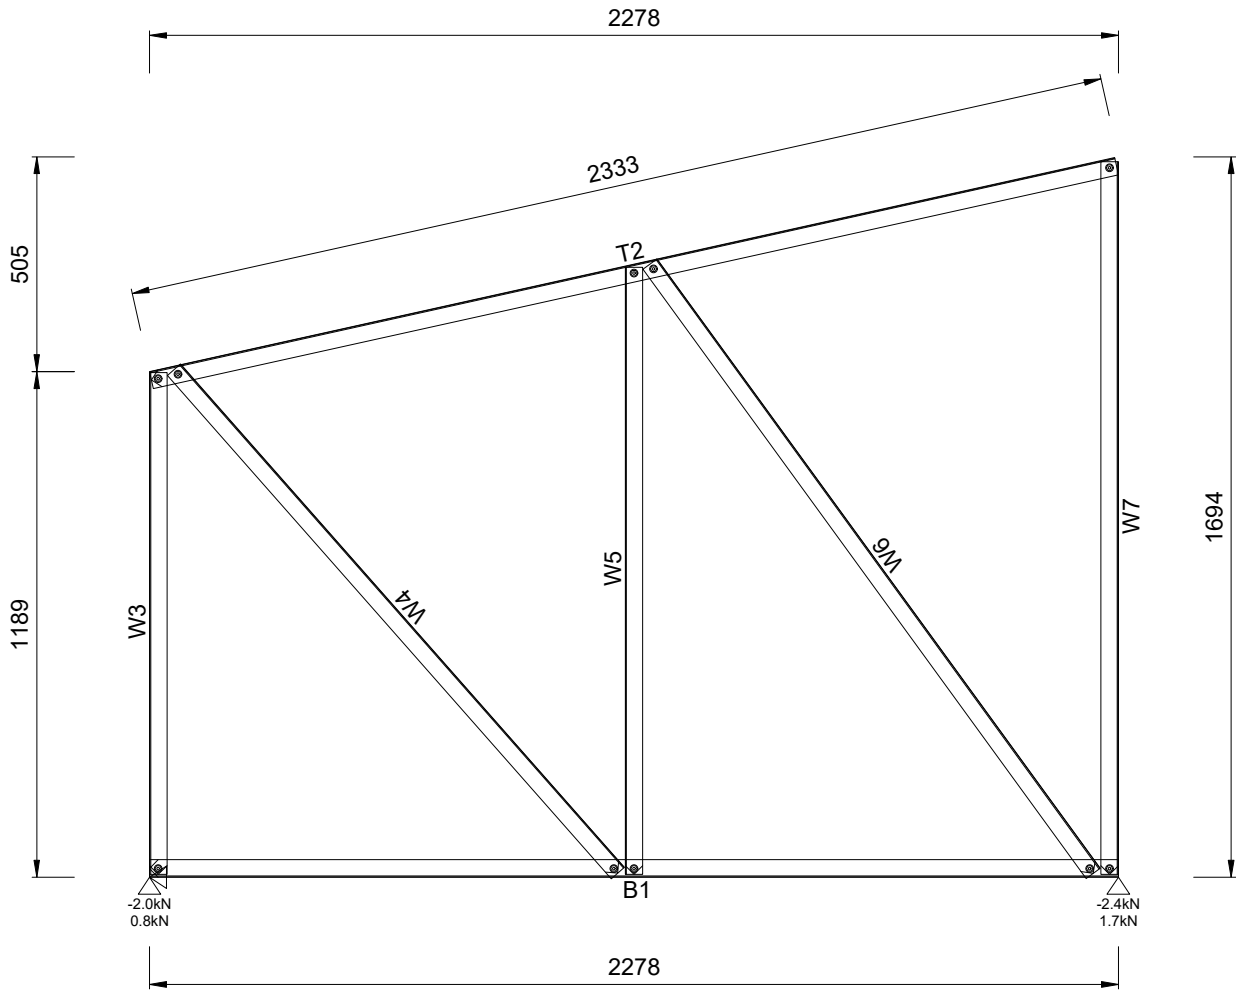


Quantity Required = 1 Mark as HN161 Engineering Status = 69%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1696h x 2278w				

B1 75S41-095-550	1	2281	T2 75S41-095-550	1	2327	W3 75S41-095-550	1	1180	W4 75S41-095-550	1	1579	W5 75S41-095-550	1	1428
W6 75S41-095-550	1	1773	W7 75S41-095-550	1	1677	FRAMECAD M6 Screw	20		Working Sheet: Trusses			Assembly Weight		15.8kg

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

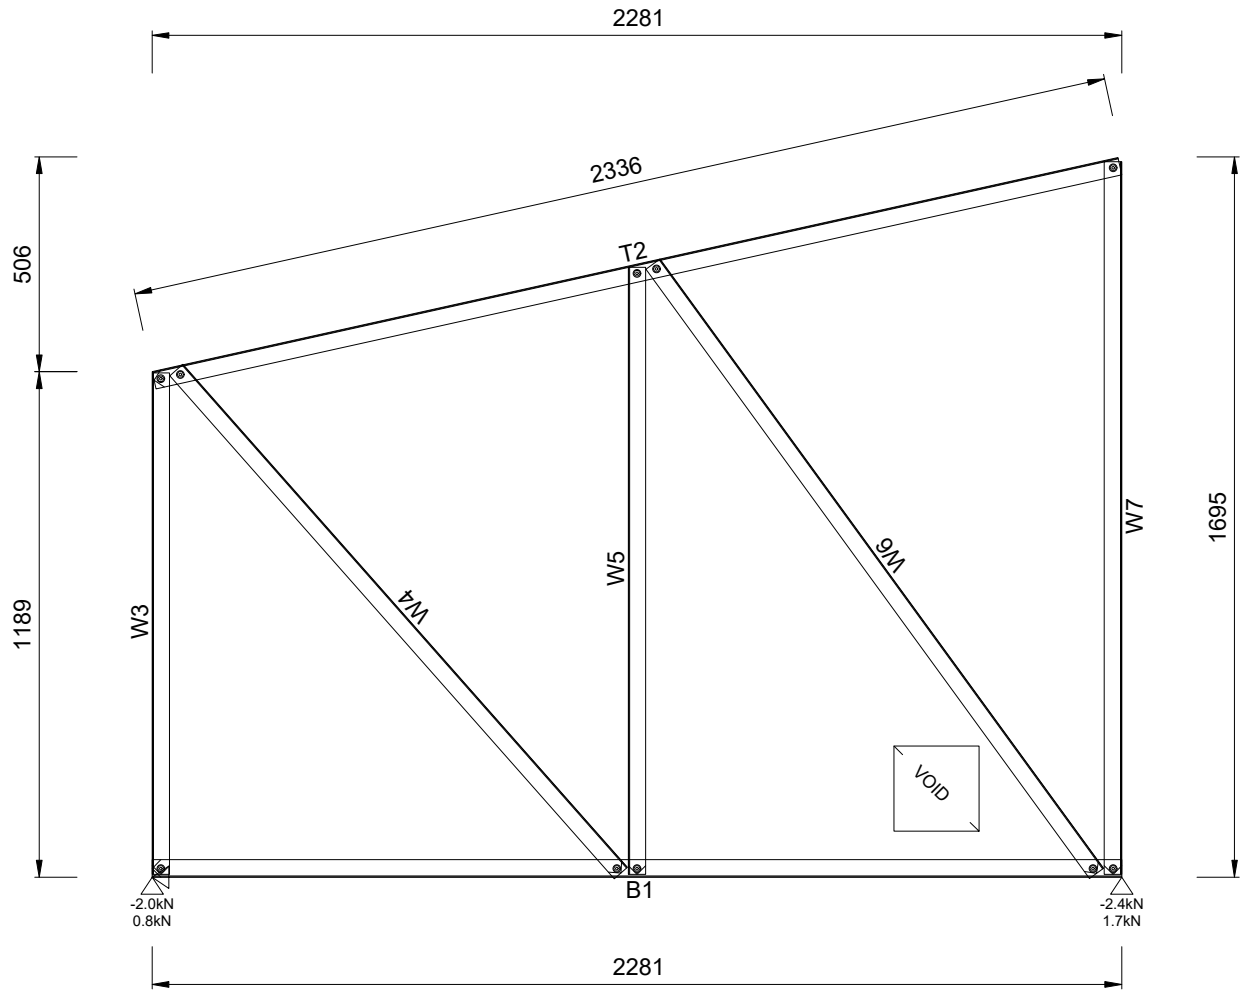


Quantity Required = 1 Mark as HN162 Engineering Status = 69%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1696h x 2281w				

B1 75S41-095-550 Working Sheet: Trusses	1 3195	T2 75S41-095-550 Assembly Weight	1 3195 19.7kg	W3 75S41-095-550	4 1117	W4 75S41-095-550	3 1478	FRAMECAD M6 Screw	28
--	--------	-------------------------------------	------------------	------------------	--------	------------------	--------	-------------------	----

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

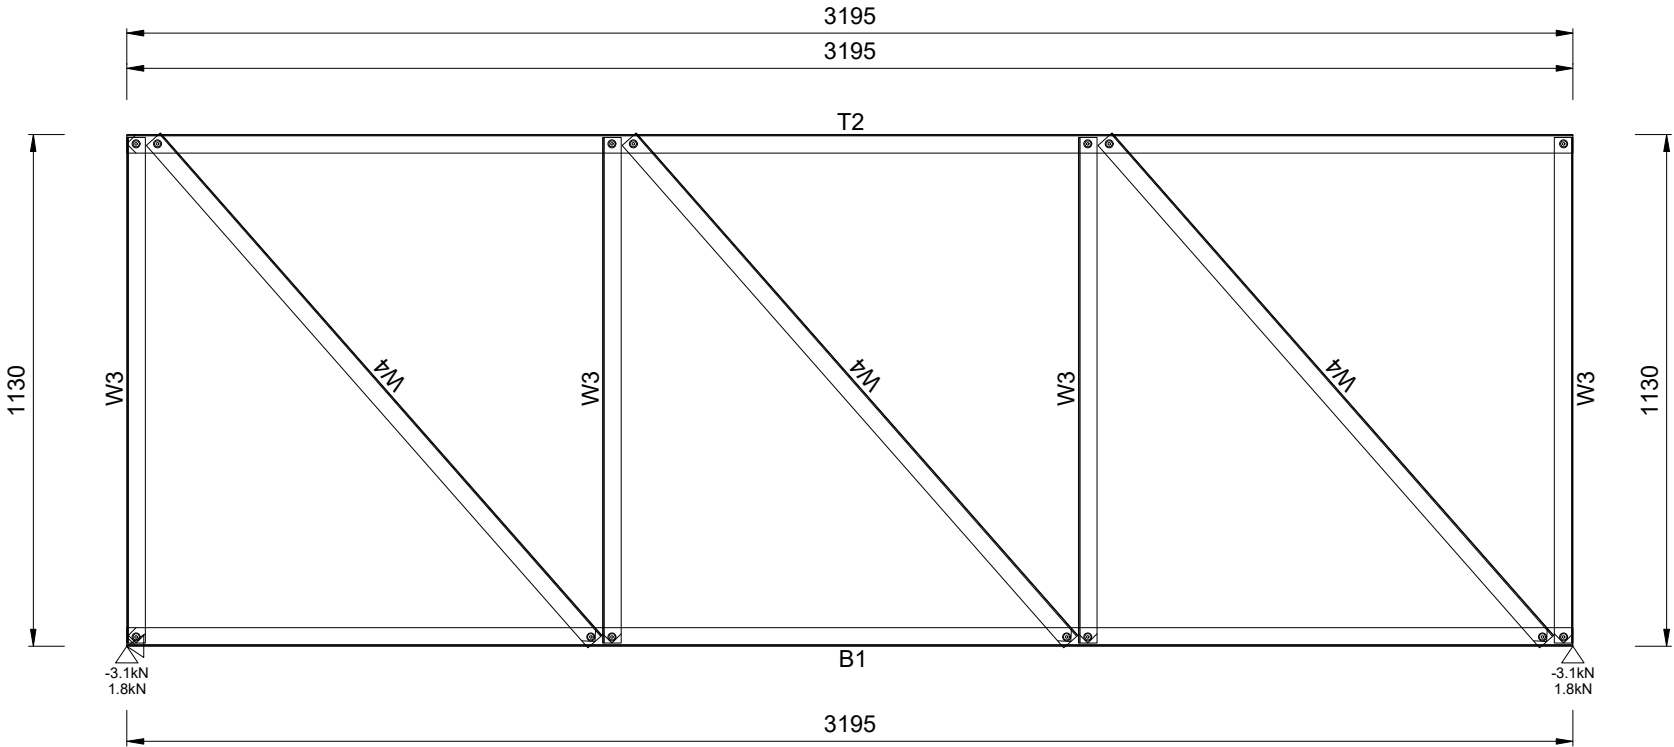


Quantity Required = 1 Mark as HN163 Engineering Status = 65%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1137h x 3195w				

B1 75S41-095-550 FRAMECAD 10g-16mm Flathead	1 5501 2	T2 75S41-095-550 FRAMECAD M6 Screw	1 5501 36	W3 75S41-095-550 Working Sheet: Truss.1	5 968	W4 75S41-095-550 Assembly Weight	4 1609 28.7kg
--	-------------	---------------------------------------	--------------	--	-------	-------------------------------------	------------------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

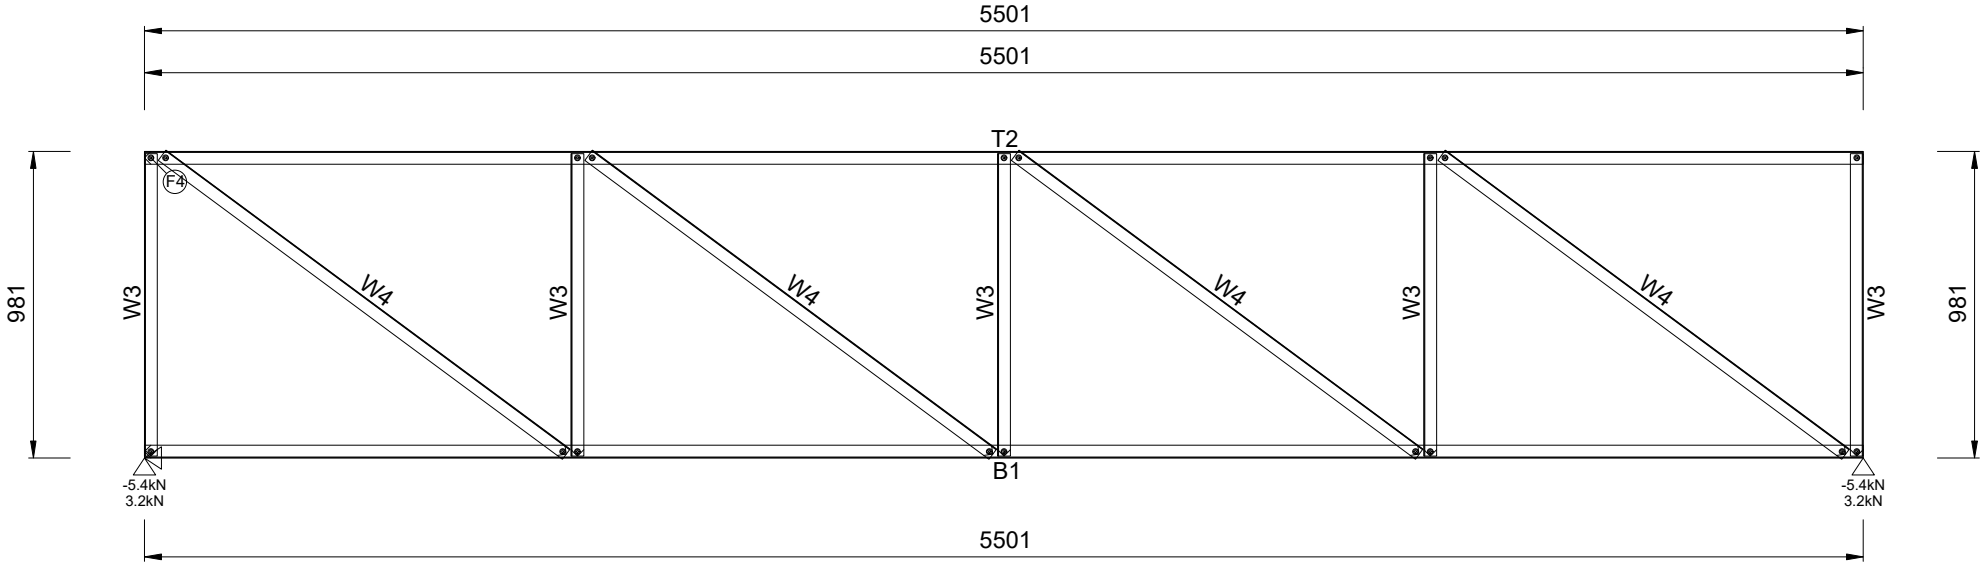

Quantity Required = 1 Mark as HN164 Engineering Status = 88%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	990h x 5501w				

B1	75S41-095-550	1	7597	T2	75S41-095-550	1	4546	T3	75S41-095-550	1	1032	H4	75S41-095-550	1	2986	W5	75S41-095-550	4	404
W6	75S41-095-550	2	685	W7	75S41-095-550	1	802	W8	75S41-095-550	2	965	W9	75S41-095-550	1	496	W10	75S41-095-550	1	585
W11	75S41-095-550	1	1327	W12	75S41-095-550	1	1060	W13	75S41-095-550	1	718	W14	75S41-095-550	1	1083	W15	75S41-095-550	1	800
W16	75S41-095-550	1	877	W17	75S41-095-550	1	1254	W18	75S41-095-550	1	773	FRAMECAD M6 Screw		82	Working Sheet: Trusses				
Assembly Weight		39.8kg																	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

STP

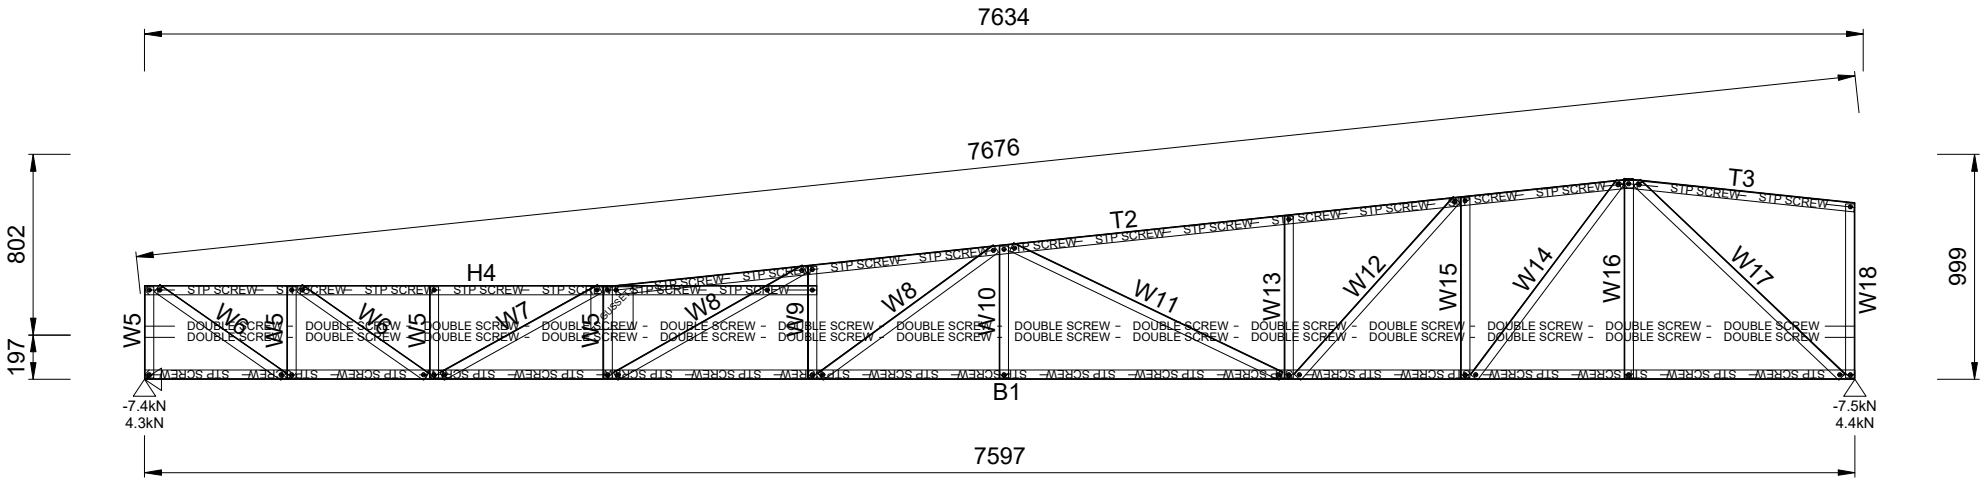


Quantity Required = 1 Mark as HN165 Engineering Status = 155%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	6.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	897h x 7597w				

B1 75S41-095-550	1	5501	T2 75S41-095-550	1	1100	H3 75S41-095-550	1	5501	W4 75S41-095-550	5	647
W5 75S41-095-550	1	1238	W6 75S41-095-550	2	1177	W7 75S41-095-550	1	1197	W8 75S41-095-550	1	1228
W9 75S41-095-550	1	760	FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 10g-16mm Flathead	36		FRAMECAD M6 Screw	50	
Working Sheet: Trusses			Assembly Weight			28.5kg					

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

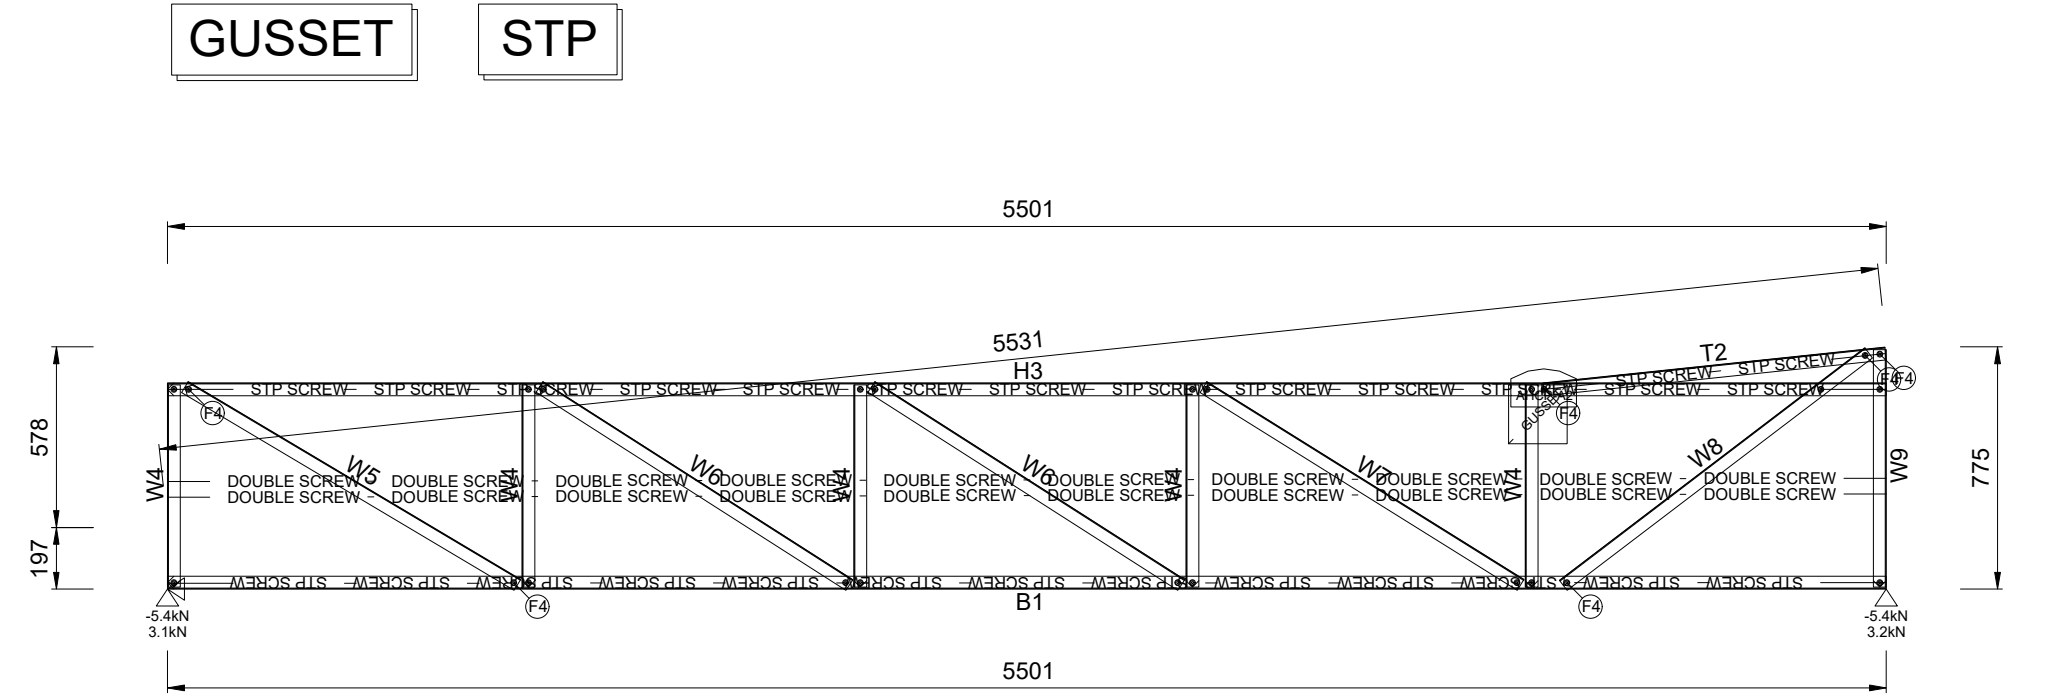


Quantity Required = 1 Mark as HN166 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	6.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	779h x 5501w				

B1 75S41-095-550	1	2108	T2 75S41-095-550	1	2108	T3 75S41-095-550	1	1588	W4 75S41-095-550	2	287
W5 75S41-095-550	1	671	W6 75S41-095-550	1	745	W7 75S41-095-550	1	819	W8 75S41-095-550	1	437
W9 75S41-095-550	1	584	FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 1.15mm Fix Plate	2		FRAMECAD 10g-16mm Flathead	48	
FRAMECAD M6 Screw	38		Working Sheet: Trusses			Assembly Weight	12.4kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

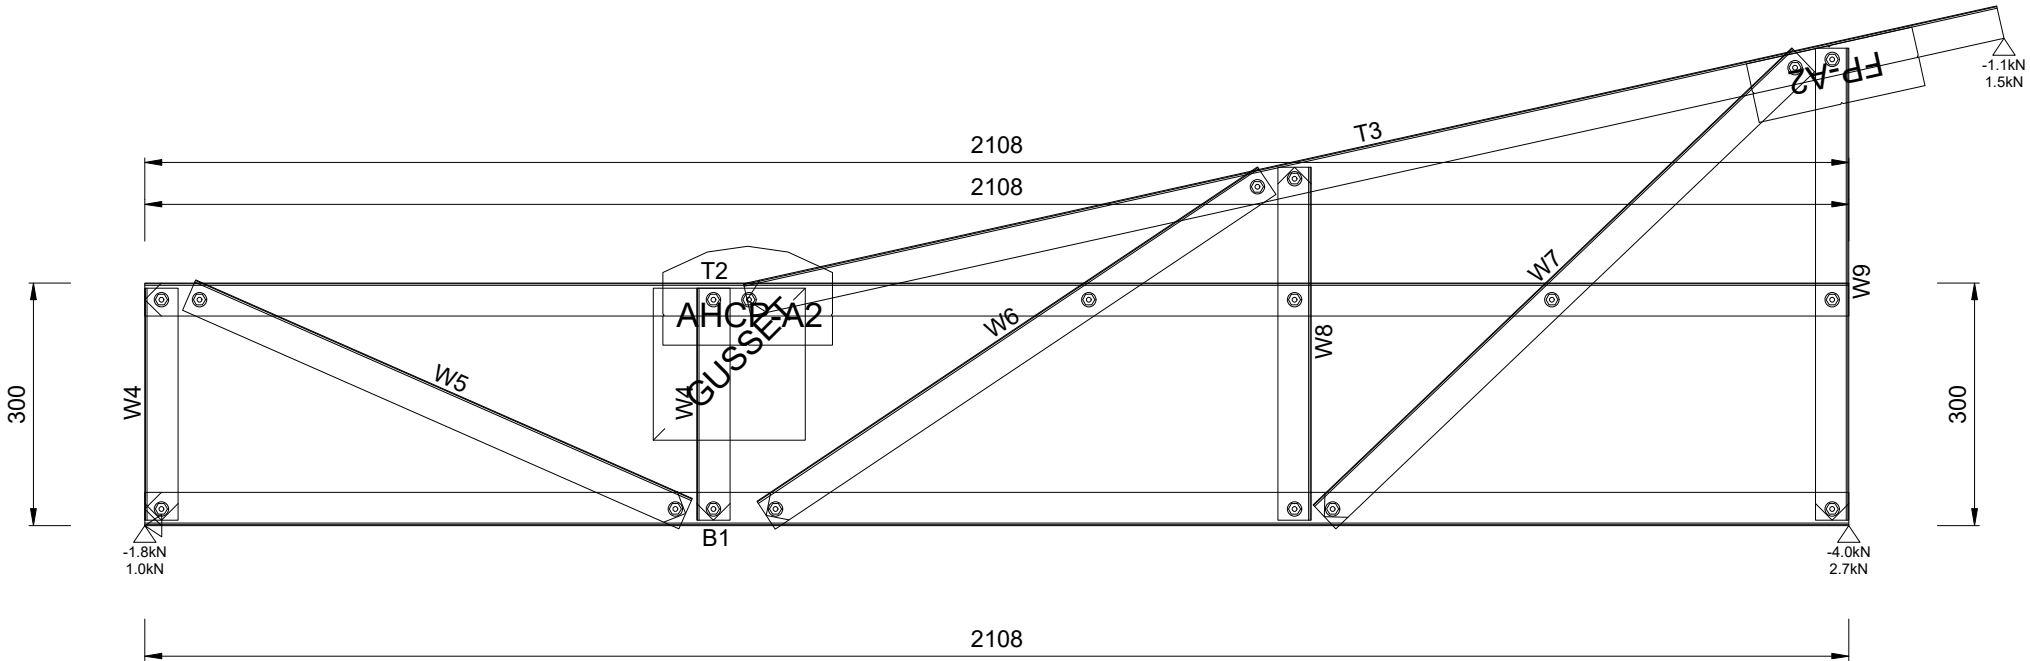


Quantity Required = 1 Mark as HN207 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	647h x 2300w				

B1	75S41-095-550	1	2459	B2	75S41-095-550	1	1150	B3	75S41-095-550	1	2666	T4	75S41-095-550	1	2111	T5	75S41-095-550	1	1178
T6	75S41-095-550	1	2671	T7	75S41-095-550	1	145	H8	75S41-095-550	1	867	H9	75S41-095-550	1	1463	H10	75S41-095-550	1	2666
W11	75S41-095-550	2	920	W12	75S41-095-550	1	977	W13	75S41-095-550	1	1043	W14	75S41-095-550	1	1003	W15	75S41-095-550	1	1076
W16	75S41-095-550	1	1103	W17	75S41-095-550	1	1537	W18	75S41-095-550	1	1356	W19	75S41-095-550	1	833	W20	75S41-095-550	1	583
W21	75S41-095-550	1	947	W22	75S41-095-550	1	704	W23	75S41-095-550	1	829	W24	75S41-095-550	1	1653	W25	75S41-095-550	1	2060
W26	75S41-095-550	1	2444	W27	75S41-095-550	1	1952	W28	75S41-095-550	1	2208	W29	75S41-095-550	1	2198	W30	75S41-095-550	1	2181
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				59.2kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

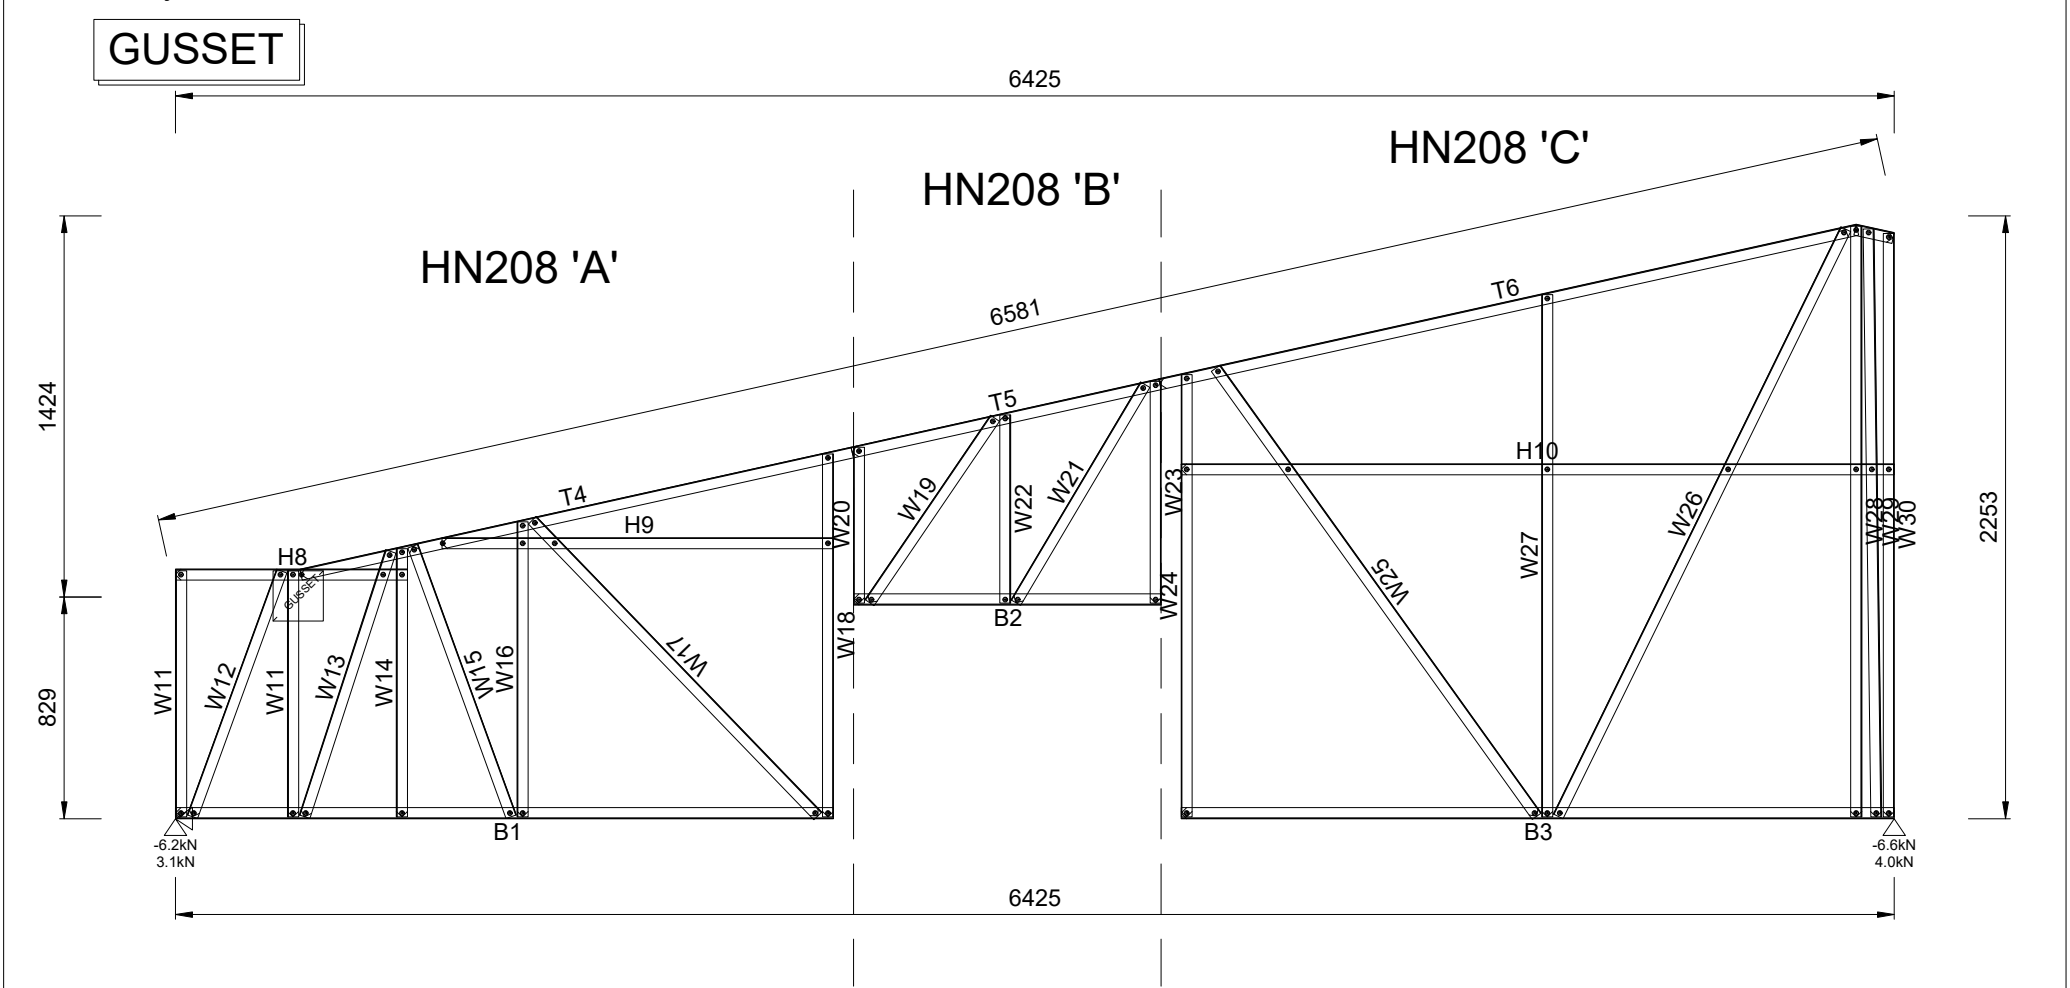


Quantity Required = 1 Mark as HN208 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2226h x 6425w				

B1	75S41-095-550	1	6425	T2	75S41-095-550	1	6436	T3	75S41-095-550	1	145	H4	75S41-095-550	1	4480	W5	75S41-095-550	1	820
W6	75S41-095-550	1	1014	W7	75S41-095-550	1	968	W8	75S41-095-550	1	1110	W9	75S41-095-550	1	1103	W10	75S41-095-550	1	1578
W11	75S41-095-550	1	1369	W12	75S41-095-550	1	1791	W13	75S41-095-550	1	1641	W14	75S41-095-550	1	2115	W15	75S41-095-550	1	2444
W16	75S41-095-550	1	1952	W17	75S41-095-550	1	2208	W18	75S41-095-550	1	2198	W19	75S41-095-550	1	2181	FRAMECAD M6 Screw		80	
Working Sheet: Trusses				Assembly Weight				54.2kg											

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

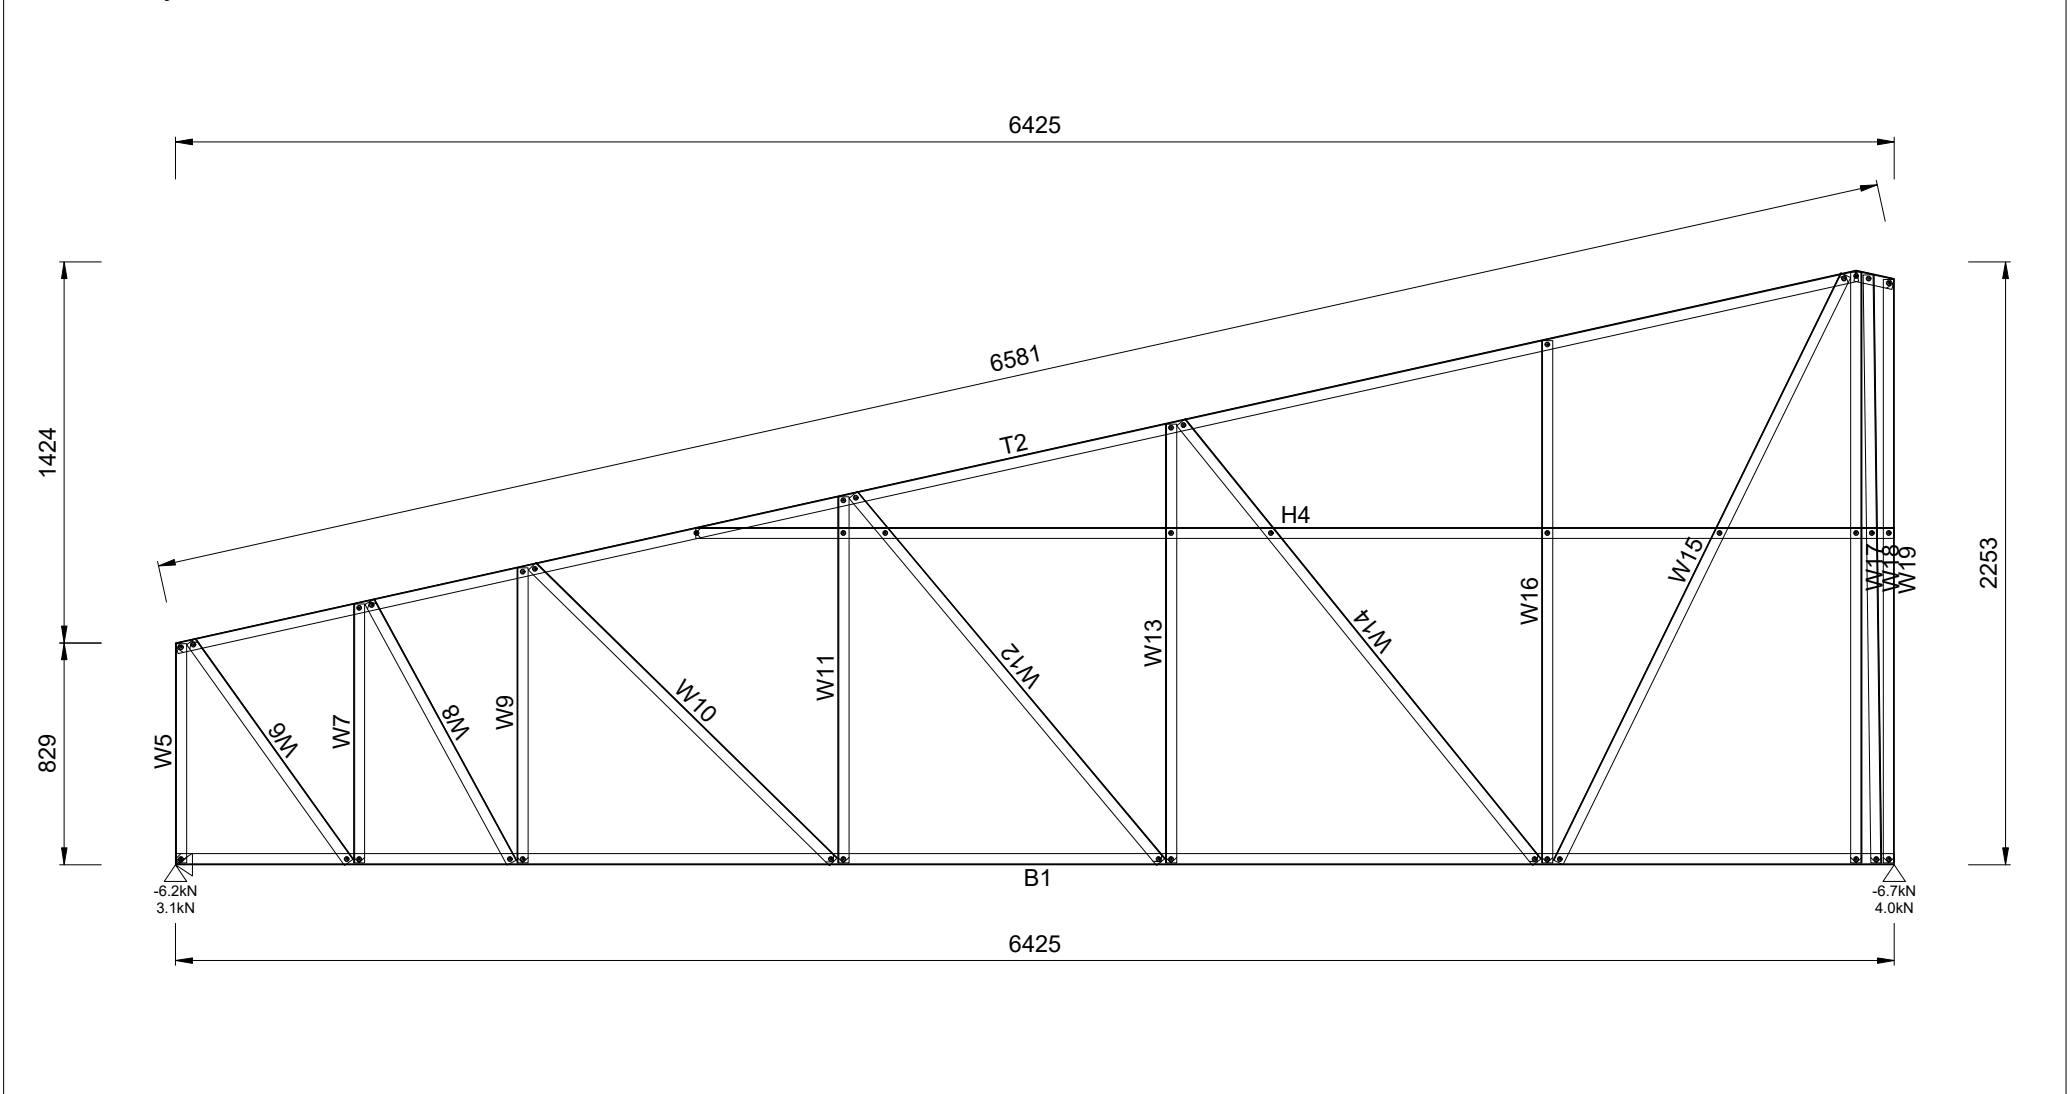

Quantity Required = 1 Mark as HN209 Engineering Status = 107%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	2226h x 6425w				

B1	75S41-095-550	1	2303	B2	75S41-095-550	1	1150	B3	75S41-095-550	1	3384	T4	75S41-095-550	1	456	T5	75S41-095-550	1	2781
H6	75S41-095-550	1	2113	H7	75S41-095-550	1	1150	H8	75S41-095-550	1	3459	W9	75S41-095-550	1	1043	W10	75S41-095-550	1	1088
W11	75S41-095-550	1	1091	W12	75S41-095-550	1	1549	W13	75S41-095-550	4	1098	W14	75S41-095-550	1	1351	W15	75S41-095-550	3	299
W16	75S41-095-550	2	562	W17	75S41-095-550	1	1213	W18	75S41-095-550	1	1379	W19	75S41-095-550	1	1487	W20	75S41-095-550	1	1244
W21	75S41-095-550	1	2132	W22	75S41-095-550	1	1388	W23	75S41-095-550	1	1696	FRAMECAD M6 Screw		100	Working Sheet: Trusses				
Assembly Weight			51.4kg																

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

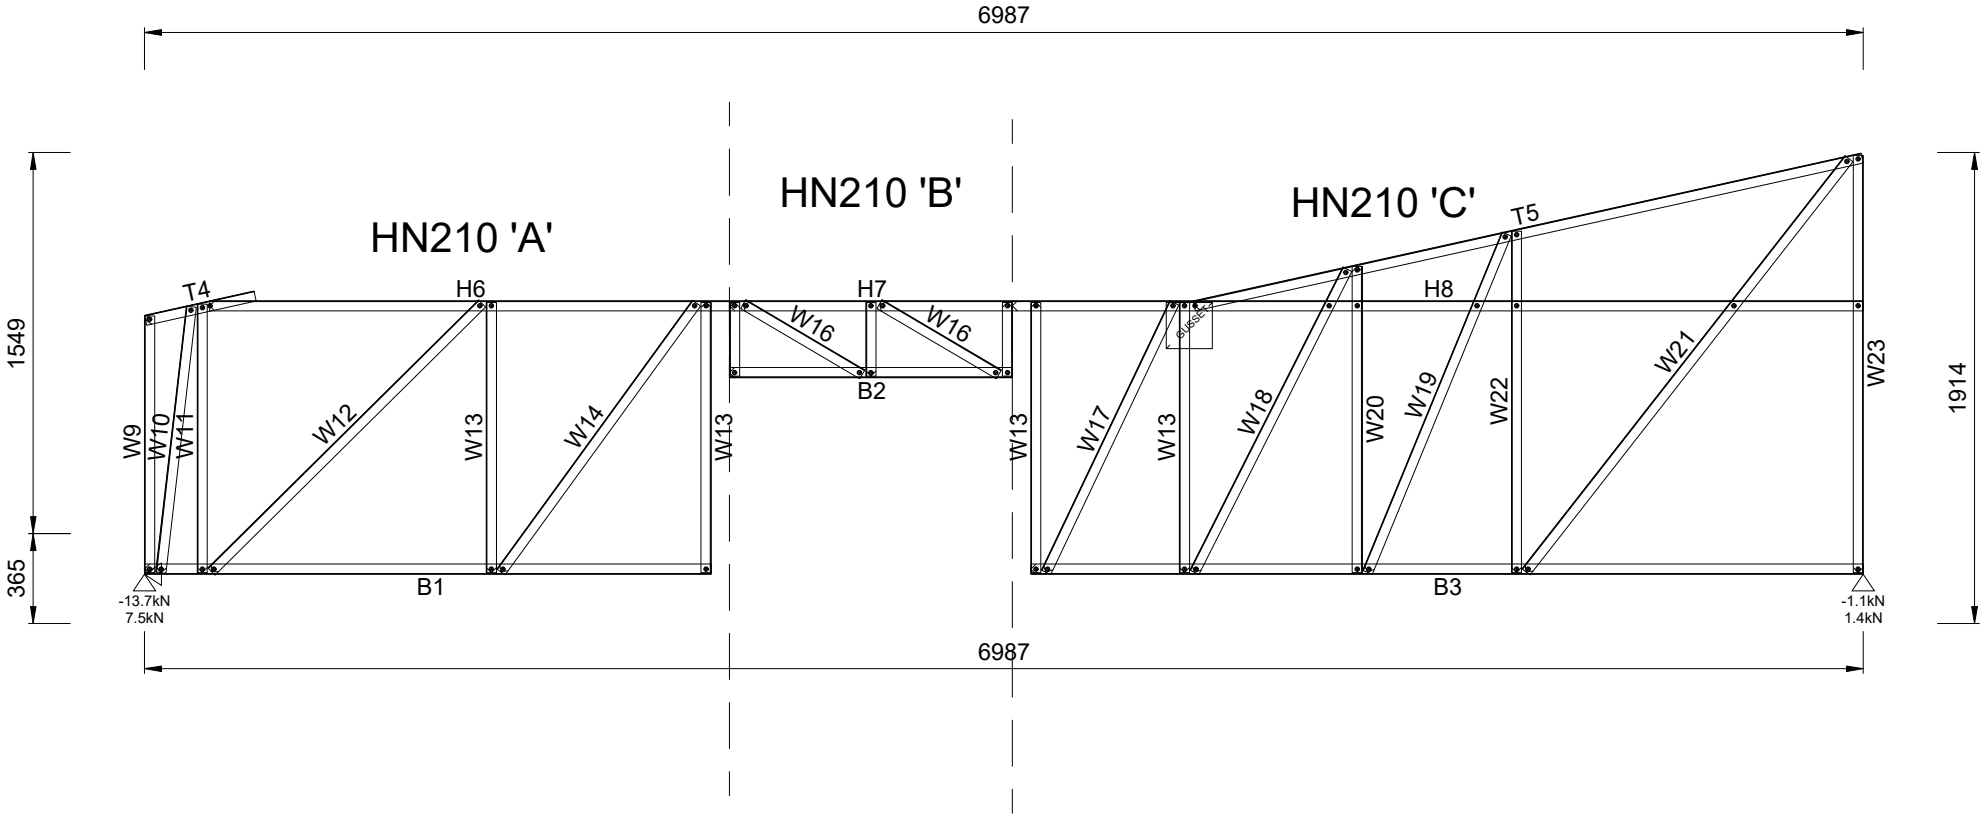

Quantity Required = 1 Mark as HN210 Engineering Status = 500%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1716h x 6987w				

B1	75S41-095-550	1	6987	T2	75S41-095-550	1	1685	T3	75S41-095-550	1	1551	H4	75S41-095-550	1	5522	W5	75S41-095-550	1	1043
W6	75S41-095-550	1	1217	W7	75S41-095-550	1	1197	W8	75S41-095-550	2	1352	W9	75S41-095-550	1	1581	W10	75S41-095-550	4	1364
W11	75S41-095-550	1	1763	W12	75S41-095-550	1	1596	W13	75S41-095-550	1	1591	W14	75S41-095-550	1	1697	W15	75S41-095-550	1	1796
W16	75S41-095-550	1	1539	W17	75S41-095-550	1	1696	FRAMECAD M6 Screw		80		Working Sheet: Trusses				Assembly Weight		52.4kg	

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

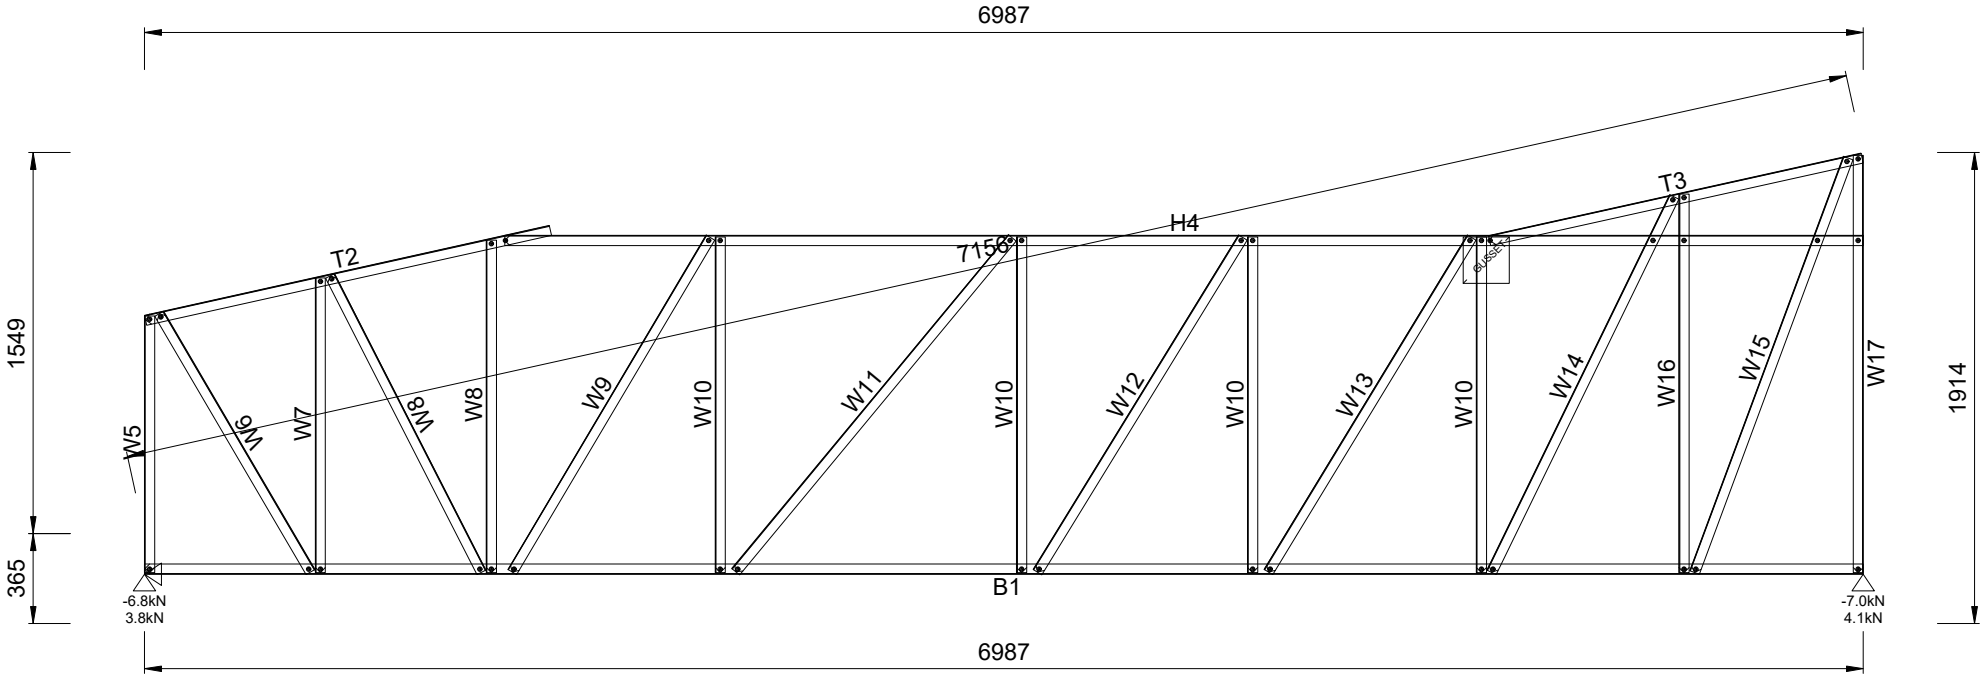


Quantity Required = 1 Mark as HN211 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1715h x 6987w				

B1	75S41-095-550	1	6987	T2	75S41-095-550	1	2914	T3	75S41-095-550	1	322	H4	75S41-095-550	1	4322
W5	75S41-095-550	1	1873	W6	75S41-095-550	1	1043	W7	75S41-095-550	1	1979	W8	75S41-095-550	1	1351
W9	75S41-095-550	1	1624	W10	75S41-095-550	1	2192	W11	75S41-095-550	3	1630	W12	75S41-095-550	1	2088
W13	75S41-095-550	1	1899	W14	75S41-095-550	1	1702	W15	75S41-095-550	1	1696	FRAMECAD 1.15mm Apex/Heel Plate			2
FRAMECAD 1.15mm Fix Plate		2	FRAMECAD 10g-16mm Flathead		58	FRAMECAD M6 Screw		60	Working Sheet: Trusses						
Assembly Weight		47.6kg													


Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

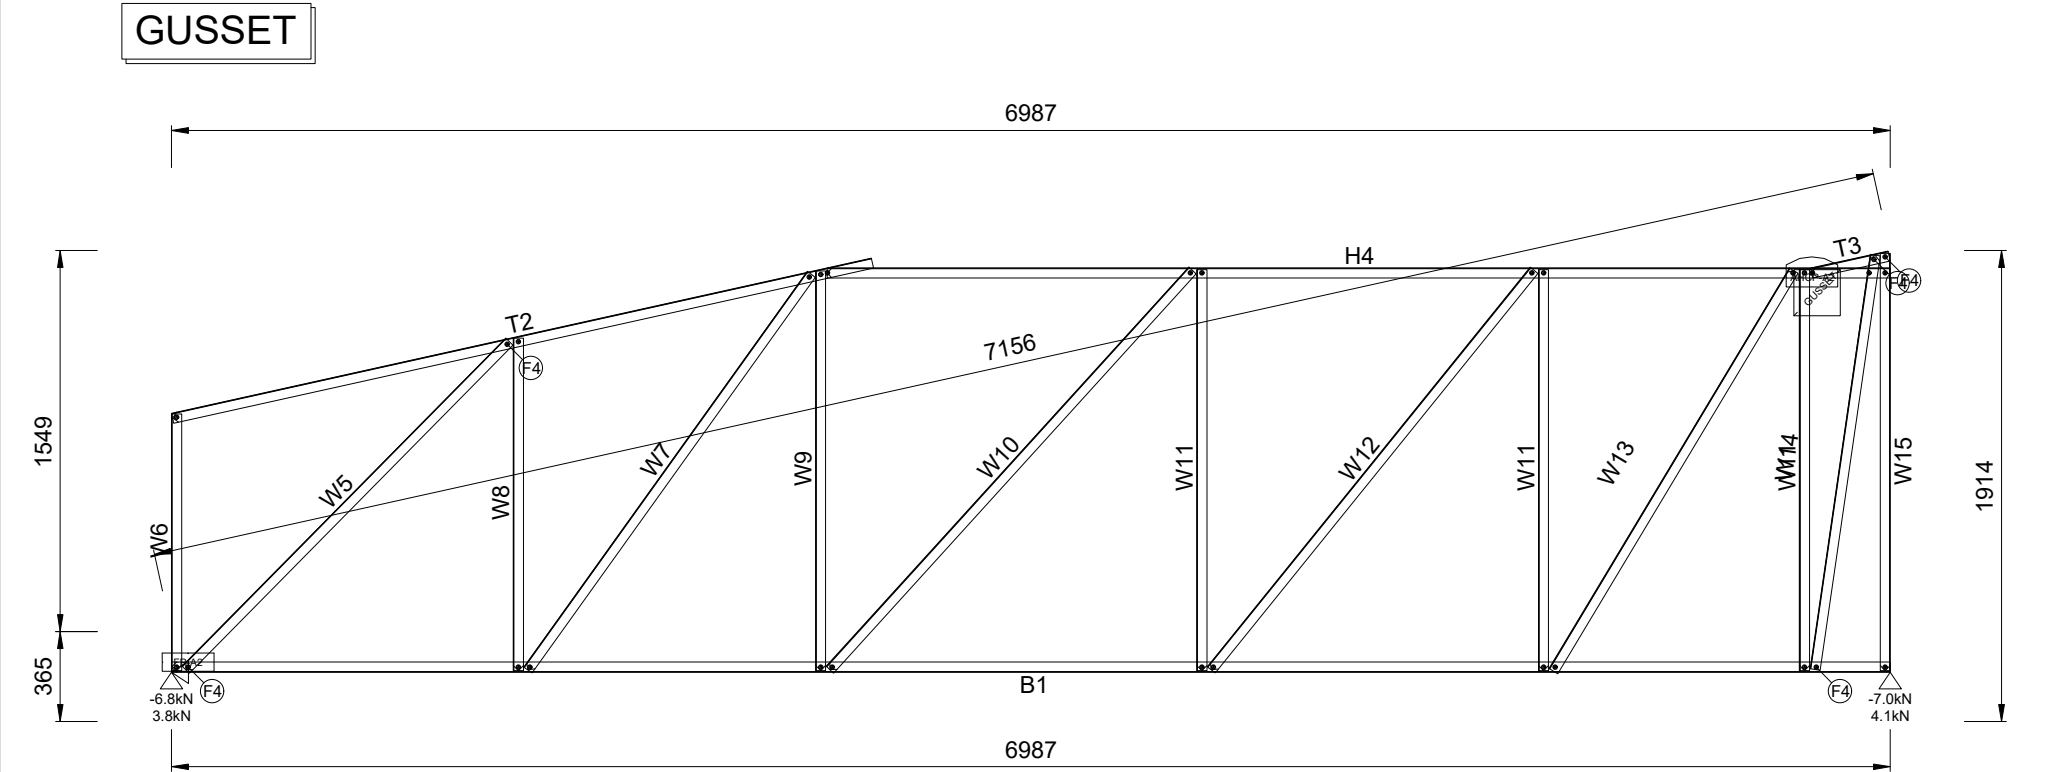

Quantity Required = 1 Mark as HN212 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1718h x 6987w				

B1	75S41-095-550	1	6987	T2	75S41-095-550	1	3845	H3	75S41-095-550	1	3413	W4	75S41-095-550	1	1679
W5	75S41-095-550	1	1043	W6	75S41-095-550	1	1953	W7	75S41-095-550	1	1300	W8	75S41-095-550	1	2086
W9	75S41-095-550	1	1577	W10	75S41-095-550	1	1825	W11	75S41-095-550	1	2136	W12	75S41-095-550	3	1832
W13	75S41-095-550	1	2084	W14	75S41-095-550	1	2120	FRAMECAD	1.15mm Fix Plate	2		FRAMECAD	10g-16mm Flathead	28	
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				48.4kg			

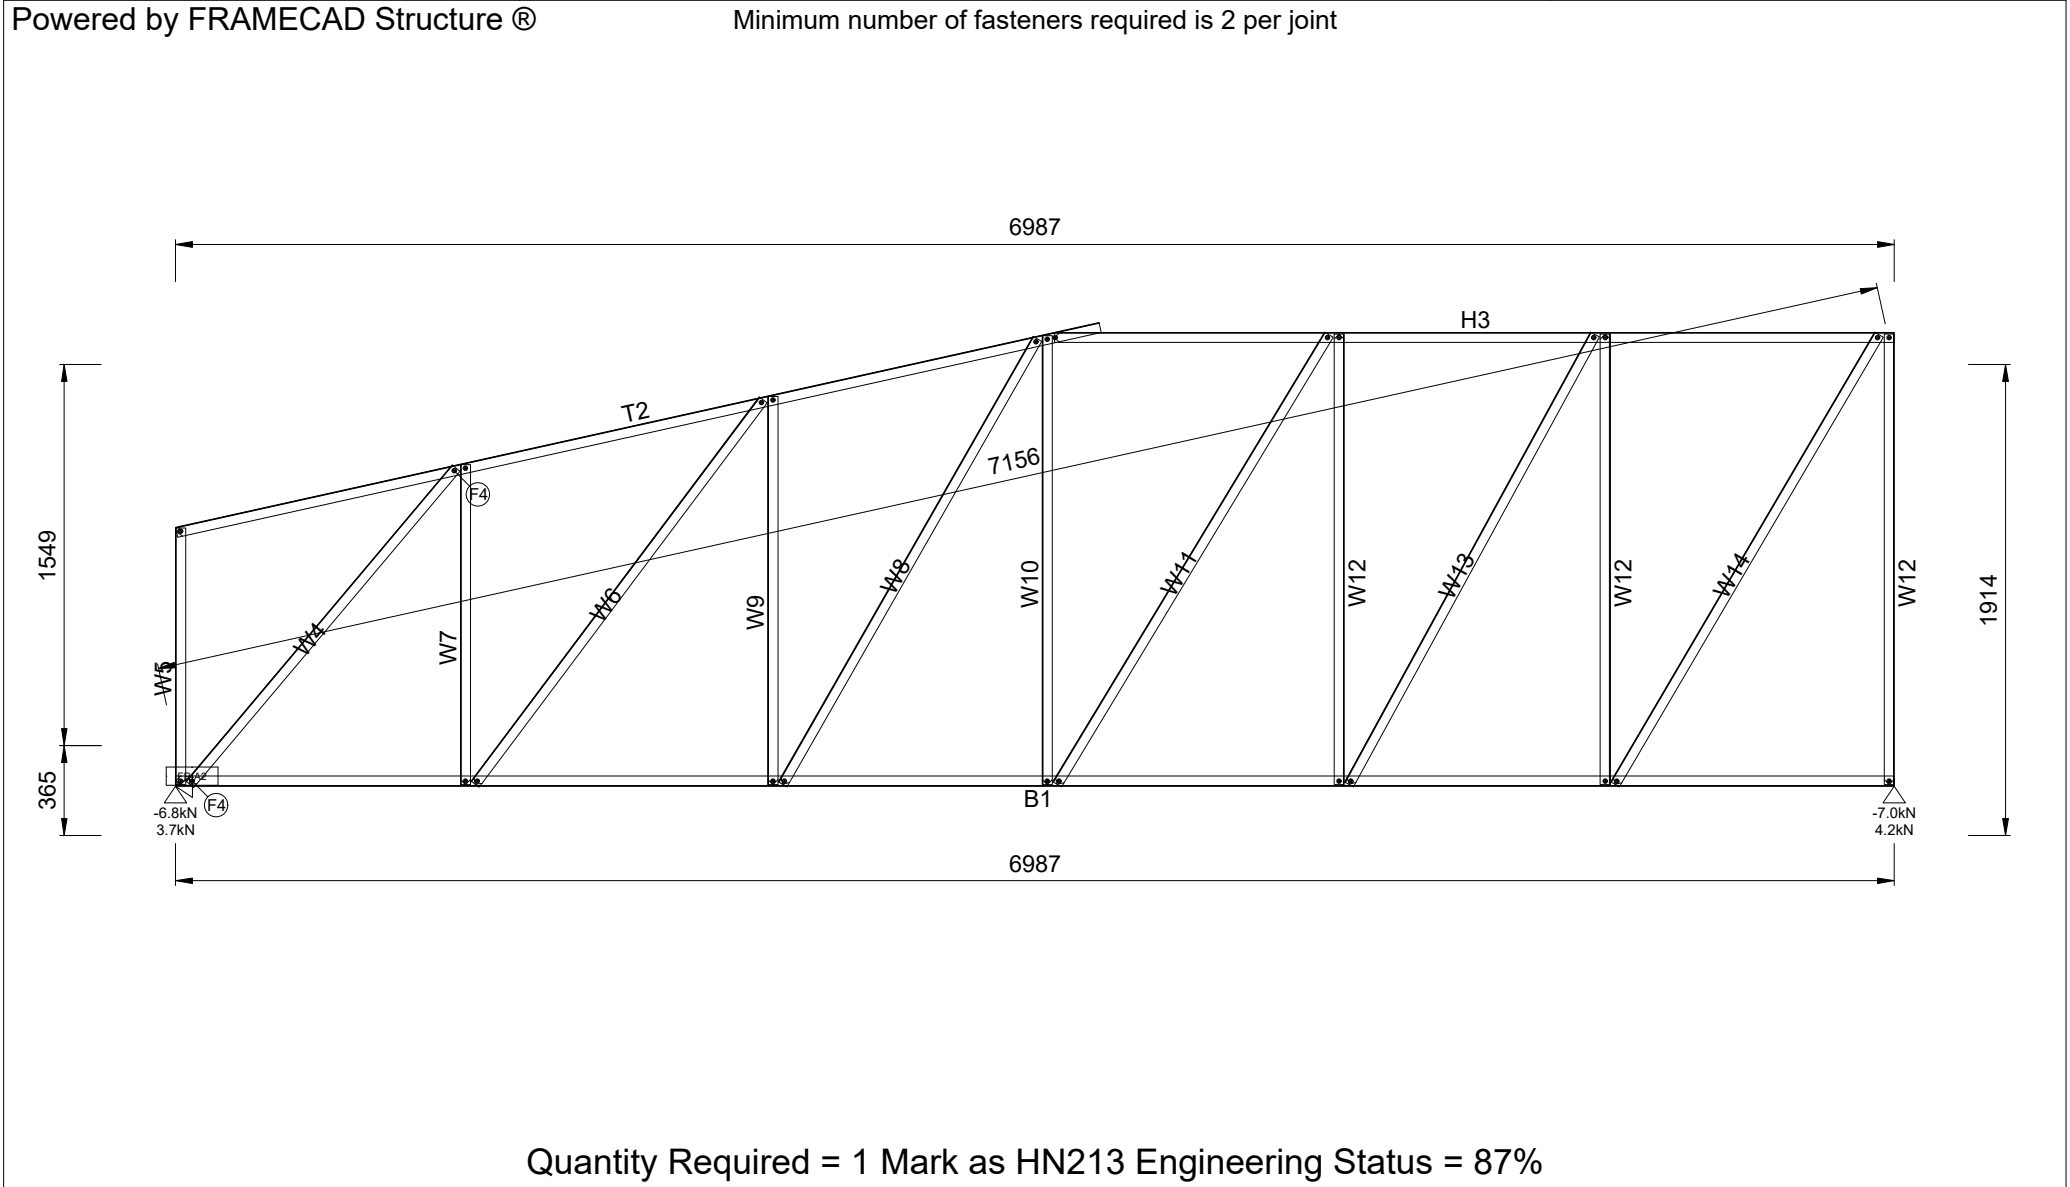


Quantity Required = 1 Mark as HN213 Engineering Status = 87%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1890h x 6987w				

B1 75S41-095-550	1 2126	T2 75S41-095-550	1 2126	W3 75S41-095-550	3 287	W4 75S41-095-550	2 1011	FRAMECAD M6 Screw	20
Working Sheet: Trusses		Assembly Weight		9.2kg					

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

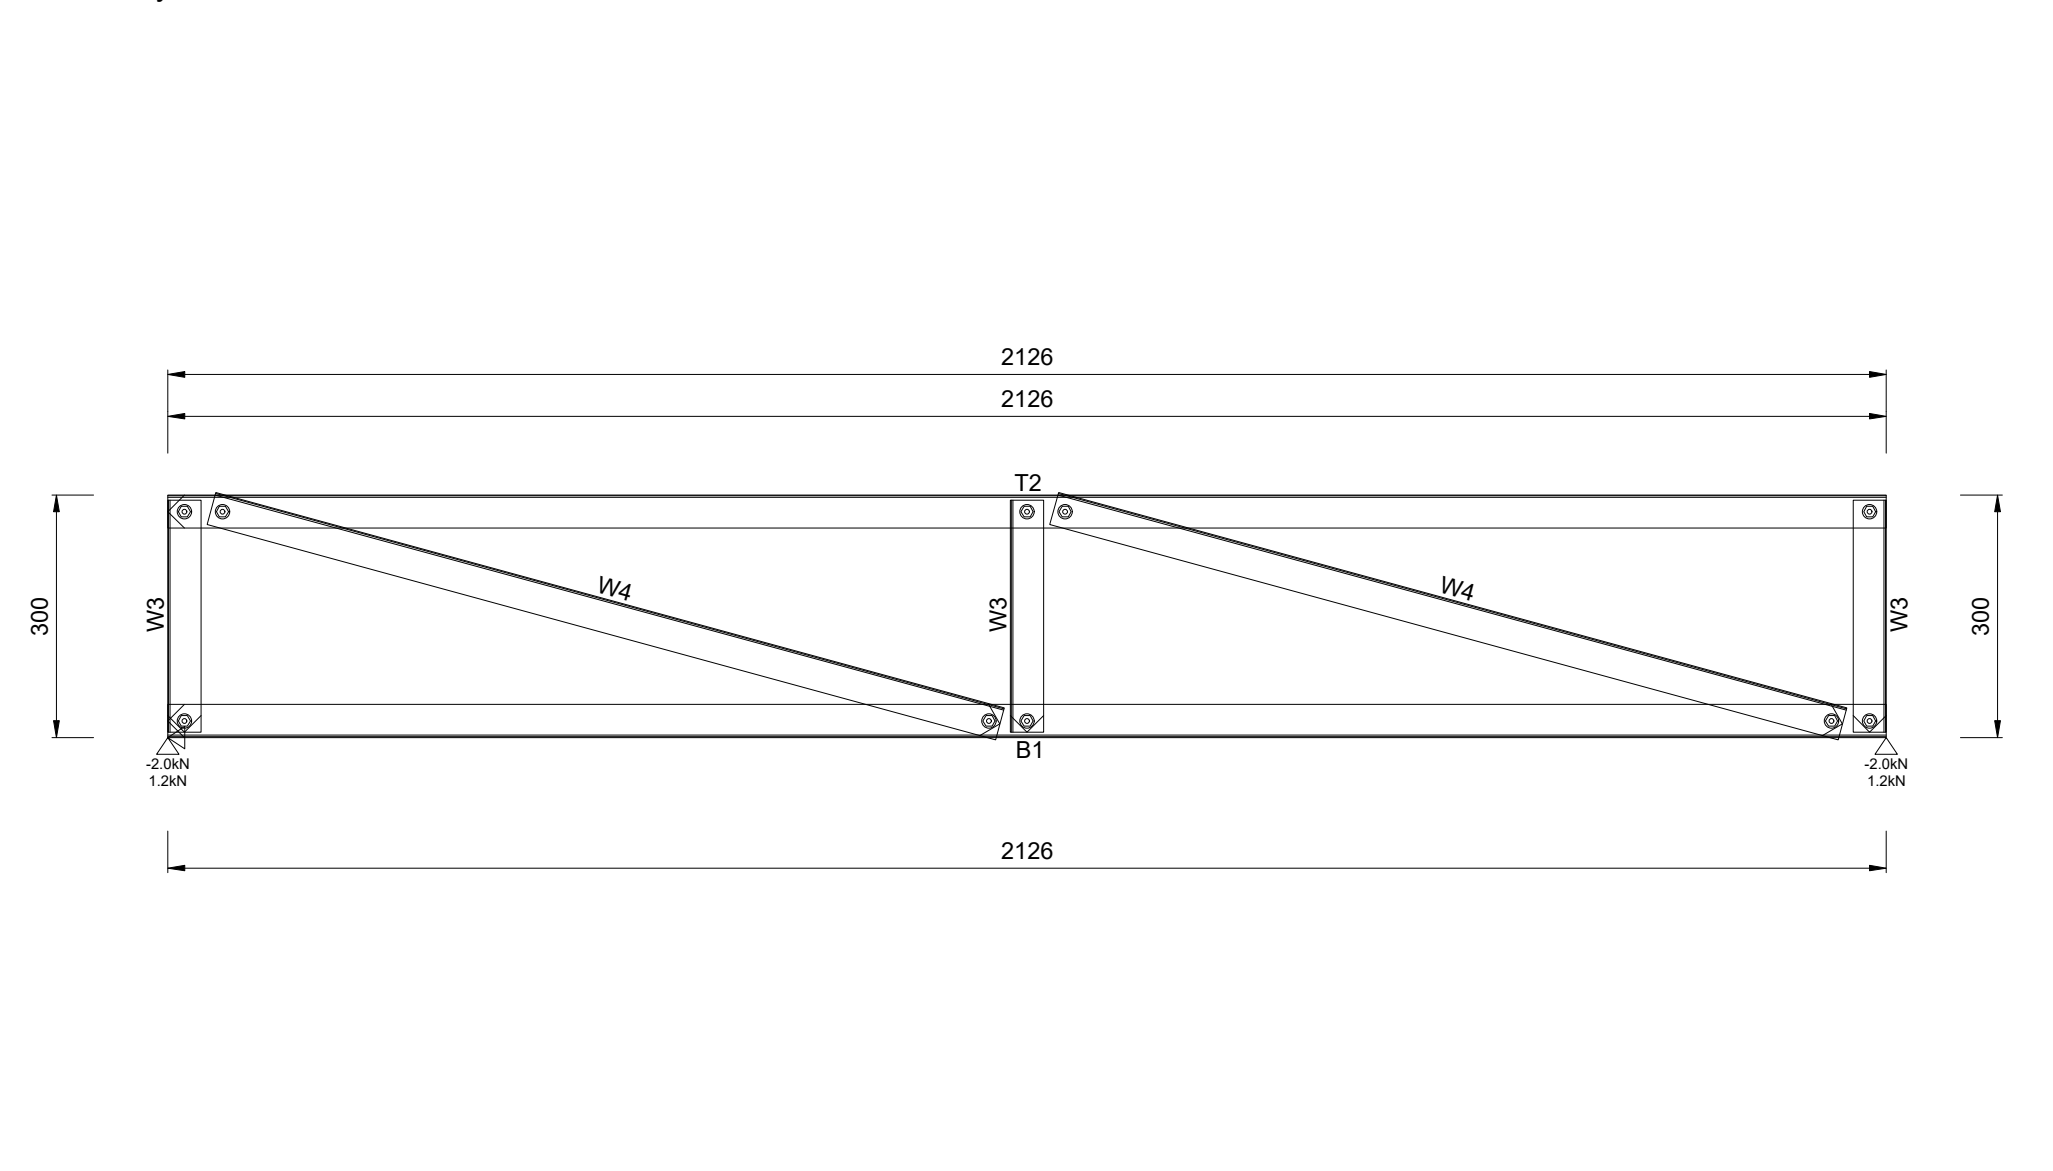


Quantity Required = 1 Mark as HN214 Engineering Status = 67%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	306h x 2126w				

B1	75S41-095-550	1	5926	T2	75S41-095-550	1	4157	H3	75S41-095-550	1	2984	W4	75S41-095-550	3	765	
W5	75S41-095-550	1	1092	W6	75S41-095-550	1	1154	W7	75S41-095-550	1	1452	W8	75S41-095-550	1	1008	
W9	75S41-095-550	1	1725	W10	75S41-095-550	1	1335	W11	75S41-095-550	1	1934	W12	75S41-095-550	1	1661	
FRAMECAD 1.15mm Apex/Heel Plate				2	FRAMECAD 1.15mm Fix Plate			2	FRAMECAD 10g-16mm Flathead			54	FRAMECAD M6 Screw			50
Working Sheet: Trusses					Assembly Weight			34.5kg								

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

GUSSET

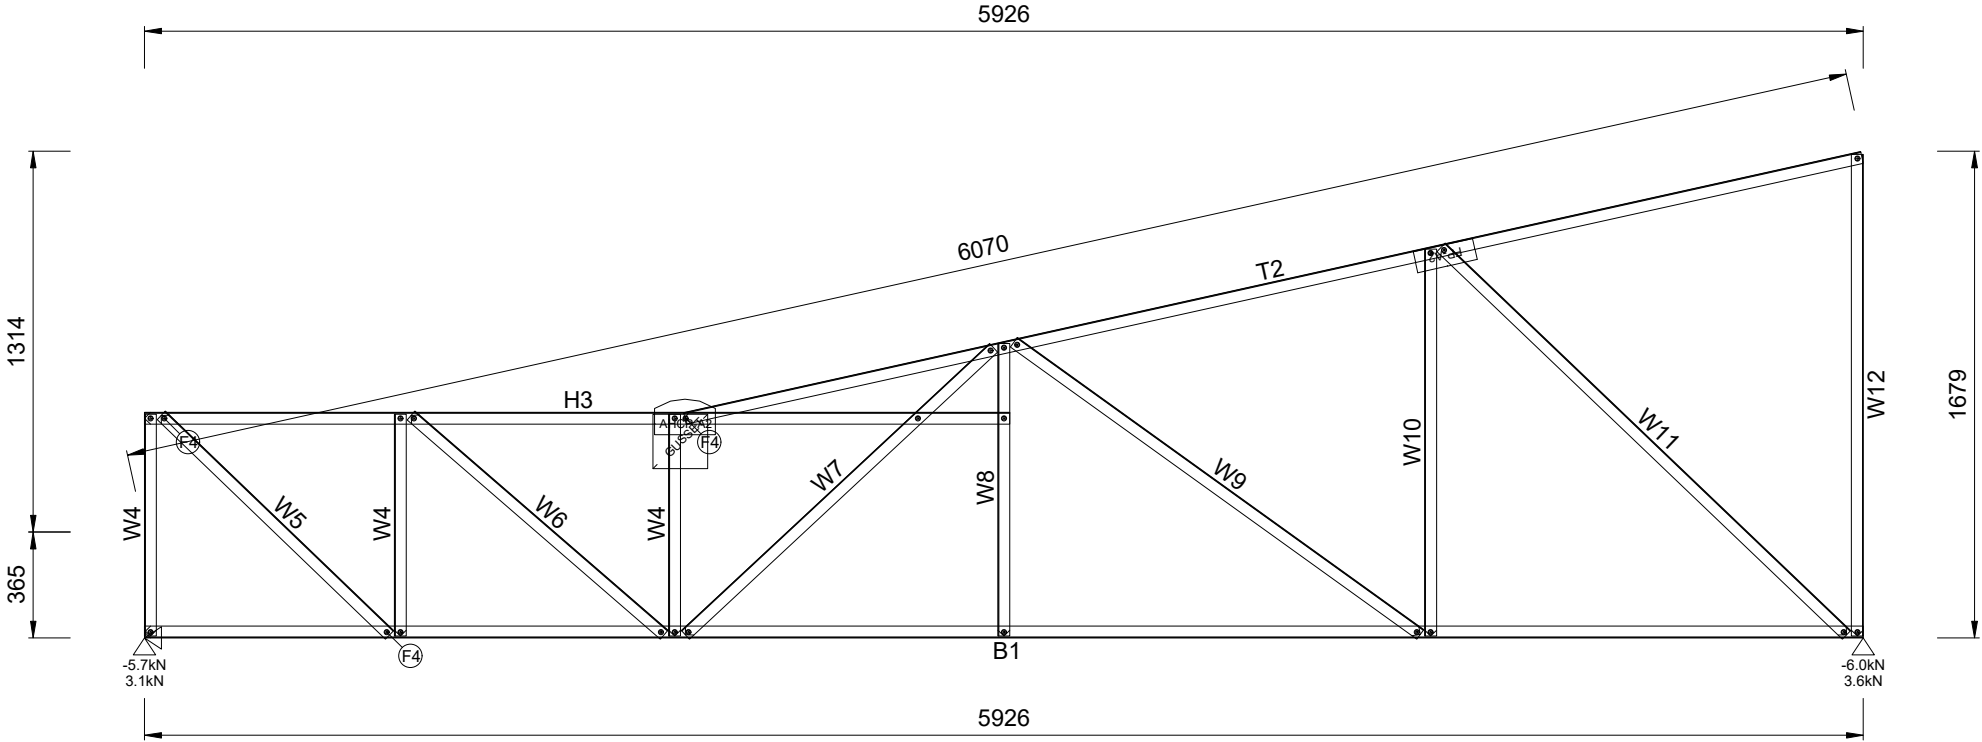


Quantity Required = 1 Mark as HN215 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1681h x 5926w				

B1	75S41-095-550	1	7532	T2	75S41-095-550	1	7704	H3	75S41-095-550	1	3771	W4	75S41-095-550	1	327	W5	75S41-095-550	1	451
W6	75S41-095-550	1	459	W7	75S41-095-550	1	425	W8	75S41-095-550	1	437	W9	75S41-095-550	1	621	W10	75S41-095-550	1	629
W11	75S41-095-550	1	564	W12	75S41-095-550	1	575	W13	75S41-095-550	1	726	W14	75S41-095-550	1	734	W15	75S41-095-550	1	702
W16	75S41-095-550	1	714	W17	75S41-095-550	1	1228	W18	75S41-095-550	1	1244	W19	75S41-095-550	1	968	W20	75S41-095-550	1	980
W21	75S41-095-550	1	1409	W22	75S41-095-550	1	1417	W23	75S41-095-550	1	1234	W24	75S41-095-550	1	1246	W25	75S41-095-550	1	1612
W26	75S41-095-550	1	1619	W27	75S41-095-550	1	1500	W28	75S41-095-550	1	1512	W29	75S41-095-550	1	1827	W30	75S41-095-550	1	1835
W31	75S41-095-550	1	1766	W32	75S41-095-550	1	1778	W33	75S41-095-550	1	1948	W34	75S41-095-550	1	1959	W35	75S41-095-550	1	1981
W36	75S41-095-550	1	1988	FRAMECAD M6 Screw		174	Working Sheet: Trusses		Assembly Weight		74.1kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

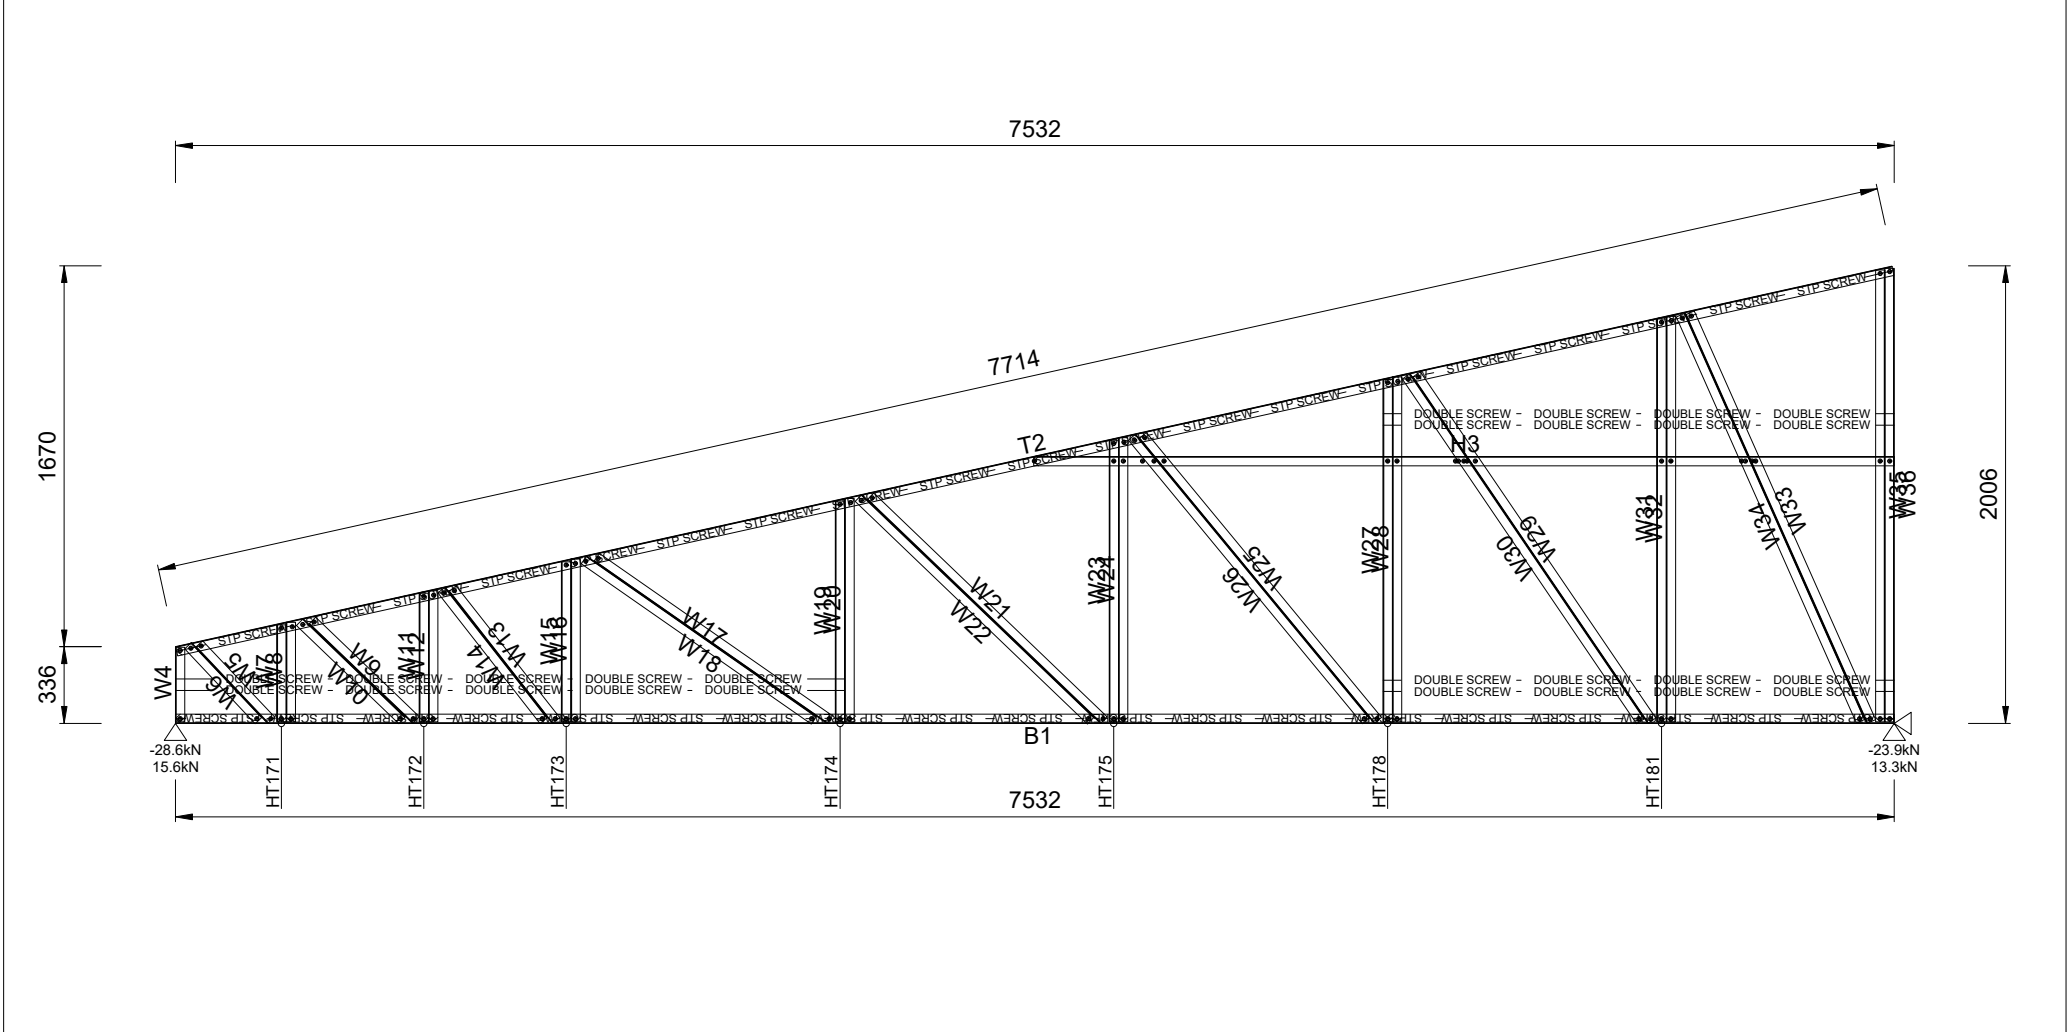

Quantity Required = 1 Mark as HA186 Engineering Status = 433%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	7	Envelope:	2007h x 7532w		

Powered by FRAMECAD Structure® Minimum number of fasteners required is 2 per joint

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	10	Envelope:	2169h x 9278w		


Minimum number of fasteners required is 2 per joint



J/No. 26110

B1 75S41-095-550	1	982	T2 75S41-095-550	1	997	H3 75S41-095-550	1	982	W4 75S41-095-550	1	1779	W5 75S41-095-550	1	1971
W6 75S41-095-550	1	1988	FRAMECAD M6 Screw	18		Working Sheet: Trusses			Assembly Weight	11.2kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

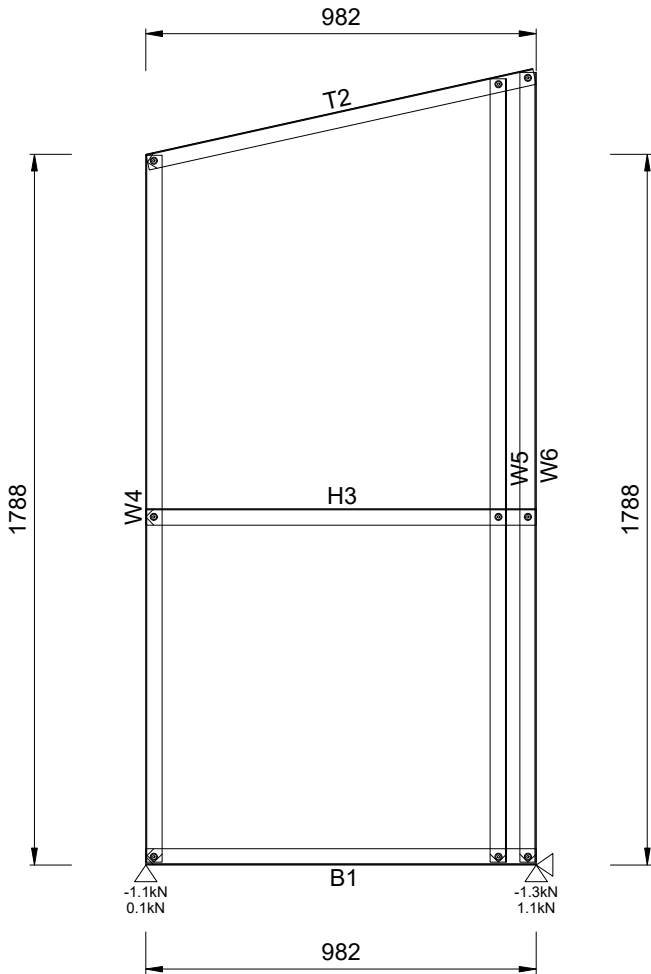


Quantity Required = 1 Mark as HA189 Engineering Status = 500%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	2004h x 982w		

B1	75S41-095-550	1	1307	B2	75S41-095-550	1	7975	T3	75S41-095-550	1	4241	H4	75S41-095-550	1	5292	W5	75S41-095-550	1	101
W6	75S41-095-550	1	303	W7	75S41-095-550	1	231	W8	75S41-095-550	1	653	W9	75S41-095-550	1	382	W10	75S41-095-550	1	714
W11	75S41-095-550	1	475	W12	75S41-095-550	1	728	W13	75S41-095-550	1	613	W14	75S41-095-550	1	1366	W15	75S41-095-550	1	899
W16	75S41-095-550	1	1453	W17	75S41-095-550	5	911	W18	75S41-095-550	1	1231	W19	75S41-095-550	3	1338	FRAMECAD M6 Screw		88	
Working Sheet: Trusses				Assembly Weight				47.1kg											

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

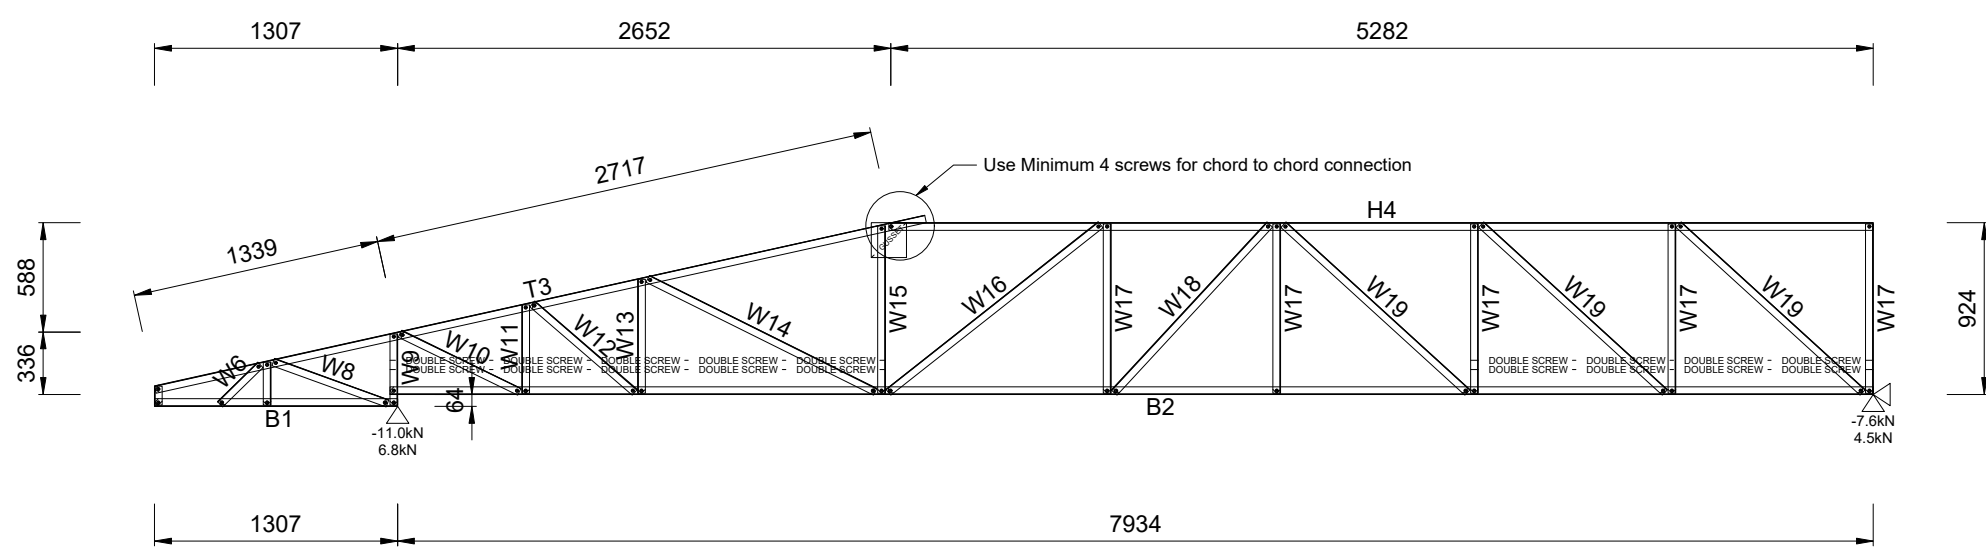

Quantity Required = 1 Mark as HT167 Engineering Status = Unknown


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1032h x 9241w				

B1	75S41-095-550	1	1307	B2	75S41-095-550	1	7975	T3	75S41-095-550	1	5313	H4	75S41-095-550	1	4246	W5	75S41-095-550	1	101
W6	75S41-095-550	1	303	W7	75S41-095-550	1	231	W8	75S41-095-550	1	653	W9	75S41-095-550	1	382	W10	75S41-095-550	1	657
W11	75S41-095-550	1	461	W12	75S41-095-550	1	705	W13	75S41-095-550	1	595	W14	75S41-095-550	1	1285	W15	75S41-095-550	1	863
W16	75S41-095-550	1	1049	W17	75S41-095-550	1	1262	W18	75S41-095-550	4	1143	W19	75S41-095-550	1	1587	W20	75S41-095-550	2	1761
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight											
84								47.8kg											

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

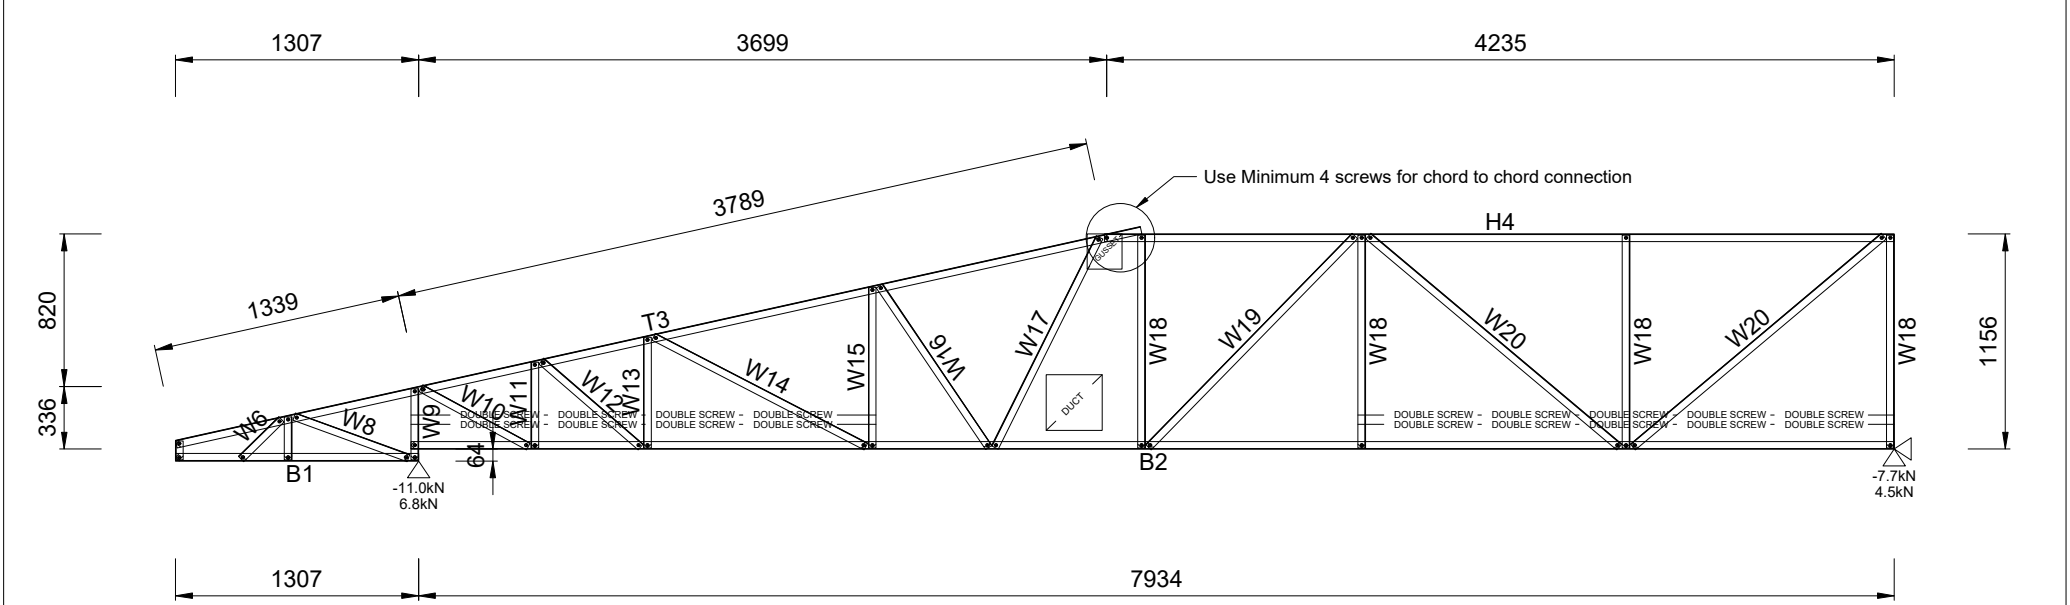


Quantity Required = 1 Mark as HT168 Engineering Status = 116%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1264h x 9241w				

B1 75S41-095-550	1	1307	B2 75S41-095-550	1	7975	T3 75S41-095-550	1	6288	H4 75S41-095-550	1	3294
W5 75S41-095-550	1	101	W6 75S41-095-550	1	303	W7 75S41-095-550	1	231	W8 75S41-095-550	1	653
W9 75S41-095-550	1	382	W10 75S41-095-550	1	628	W11 75S41-095-550	1	454	W12 75S41-095-550	1	676
W13 75S41-095-550	1	581	W14 75S41-095-550	1	1221	W15 75S41-095-550	1	835	W16 75S41-095-550	1	1255
W17 75S41-095-550	1	1058	W18 75S41-095-550	1	1608	W19 75S41-095-550	1	1342	W20 75S41-095-550	3	1695
W21 75S41-095-550	3	1354	FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 1.15mm Fix Plate	2		FRAMECAD 10g-16mm Flathead	62	
FRAMECAD M6 Screw	88		Working Sheet: Trusses			Assembly Weight		50.7kg			

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

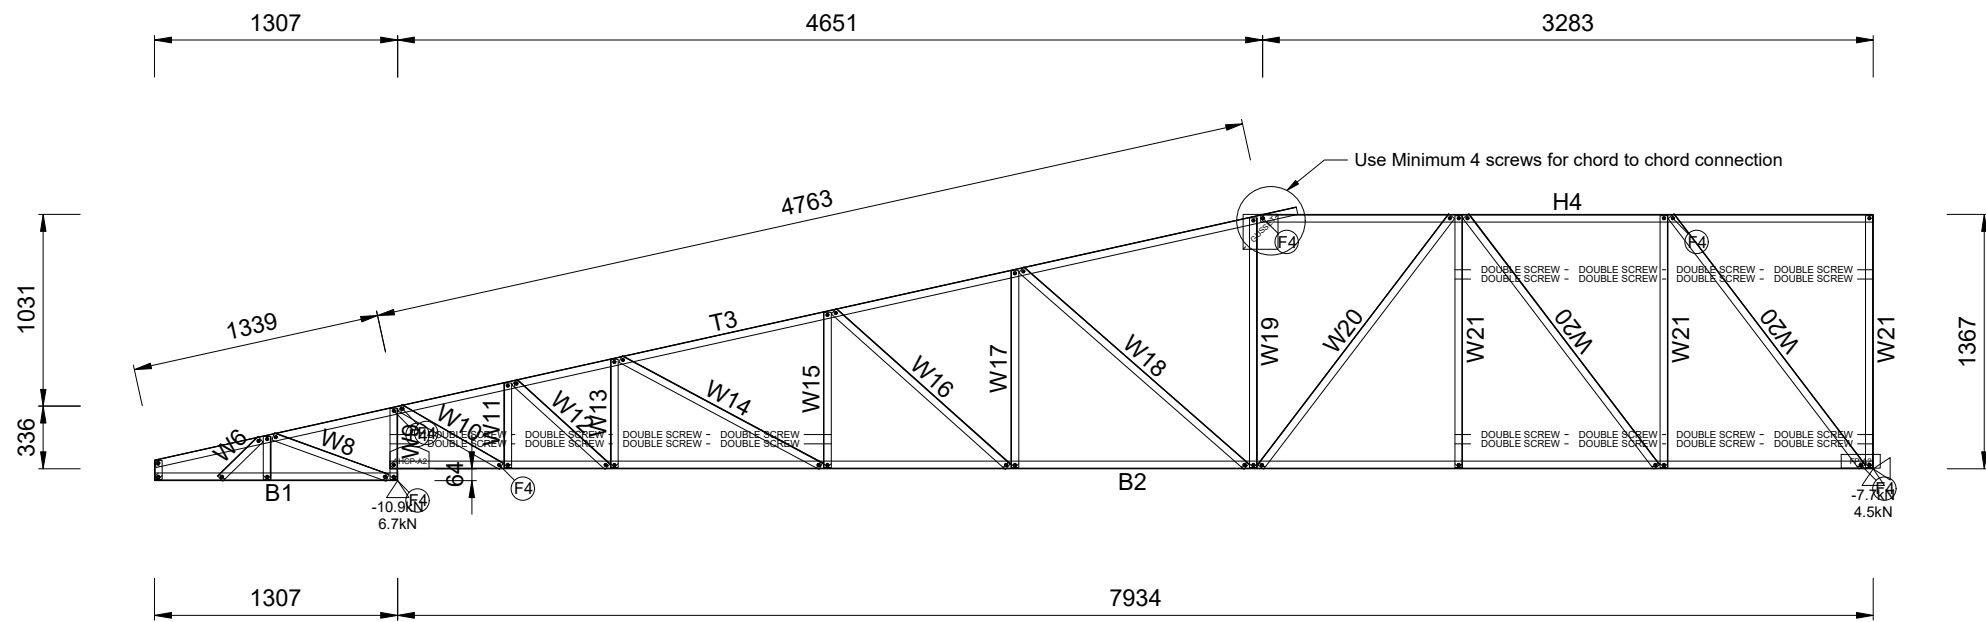

Quantity Required = 1 Mark as HT169 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1475h x 9241w				

Minimum number of fasteners required is 2 per joint




J/No. 26110

B1	75S41-095-550	1	7844	T2	75S41-095-550	1	6562	H3	75S41-095-550	1	1301	H4	75S41-095-550	1	1486	W5	75S41-095-550	2	376
W6	75S41-095-550	1	703	W7	75S41-095-550	1	768	W8	75S41-095-550	1	499	W9	75S41-095-550	1	626	W10	75S41-095-550	1	1344
W11	75S41-095-550	1	906	W12	75S41-095-550	1	1494	W13	75S41-095-550	1	1185	W14	75S41-095-550	1	1678	W15	75S41-095-550	1	1464
W16	75S41-095-550	1	1886	W17	75S41-095-550	1	1743	W18	75S41-095-550	2	1876	W19	75S41-095-550	2	1755	FRAMECAD M6 Screw		84	
Working Sheet: Trusses				Assembly Weight		51.0kg													

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

GUSSET

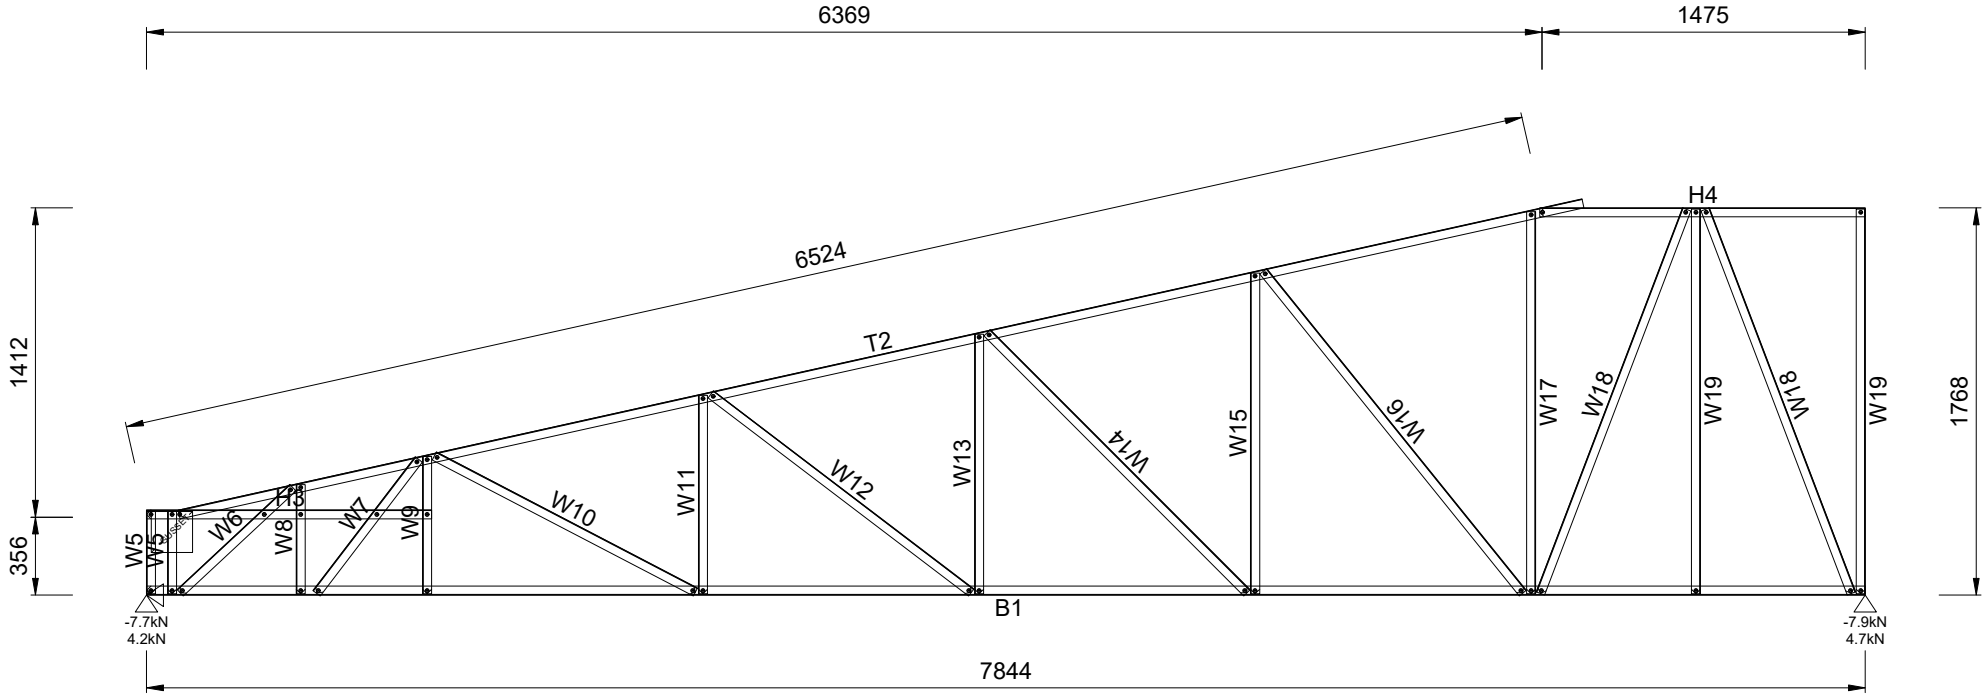


Quantity Required = 1 Mark as HT171 Engineering Status = 133%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1813h x 7844w				

B1	75S41-095-550	1	5422	T2	75S41-095-550	1	4758	H3	75S41-095-550	1	1177	W4	75S41-095-550	2	514
W5	75S41-095-550	1	821	W6	75S41-095-550	1	674	W7	75S41-095-550	1	892	W8	75S41-095-550	1	599
W9	75S41-095-550	1	1003	W10	75S41-095-550	1	733	W11	75S41-095-550	1	1120	W12	75S41-095-550	1	868
W13	75S41-095-550	1	1240	W14	75S41-095-550	1	1002	W15	75S41-095-550	1	1363	W16	75S41-095-550	1	1137
W17	75S41-095-550	1	1488	W18	75S41-095-550	1	1271	W19	75S41-095-550	1	1615	W20	75S41-095-550	1	1405
W21	75S41-095-550	1	1540	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			30	FRAMECAD M6 Screw			82
Working Sheet: Trusses				Assembly Weight			40.2kg								

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

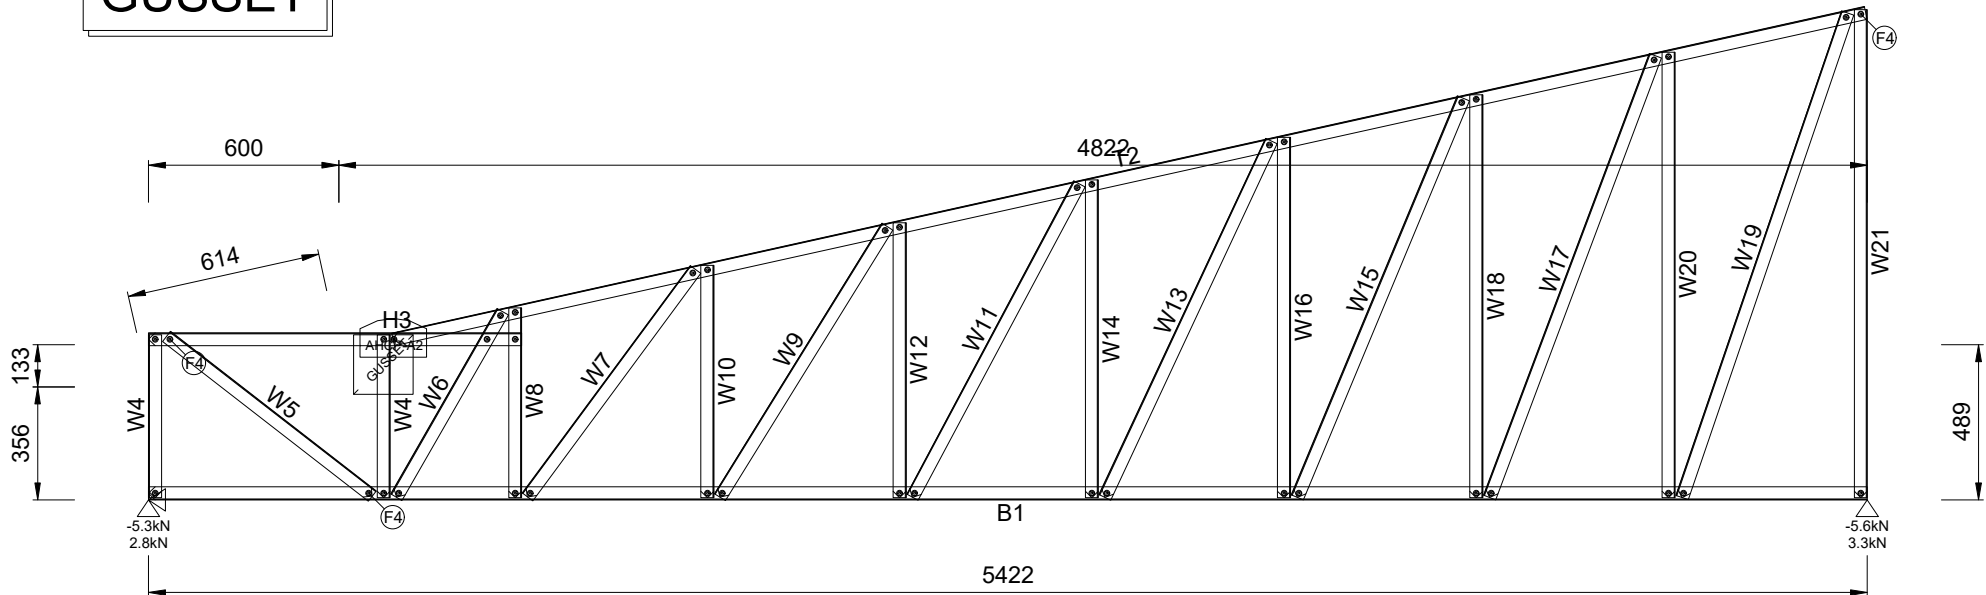

Quantity Required = 1 Mark as HT172 Engineering Status = Unknown


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1560h x 5422w				

B1	75S41-095-550	1	5422	T2	75S41-095-550	1	4121	H3	75S41-095-550	1	5422	W4	75S41-095-550	3	652	
W5	75S41-095-550	1	902	W6	75S41-095-550	1	854	W7	75S41-095-550	1	1101	W8	75S41-095-550	1	1228	
W9	75S41-095-550	1	836	W10	75S41-095-550	1	1382	W11	75S41-095-550	1	1012	W12	75S41-095-550	1	1522	
W13	75S41-095-550	1	1190	W14	75S41-095-550	1	1685	W15	75S41-095-550	1	1364	W16	75S41-095-550	1	1540	
FRAMECAD 1.15mm Apex/Heel Plate				2	FRAMECAD 10g-16mm Flathead				28	FRAMECAD M6 Screw				82		Working Sheet: Trusses
Assembly Weight				40.7kg												

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

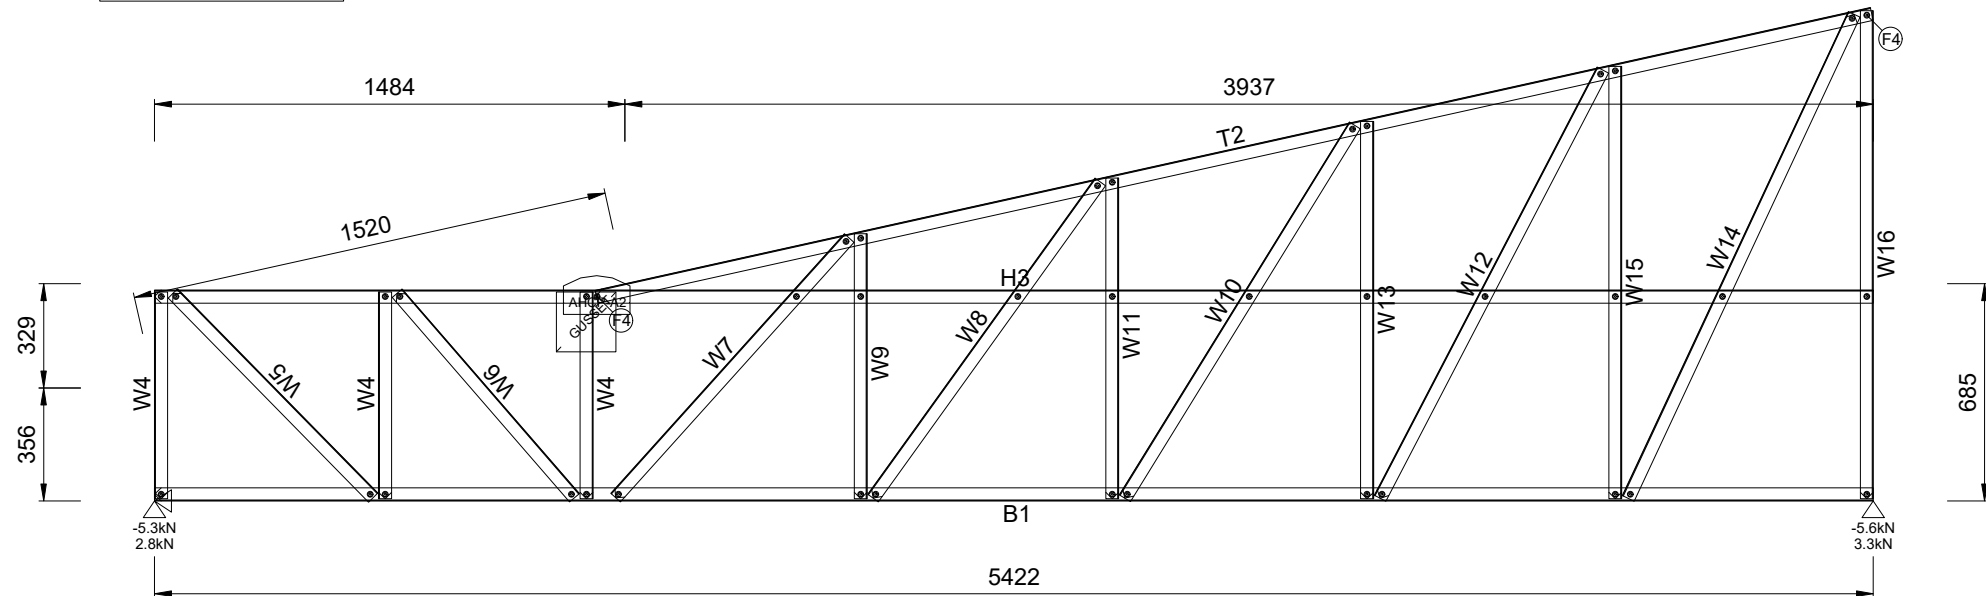

Quantity Required = 1 Mark as HT173 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1560h x 5422w				

Minimum number of fasteners required is 2 per joint


Quantity Required = 1 Mark as HT174 Engineering Status = Unknown

J/No. 26110

B1	75S41-095-550	1	5722	T2	75S41-095-550	1	1970	H3	75S41-095-550	1	5722	W4	75S41-095-550	4	1184
W5	75S41-095-550	2	1678	W6	75S41-095-550	1	1618	W7	75S41-095-550	1	1674	W8	75S41-095-550	1	1399
W9	75S41-095-550	1	1645	W10	75S41-095-550	1	1606	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		2	
FRAMECAD 10g-16mm Flathead				48	FRAMECAD M6 Screw		54	Working Sheet: Trusses				Assembly Weight			38.0kg

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

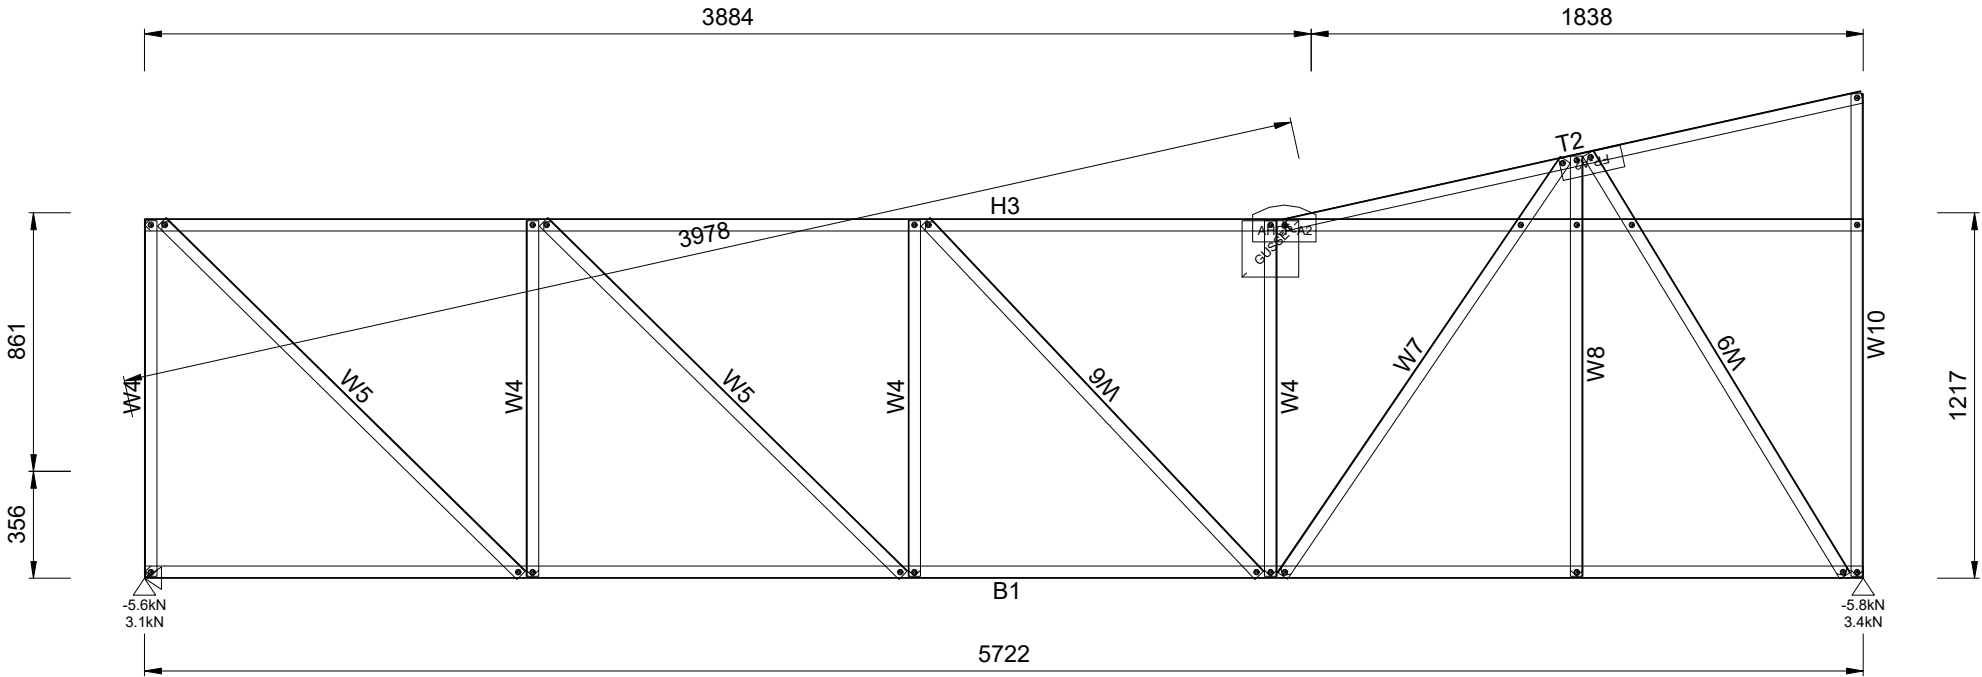


Quantity Required = 1 Mark as HT175 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1626h x 5722w				

B1	75S41-095-550	1	1350	B2	75S41-095-550	1	7857	T3	75S41-095-550	1	4073	H4	75S41-095-550	1	5382	W5	75S41-095-550	1	101
W6	75S41-095-550	1	303	W7	75S41-095-550	1	230	W8	75S41-095-550	1	694	W9	75S41-095-550	1	391	W10	75S41-095-550	1	1204
W11	75S41-095-550	1	599	W12	75S41-095-550	1	1267	W13	75S41-095-550	1	862	W14	75S41-095-550	4	1338	W15	75S41-095-550	5	874
W16	75S41-095-550	1	1282	FRAMECAD M6 Screw		80		Working Sheet: Trusses				Assembly Weight		45.6kg					

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

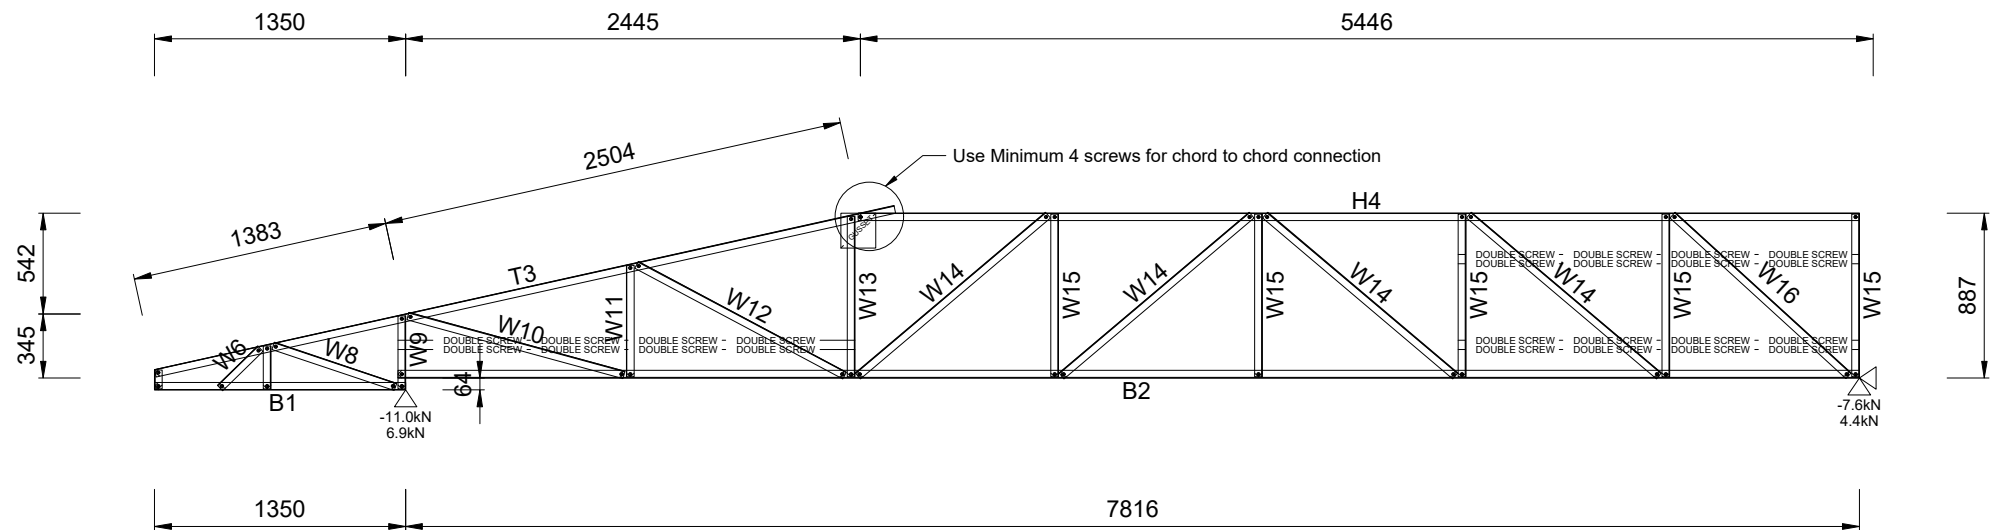

Quantity Required = 1 Mark as HT176 Engineering Status = Unknown


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	995h x 9166w				

B1	75S41-095-550	1	1350	B2	75S41-095-550	1	7857	T3	75S41-095-550	1	4918	H4	75S41-095-550	1	4556
W5	75S41-095-550	1	101	W6	75S41-095-550	1	303	W7	75S41-095-550	1	230	W8	75S41-095-550	1	694
W9	75S41-095-550	1	391	W10	75S41-095-550	1	1088	W11	75S41-095-550	1	573	W12	75S41-095-550	1	1148
W13	75S41-095-550	1	809	W14	75S41-095-550	1	1282	W15	75S41-095-550	1	1045	W16	75S41-095-550	3	1511
W17	75S41-095-550	4	1057	W18	75S41-095-550	1	1458	FRAMECAD 1.15mm Apex/Heel Plate		2		FRAMECAD 1.15mm Fix Plate		4	
FRAMECAD 10g-16mm Flathead			90	FRAMECAD M6 Screw			80	Working Sheet: Trusses				Assembly Weight			47.2kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

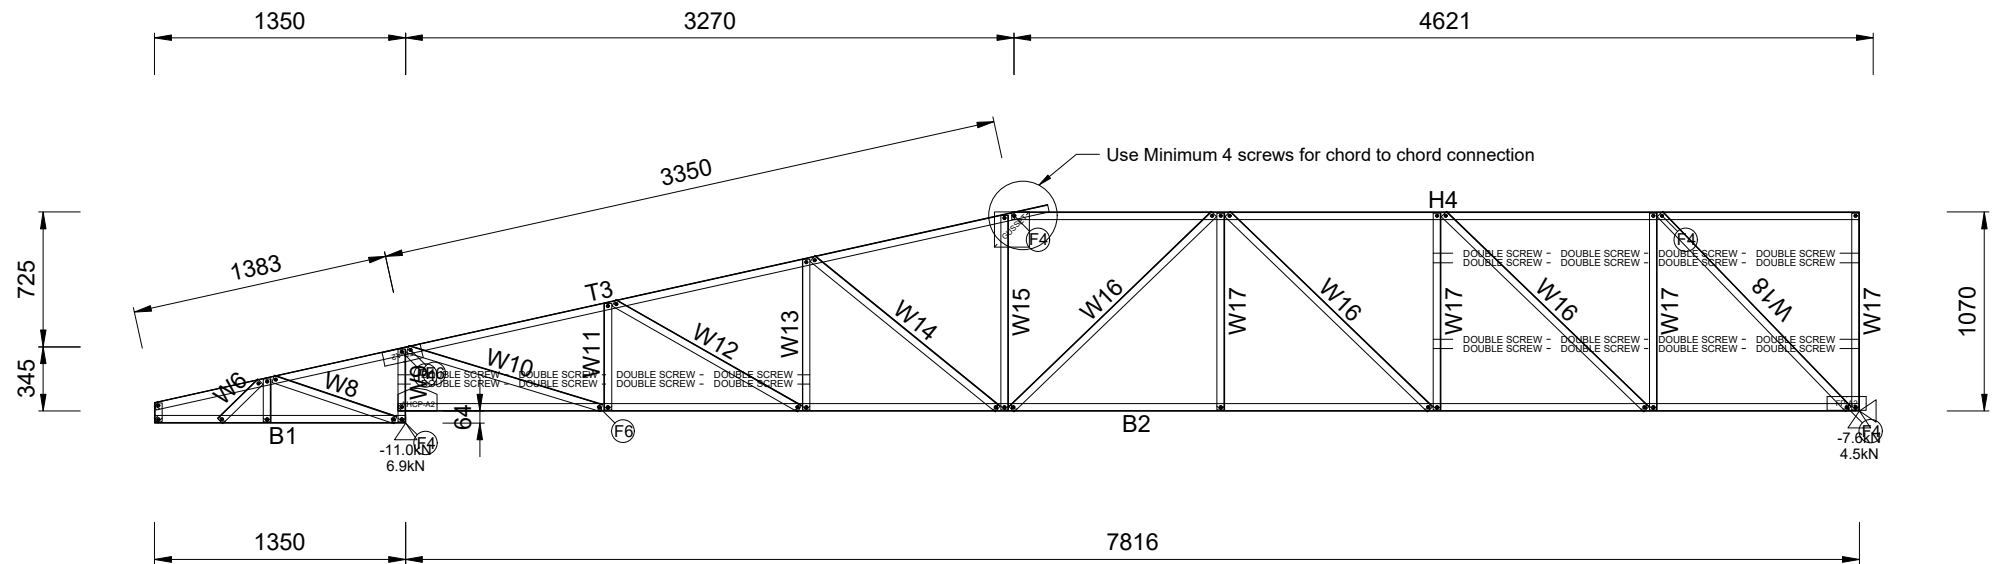


Quantity Required = 1 Mark as HT177 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1178h x 9166w				

B1 75S41-095-550	1	5722	T2 75S41-095-550	1	741	H3 75S41-095-550	2	5722	W4 75S41-095-550	6	1450
W5 75S41-095-550	2	1546	W6 75S41-095-550	2	1862	W7 75S41-095-550	1	1810	W8 75S41-095-550	1	1729
W9 75S41-095-550	1	1606	FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 10g-16mm Flathead	26		FRAMECAD M6 Screw	84	
Working Sheet: Trusses			Assembly Weight			49.8kg					

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

GUSSET

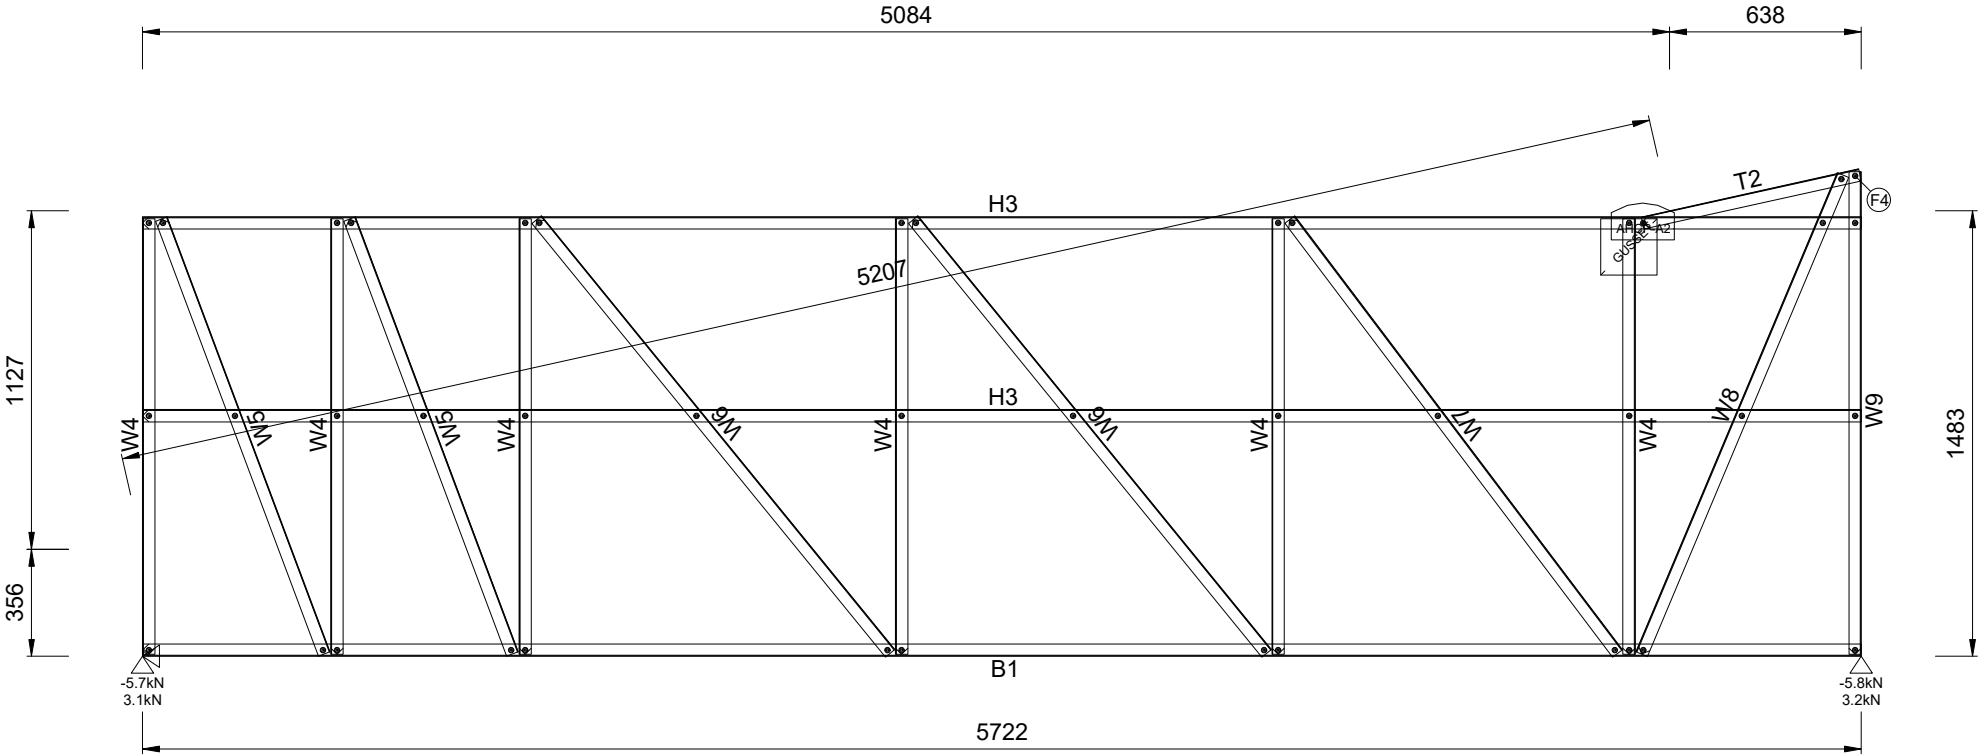


Quantity Required = 1 Mark as HT178 Engineering Status = 67%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1626h x 5722w				

B1	75S41-095-550	1	1350	B2	75S41-095-550	1	7857	T3	75S41-095-550	1	5769	H4	75S41-095-550	1	3727	W5	75S41-095-550	1	101
W6	75S41-095-550	1	303	W7	75S41-095-550	1	230	W8	75S41-095-550	1	694	W9	75S41-095-550	1	391	W10	75S41-095-550	1	1356
W11	75S41-095-550	1	634	W12	75S41-095-550	1	1422	W13	75S41-095-550	1	932	W14	75S41-095-550	1	1576	W15	75S41-095-550	1	1229
W16	75S41-095-550	2	1720	W17	75S41-095-550	3	1241	W18	75S41-095-550	1	1668	FRAMECAD M6 Screw	72						
Assembly Weight		47.0kg		Working Sheet: Trusses															

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

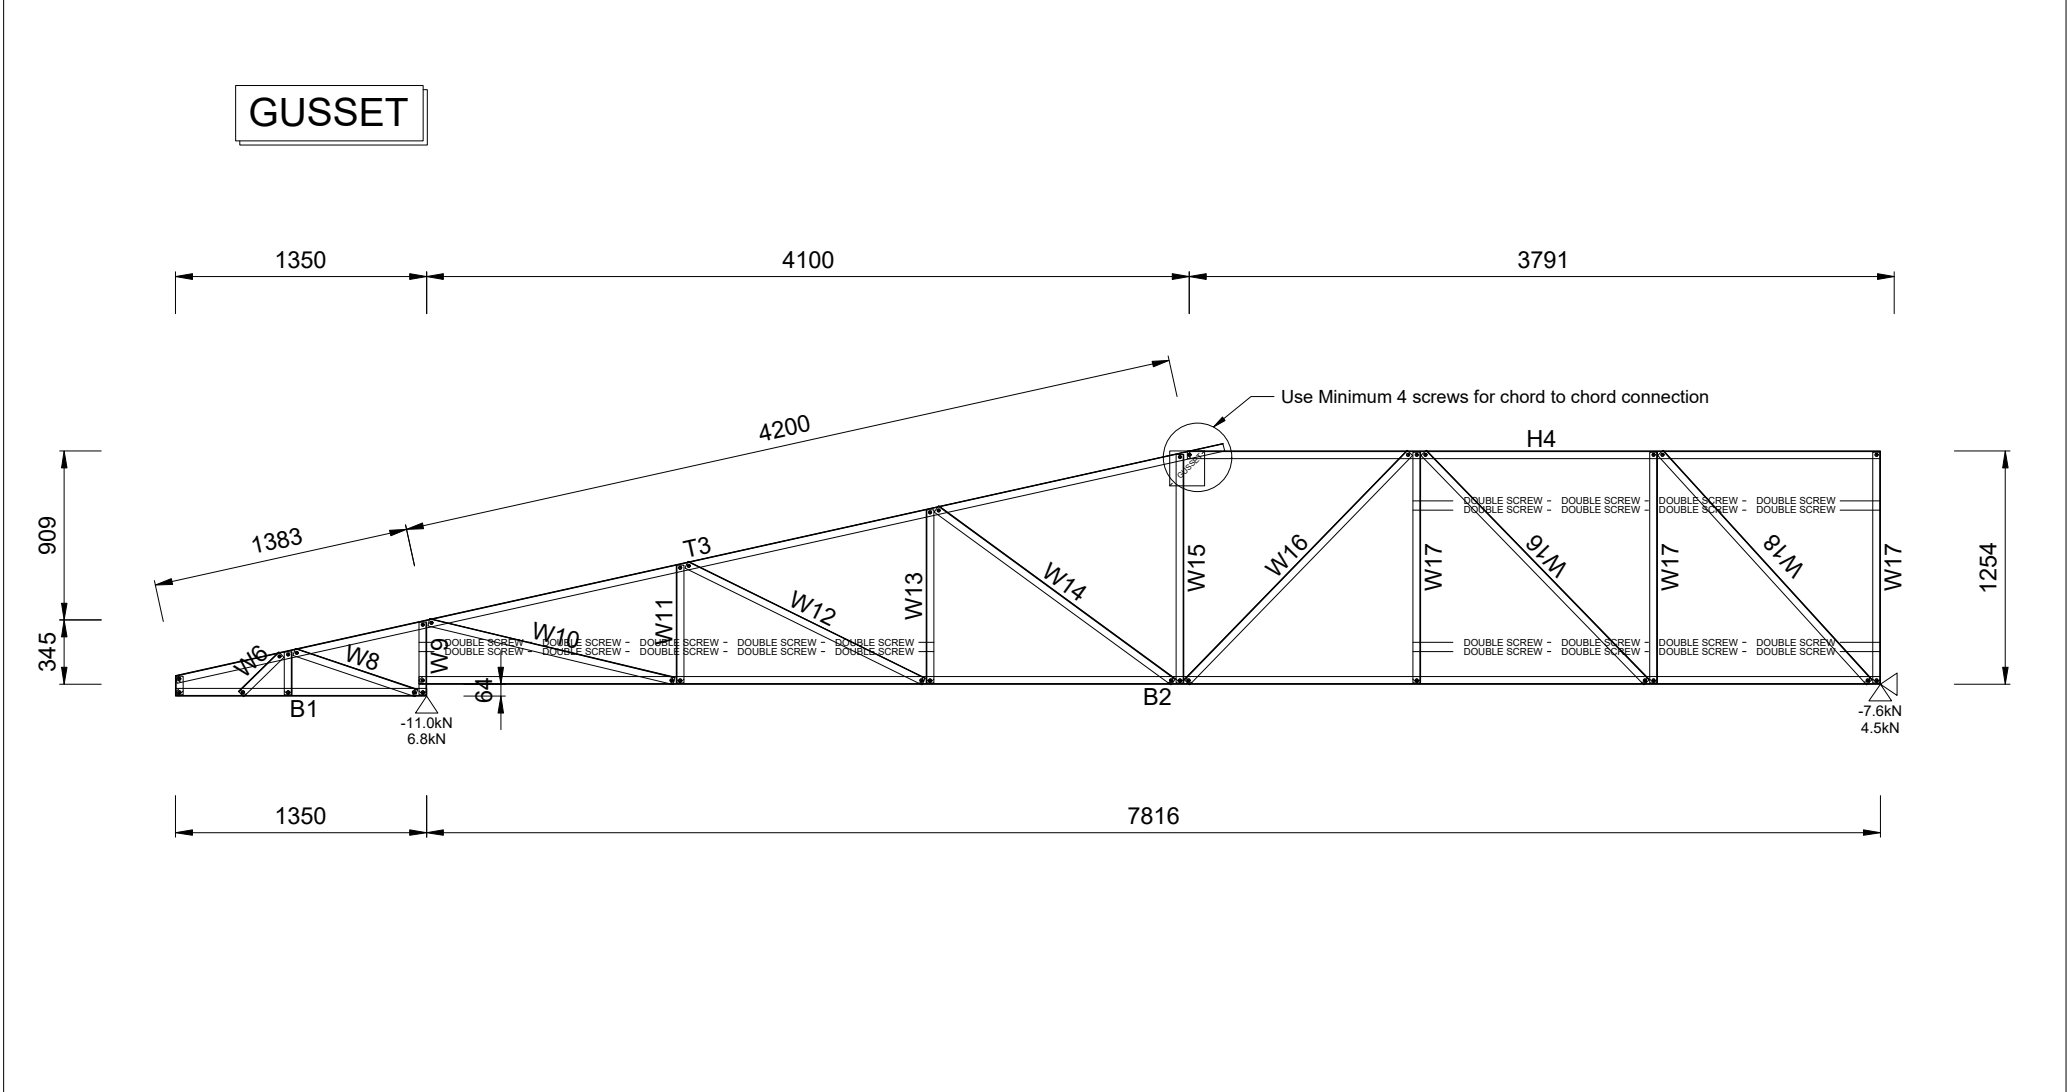


Quantity Required = 1 Mark as HT179 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1362h x 9166w				

B1	75S41-095-550	1	4372	T2	75S41-095-550	1	1795	T3	75S41-095-550	1	1236	H4	75S41-095-550	1	1774
W5	75S41-095-550	1	194	W6	75S41-095-550	1	485	W7	75S41-095-550	1	308	W8	75S41-095-550	2	521
W9	75S41-095-550	1	417	W10	75S41-095-550	1	609	W11	75S41-095-550	2	531	W12	75S41-095-550	1	642
W13	75S41-095-550	3	538	W14	75S41-095-550	1	631	W15	75S41-095-550	1	639	W16	75S41-095-550	1	715
W17	75S41-095-550	1	594	W18	75S41-095-550	1	423	W19	75S41-095-550	1	315	FRAMECAD 10g-16mm Flathead		6	
FRAMECAD M6 Screw			80	Working Sheet: Trusses				Assembly Weight			24.3kg				

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

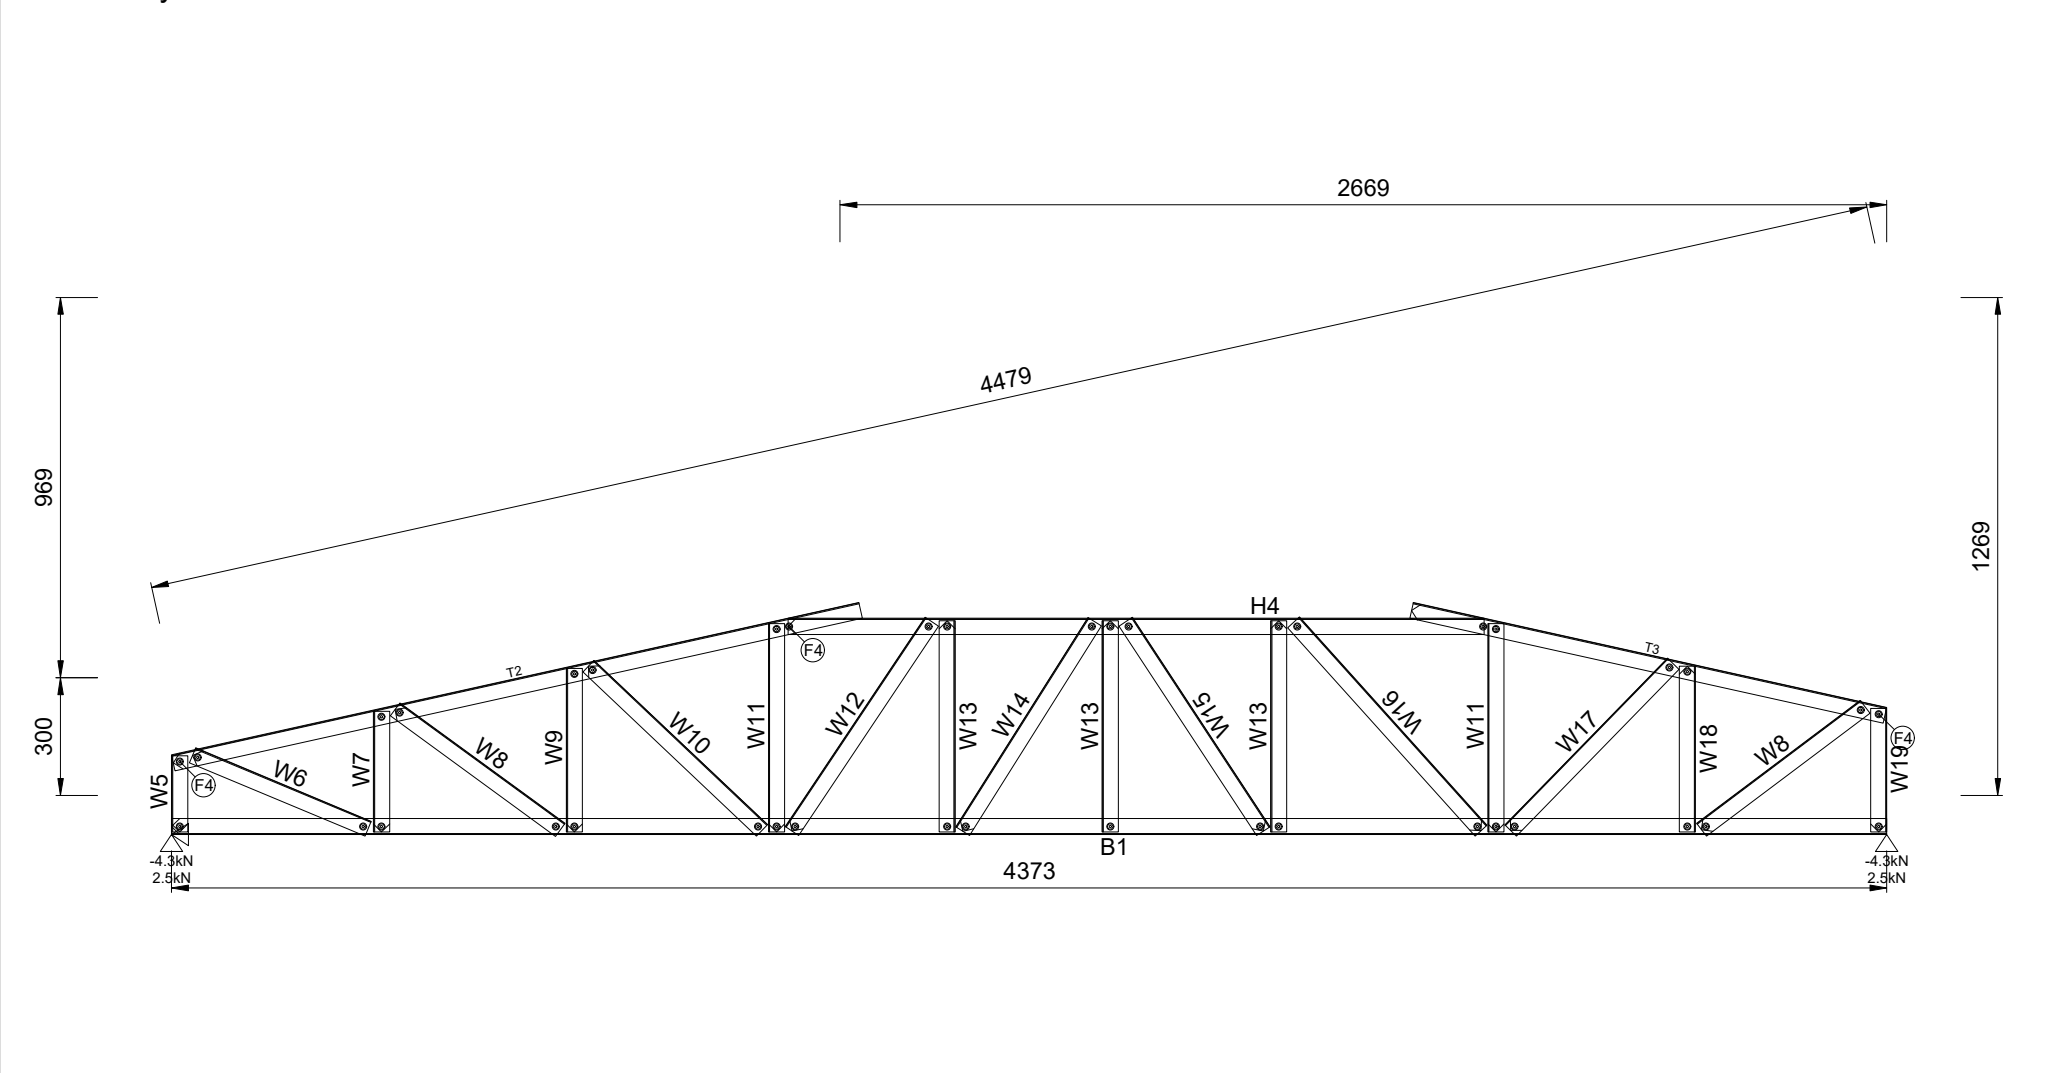


Quantity Required = 1 Mark as HT180 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	596h x 4372w				

B1 75S41-095-550	1	5722	H2 75S41-095-550	1	5722	W3 75S41-095-550	5	1716	W4 75S41-095-550	1	2150
W5 75S41-095-550	1	2136	W6 75S41-095-550	1	2153	W7 75S41-095-550	1	2156	FRAMECAD 1.15mm Fix Plate	4	
FRAMECAD 10g-16mm Flathead	48		FRAMECAD M6 Screw	36		Working Sheet: Trusses			Assembly Weight	36.9kg	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

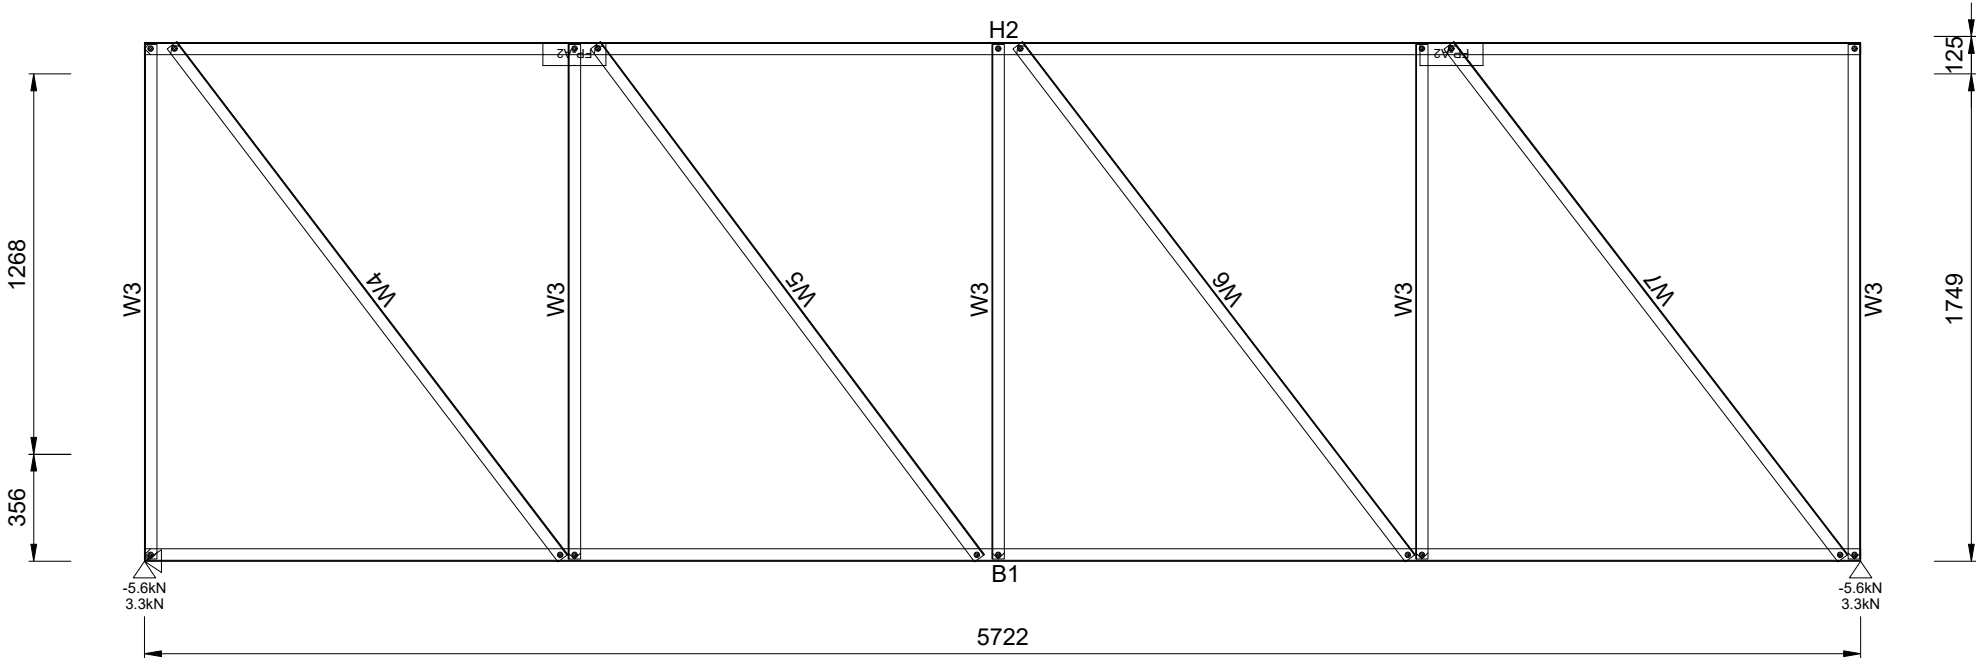


Quantity Required = 1 Mark as HT181 Engineering Status = 92%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1735h x 5722w				

B1	75S41-095-550	1	7816	T2	75S41-095-550	1	5573	H3	75S41-095-550	1	2567	W4	75S41-095-550	1	336	W5	75S41-095-550	1	670
W6	75S41-095-550	1	485	W7	75S41-095-550	1	736	W8	75S41-095-550	1	624	W9	75S41-095-550	1	1376	W10	75S41-095-550	1	911
W11	75S41-095-550	1	1527	W12	75S41-095-550	1	1199	W13	75S41-095-550	1	1715	W14	75S41-095-550	1	1486	W15	75S41-095-550	1	1949
W16	75S41-095-550	2	1498	W17	75S41-095-550	1	1901	FRAMECAD M6 Screw		62		Working Sheet: Trusses				Assembly Weight		43.7kg	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

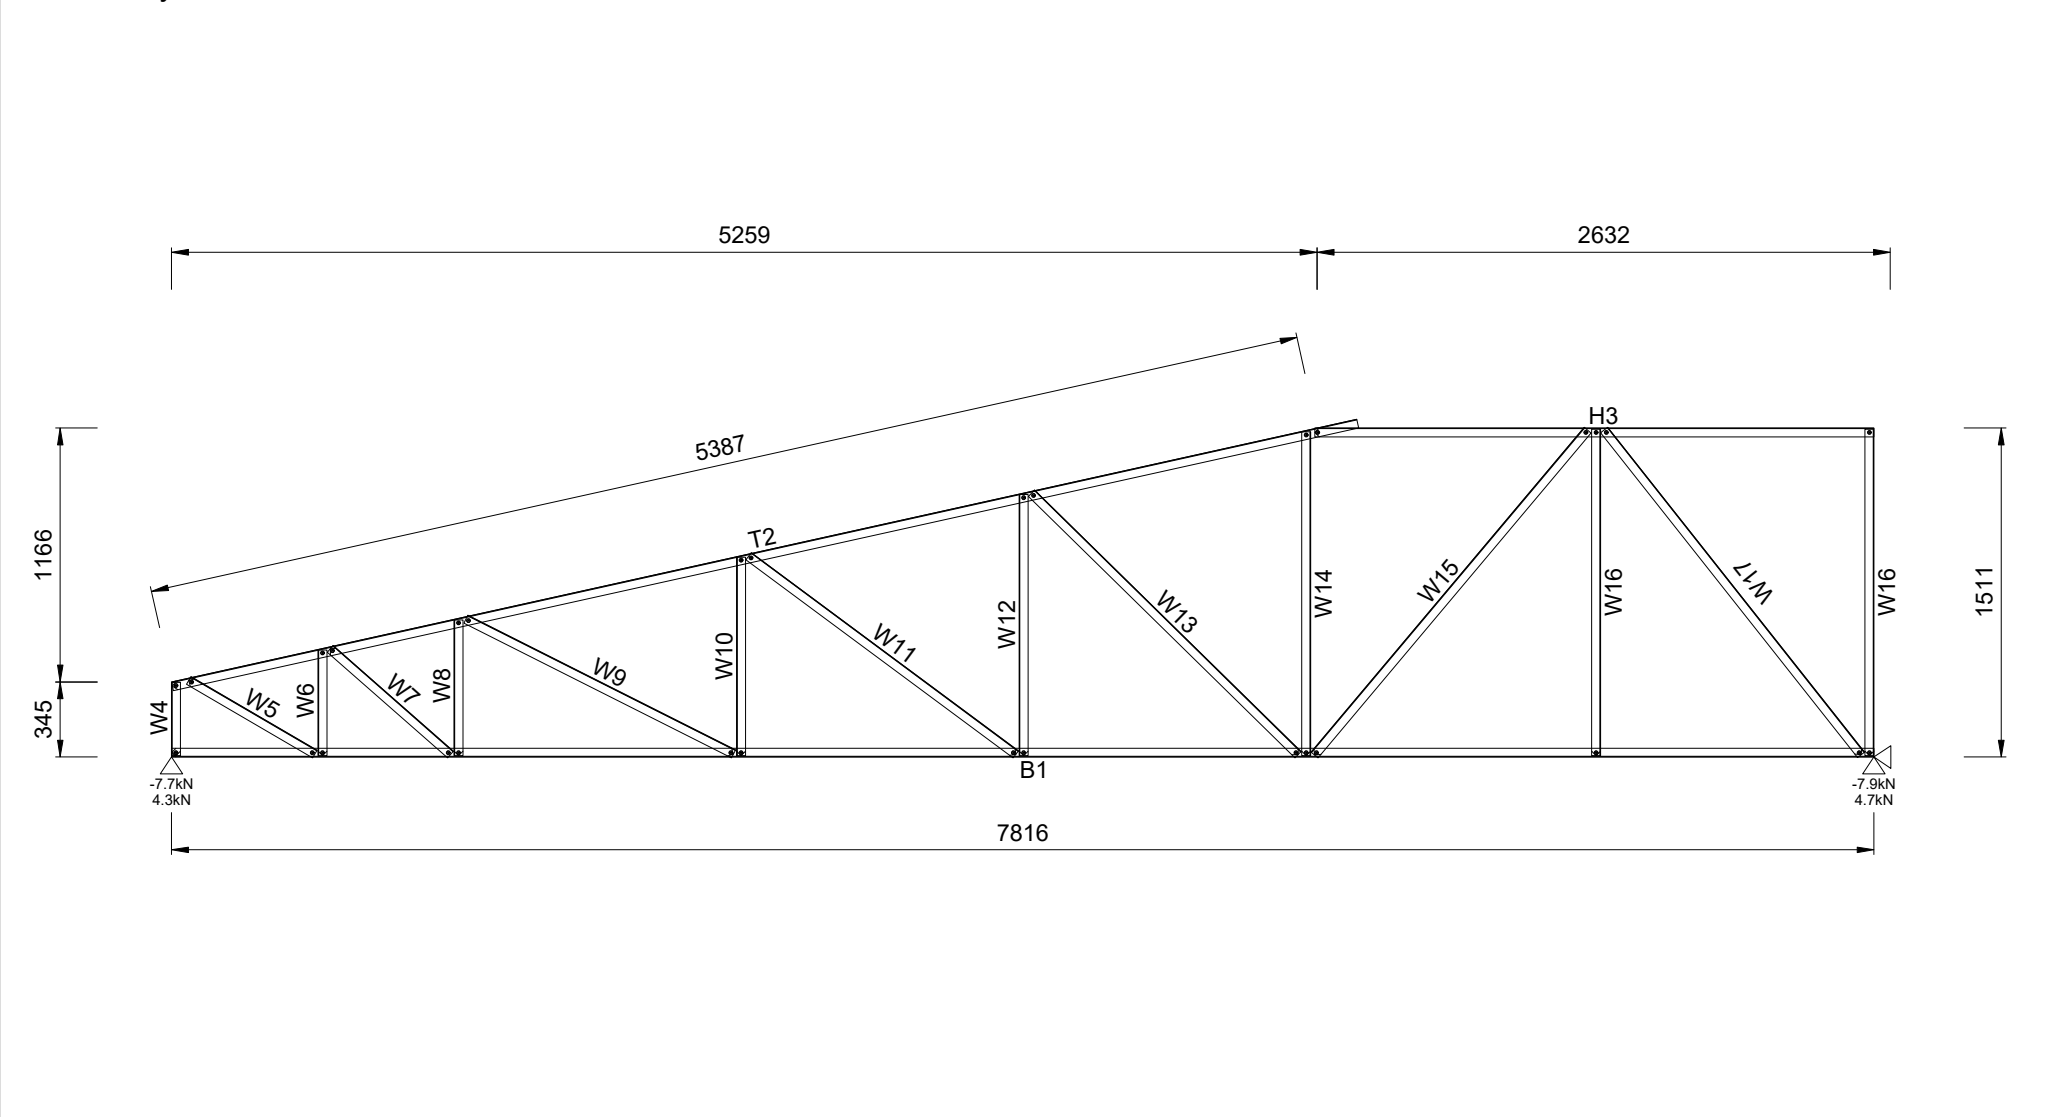


Quantity Required = 1 Mark as HT182 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1556h x 7816w				

B1 75S41-095-550	1	7726	T2 75S41-095-550	1	6040	H3 75S41-095-550	1	1293	H4 75S41-095-550	1	1408
W5 75S41-095-550	2	489	W6 75S41-095-550	1	683	W7 75S41-095-550	1	872	W8 75S41-095-550	1	634
W9 75S41-095-550	1	1011	W10 75S41-095-550	1	824	W11 75S41-095-550	1	1090	W12 75S41-095-550	1	998
W13 75S41-095-550	1	1272	W14 75S41-095-550	1	1188	W15 75S41-095-550	1	1675	W16 75S41-095-550	1	1466
W17 75S41-095-550	1	1882	W18 75S41-095-550	1	1743	W19 75S41-095-550	1	1876	W20 75S41-095-550	2	1755
W21 75S41-095-550	1	1850	FRAMECAD 1.15mm Apex/Heel Plate	2		FRAMECAD 1.15mm Fix Plate	6		FRAMECAD 10g-16mm Flathead	110	
FRAMECAD M6 Screw	84		Working Sheet: Trusses			Assembly Weight	51.6kg				

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

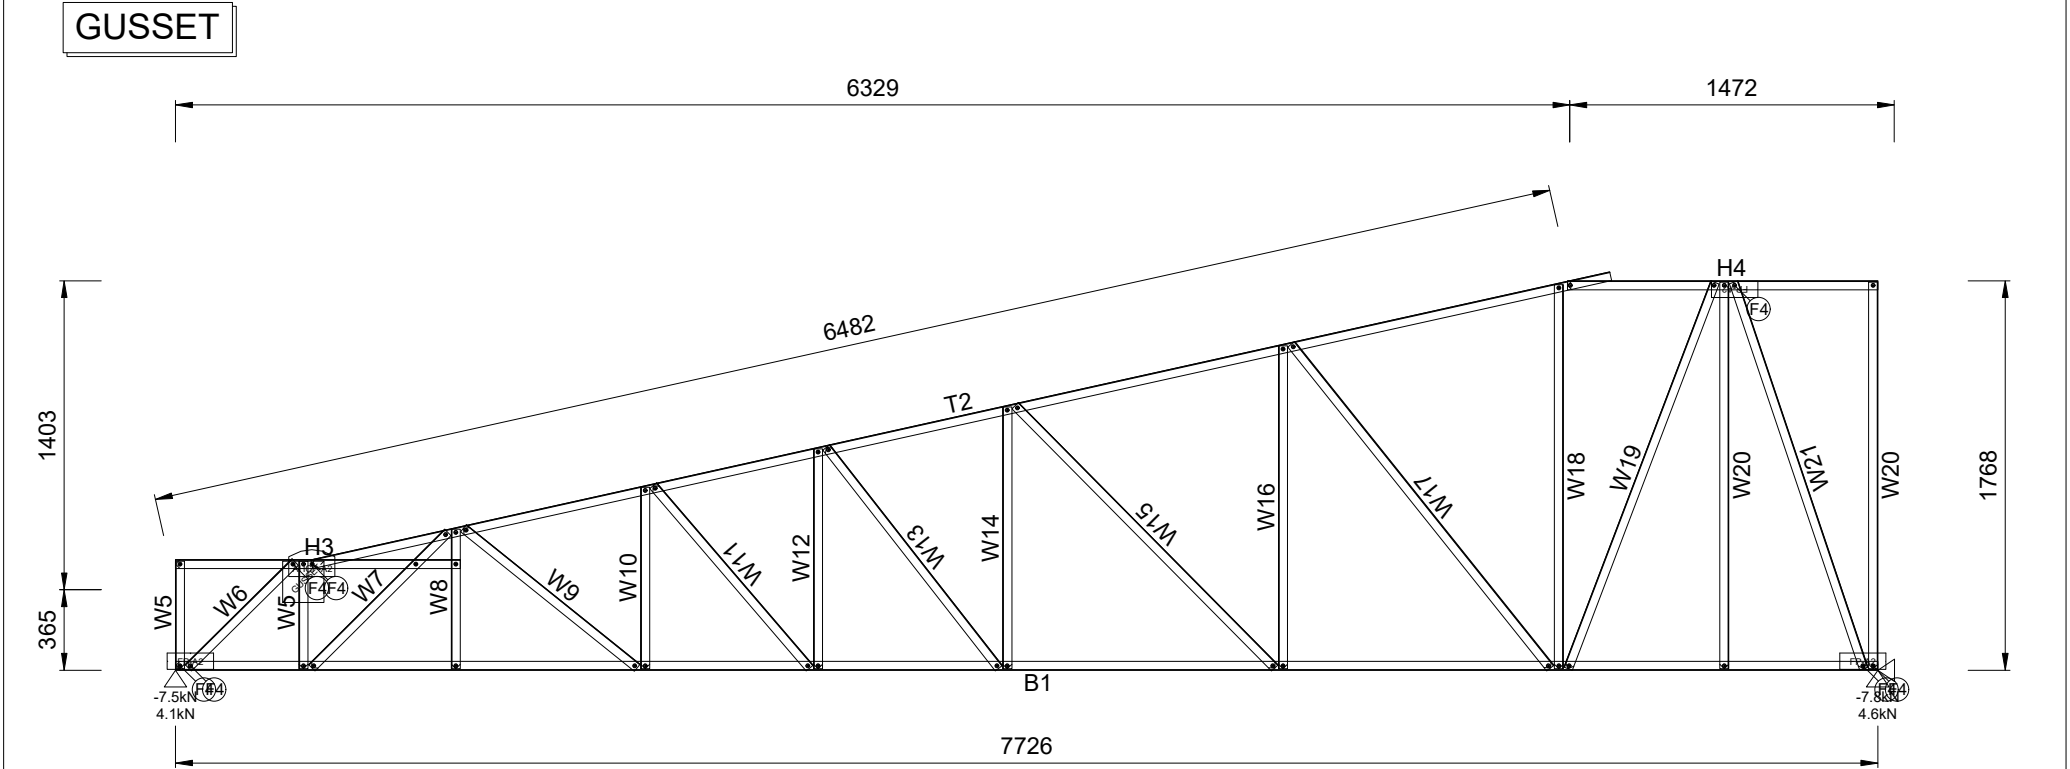


Quantity Required = 1 Mark as HT183 Engineering Status = 91%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1812h x 7726w				

B1	75S41-095-550	1	8796	T2	75S41-095-550	1	3166	H3	75S41-095-550	1	5898	W4	75S41-095-550	1	327	W5	75S41-095-550	1	742
W6	75S41-095-550	1	490	W7	75S41-095-550	1	783	W8	75S41-095-550	1	1641	W9	75S41-095-550	1	642	W10	75S41-095-550	1	956
W11	75S41-095-550	5	1467	W12	75S41-095-550	5	968	FRAMECAD M6 Screw		70		Working Sheet: Trusses				Assembly Weight		45.9kg	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

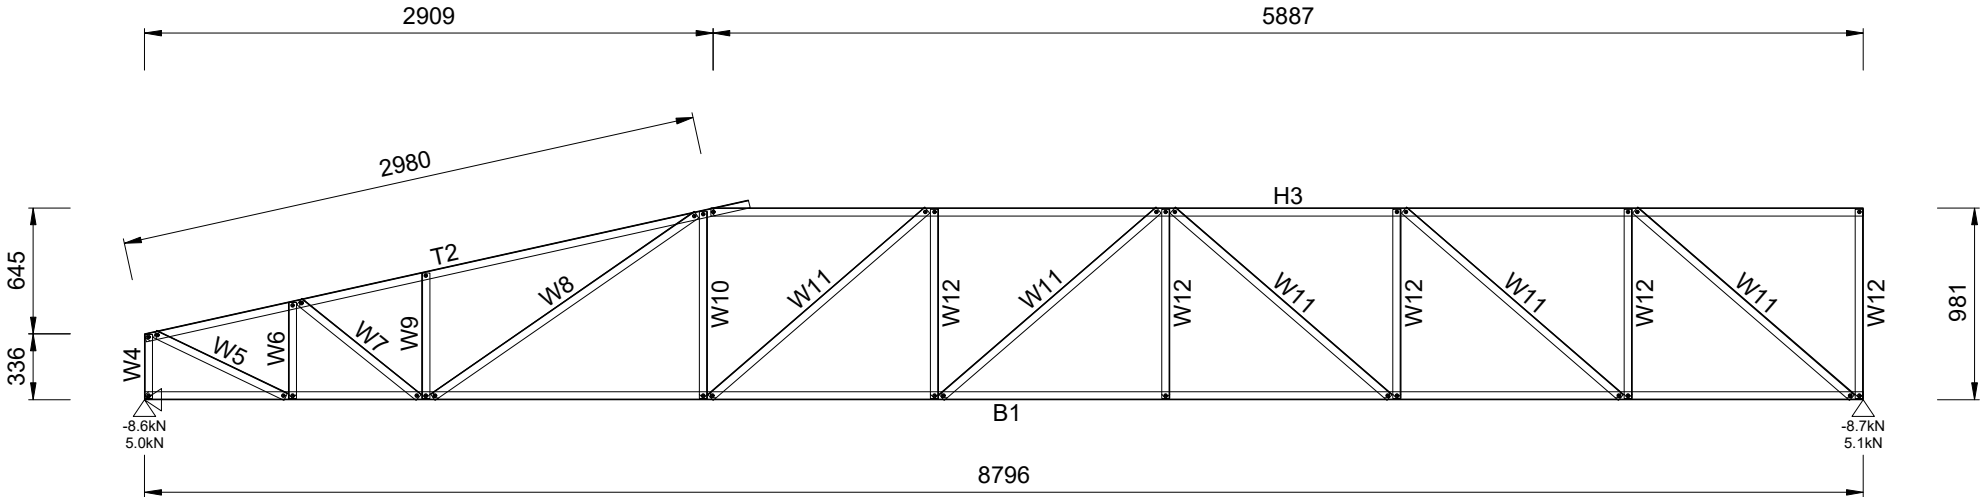


Quantity Required = 1 Mark as HT184 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1026h x 8796w				

B1	75S41-095-550	1	1307	B2	75S41-095-550	1	8837	T3	75S41-095-550	1	3816	H4	75S41-095-550	1	6570	W5	75S41-095-550	1	101
W6	75S41-095-550	1	303	W7	75S41-095-550	1	231	W8	75S41-095-550	1	653	W9	75S41-095-550	1	382	W10	75S41-095-550	1	1102
W11	75S41-095-550	1	567	W12	75S41-095-550	1	1160	W13	75S41-095-550	1	807	W14	75S41-095-550	6	1306	W15	75S41-095-550	6	819
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				49.8kg							

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

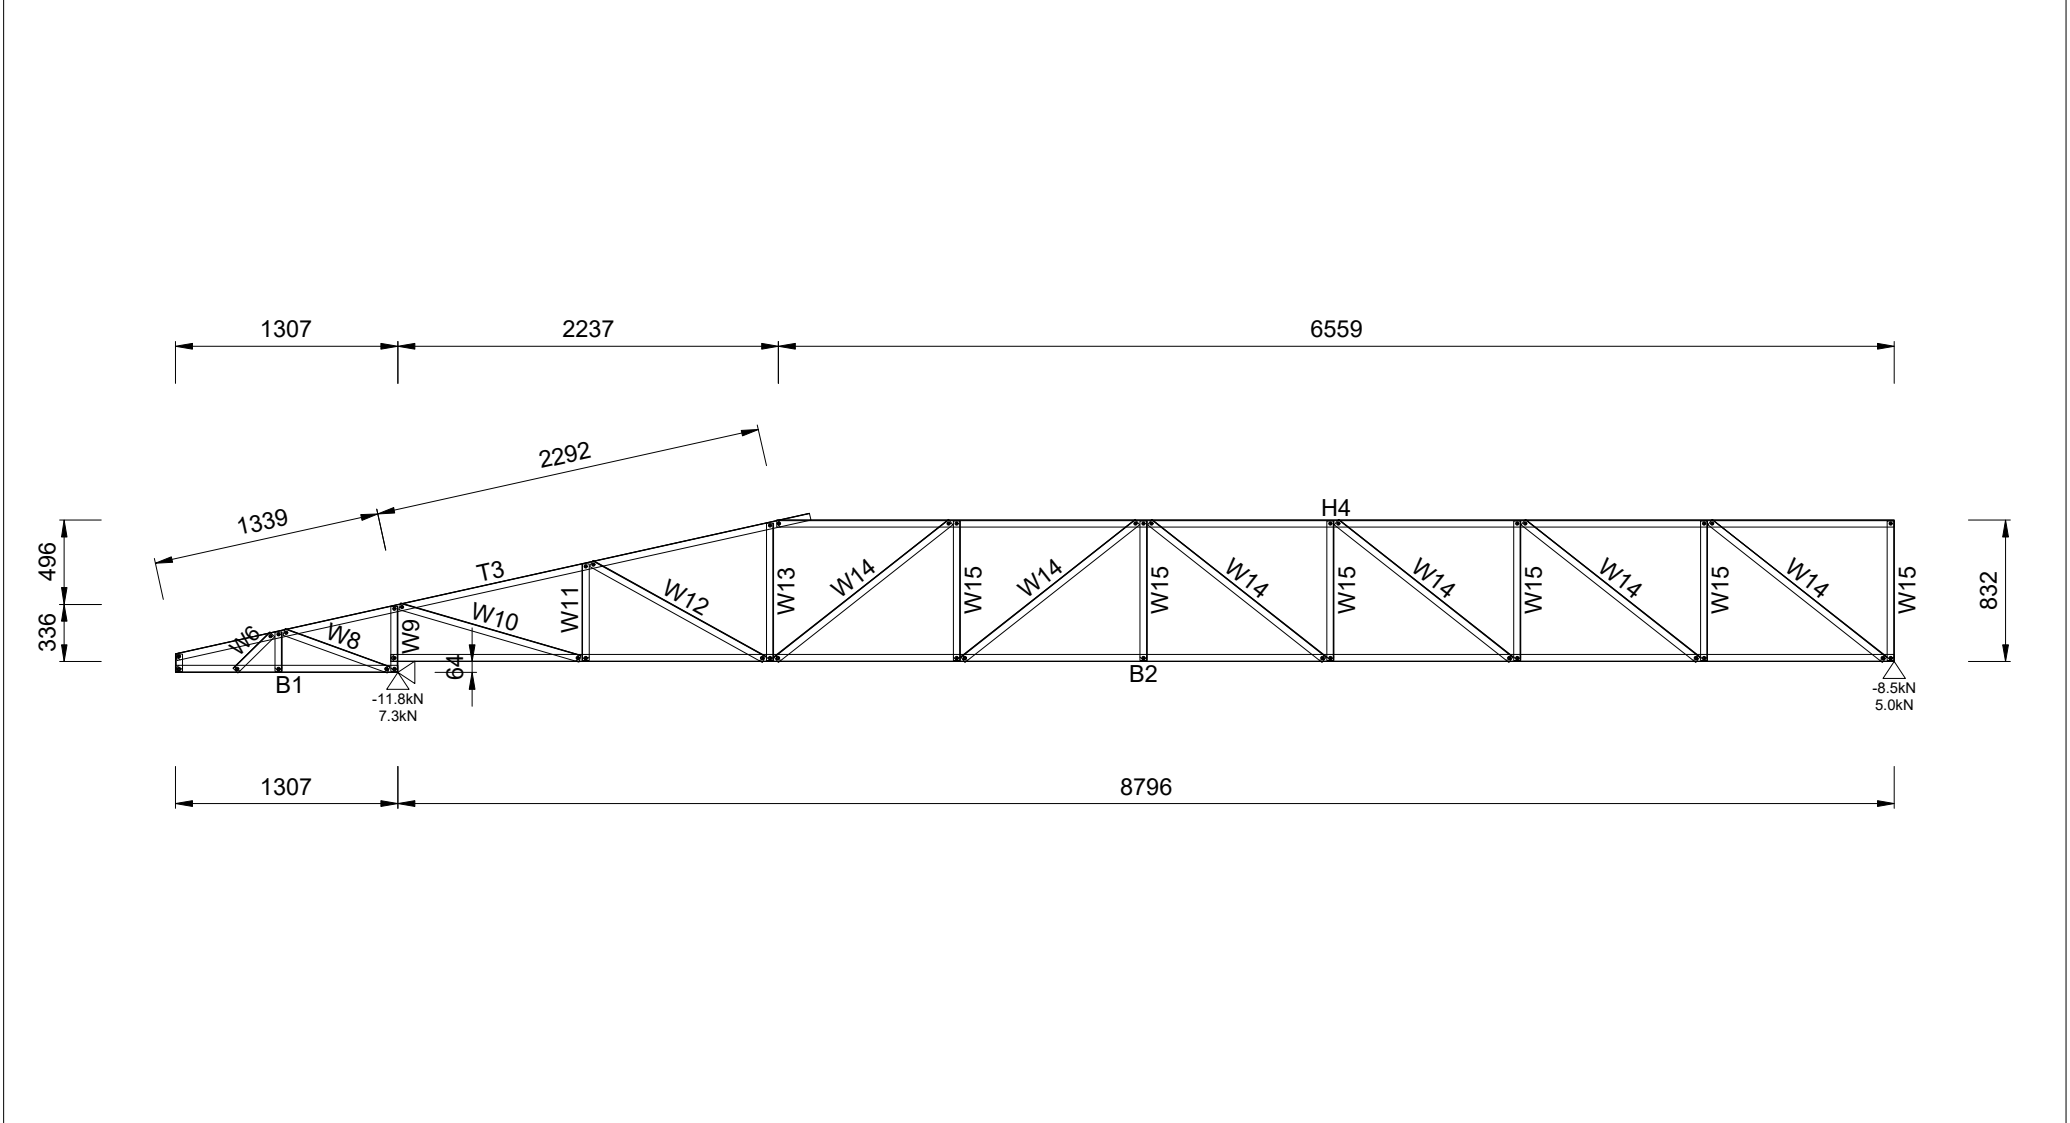


Quantity Required = 1 Mark as HT185 Engineering Status = 125%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	940h x 10103w				

B1	75S41-095-550	1	1262	B2	75S41-095-550	1	7975	T3	75S41-095-550	1	3174	H4	75S41-095-550	1	6289	W5	75S41-095-550	1	111
W6	75S41-095-550	1	307	W7	75S41-095-550	1	236	W8	75S41-095-550	1	633	W9	75S41-095-550	1	382	W10	75S41-095-550	1	700
W11	75S41-095-550	1	717	W12	75S41-095-550	2	503	W13	75S41-095-550	2	760	W14	75S41-095-550	2	769	W15	75S41-095-550	2	678
W16	75S41-095-550	1	716	W17	75S41-095-550	1	712	W18	75S41-095-550	20	690	W19	75S41-095-550	1	758	W20	75S41-095-550	1	773
W21	75S41-095-550	1	777	W22	75S41-095-550	1	808	W23	75S41-095-550	2	810	W24	75S41-095-550	1	767	W25	75S41-095-550	2	750
W26	75S41-095-550	2	748	W27	75S41-095-550	2	991	W28	75S41-095-550	2	980	W29	75S41-095-550	1	816	W30	75S41-095-550	1	755
W31	75S41-095-550	1	751	FRAMECAD M6 Screw			228	Working Sheet: Trusses				Assembly Weight			73.8kg				

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

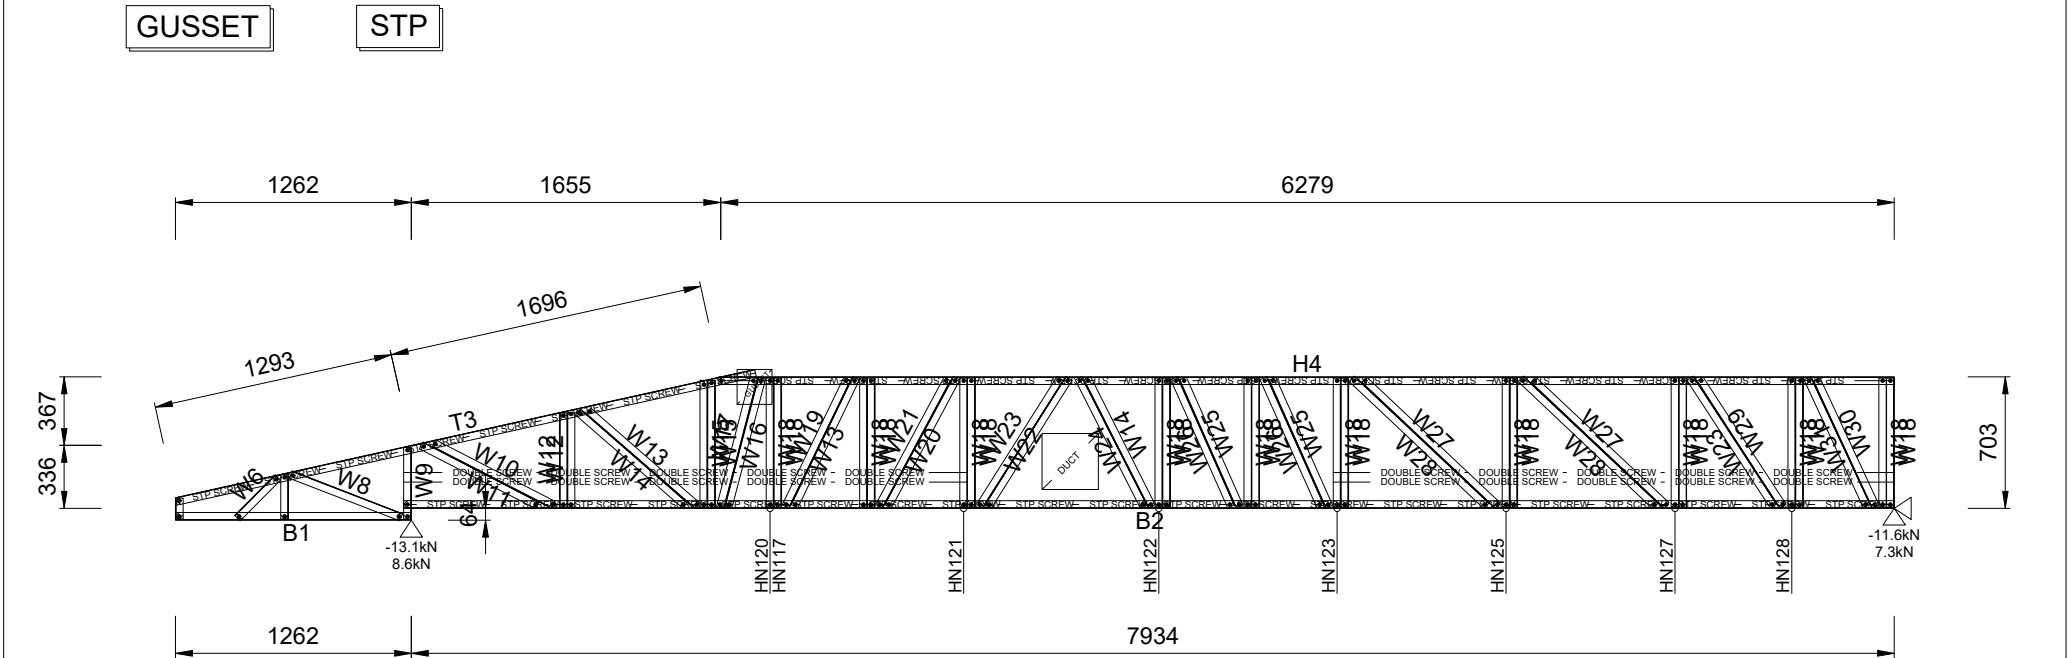

Quantity Required = 1 Mark as HB190 Engineering Status = 152%


System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	8	Envelope:	811h x 9196w		

B1	75S41-095-550	1	1305	B2	75S41-095-550	1	7857	T3	75S41-095-550	1	3177	H4	75S41-095-550	1	6212	W5	75S41-095-550	1	111
W6	75S41-095-550	1	310	W7	75S41-095-550	1	240	W8	75S41-095-550	1	655	W9	75S41-095-550	1	391	W10	75S41-095-550	2	678
W11	75S41-095-550	1	700	W12	75S41-095-550	1	501	W13	75S41-095-550	1	507	W14	75S41-095-550	1	786	W15	75S41-095-550	4	795
W16	75S41-095-550	1	672	W17	75S41-095-550	1	709	W18	75S41-095-550	1	703	W19	75S41-095-550	20	690	W20	75S41-095-550	2	932
W21	75S41-095-550	2	942	W22	75S41-095-550	1	929	W23	75S41-095-550	1	939	W24	75S41-095-550	3	799	W25	75S41-095-550	1	797
W26	75S41-095-550	1	792	W27	75S41-095-550	1	821	W28	75S41-095-550	1	815	W29	75S41-095-550	1	740	W30	75S41-095-550	1	737
FRAMECAD M6 Screw				172	Working Sheet: Trusses			Assembly Weight			72.1kg								

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

STP

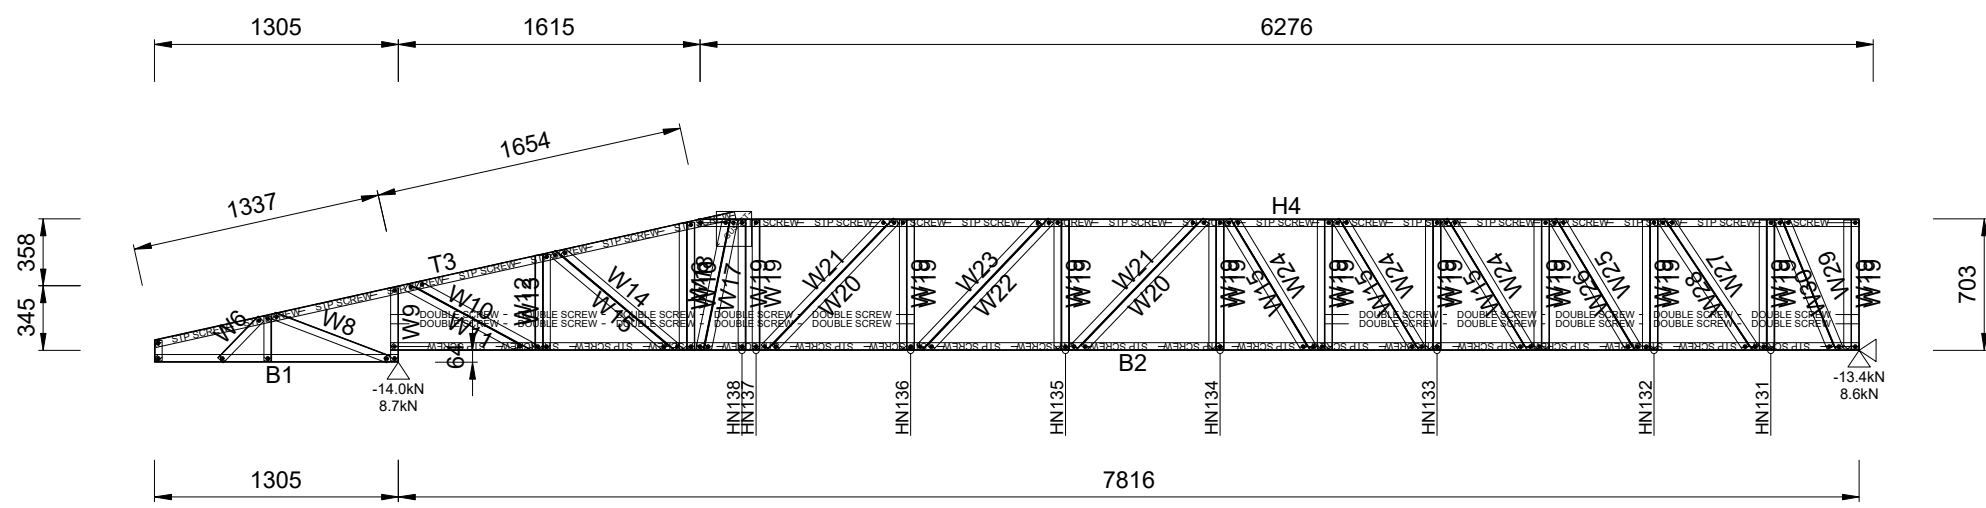


Quantity Required = 1 Mark as HB191 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	8	Envelope:	811h x 9121w		

B1	75S41-095-550	1	1262	B2	75S41-095-550	1	8748	T3	75S41-095-550	1	3012	T4	75S41-095-550	1	1115	H5	75S41-095-550	1	7210
W6	75S41-095-550	1	111	W7	75S41-095-550	1	253	W8	75S41-095-550	1	294	W9	75S41-095-550	1	633	W10	75S41-095-550	1	378
W11	75S41-095-550	1	1399	W12	75S41-095-550	1	628	W13	75S41-095-550	1	685	W14	75S41-095-550	8	647	W15	75S41-095-550	1	996
W16	75S41-095-550	5	1025	W17	75S41-095-550	1	839	W18	75S41-095-550	1	1292	W19	75S41-095-550	1	762	FRAMECAD M6 Screw		110	
Working Sheet: Trusses				Assembly Weight				51.5kg											

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET

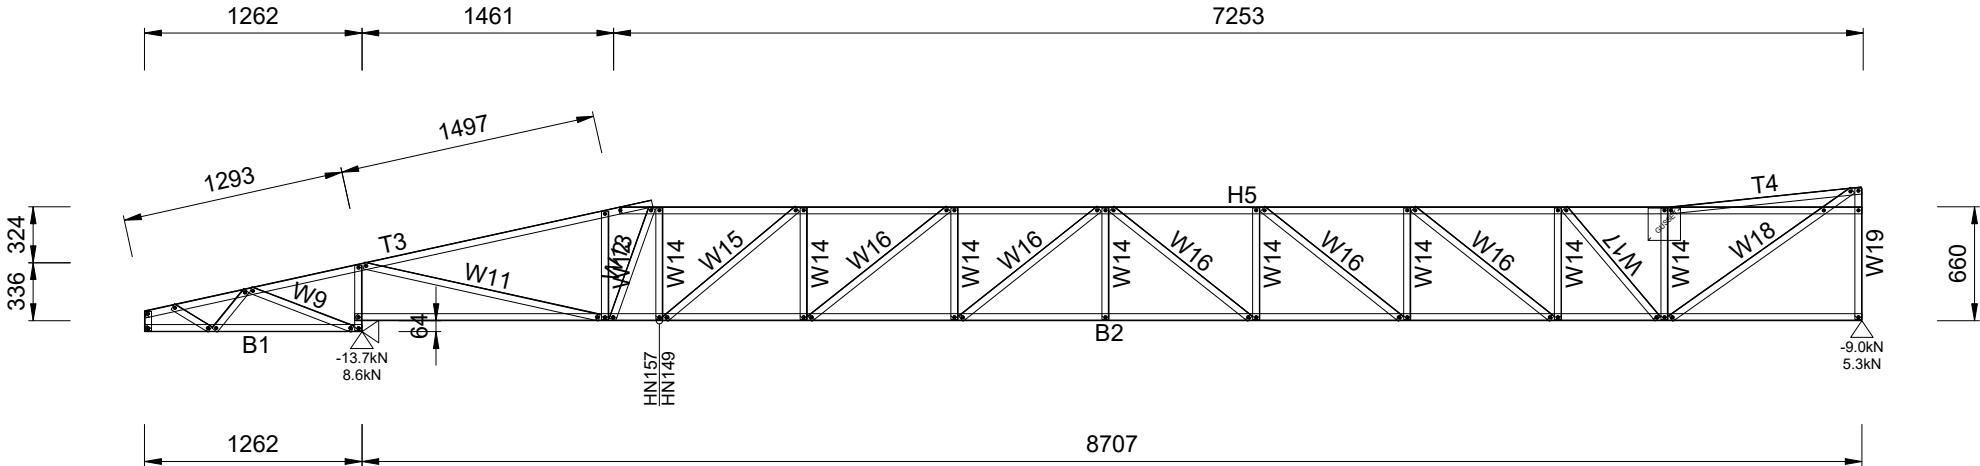


Quantity Required = 1 Mark as HB192 Engineering Status = 255%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	2	Envelope:	845h x 9969w		

B1	75S41-095-550	1	5834	T2	75S41-095-550	1	1248	H3	75S41-095-550	1	4796	W4	75S41-095-550	1	754	W5	75S41-095-550	1	908
W6	75S41-095-550	1	1016	W7	75S41-095-550	1	882	W8	75S41-095-550	1	973	W9	75S41-095-550	1	1204	W10	75S41-095-550	5	980
W11	75S41-095-550	2	1487	W12	75S41-095-550	1	1281	W13	75S41-095-550	1	1162	FRAMECAD M6 Screw		62	Working Sheet: Trusses				
Assembly Weight		36.0kg																	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

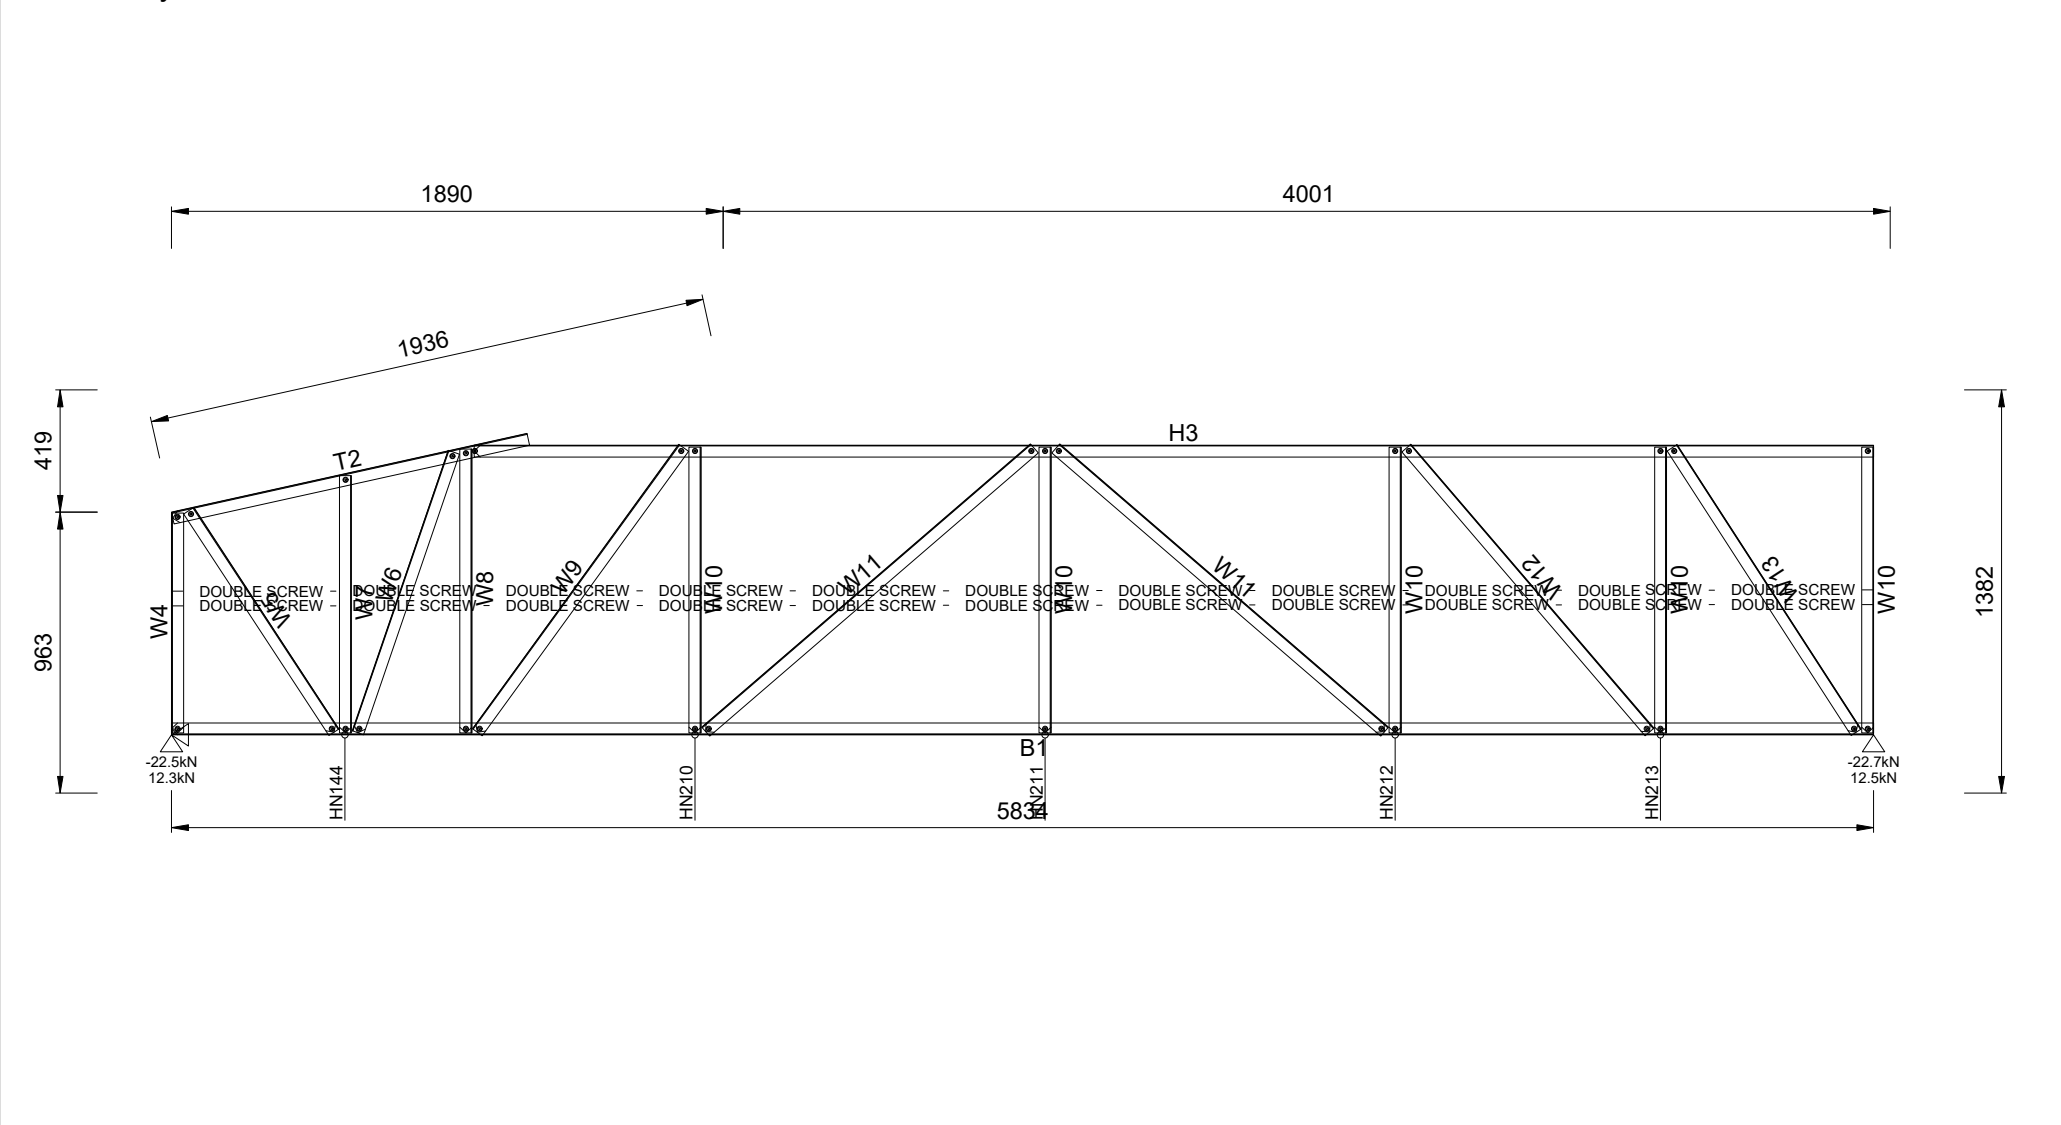


Quantity Required = 1 Mark as HB193 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	5	Envelope:	1037h x 5834w		

B1 75S41-095-550	4 2108	T2 75S41-095-550	4 2107	W3 75S41-095-550	12 279	W4 75S41-095-550	8 1000	FRAMECAD M6 Screw	80
Working Sheet: Trusses		Assembly Weight		9.1kg					

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

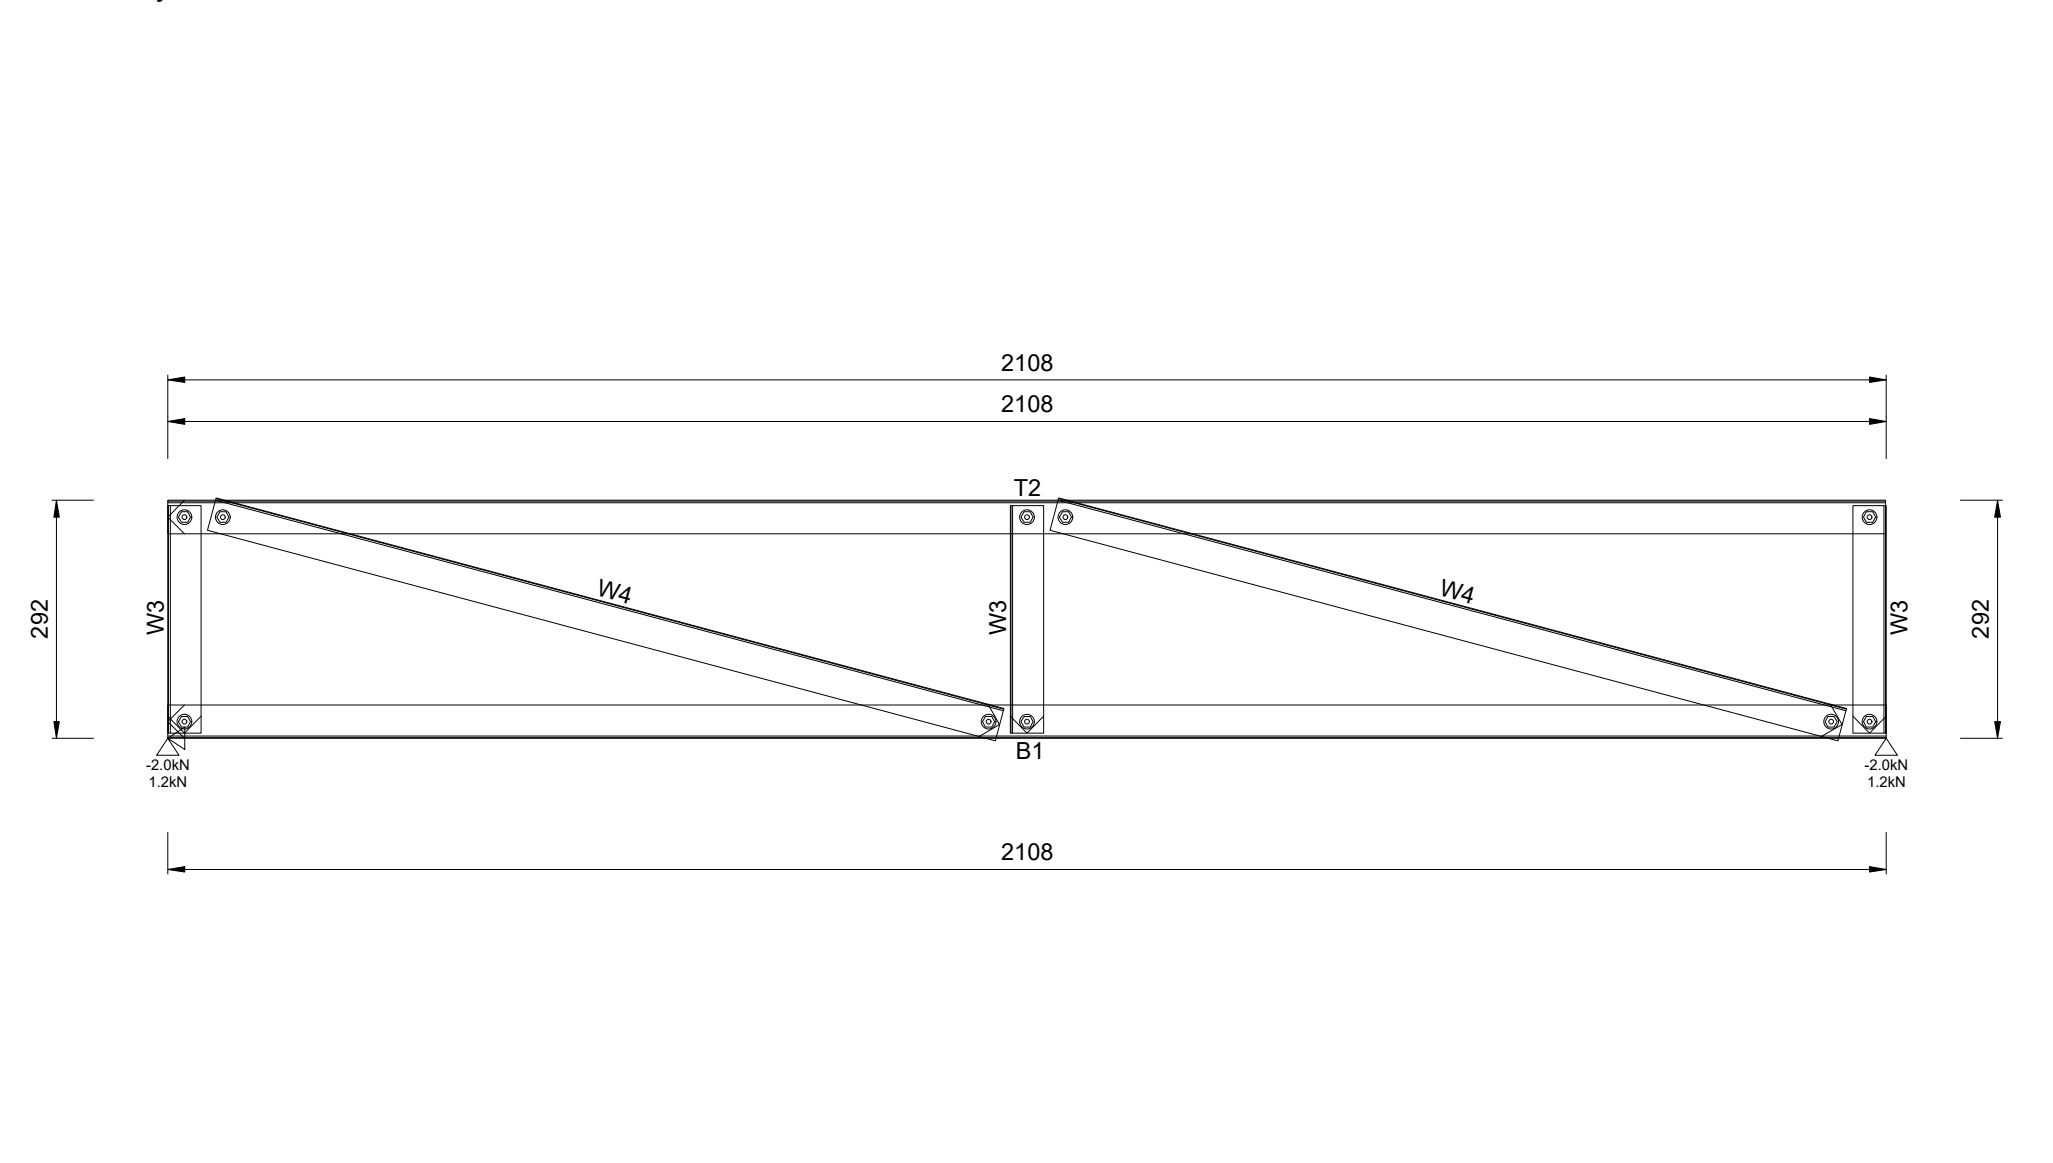


Quantity Required = 4 Mark as HN216 Engineering Status = 66%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	298h x 2108w				

B1	75S41-095-550	1	6250	T2	75S41-095-550	1	282	T3	75S41-095-550	1	4743	H4	75S41-095-550	1	1641	H5	75S41-095-550	1	6250
W6	75S41-095-550	6	2299	W7	75S41-095-550	3	2308	W8	75S41-095-550	1	2411	W9	75S41-095-550	1	2406	W10	75S41-095-550	1	2346
W11	75S41-095-550	1	2353	W12	75S41-095-550	1	2358	W13	75S41-095-550	1	2352	W14	75S41-095-550	1	2505	W15	75S41-095-550	1	2490
W16	75S41-095-550	1	2119	W17	75S41-095-550	1	2112	W18	75S41-095-550	1	2327	W19	75S41-095-550	1	1853	W20	75S41-095-550	1	1846
W21	75S41-095-550	1	2092	W22	75S41-095-550	1	2071	W23	75S41-095-550	1	1587	W24	75S41-095-550	1	1580	W25	75S41-095-550	1	1712
W26	75S41-095-550	1	1693	W27	75S41-095-550	1	1392	W28	75S41-095-550	1	1381	W29	75S41-095-550	1	1371	W30	75S41-095-550	1	1361
W31	75S41-095-550	1	1348	W32	75S41-095-550	1	1336	FRAMECAD M6 Screw			108	Working Sheet: Trusses			Assembly Weight			113.9kg	

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

GUSSET
 STP

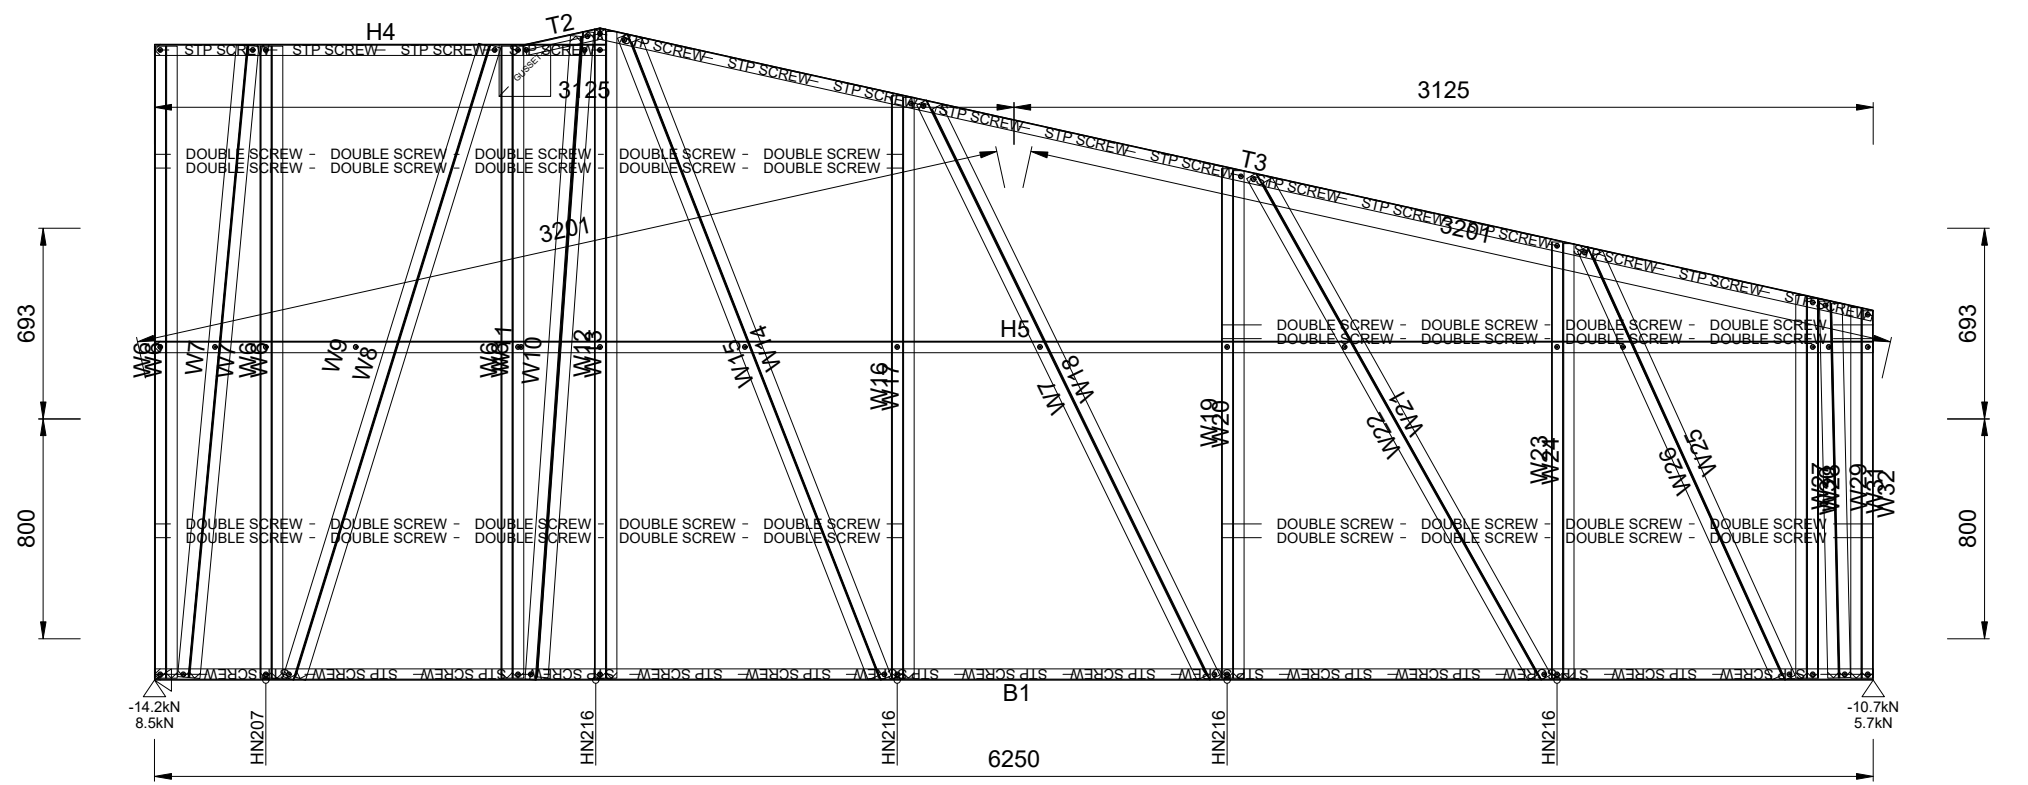


Quantity Required = 1 Mark as GI217 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	5	Envelope:	2373h x 6250w		

B1 75S41-095-550	1 4276	T2 75S41-095-550	1 4276	H3 75S41-095-550	1 4276	W4 75S41-095-550	5 2346	W5 75S41-095-550	1 2517
W6 75S41-095-550	2 2544	W7 75S41-095-550	1 2551	FRAMECAD M6 Screw	54	Working Sheet: Trusses		Assembly Weight	44.8kg

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

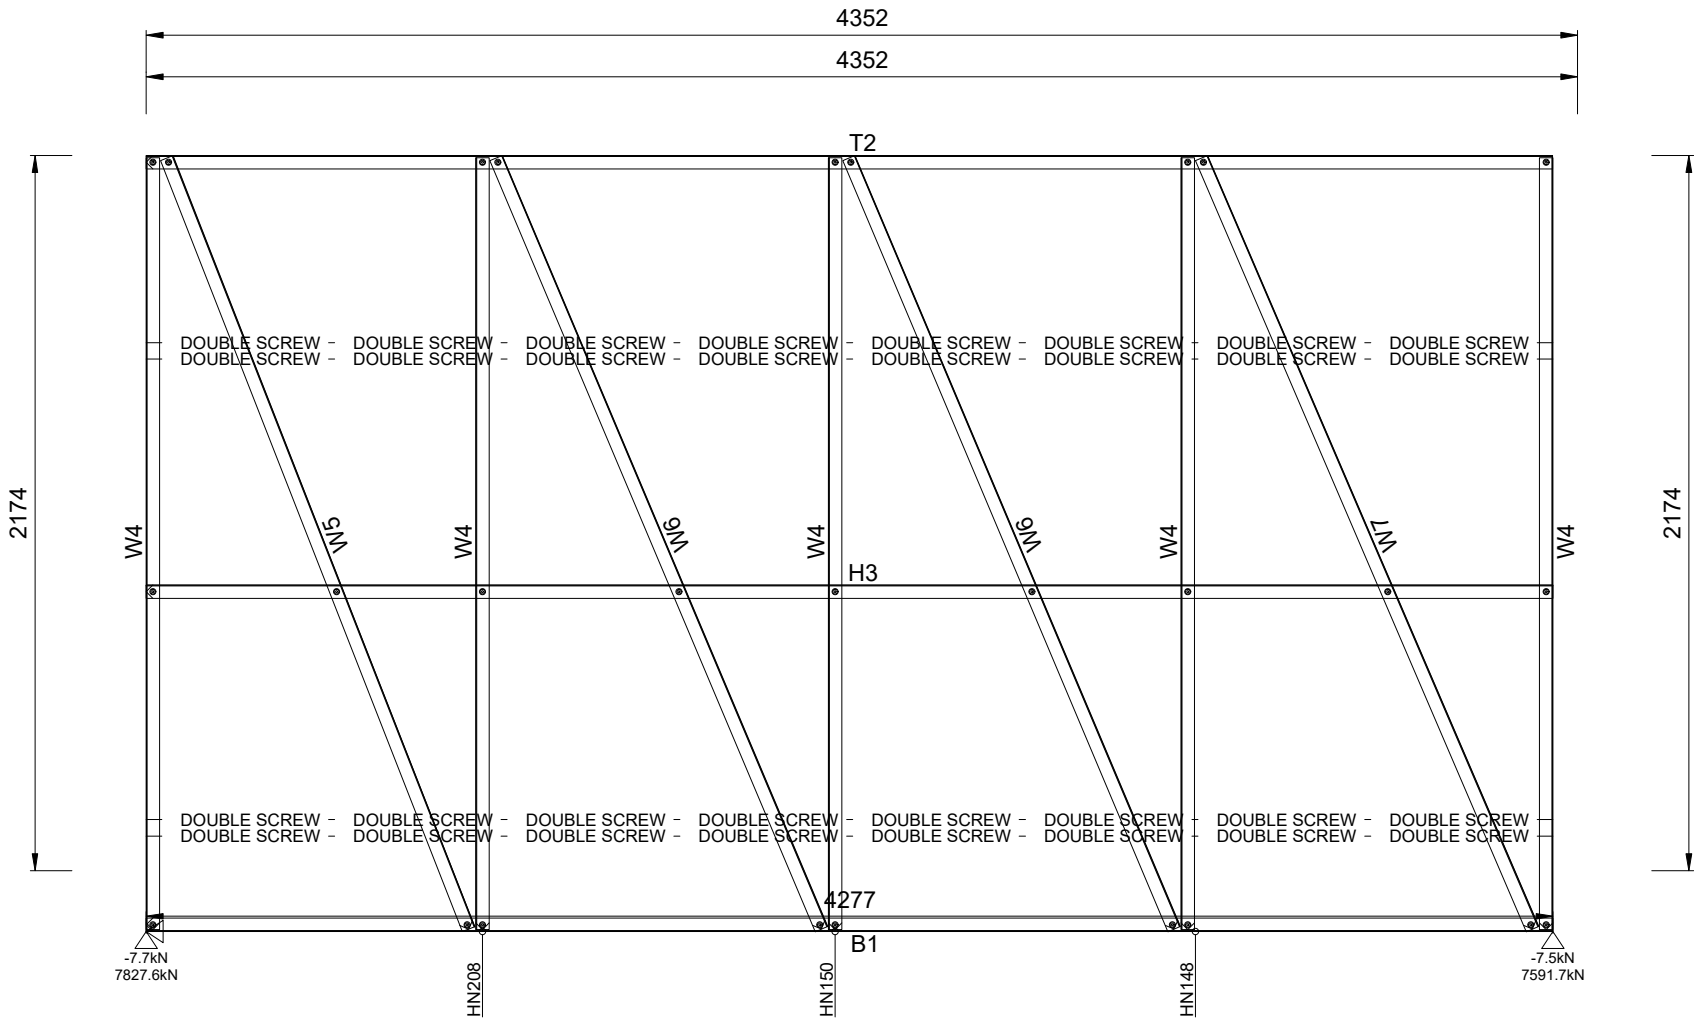


Quantity Required = 1 Mark as HA218 (Edited) Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	3	Envelope:	2360h x 4276w		

B1 75S41-095-550 FRAMECAD 10g-16mm Flathead	1 5501 10	T2 75S41-095-550 FRAMECAD M6 Screw	1 5501 36	W3 75S41-095-550 Working Sheet: Truss.1	5 819	W4 75S41-095-550 Assembly Weight	4 1525 27.3kg
--	--------------	---------------------------------------	--------------	--	-------	-------------------------------------	------------------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

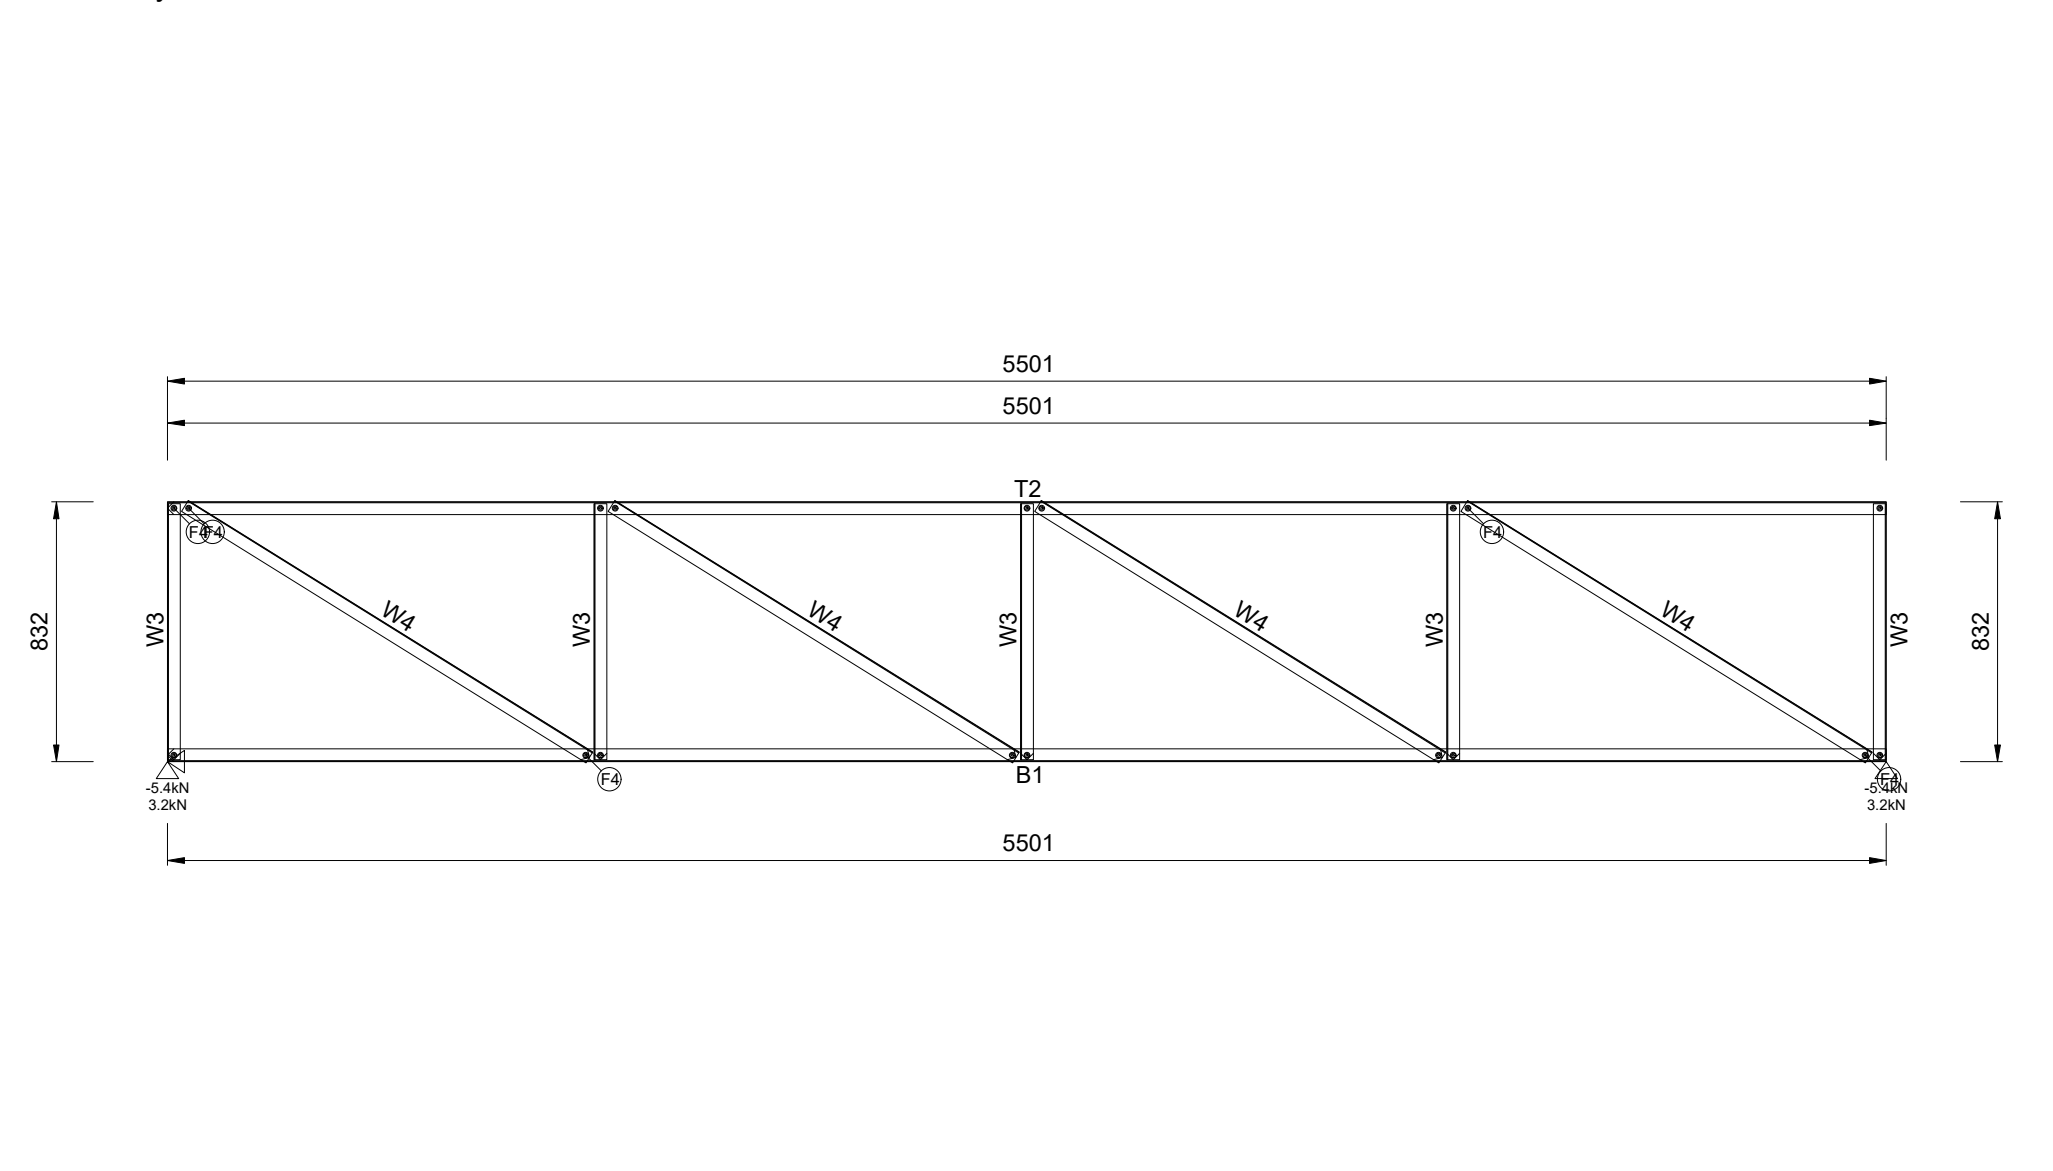


Quantity Required = 1 Mark as HN219 Engineering Status = 92%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	841h x 5501w				

B1	75S41-095-550	1	2126	T2	75S41-095-550	1	1053	T3	75S41-095-550	1	1107	W4	75S41-095-550	1	296	W5	75S41-095-550	1	544
W6	75S41-095-550	1	601	W7	75S41-095-550	1	403	W8	75S41-095-550	1	622	W9	75S41-095-550	1	564	W10	75S41-095-550	1	291
FRAMECAD M6 Screw				Working Sheet: Truss.2				Assembly Weight				9.8kg							

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

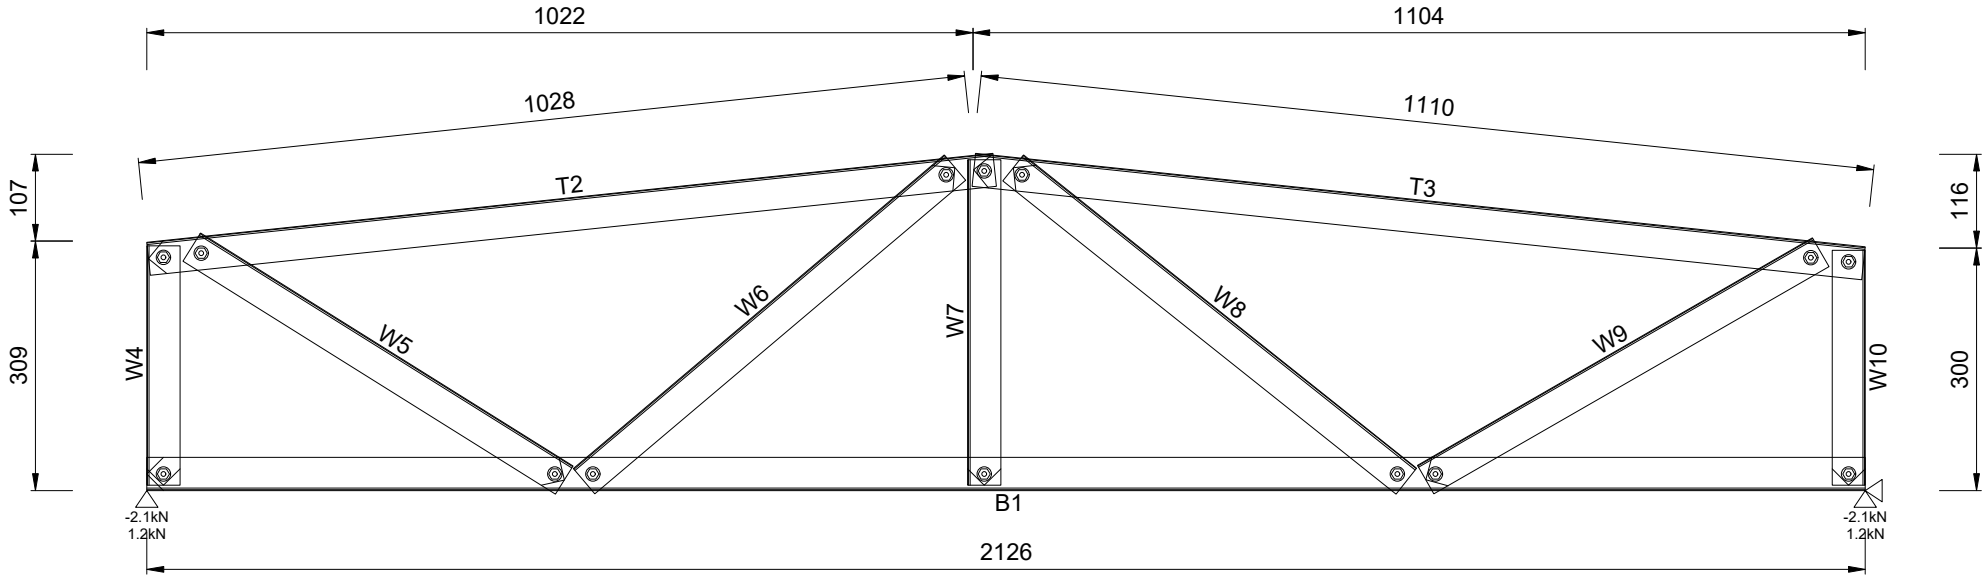

Quantity Required = 1 Mark as N220 Engineering Status = 73%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	6	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	421h x 2126w				


B1	75S41-095-550	1	5936	T2	75S41-095-550	1	5936	T3	75S41-095-550	1	3361	W4	75S41-095-550	4	404
W5	75S41-095-550	1	918	W6	75S41-095-550	1	777	W7	75S41-095-550	1	897	W8	75S41-095-550	1	811
W9	75S41-095-550	1	633	W10	75S41-095-550	1	476	W11	75S41-095-550	1	890	W12	75S41-095-550	1	523
W13	75S41-095-550	1	943	W14	75S41-095-550	1	601	W15	75S41-095-550	1	971	W16	75S41-095-550	1	679
W17	75S41-095-550	1	753	FRAMECAD 1.15mm Apex/Heel Plate			2	FRAMECAD 10g-16mm Flathead			46	FRAMECAD M6 Screw			90
Working Sheet: Trusses				Assembly Weight			34.5kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

GUSSET

STP

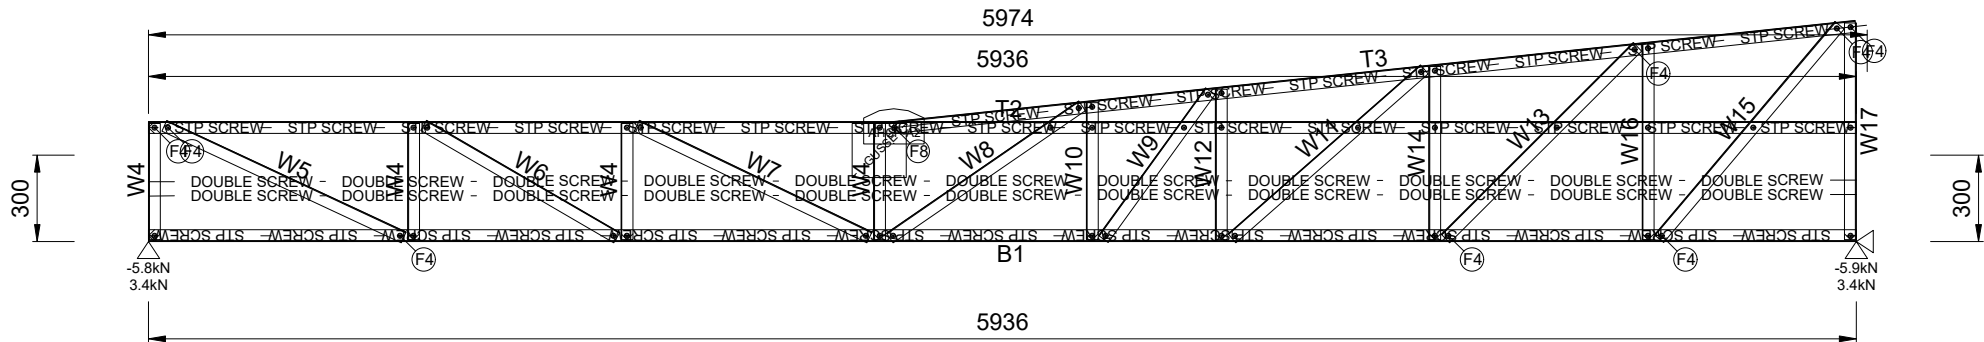


Quantity Required = 1 Mark as HN221 Engineering Status = 100%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	772h x 5936w				

B1 75S41-095-550	1 693	T2 75S41-095-550	1 666	T3 75S41-095-550	1 120	W4 75S41-095-550	1 299	W5 75S41-095-550	1 418	W6 75S41-095-550	1 465
W7 75S41-095-550	1 380	W8 75S41-095-550	1 434	FRAMECAD M6 Screw	22	Working Sheet: Trusses		Assembly Weight	4.5kg		

Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

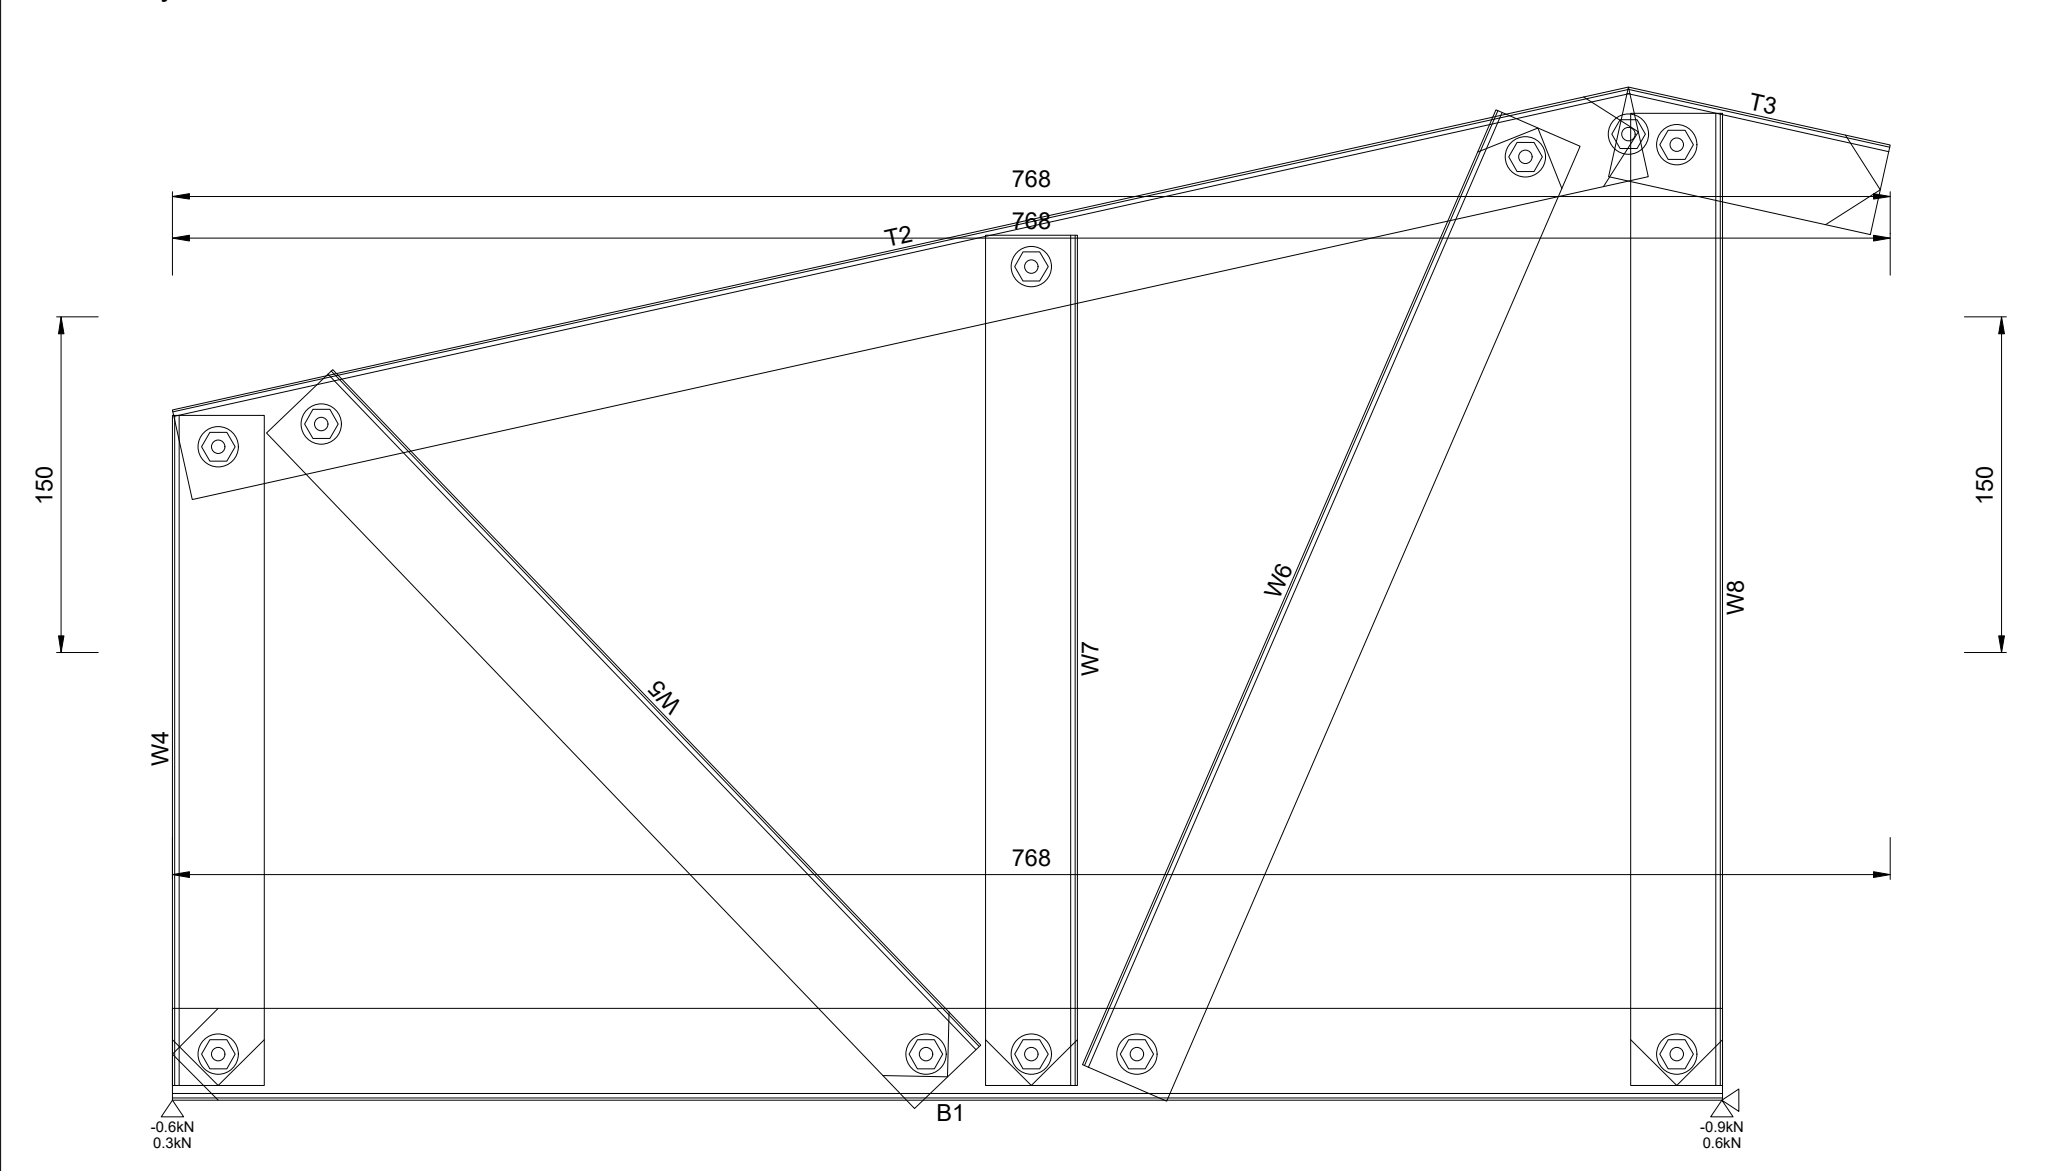


Quantity Required = 1 Mark as HN222 Engineering Status = 40%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	457h x 768w				

B1 75S41-095-550 FRAMECAD M6 Screw	1 2421 20	T2 75S41-095-550 Working Sheet: Truss.1	1 2421	W3 75S41-095-550 Assembly Weight	3 389 10.8kg	W4 75S41-095-550	1 978	W5 75S41-095-550	1 1389
---------------------------------------	--------------	--	--------	-------------------------------------	-----------------	------------------	-------	------------------	--------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

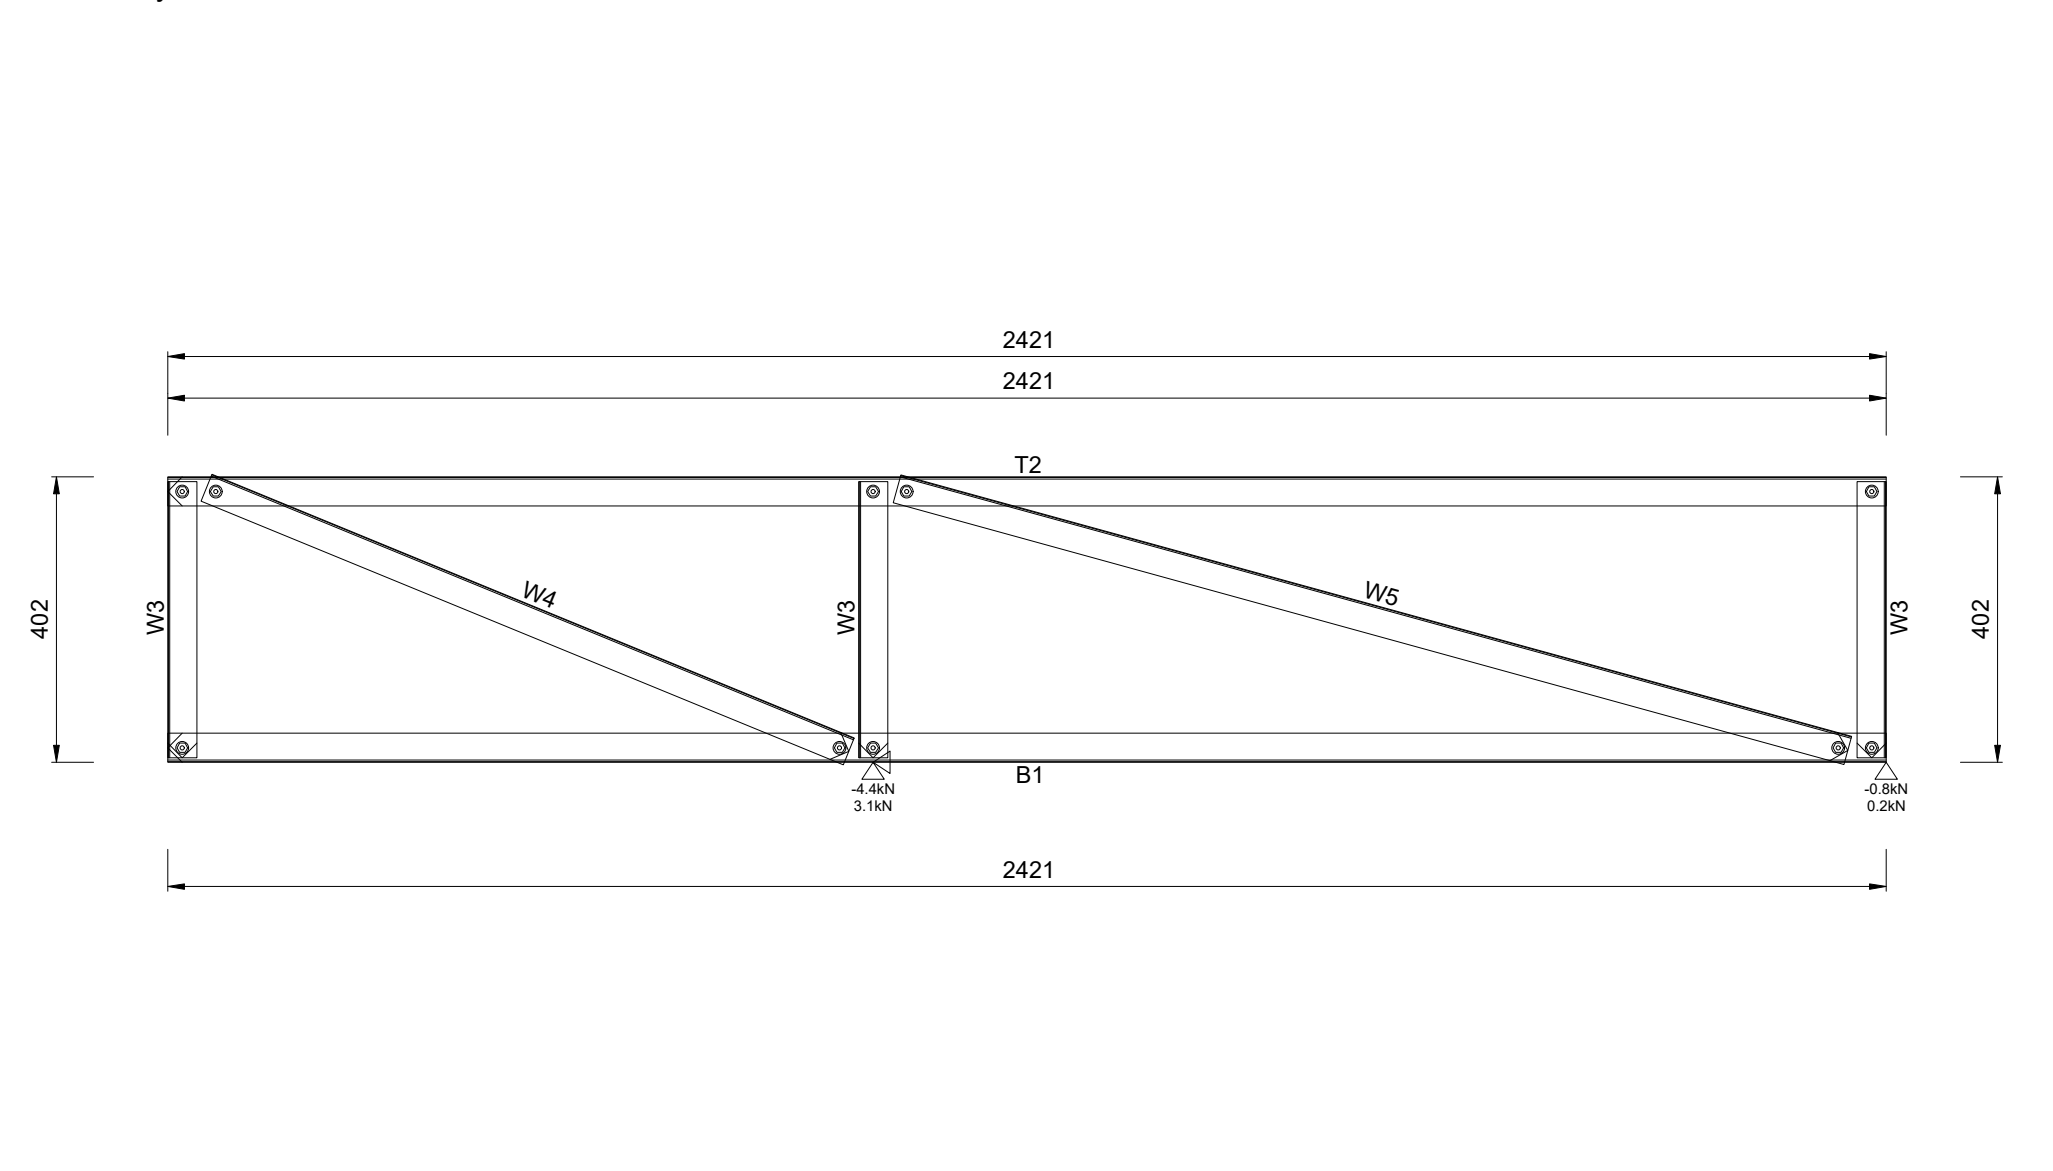


Quantity Required = 1 Mark as HN223 Engineering Status = 83%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Envelope:	410h x 2421w				

B1	75S41-095-550	1	4705	B2	75S41-095-550	1	1850	T3	75S41-095-550	1	4756	T4	75S41-095-550	1	1673	H5	75S41-095-550	1	6276
W6	75S41-095-550	1	1824	W7	75S41-095-550	1	1847	W8	75S41-095-550	1	1334	W9	75S41-095-550	1	1345	W10	75S41-095-550	1	2084
W11	75S41-095-550	1	2104	W12	75S41-095-550	1	1587	W13	75S41-095-550	1	1598	W14	75S41-095-550	1	2327	W15	75S41-095-550	1	2340
W16	75S41-095-550	1	1853	W17	75S41-095-550	1	1864	W18	75S41-095-550	2	2375	W19	75S41-095-550	2	2387	W20	75S41-095-550	1	2119
W21	75S41-095-550	1	2130	W22	75S41-095-550	1	2315	W23	75S41-095-550	1	2352	W24	75S41-095-550	1	2384	W25	75S41-095-550	1	2393
W26	75S41-095-550	1	2415	W27	75S41-095-550	1	2405	W28	75S41-095-550	1	2248	W29	75S41-095-550	1	2242	W30	75S41-095-550	1	2253
W31	75S41-095-550	1	2236	W32	75S41-095-550	1	2124	W33	75S41-095-550	1	2117	W34	75S41-095-550	1	2097	W35	75S41-095-550	1	2102
W36	75S41-095-550	1	2047	W37	75S41-095-550	1	2036	FRAMECAD M6 Screw		266	Working Sheet: Trusses		Assembly Weight		117.3kg				

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

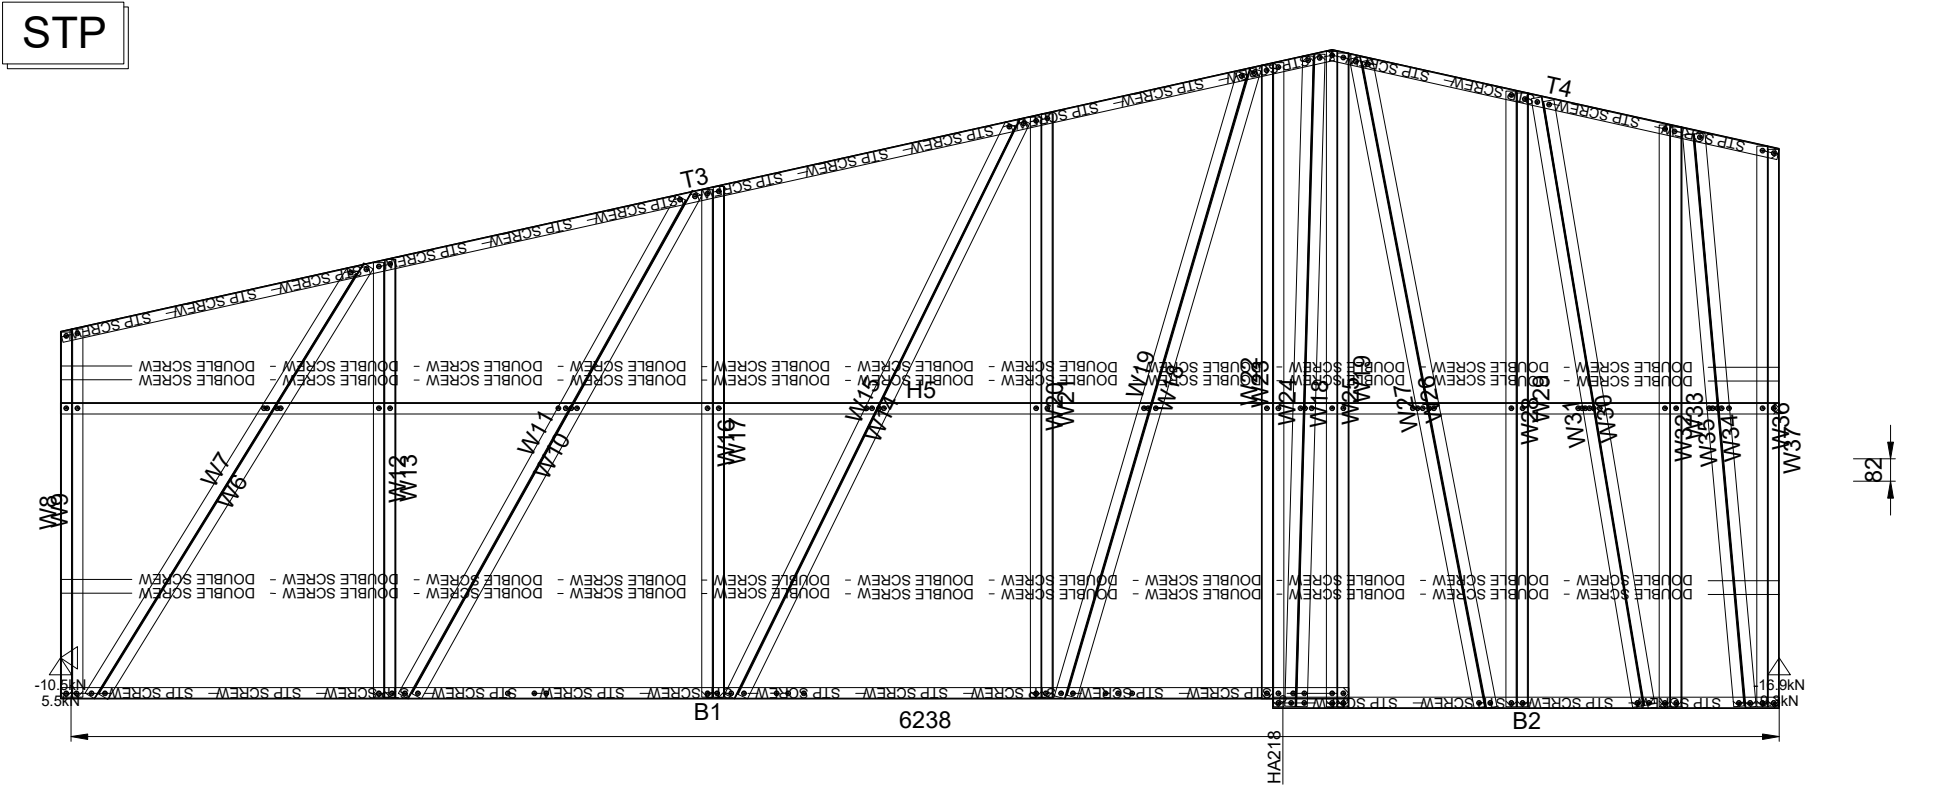

Quantity Required = 1 Mark as GI224 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	2407h x 6276w		


Powered by FRAMECAD Structure® Minimum number of fasteners required is 2 per joint

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	2007h x 7532w		

B1	75S41-095-550	1	6680	T2	75S41-095-550	1	6833	H3	75S41-095-550	1	3697	W4	75S41-095-550	2	337	W5	75S41-095-550	2	438
W6	75S41-095-550	1	447	W7	75S41-095-550	1	449	W8	75S41-095-550	1	526	W9	75S41-095-550	1	535	W10	75S41-095-550	1	538
W11	75S41-095-550	1	550	W12	75S41-095-550	1	897	W13	75S41-095-550	1	907	W14	75S41-095-550	1	740	W15	75S41-095-550	1	756
W16	75S41-095-550	1	983	W17	75S41-095-550	1	990	W18	75S41-095-550	1	923	W19	75S41-095-550	1	935	W20	75S41-095-550	1	1143
W21	75S41-095-550	1	1151	W22	75S41-095-550	1	1107	W23	75S41-095-550	1	1118	W24	75S41-095-550	1	1293	W25	75S41-095-550	2	1302
W26	75S41-095-550	1	1290	W27	75S41-095-550	1	1633	W28	75S41-095-550	1	1641	W29	75S41-095-550	1	1548	W30	75S41-095-550	1	1559
W31	75S41-095-550	1	1838	W32	75S41-095-550	1	1846	W33	75S41-095-550	1	1802	W34	75S41-095-550	1	1809	FRAMECAD M6 Screw		180	
Working Sheet: Trusses				Assembly Weight				67.5kg											

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

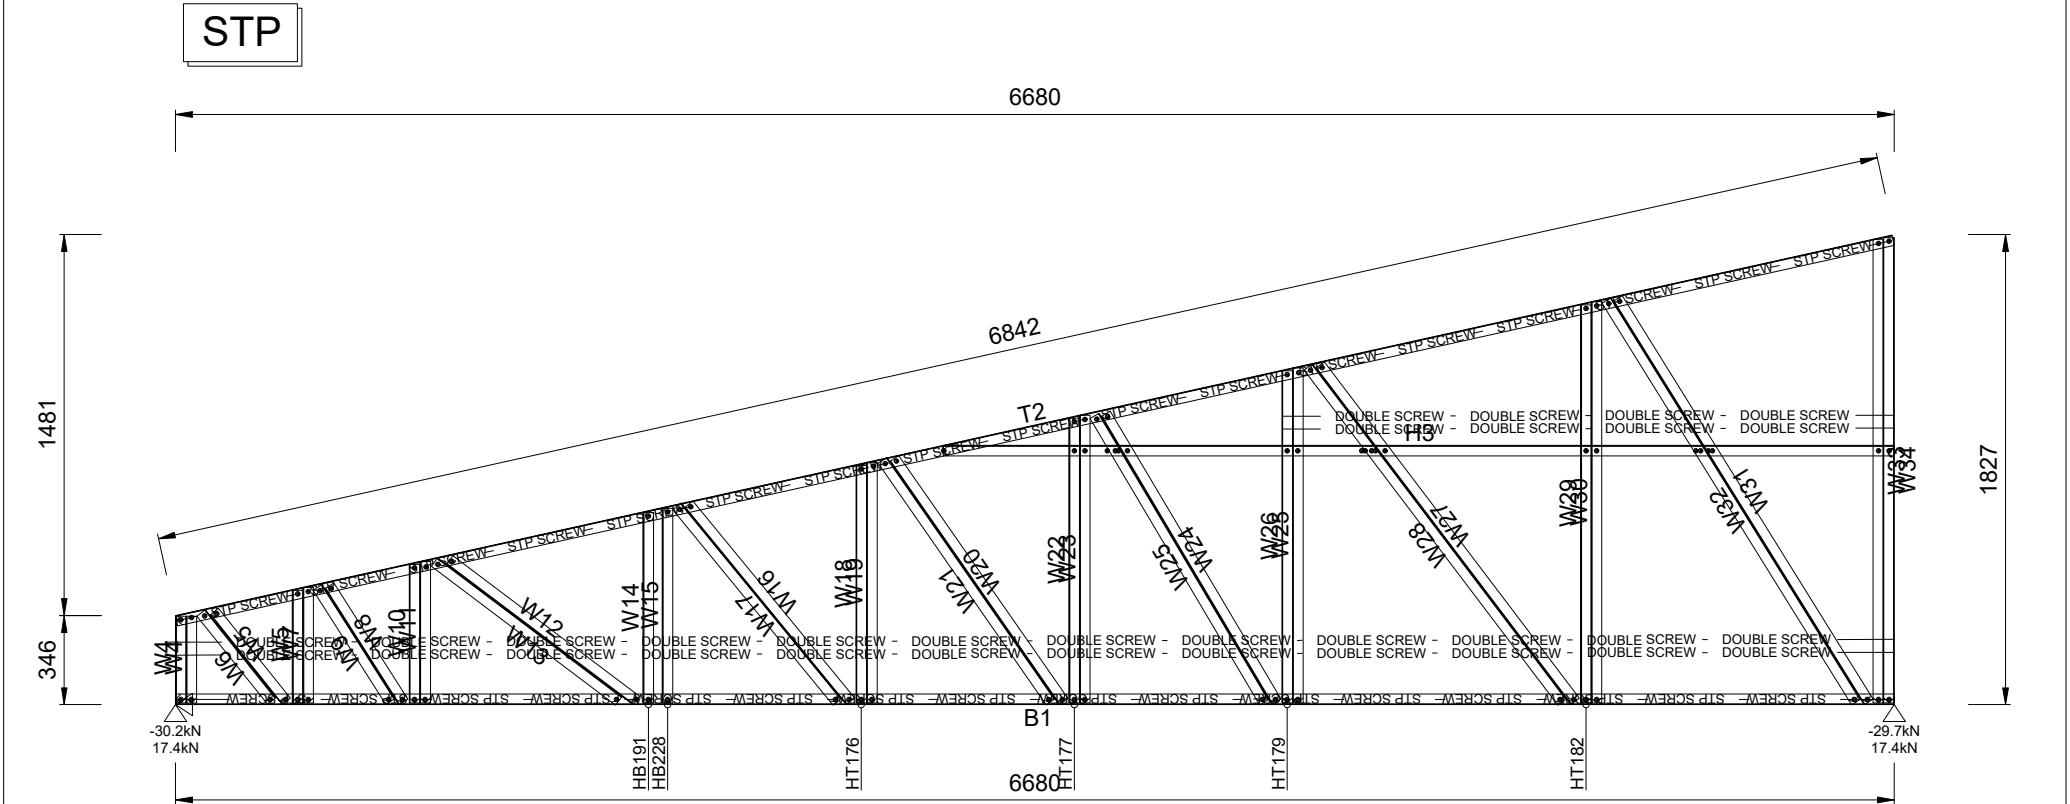


Quantity Required = 1 Mark as HA226 Engineering Status = 450%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	6	Envelope:	1827h x 6680w		

B1	75S41-095-550	1	7934	T2	75S41-095-550	1	1959	H3	75S41-095-550	1	6202	W4	75S41-095-550	1	327	W5	75S41-095-550	1	339
W6	75S41-095-550	1	664	W7	75S41-095-550	1	682	W8	75S41-095-550	1	503	W9	75S41-095-550	1	514	W10	75S41-095-550	2	786
W11	75S41-095-550	1	804	W12	75S41-095-550	2	678	W13	75S41-095-550	1	716	W14	75S41-095-550	1	712	W15	75S41-095-550	20	714
W16	75S41-095-550	3	755	W17	75S41-095-550	1	785	W18	75S41-095-550	1	788	W19	75S41-095-550	1	851	W20	75S41-095-550	1	853
W21	75S41-095-550	1	758	W22	75S41-095-550	2	765	W23	75S41-095-550	2	763	W24	75S41-095-550	1	1008	W25	75S41-095-550	1	997
W26	75S41-095-550	1	1011	W27	75S41-095-550	1	1000	W28	75S41-095-550	1	833	W29	75S41-095-550	1	828	W30	75S41-095-550	1	782
FRAMECAD M6 Screw				Working Sheet: Trusses				Assembly Weight				70.1kg							

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

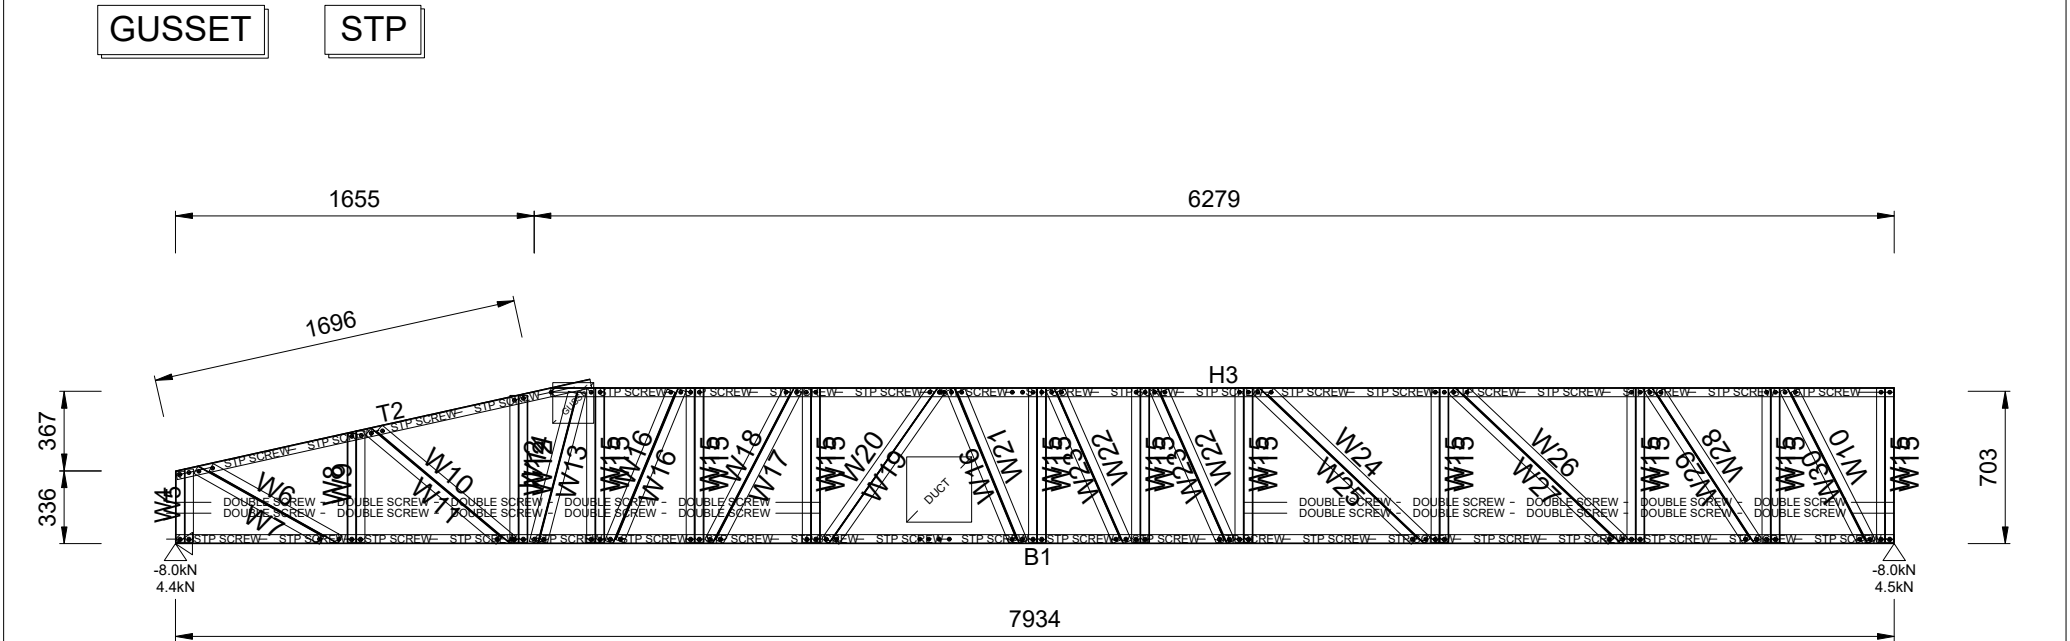


Quantity Required = 1 Mark as HB227 Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	763h x 7934w		

B1	75S41-095-550	1	7816	T2	75S41-095-550	1	1918	H3	75S41-095-550	1	6124	W4	75S41-095-550	2	338	W5	75S41-095-550	1	653
W6	75S41-095-550	1	669	W7	75S41-095-550	2	507	W8	75S41-095-550	2	753	W9	75S41-095-550	1	762	W10	75S41-095-550	2	678
W11	75S41-095-550	1	726	W12	75S41-095-550	1	720	W13	75S41-095-550	20	707	W14	75S41-095-550	2	942	W15	75S41-095-550	2	952
W16	75S41-095-550	1	943	W17	75S41-095-550	1	953	W18	75S41-095-550	1	813	W19	75S41-095-550	1	808	W20	75S41-095-550	2	811
W21	75S41-095-550	2	806	W22	75S41-095-550	1	810	W23	75S41-095-550	1	805	W24	75S41-095-550	1	834	W25	75S41-095-550	1	828
W26	75S41-095-550	1	756	FRAMECAD M6 Screw			206	Working Sheet: Trusses				Assembly Weight			67.9kg				

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

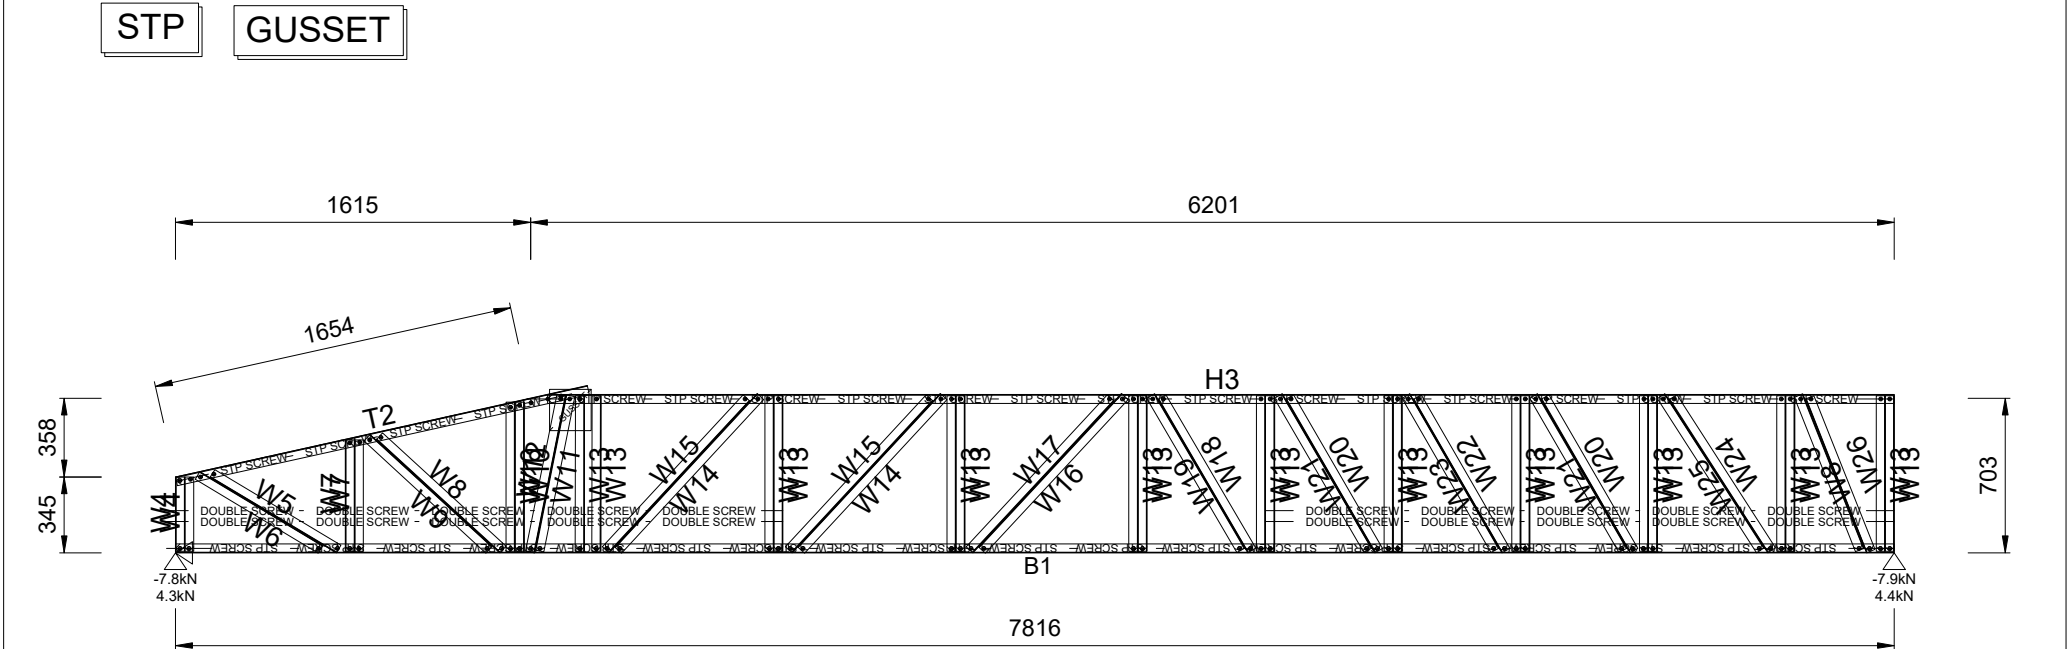


Quantity Required = 1 Mark as HB228 Engineering Status = 111%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	762h x 7816w		

B1	75S41-095-550	1	5834	T2	75S41-095-550	1	1174	H3	75S41-095-550	1	4868	W4	75S41-095-550	1	754	W5	75S41-095-550	1	908
W6	75S41-095-550	1	981	W7	75S41-095-550	1	882	W8	75S41-095-550	1	958	W9	75S41-095-550	1	1234	W10	75S41-095-550	5	964
W11	75S41-095-550	2	1477	W12	75S41-095-550	1	1269	W13	75S41-095-550	1	1148	FRAMECAD M6 Screw		62	Working Sheet: Trusses				
Assembly Weight		35.8kg																	


Powered by FRAMECAD Structure ®
 Minimum number of fasteners required is 2 per joint

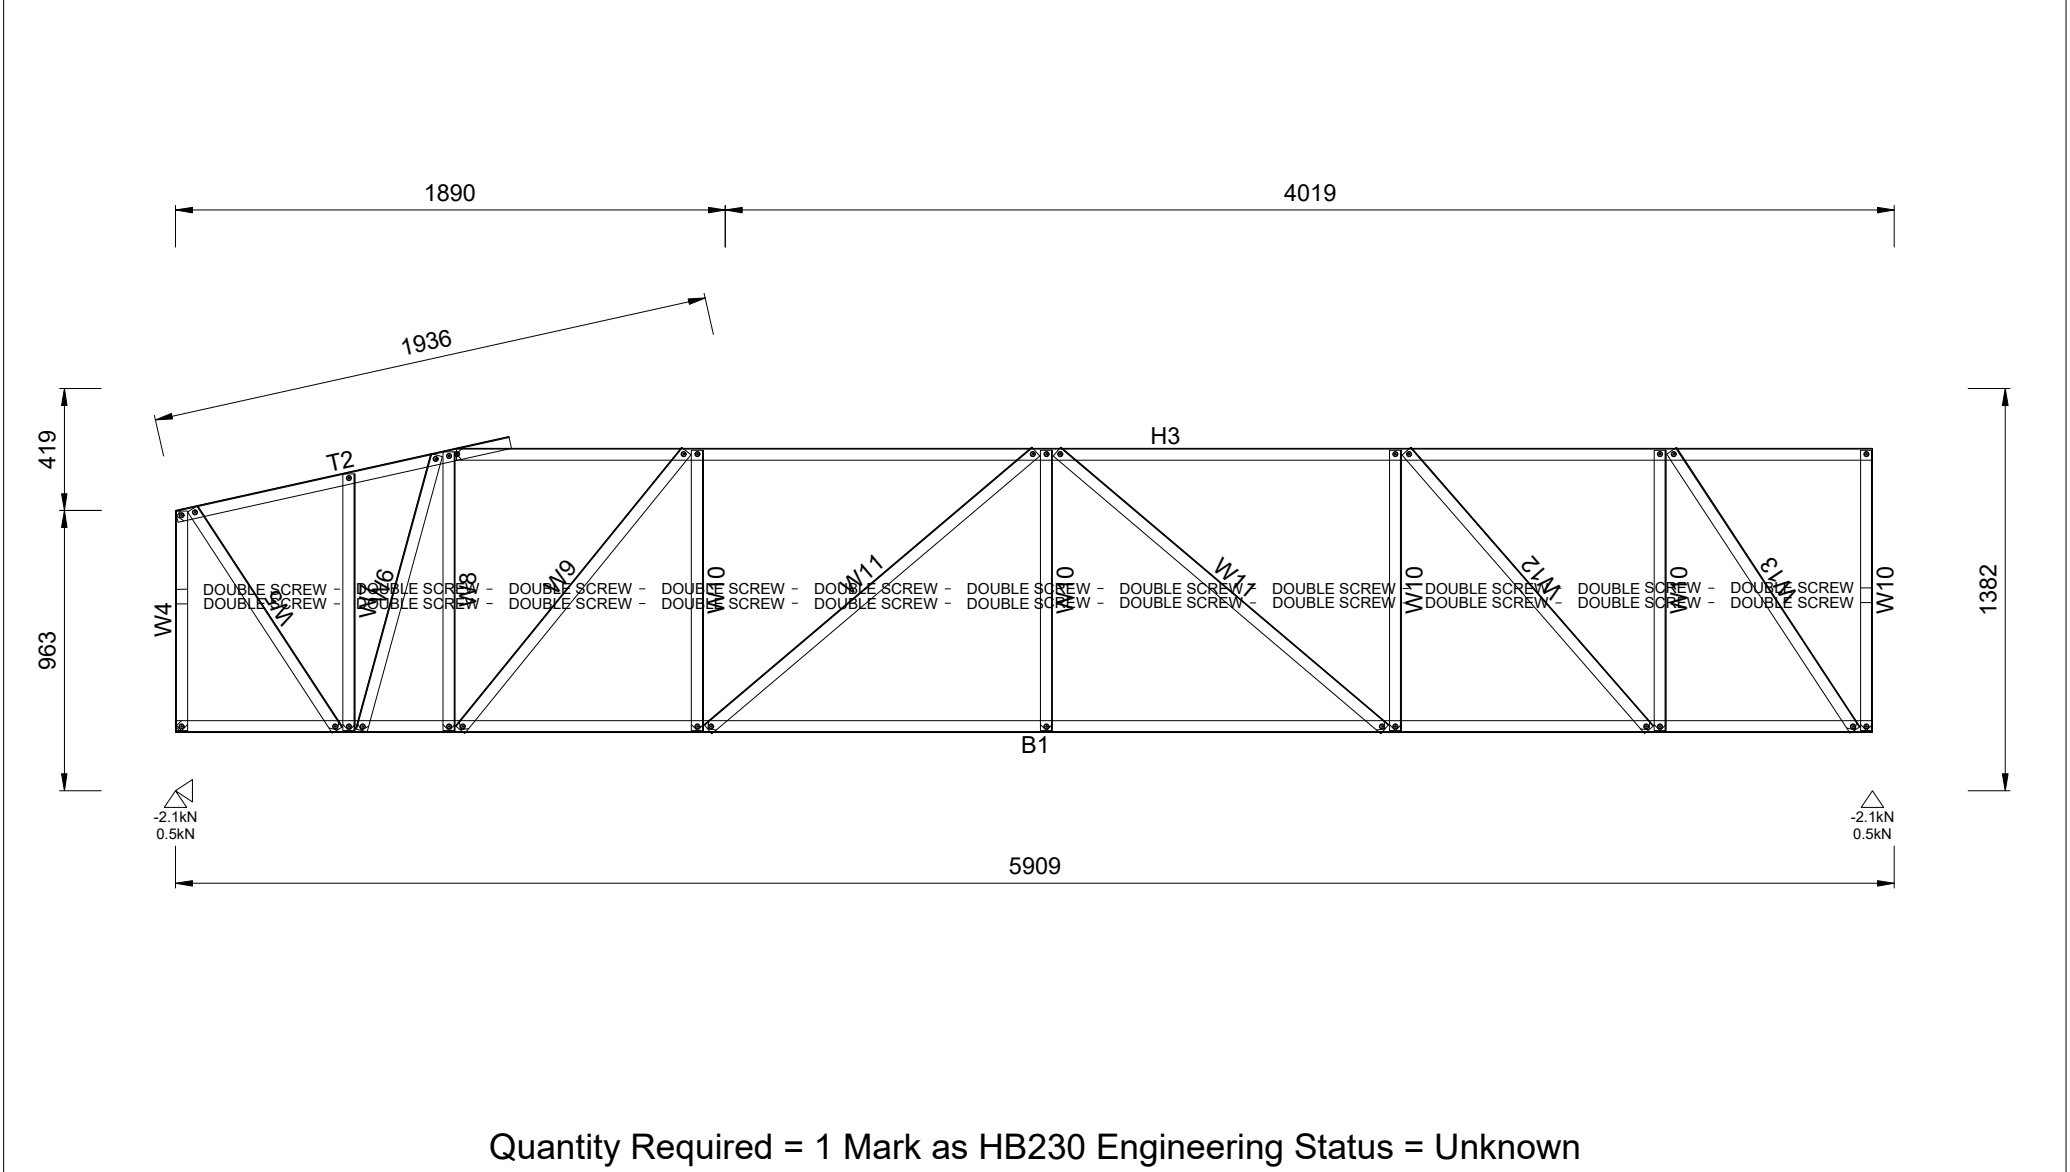

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.5	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	5	Envelope:	1021h x 5834w		

B1 75S41-095-550 FRAMECAD 10g-16mm Flathead	1 2325 2	T2 75S41-095-550 FRAMECAD M6 Screw	1 2325 20	W3 75S41-095-550 Working Sheet: Trusses	3 1355	W4 75S41-095-550 Assembly Weight	2 1719 15.7kg
--	-------------	---------------------------------------	--------------	--	--------	-------------------------------------	------------------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

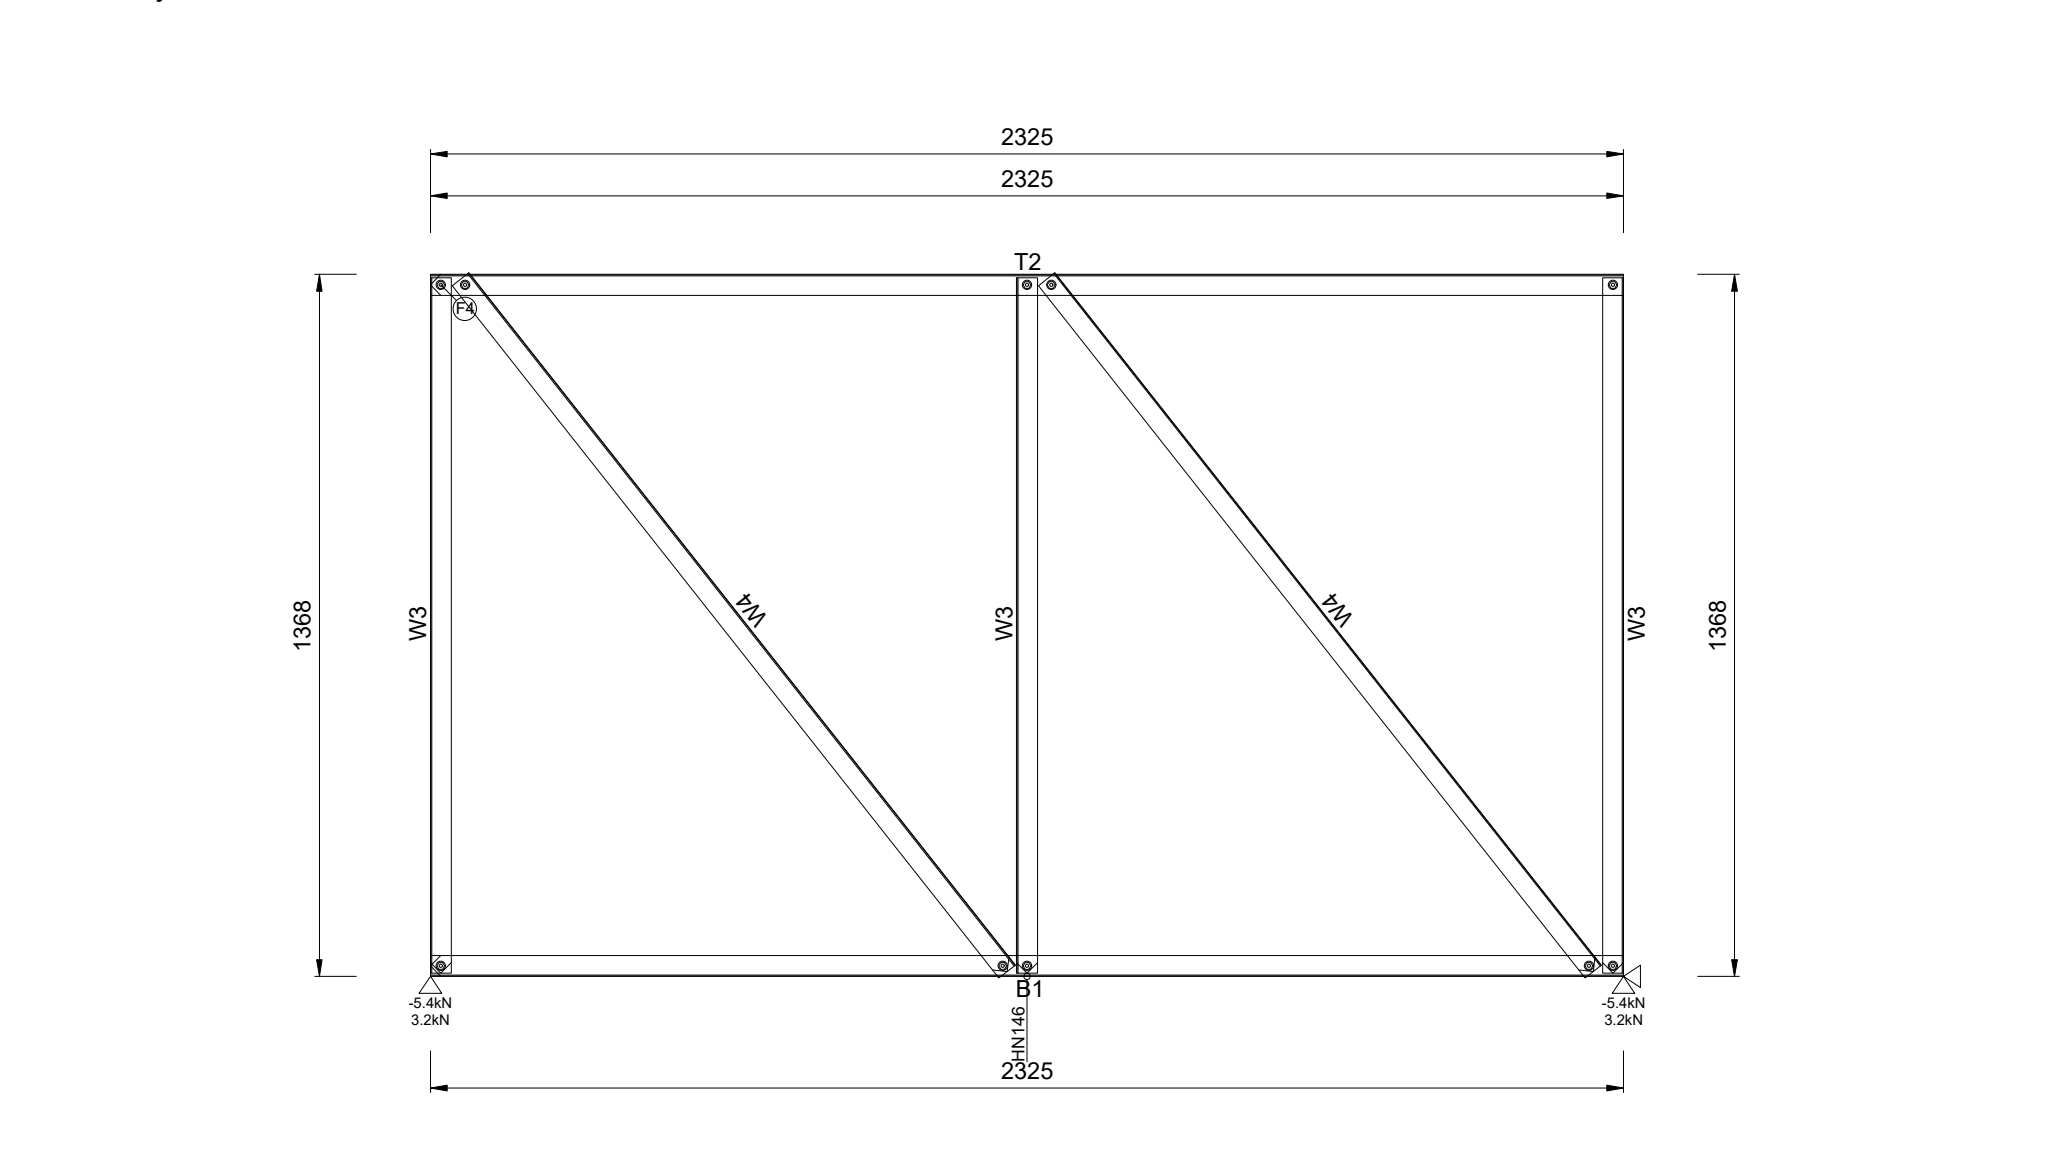


Quantity Required = 1 Mark as HA231 Engineering Status = 84%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	1374h x 2325w		

B1 75S41-095-550 FRAMECAD 10g-16mm Flathead	1 2325 2	T2 75S41-095-550 FRAMECAD M6 Screw	1 2325 20	W3 75S41-095-550 Working Sheet: Trusses	3 1083	W4 75S41-095-550 Assembly Weight	2 1515 14.1kg
--	-------------	---------------------------------------	--------------	--	--------	-------------------------------------	------------------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

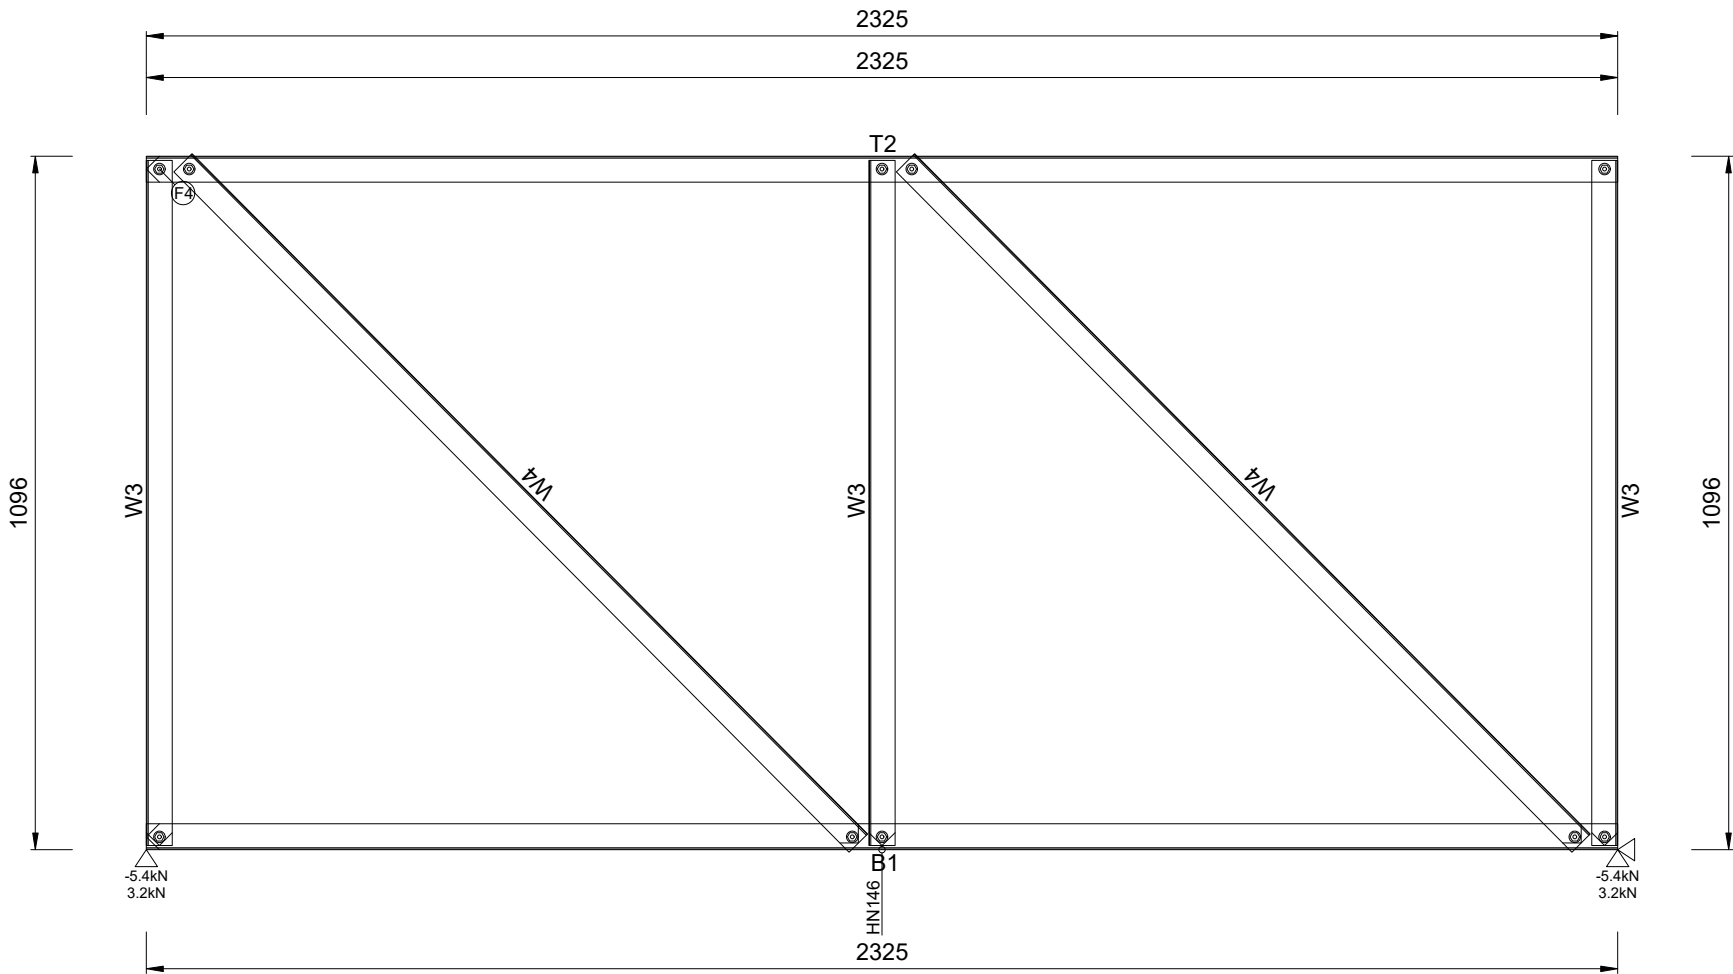


Quantity Required = 1 Mark as HA232 Engineering Status = 84%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	1104h x 2325w		

B1 75S41-095-550	1	2325	T2 75S41-095-550	1	2372	W3 75S41-095-550	1	794	W4 75S41-095-550	1	1333	W5 75S41-095-550	1	1047
W6 75S41-095-550	1	1498	W7 75S41-095-550	1	1300	FRAMECAD M6 Screw	20		Working Sheet: Trusses			Assembly Weight		13.8kg

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

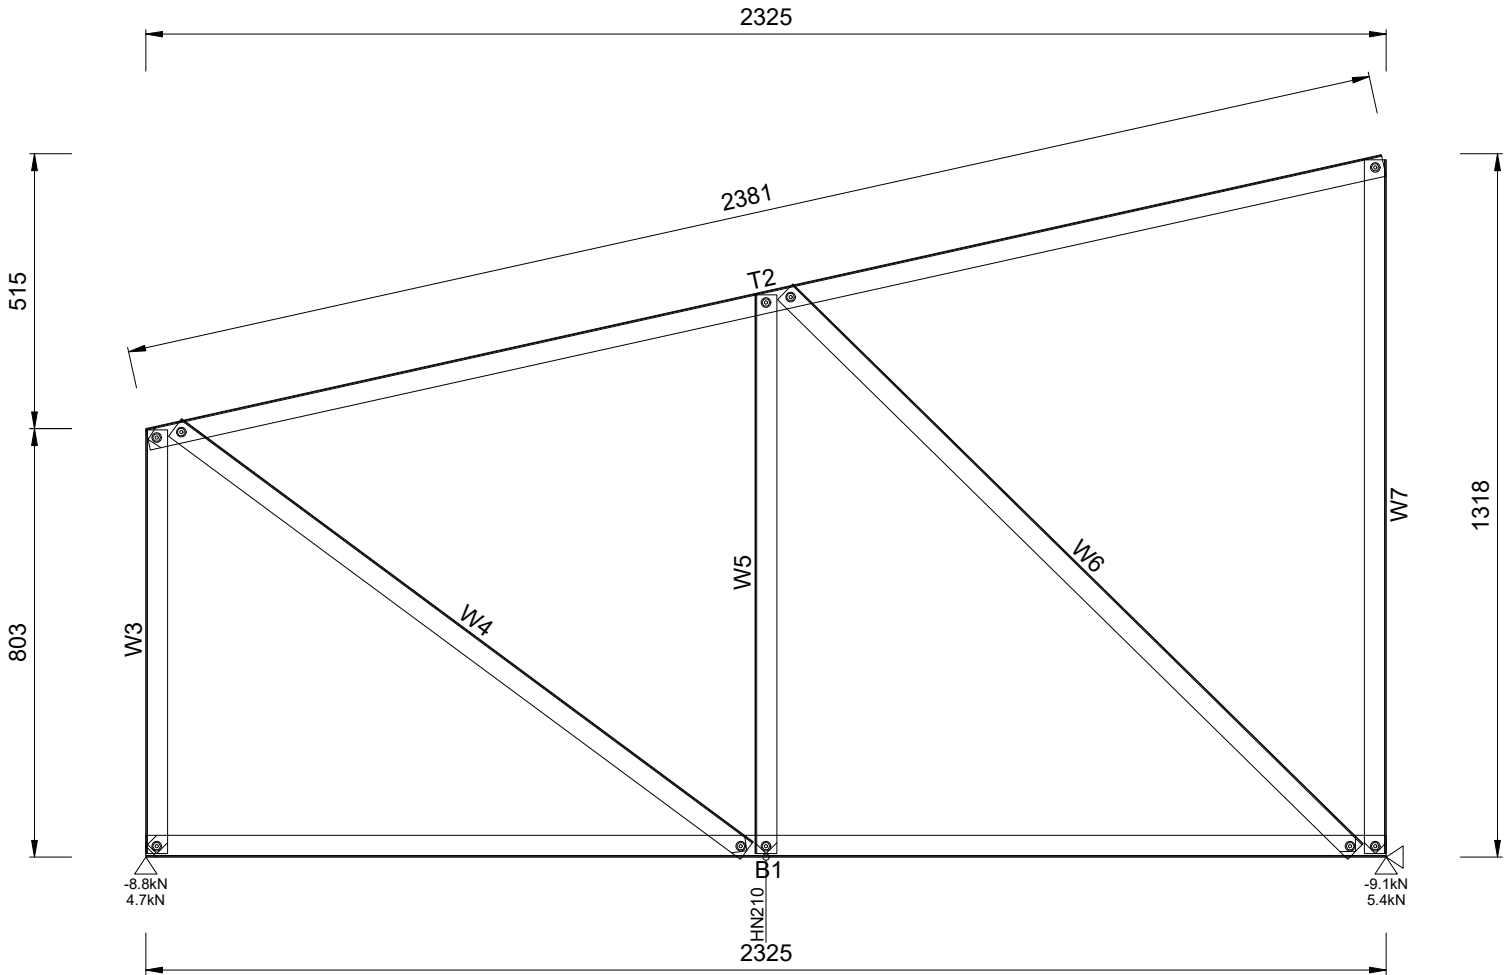


Quantity Required = 1 Mark as HA233 Engineering Status = 117%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	1321h x 2325w		

B1 75S41-095-550 FRAMECAD 10g-16mm Flathead	1 2069 2	T2 75S41-095-550 FRAMECAD M6 Screw	1 2069 20	W3 75S41-095-550 Working Sheet: Trusses	3 1319	W4 75S41-095-550 Assembly Weight	2 1613 14.6kg
--	-------------	---------------------------------------	--------------	--	--------	-------------------------------------	------------------

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

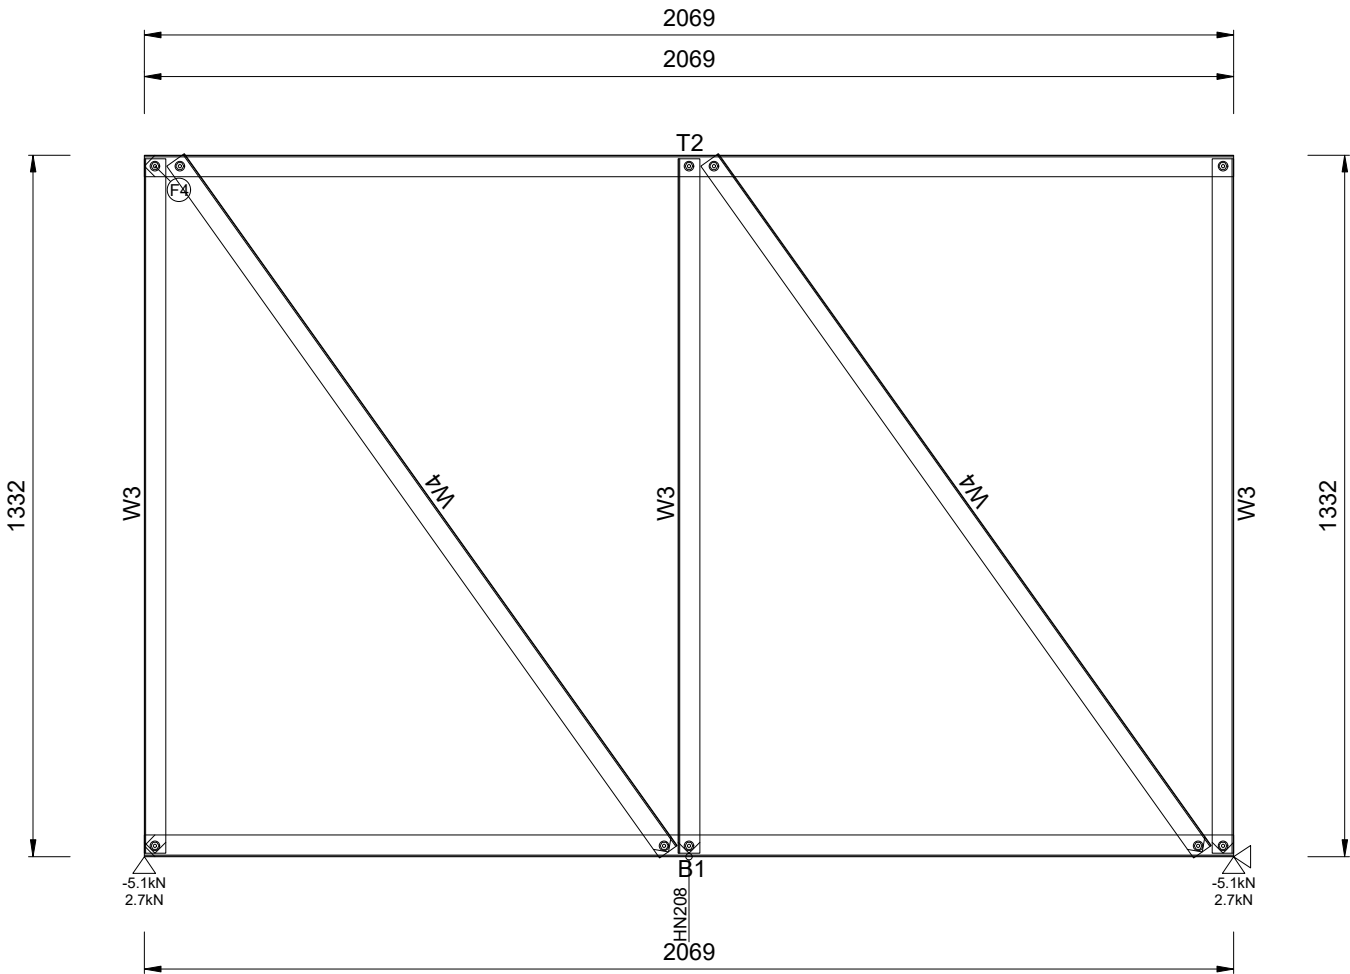

Quantity Required = 1 Mark as HA234 Engineering Status = 80%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	0.000	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	1338h x 2069w		


Powered by FRAMECAD Structure® Minimum number of fasteners required is 2 per joint



Dwg: 26110-LGS-16-020 [B] ZONE 16 - Structure File View 134 of 135 Client: Arcare Lynbrook Job No: 26110

B1 75S41-095-550	1 2325	T2 75S41-095-550	1 2372	W3 75S41-095-550	1 794	W4 75S41-095-550	1 1333	W5 75S41-095-550	1 1047
W6 75S41-095-550	1 1498	W7 75S41-095-550	1 1300	FRAMECAD M6 Screw	20	Working Sheet: Trusses		Assembly Weight	13.8kg

Powered by FRAMECAD Structure ® Minimum number of fasteners required is 2 per joint

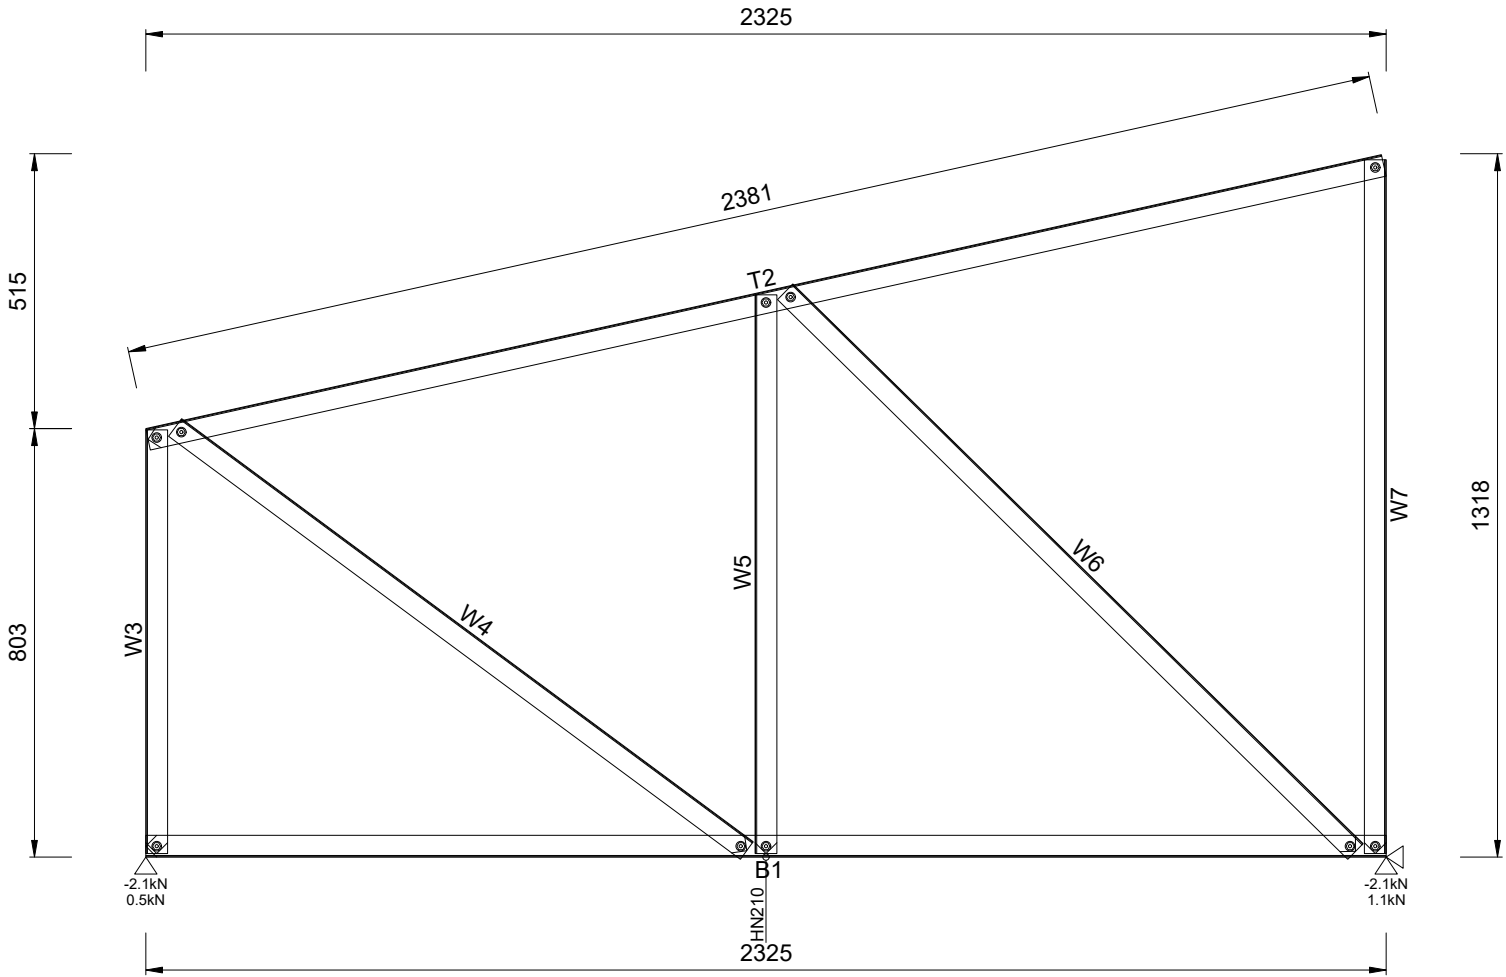

Quantity Required = 1 Mark as HA236 Engineering Status = 73%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N3
Truss Type:	In-plane Truss	Truss Pitch:	12.500	Truss Spacing:	1200	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.40
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	1	Envelope:	1321h x 2325w		