

Noise studies with Crab Cavities in the SPS for
the HL-LHC project



Thesis submitted in accordance with the requirements of the
University of Liverpool for the degree of Doctor in Philosophy

by

Natalia Triantafyllou

Day Month Year

Abstract

Acknowledgments

List of Figures

4.1	Cut of the CC cryomodule [7].	7
4.2	Installation of the cryomodule in the SPS-LSS6 zone [8].	7
4.3	Diagram of the SPS HT monitor [11].	9
4.4	Example Δ and Σ signals from the HT monitor with respect to the longitudinal position within the bunch over several SPS revolutions, after the basic post processing (Ref. [11]) but before the baseline correction. The different colors indicate the signals from different turns.	10
4.5	2D representation of example Δ and Σ signals with respect to the longitudinal position within the bunch obtained from the HT monitor over several SPS revolutions.	11
4.6	HT monitor baseline correction for the SPS CC tests.	12
4.7	HT acquisitions before and after the synchronisation of the SPS main RF with the CC.	12
4.8	Intra-bunch offset from the CC kick expressed in mm after the removal of the baseline.	13
4.9	CC voltage calibration from the HT monitor.	14
4.10	Illustration of the crabbing from the HT monitor signal.	15
4.11	Sketch of the SPS rotational wire scanners [17]	16
4.12	Vertical beam profile obtained from the BWS.41677.V instrument. The measured data points (light blue) are fitted with a four parameter Gaussian (orange) to obtain the beam size. The calculated emittance is also shown.	16

List of Tables

4.1	Main machine and beam parameters for the emittance growth studies with CCs in SPS in 2018	6
4.2	Crab cavities parameters for the emittance growth studies with CCs in SPS in 2018	8
4.3	Parameters for computing the CC voltage from the example HT monitor measurements discussed in this chapter	14

List of Symbols

E_b	Energy
f_{rev}	Revolution frequency
V_{RF}	Main RF voltage
f_{RF}	Main RF frequency
CC	Crab Cavity
V_{CC}	CC voltage
f_{CC}	CC frequency
ϕ_{CC}	CC phase
Q_x	Horizontal tune
Q_y	Vertical tune
Q_s	Synchrotron tune
ψ_y	Vertical phase advance
β	Relativistic beta
γ	Relativistic gamma (Lorentz factor)
N_b	Bunch intensity i.e. number of particles (here protons)
Q'_x	Horizontal first order chromaticity
Q'_y	Vertical first order chromaticity

Contents

Abstract	iii
Acknowledgments	v
List of figures	vi
List of tables	vii
List of symbols	viii
1 Introduction	1
2 Basics of accelerator beam dynamics	3
3 Theory of Crab Cavity noise induced emittance growth	4
4 Experimental studies 2018: Operational setup and beam instrumentation	5
4.1 Machine and beam configuration	5
4.2 Crab Cavities in the SPS	6
4.2.1 Operational considerations	8
4.3 SPS Head-Tail monitor	9
4.3.1 Post processing in the presence of Crab Cavities	11
4.3.2 Crab Cavity voltage calibration	13
4.4 SPS Wire Scanners	15
4.5 ABWLM and wall current monitor	18
5 Experimental studies 2018: Measurements and analysis	19
5.1 Crab Cavities in the SPS	19
5.2 Experimental procedure	20

0. Contents

5.2.1	Machine and beam configuration	20
5.2.2	Measurement methods	20
5.3	Experimental results	20
5.3.1	Overview	20
5.3.2	Comparison with the theory	20
5.4	Experimental Setup	21
5.4.1	Injected RF noise	21
6	Investigation of the discrepancy	22
7	Simple model of describing the decoherence suppression from impedance	23
8	Application and impact for HL-LHC	24
9	Conclusion	25
A	Appendix Title	26
	Bibliography	29

1 | Introduction

This is the introduction of my PhD thesis.

In 2018, two prototype Crab Cavities (CCs) were installed in the SPS to be tested for the first time with proton beams. A series of dedicated machine development studies was carried out in order to validate their working principle and answer various beam dynamic questions. One of the operational issues that needed to be addressed concerned the expected emittance growth due to noise in their RF system, which is the main subject of this thesis. As mentioned in chapter 3 a theoretical model had already been developed and validated by tracking simulations [1]. As a part of the first experimental campaign with CCs in SPS a dedicated experiment was conducted to benchmark these models with experimental data and confirm the analytical predictions. The objective of this chapter is to provide an overview of the machine setup for the CC experiments and introduce the instruments and methods used for measuring the beam parameters of interest for the emittance growth studies.

2 | Basics of accelerator beam dynamics

For a gaussian beam distribution the normalised beam emittance is defined as:

$$\epsilon_x = \frac{\sigma_x(s)^2 - \delta^2 D_x^2(s)}{\beta_x(s)} \beta \gamma \quad (2.1)$$

where $\sigma_x(s)$ is the beam size, $\beta_x(s)$ is the beta function, $D_x(s)$ is the dispersion fat a specific location s along the accelerator, $\delta = \Delta p / p_0$ is the momentum spread and β, γ the relativistic parameters. Similar expression is valid for the vertical plane, with the difference that there is no dispersion.

3 | Theory of Crab Cavity noise induced emittance growth

4 | Experimental studies 2018: Operational setup and beam instrumentation

The theoretical model for the transverse emittance growth caused by amplitude and phase noise in a CC was introduced in Chapter 3. In 2018, a dedicated experiment was conducted in the SPS to benchmark these models with experimental data and confirm the analytical predictions. Here, the machine setup, the beam configuration and the instrumentation used for the emittance growth studies with CCs in the SPS are presented.

The chapter is structured as follows: Section 4.1 describes the experimental machine configuration. Thereafter, Section 4.2 elaborates on the installation and the operation of the CCs in the SPS. In Sections 4.3- 4.5 the instruments used for the parameters of interest (see Chapter 3, Eq....) i.e. CC voltage, emittance and bunch length are discussed, including the post processing methods where it was performed by the author.

4.1 Machine and beam configuration

For studying the long-term emittance evolution special cycles were set up in the SPS which are called "coast" beam cycles with bunched beams. During them, bunches circulate in the machine at constant energy for long periods, from a few minutes up to several hours, similarly to the HL-LHC case.

To make sure that the SPS machine can be used as a testbed for the emittance growth studies with CCs an extensive preparatory campaign was carried out over the years 2012-2017 [2, 3, 4]. The primary concern was the natural emittance growth

4. Experimental studies 2018: Operational setup and beam instrumentation

that was observed in the machine (without noise), as it needed to be well characterized and be kept sufficiently small in order to distinguish and understand the contribution from the CC noise. From these studies, it was concluded that the optimal coast setup should be at 270 GeV, with low chromaticity and bunches of low intensity. No measurements of chromaticity are available from the day of the experiment, however it was ensured that it was corrected to small positive values. Furthermore, as the natural emittance growth was found to be a single bunch effect four bunches were used to reduce the statistical uncertainty of the measurements.

During the measurements the Landau octupoles were switched off. It should be noted, though, that a residual non-linearity was present in the machine mainly due to multipole components in the dipole magnets [5, 6]. Last, the transverse feedback system was switched off. The main machine and beam parameters of the experiment of 2018 are listed in Table 4.1.

Table 4.1: Main machine and beam parameters for the emittance growth studies with CCs in SPS in 2018

Parameters	Units	Values
E_b	[GeV]	270
f_{rev}	[kHz]	43.375
N_b	[p/b]	3×10^{10}
bunches	[-]	4
bunch spacing	[ns]	524
f_{RF} / V_{RF}	[MHz] / [MV]	200 / 3.8
Q_x / Q_y	[-]	26.13 / 26.18
Q'_x / Q'_y	[-]	$\sim 1.0 / \sim 1.0$
Q_s	[-]	0.0051

4.2 Crab Cavities in the SPS

For the SPS tests two prototype CCs of the Double Quarter Wave (DQW) type, CC1 and CC2, were fabricated by CERN and were assembled into the same cryomodule

which is shown in Fig. 4.1 [7]. The cryomodule was installed in the SPS-LSS6 zone, Fig. 4.2, and was placed on a mobile transfer table [8]. The table moved with high precision and without breaking the vacuum the cryomodule in the beamline for the CC tests and out of it for the usual SPS operation. For the noise induced emittance growth studies only CC2 was used. Nevertheless, the parameters for both CCs experiments are shown in Table 4.2 for completeness.

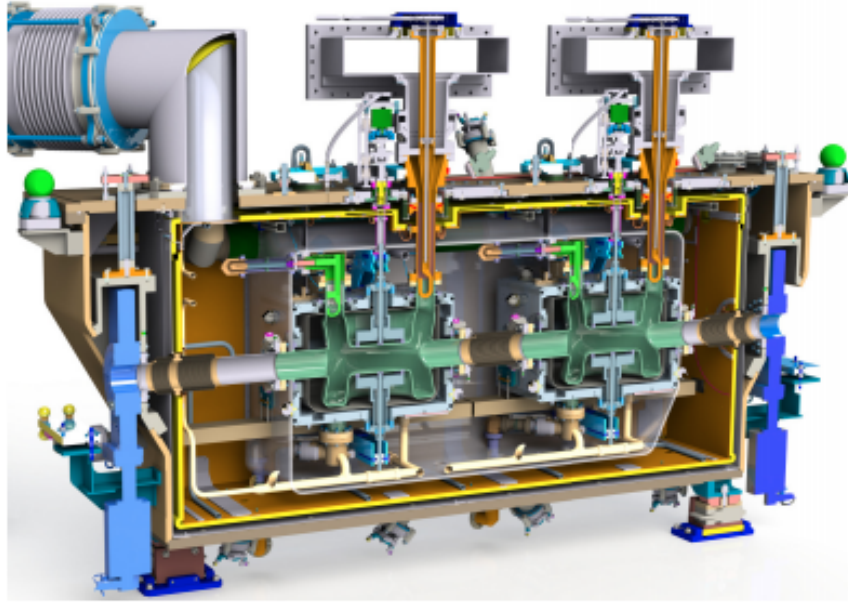


Figure 4.1: Cut of the CC cryomodule [7].

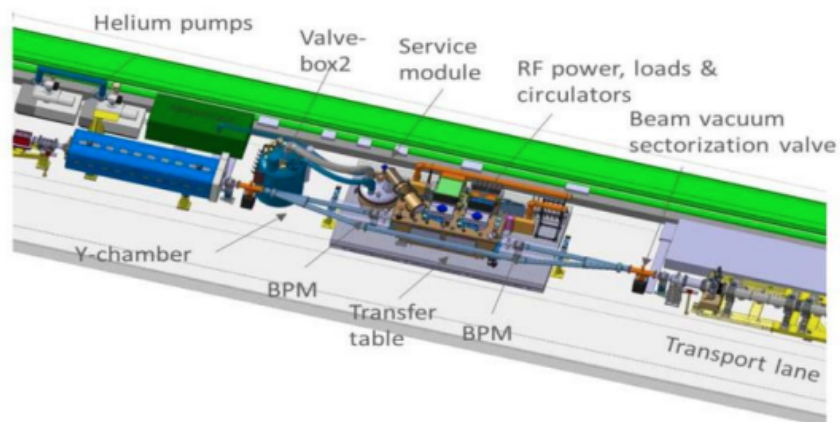


Figure 4.2: Installation of the cryomodule in the SPS-LSS6 zone [8].

4. Experimental studies 2018: Operational setup and beam instrumentation

Table 4.2: Crab cavities parameters for the emittance growth studies with CCs in SPS in 2018

Parameters	Units	Values	
		CC1	CC2
crabbing plane	[-]	vertical	vertical
s-location	[m]	6312.72	6313.32
V_{CC}	[MV]	0	1
f_{CC}	[MHz]	400	400
$\beta_{x,CC} / \beta_{y,CC}$	[m]	29.24 / 76.07	30.31 / 73.82
$\alpha_{x,CC} / \alpha_{y,CC}$	[m]	-0.88 / 1.9	-0.91 / 1.86
$D_{x,CC} / D_{y,CC}$	[m]	-0.48 / 0	-0.5 / 0

4.2.1 Operational considerations

For the beam tests with the CC in the SPS the approach regarding the energy ramp and the adjustment of the phasing with the main RF system needed to be evaluated and they are briefly discussed here.

Energy ramp

SPS receives the proton beam at 26 GeV from the PS. It was observed that if the ramp to higher energies was performed with the CC on, the beam was lost while crossing one of the vertical betatron sidebands due to resonant excitation [9]. Therefore, it was established that the acceleration has to be performed with the CC off and its voltage must be set up only after the energy of interest has been achieved. It is worth noting that this approach will also be used for in the HL-LHC.

Crab Cavity - main RF synchronisation

Another issue of concern was the fact that the CC operate at the fixed frequency of 400 MHz while the SPS main RF system operates at 200 MHz (see Tables 4.1 and 4.2). In order to make sure that the beam will experience the same effect from the CC each turn the SPS main RF has to be re-phased such as it becomes synchronous with the crabbing signal. For the studies at 270 GeV the synchronisation took place

at the end of the ramp to the coast energy and shortly after the cavity was switched on [10].

4.3 SPS Head-Tail monitor

The HT monitor was the main diagnostic device deployed for the calibration of the CC voltage. Additionally, it was used for the measurement and the physical illustration of the crabbing. This made it a very useful tool in the time of the experiments as it provided a direct validation of the effect of the CC kick on the beam. The HT monitor was originally designed for measuring chromaticity and transverse instabilities. Therefore its use as a crabbing diagnostic should be explained here. The methods and procedures described in this section were developed at CERN and they are described here for the completeness of the thesis.

In the first part of this section some general information on the instrument along with example signals will be presented. Subsequently, the post processing of the HT signal in the presence of the CCs. Last, the calibration of the CC voltage from the HT data is described. The experimental data presented in this section were acquired at the SPS injection energy of 26 GeV with only one CC, CC1, at $\phi_{CC} = 0$ for simplicity. That energy option was chosen to provide a better explanation of the methods used as the orbit shift from the CC kick is stronger and thus more visible than in higher energies.

General information

The HT monitor is a high bandwidth version of a standard beam position moni-

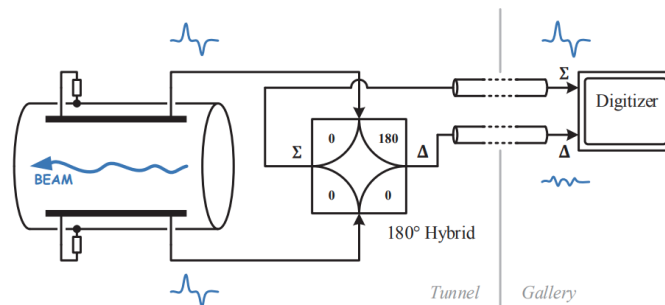


Figure 4.3: Diagram of the SPS HT monitor [11].

tor but it can measure the transverse offset within the bunch. This makes it ideal for the measurement of the intra-bunch offset caused from the CC kick. Its reading consists of the sum Σ and the difference Δ of the electrode signals of a straight stripline coupler (Fig. 4.3) [12, 11] over a defined acquisition period. The Σ signal is the longitudinal line density while the Δ signal corresponds to the intra-bunch offset.

The raw signals from the HT monitor require a specific post processing procedure, which is described in Ref. [11], in order to give useful information. Figure 4.4 shows some example signals obtained from the HT monitor after the basic post processing is applied. Moreover, Fig. 4.5 shows a 2D representation of the HT monitor reading. It is worth noting here that in the specific example a clear periodic oscillation of the vertical intra-bunch offset (vertical Δ) signal is observed. This is a result of the main RF system not being synchronous with the CC frequency.

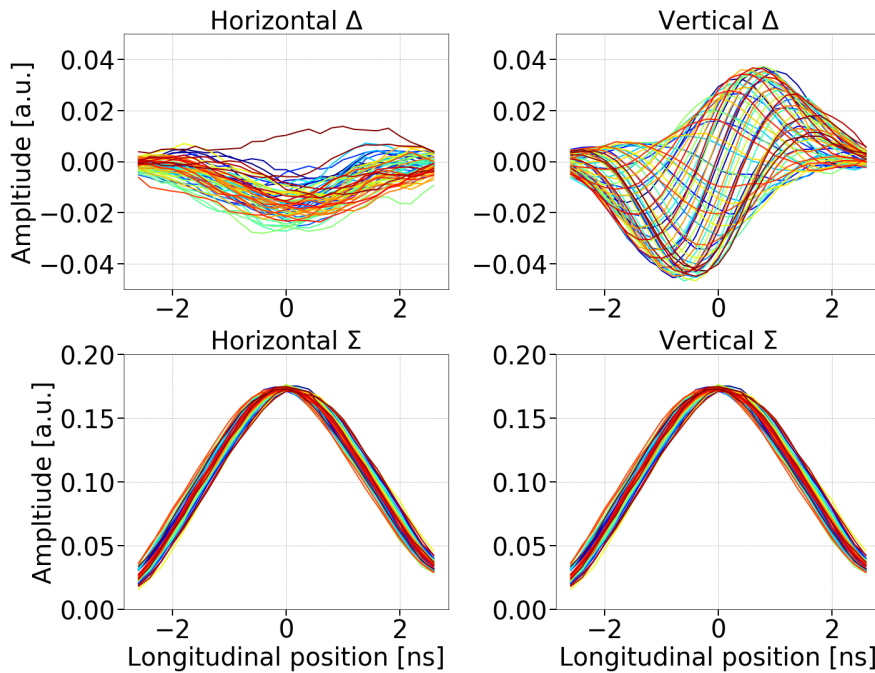


Figure 4.4: Example Δ and Σ signals from the HT monitor with respect to the longitudinal position within the bunch over several SPS revolutions, after the basic post processing (Ref. [11]) but before the baseline correction. The different colors indicate the signals from different turns.

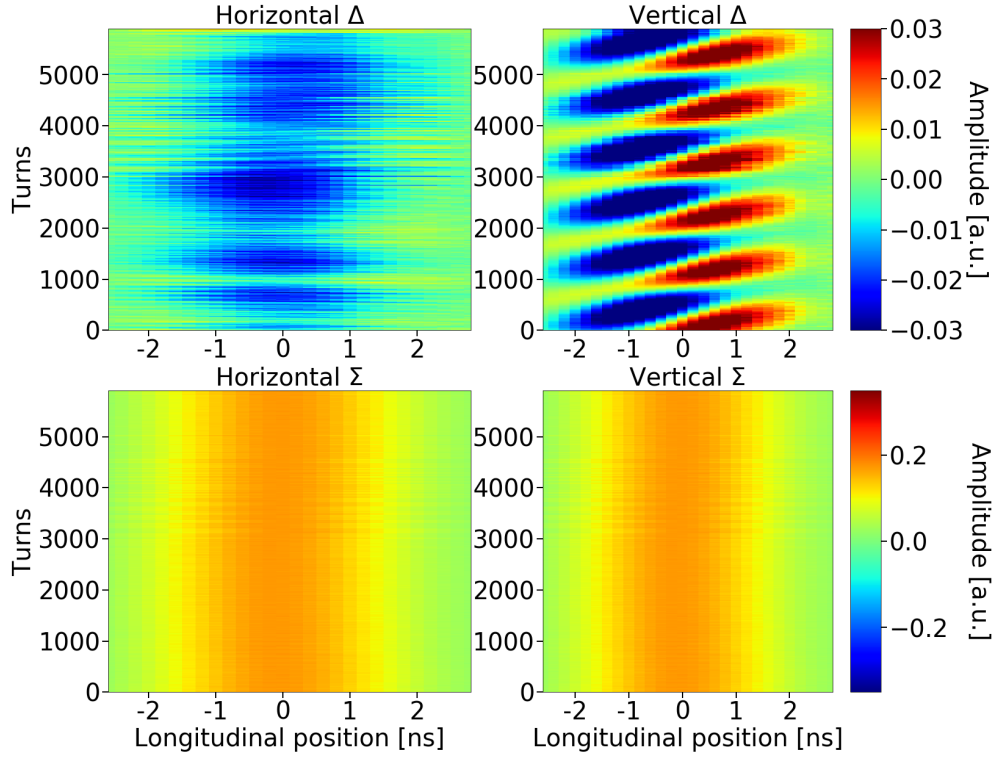


Figure 4.5: 2D representation of example Δ and Σ signals with respect to the longitudinal position within the bunch obtained from the HT monitor over several SPS revolutions.

4.3.1 Post processing in the presence of Crab Cavities

To obtain useful information from the HT monitor signal in the presence of the CCs there are a few steps that differ from the standard post processing procedure and they are described below.

Heat-Tail monitor baseline correction

One issue of concern is the correction of the Δ signal baseline due to orbit offsets and non-linearities of the instrument [11]. During the normal post processing, the correction is achieved by computing the mean of the Δ signals over all turns and then subtracting this static offset from the signal of each turn. However, in the SPS tests, where the CCs are well synchronised with the main RF system (Section 4.2), the crabbing signal is also a static intra-bunch position offset and thus would also be removed with the usual method.

Therefore, for the CC experiments a reference measurement had first to be made

with the CC unsynchronised. The mean of the Δ signal over this reference period was the baseline which then was subtracted from the Δ signals acquired after the synchronisation (Fig 4.6). The datasets before and after synchronisation are easily distinguishable in the 2D HT monitor reading as displayed in Fig. 4.7

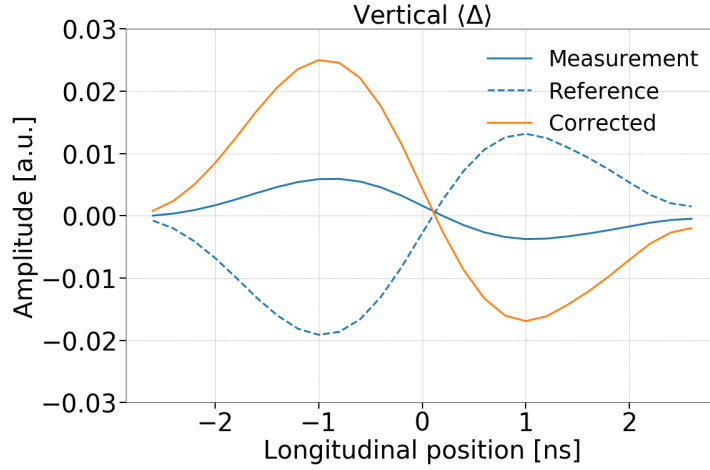


Figure 4.6: HT monitor baseline correction for the SPS CC tests.

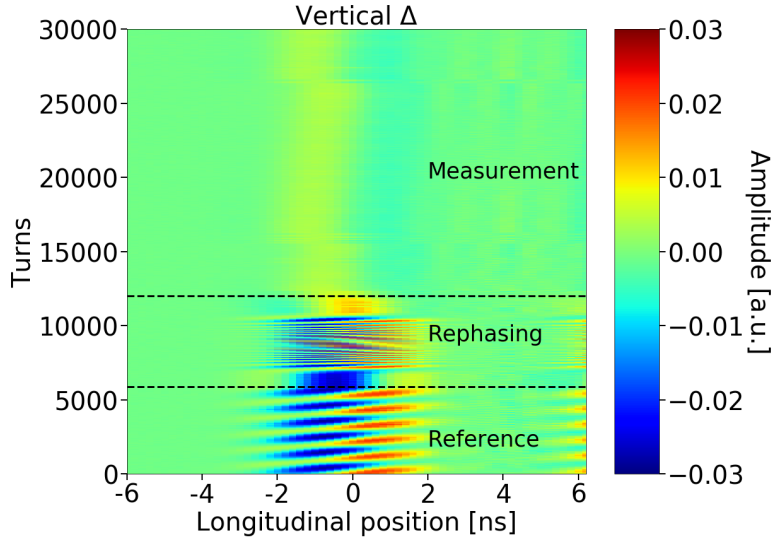


Figure 4.7: HT acquisitions before and after the synchronisation of the SPS main RF with the CC.

Headtail monitor calibration

The last step, to make the HT acquisitions meaningful is to convert the measured intra bunch offset, $\langle\Delta\rangle$, from arbitrary units to mm. The scaling is achieved by division with the $\langle\Sigma\rangle$ signal and with a normalisation factor which is provided by the calibration of the HT monitor [13]. The normalisation factor for the SPS was mea-

sured at 0.1052 in 2018 [14]. Figure 4.8 shows the intra bunch offset from the CC kick in mm and after the baseline correction.

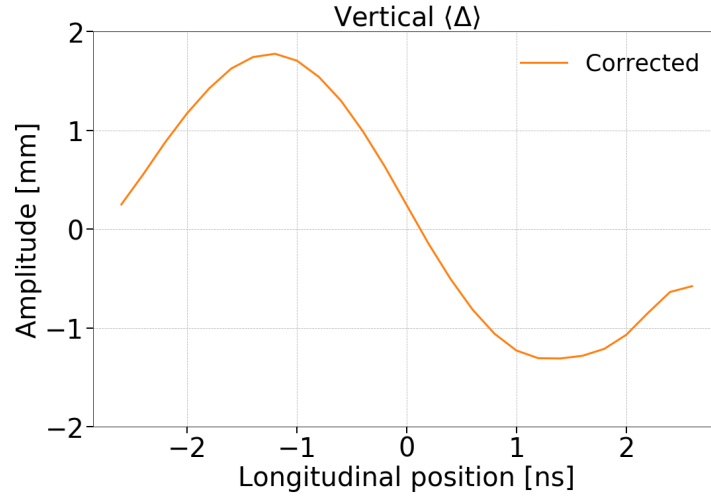


Figure 4.8: Intra-bunch offset from the CC kick expressed in mm after the removal of the baseline.

4.3.2 Crab Cavity voltage calibration

This section discusses the beam based measurement of the CC voltage from the HT monitor signal. The calibration was performed by calculating the kick required to reconstruct the measured intra-bunch offset using Eq. (4.1). Equation (4.1), which is obtained from Chaos' Eq. (1) from chapter 4.7.1 in Ref. [15], gives the vertical orbit shift (in meters) from the CC kick, θ , at the HT monitor location as follows:

$$\Delta y_{HT} = \frac{\sqrt{\beta_{y,HT}}}{2 \sin(\pi Q_y)} \theta \sqrt{\beta_{y,CC} \cos(\pi Q_y - |\psi_{y,HT} - \psi_{y,CC}|)}, \quad (4.1)$$

where β_y is the beta function, Q_y is the tune, and ψ_y is the phase advance in tune units. The same applies for the horizontal plane. The indices HT and CC indicate the optic parameters at the location of the HT monitor and CC respectively.

The deflection from the CC is written as $\theta = -\frac{qV(t)}{E_b}$, where q is the charge of the particle, E_b the beam energy and $V_{CC}(t) = V_{CC} \sin(2\pi f_{CC}t + \phi_{CC})$ is the voltage that a particle experiences while passing through the CC. Computing the maximum of $V_{CC}(t)$ gives the cavity voltage, V_{CC} .

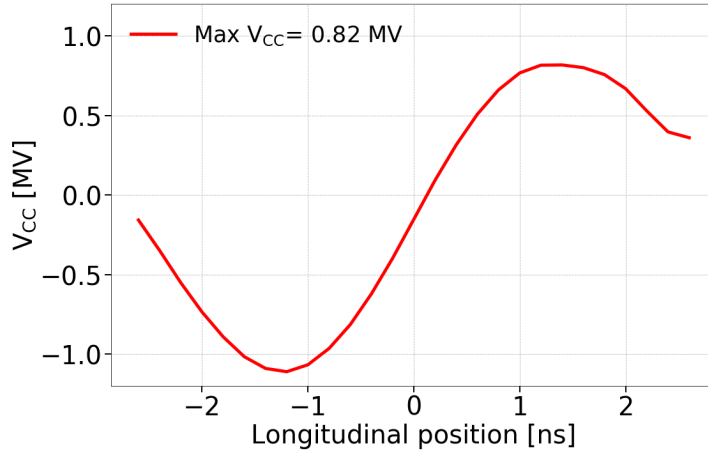


Figure 4.9: CC voltage calibration from the HT monitor.

It should be noted here, that the measured intra-bunch offset, Δy_{HT} , is inserted in Eq. (4.1) after removing the baseline and converting it in mm as discussed in Section 4.3.1. Figure 4.9 illustrates the cavity voltage computed from the HT signals shown already in this section. The corresponding beam and optic parameters are listed in Table 4.3

Table 4.3: Parameters for computing the CC voltage from the example HT monitor measurements discussed in this chapter

Parameters	Units	Values
$\beta_{y,HT} / \beta_{y,CC1}$	[m]	49.19 / 76.07
$\psi_{y,HT} / \psi_{y,CC1}$	[-]	15.68 / 23.9
Q_y	[-]	26.13
E_b	[GeV]	26

Reconstruction of crabbing

The reconstruction of the crabbing from the HT monitor measurements and the physical illustration of it are presented here. This technique was developed at CERN in 2018 and it was extensively used throughout the experimental campaign with CCs as alongside the calibrated voltage it gives a straightforward estimation of the applied CC kick, as illustrated in Fig. 4.10.

To obtain this physical illustration of the effect of the CC kick on the beam one needs

to modulate the measured longitudinal profile, $\langle \Sigma \rangle$, with the measured intra-bunch offset (e.g. Fig. 4.8). For the transverse plane a gaussian distribution is considered with σ obtained from the wire scanner (addressed in more details in the following section). The color code is normalised to the maximum intensity within the bunch.

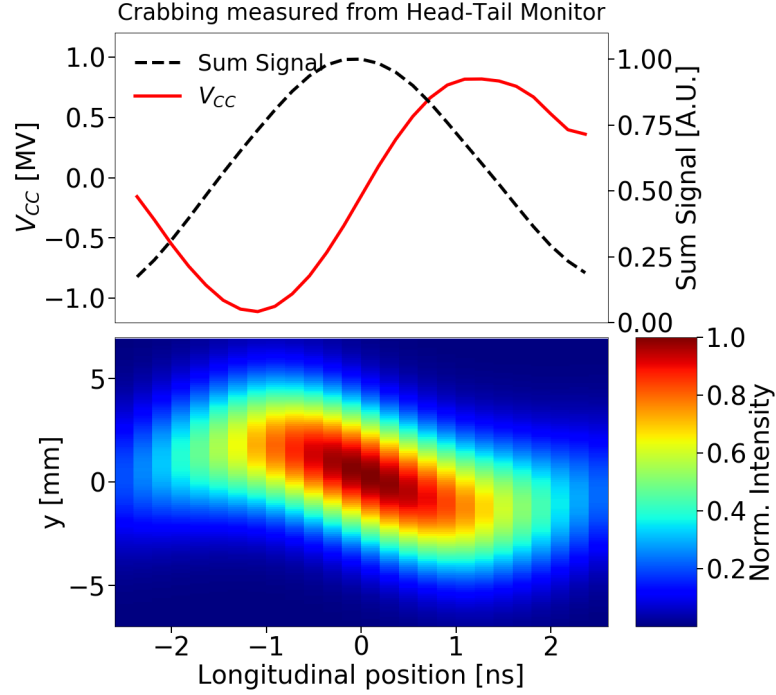


Figure 4.10: Illustration of the crabbing from the HT monitor signal.

4.4 SPS Wire Scanners

The SPS is equipped with beam wire scanners (WS) to measure the transverse beam emittance. The SPS WS system is described in detail in Ref. [16, 17]. For the SPS tests, the emittance was measured with rotational WS both for the horizontal and vertical plane (BWS.51995.H and BWS.41677.V respectively).

The working principle is shown in Fig. 4.11. A thin wire rapidly moves across the proton beam and a shower of secondary particles is generated. Their signal is then detected by a system of scintillator/photomultiplier (PM) outside of the beam pipe. By measuring the wire position and the PM current at it over multiple turns the transverse beam profile is reconstructed. An example of a vertical profile is shown in Fig. 4.12 (left).

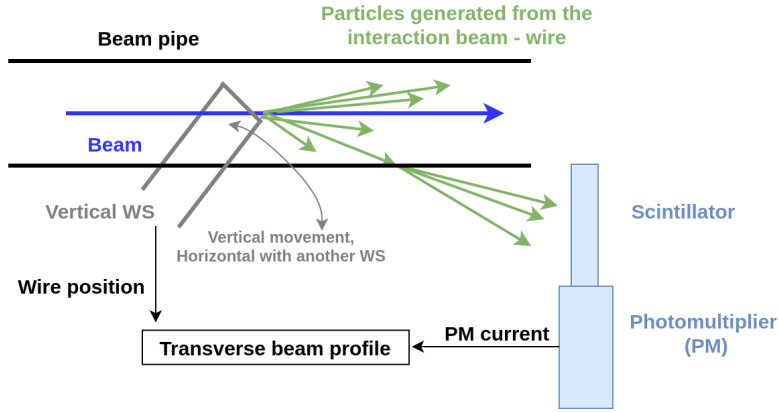


Figure 4.11: Sketch of the SPS rotational wire scanners [17]

Fitting of transverse profiles

To obtain the beam size, σ , the transverse profiles from each scan are fitted with a four parameter Gauss function:

$$f(x) = k + Ae^{-\frac{(x-\mu)^2}{2\sigma^2}}, \quad (4.2)$$

where k is the signal offset of the PM, A is the signal amplitude, μ is the mean of the Gaussian distribution and σ its standard deviation. The uncertainty of the measured beam size, $\Delta\sigma$, is defined as the one standard deviation error on σ which is computed from the square root of the diagonal elements of the covariant matrix.

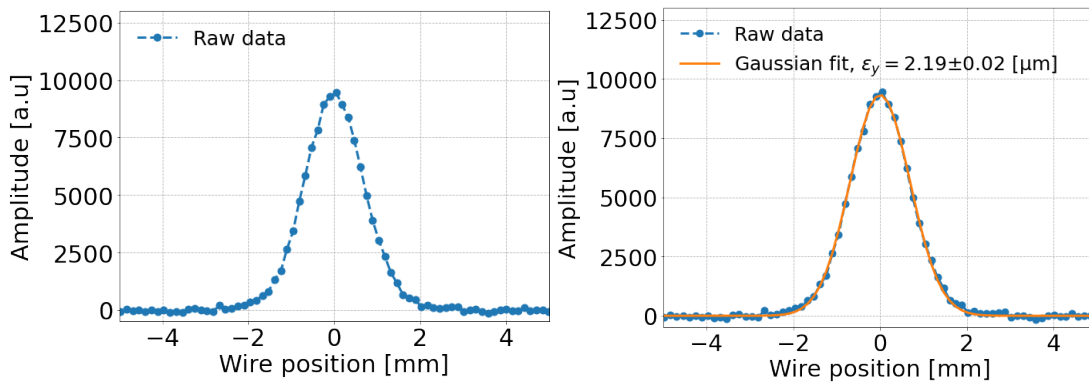


Figure 4.12: Vertical beam profile obtained from the BWS.41677.V instrument. The measured data points (light blue) are fitted with a four parameter Gaussian (orange) to obtain the beam size. The calculated emittance is also shown.

The general formula for computing the normalised beam emittance from the beam

size, σ is described in Eq. (2.1). However, in the 2018 SPS operational configuration, the dispersion was small in the WSs location and thus its contribution to the beam size was considered to be negligible¹. In that case, the normalised emittance can be calculated for both transverse planes simply from the beam size (σ), the beta function at the WS location (β_{WS}), and the relativistic parameters (β, γ) as follows:

$$\epsilon = \frac{\sigma^2}{\beta_{WS}} \beta \gamma \quad (4.3)$$

The beta functions were 81.5 m and 62.96 m at the locations of the horizontal and vertical WS respectively.

Considering that the relativistic parameters and the beta function are free of error, the uncertainty of the computed emittance, $\Delta\epsilon$, at a dispersion free region, depends only on the uncertainty of the measured beam size, $\Delta\sigma$, as:

$$\frac{\Delta\epsilon}{\epsilon} = \sqrt{\left(2 \frac{\Delta\sigma}{\sigma}\right)^2} = 2 \frac{\Delta\sigma}{\sigma}, \quad (4.4)$$

Further considerations

It is worth noting here, that during each measurement with the WS the beam profile is actually acquired twice as the wire crosses the beam at the forward direction (IN scan) and then backwards (OUT scan). For the 2018 measurements the emittance values obtained from IN and OUT scans, $\epsilon_{IN} \pm \Delta\epsilon_{IN}$ and $\epsilon_{OUT} \pm \Delta\epsilon_{OUT}$, were found to be very similar (add order of difference). In this thesis, the average emittance from the two scans, $\epsilon_{avg} = \langle \epsilon_{IN}, \epsilon_{OUT} \rangle$, will be used. The uncertainty on the averaged emittance, $\Delta\epsilon_{avg}$, is computed as:

$$\Delta\epsilon_{avg} = \sqrt{\Delta\epsilon_1^2 + \Delta\epsilon_2^2}, \quad (4.5)$$

where $\Delta\epsilon_1$ is the standard deviation of the ϵ_{IN} and ϵ_{OUT} and $\Delta\epsilon_2 = \sqrt{\langle \Delta\epsilon_{IN}, \Delta\epsilon_{OUT} \rangle}$.

¹The dispersion at BWS.51995.H location in 2018 was $D_x = -15$ mm. At 270 GeV, δ is of the order of 10^{-4} . Thus, from Eq. (2.1) the horizontal normalised emittance from the dispersion is foreseen at the order of 10^{-11} . Comparing to the observed beam size during the CC tests of a few microns the dispersion is negligible

Finally, some emittance increase is expected during each wire scan, due to Coulomb multiple scattering. This effect has been extensively studied in Ref. [18]. For the rotational SPS WS and the energy of 270 GeV, at which the CC experiments were performed the expected emittance growth from the WS is expected to be small. However, a conservative number of scans were carried, ~ 20 scans per bunch and per plane during ~ 1 hour, in order to minimise the contribution from this effect.

4.5 ABWLM and wall current monitor

The bunch length was measured with two different instruments the ABWLM [19] and the wall current monitor [20]. The ABWLM measures the longitudinal profiles from which the bunch length is computed by performing a gaussian fit. The wall current monitor acquires also the longitudinal profiles but also the beam position relative to the monitor. The bunch length is estimated from the full width half maximum of the profiles assuming a gaussian distribution. No further details on the operation of these instruments are discussed here as the offline analysis was not performed by the author.

5 | Experimental studies 2018: Measurements and analysis

In 2018, two prototype Crab Cavities (CCs) were installed in the SPS to be tested for the first time with proton beams. One of the operational issues that needed to be addressed concerned the expected emittance growth due to noise in their RF control system. A theoretical model that describes this emittance growth had already been developed and validated by tracking simulations [1]. Based on those studies a dedicated experiment was performed to benchmark the models with experimental data and to confirm the analytical predictions. In particular, the idea was to inject various noise levels in the CC RF system and record the emittance evolution. In this chapter, the experimental procedure, the measurement methods and results are presented and discussed.

The chapter is structured as follows: Section 4.2 describes the operational setup for the SPS CC tests and discusses the main diagnostic deployed for the derivation of the CC voltage.

blah blah ... describe sections and subsections after they are completed.

blah blah ... describe sections and subsections after they are completed.

blah blah ... describe sections and subsections after they are completed.

5.1 Crab Cavities in the SPS

For the SPS tests two prototype CCs of the Double Quarter Wave (DQW) type were fabricated by CERN and were assembled into the same cryomodule [7]. The cryomodule was installed in the SPS-LSS6 zone and was placed on a mobile transfer ta-

ble [Garlasch:2648553]. The table moved with high precision and without breaking the vacuum the cryomodule in the beam line for the CC tests and out of it for the usual SPS operation. For the emittance growth measurements only one of these CCs was used and its main optics and design parameters are listed in Table ??.

5.2 Experimental procedure

5.2.1 Machine and beam configuration

5.2.2 Measurement methods

What do we measure and how? emittance (show plots) bunch length ABWLM → we take the measurement directly from the responsible team → show also from the instrument that we saw the unstable bunches.

5.3 Experimental results

5.3.1 Overview

- bunches 2, 3 and 4 unstable

5.3.2 Comparison with the theory

This chapter is adapted from the the studies published in Ref. [21]

5.4 Experimental Setup

Several experimental studies have been performed (2010-2017) to identify the optimal conditions for the emittance growth studies with CCs in the SPS [2, 4]. Based on these preparatory studies, the measurements in the SPS were performed with four low intensity ($\sim 3 \cdot 10^{10}$ ppb) bunches at 270 GeV. To minimise the emittance growth from other sources [4] the first order chromaticity, Q' , of the machine was corrected to small positive values ($\sim 1-2$) in both the horizontal and the vertical planes. During the measurements the Landau octupoles were switched off. It should be note, though, that a residual non-linearity was present in the machine mainly due to multiple components in the dipole magnets [5, 6]. Only one CC was used, providing a vertical kick to the beam. The transverse feedback system was switched off. Even though the emittance growth is a single bunch effect four bunches were used to reduce the statistical uncertainty of the measurements. The distance between the bunches was 524 ns. An overview of the relevant SPS parameters during the experiment is given in Table

5.4.1 Injected RF noise

In order to characterize the CC noise induced emittance growth, controlled noise was injected into their LLRF system and the evolution of the bunch was recorded for about 20-40 minutes. The injected noise was a mixture of amplitude and phase noise up to 10 KHz, overlapping and primarily exciting the first betatron sideband at ~ 8 kHz. The phase noise was always dominant.

6 | Investigation of the discrepancy

7 | Simple model of describing the decoherence suppression from impedance

8 | Application and impact for HL-LHC

9 | Conclusion

A | Appendix Title

Bibliography

- [1] P. Baudrenghien and T. Mastoridis. “Transverse emittance growth due to rf noise in the high-luminosity LHC crab cavities”. In: *Phys. Rev. ST Accel. Beams* 18 (10 Oct. 2015), p. 101001. DOI: 10.1103/PhysRevSTAB.18.101001. URL: <https://link.aps.org/doi/10.1103/PhysRevSTAB.18.101001>.
- [2] R Calaga et al. “Proton-beam emittance growth in SPS coasts”. In: *Conf. Proc. C1205201* (May 2012), THPPP007. 3 p. URL: <https://cds.cern.ch/record/1451286>.
- [3] A Alekou et al. *Emittance growth in coast in the SPS*. Accessed: 26-11-2021. URL: https://indico.cern.ch/event/609486/contributions/2457542/attachments/1433340/2318716/EmittanceEvolutionCoastSPS_2017_April.pdf.
- [4] Fanouria Antoniou et al. “Emittance Growth in Coast in the SPS at CERN”. In: *J. Phys.: Conf. Ser.* 1067 (2018), MOPMF061. 7 p. DOI: 10.18429/JACoW-IPAC2018-MOPMF061. URL: <https://cds.cern.ch/record/2649815>.
- [5] Michele Carlà et al. “Studies of a New Optics With Intermediate Transition Energy as Alternative for High Intensity LHC Beams in the CERN SPS”. In: (2018), TUPAF022. 4 p. DOI: 10.18429/JACoW-IPAC2018-TUPAF022. URL: <https://cds.cern.ch/record/2664976>.
- [6] Androula Alekou et al. “SPS Long Term Stability Studies in the Presence of Crab Cavities and High Order Multipoles”. In: (2018), WEP2PO008. 3 p. DOI: 10.18429/JACoW-HB2018-WEP2PO008. URL: <https://cds.cern.ch/record/2640326>.
- [7] C. Zanoni et al. “The crab cavities cryomodule for SPS test”. In: 874 (July 2017), p. 012092. DOI: 10.1088/1742-6596/874/1/012092. URL: <https://doi.org/10.1088/1742-6596/874/1/012092>.

- [8] Rama Calaga, Ofelia Capatina, and Giovanna Vandoni. “The SPS Tests of the HL-LHC Crab Cavities”. In: (2018), TUPAF057. 4 p. DOI: 10.18429/JACoW-IPAC2018-TUPAF057. URL: <https://cds.cern.ch/record/2649807>.
- [9] Rama Calaga. *SPS Crab Cavity test RF Test Program*. Accessed: 11-11-2021. URL: <https://indico.cern.ch/event/718127/contributions/2951305/attachments/1645650/2629988/SPSCCtestv3.pdf>.
- [10] Carver Lee. *First proton beam dynamics results with crab cavities*. Accessed: 10-11-2021. URL: https://indico.cern.ch/event/800428/attachments/1804664/2945632/CrabCavity_BE_Seminar.pdf.
- [11] Thomas Levens, Kacper Łasocha, and Thibaut Lefèvre. “Recent Developments for Instability Monitoring at the LHC”. In: (2017), THAL02. 4 p. DOI: 10.18429/JACoW-IBIC2016-THAL02. URL: <https://cds.cern.ch/record/2313358>.
- [12] R. Jones and H. Schmickler. “The measurement of Q' and Q" in the CERN-SPS by head-tail phase shift analysis”. In: *PACS2001. Proceedings of the 2001 Particle Accelerator Conference (Cat. No.01CH37268)*. Vol. 1. 2001, 531–533 vol.1. DOI: 10.1109/PAC.2001.987561.
- [13] T. E. Levens et al. “Automatic detection of transverse beam instabilities in the Large Hadron Collider”. In: *Phys. Rev. Accel. Beams* 22 (11 Nov. 2019), p. 112803. DOI: 10.1103/PhysRevAccelBeams.22.112803. URL: <https://link.aps.org/doi/10.1103/PhysRevAccelBeams.22.112803>.
- [14] Tom Levens. *Beam instrumentation with SPS Crabs*. Accessed: 11-11-2021. URL: https://indico.cern.ch/event/718127/contributions/2951309/attachments/1646050/2630808/BI_SPS_Crabs.pdf.
- [15] Alexander Wu Chao et al. *Handbook of accelerator physics and engineering; 2nd ed.* Singapore: World Scientific, 2013. DOI: 10.1142/8543. URL: <https://cds.cern.ch/record/1490001>.
- [16] J. Bosser et al. “Transverse emittance measurement with a rapid wire scanner at the CERN SPS”. In: *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 235.3 (1985), pp. 475–480. ISSN: 0168-9002. DOI: [https://doi.org/10.1016/0168-9002\(85\)90001-1](https://doi.org/10.1016/0168-9002(85)90001-1).

- 1016/0168-9002(85)90096-8. URL: <https://www.sciencedirect.com/science/article/pii/0168900285900968>.
- [17] OE Berrig et al. *CERN-SPS Wire Scanner Impedance and Wire Heating Studies*. Tech. rep. Geneva: CERN, Sept. 2014. URL: <https://cds.cern.ch/record/1972478>.
- [18] Federico Roncarolo. “Accuracy of the Transverse Emittance Measurements of the CERN Large Hadron Collider”. Presented 2005. 2005. URL: <https://cds.cern.ch/record/1481835>.
- [19] F. Follin G. Papotti. *Online bunch length measurement for SPS OP*. Accessed: 26-11-2021. URL: https://indico.cern.ch/event/774525/contributions/3218683/attachments/1756129/2847423/20181120_LIUSPSBD.pdf.
- [20] G Papotti. “A Beam Quality Monitor for LHC Beams in the SPS”. In: (Sept. 2008), 4 p. URL: <https://cds.cern.ch/record/1124099>.
- [21] Natalia Triantafylou. “INVESTIGATION OF DAMPING EFFECTS OF THE CRAB CAVITY NOISE INDUCED EMITTANCE GROWTH”. In: (2021), TBA. DOI: TBA. URL: TBA.