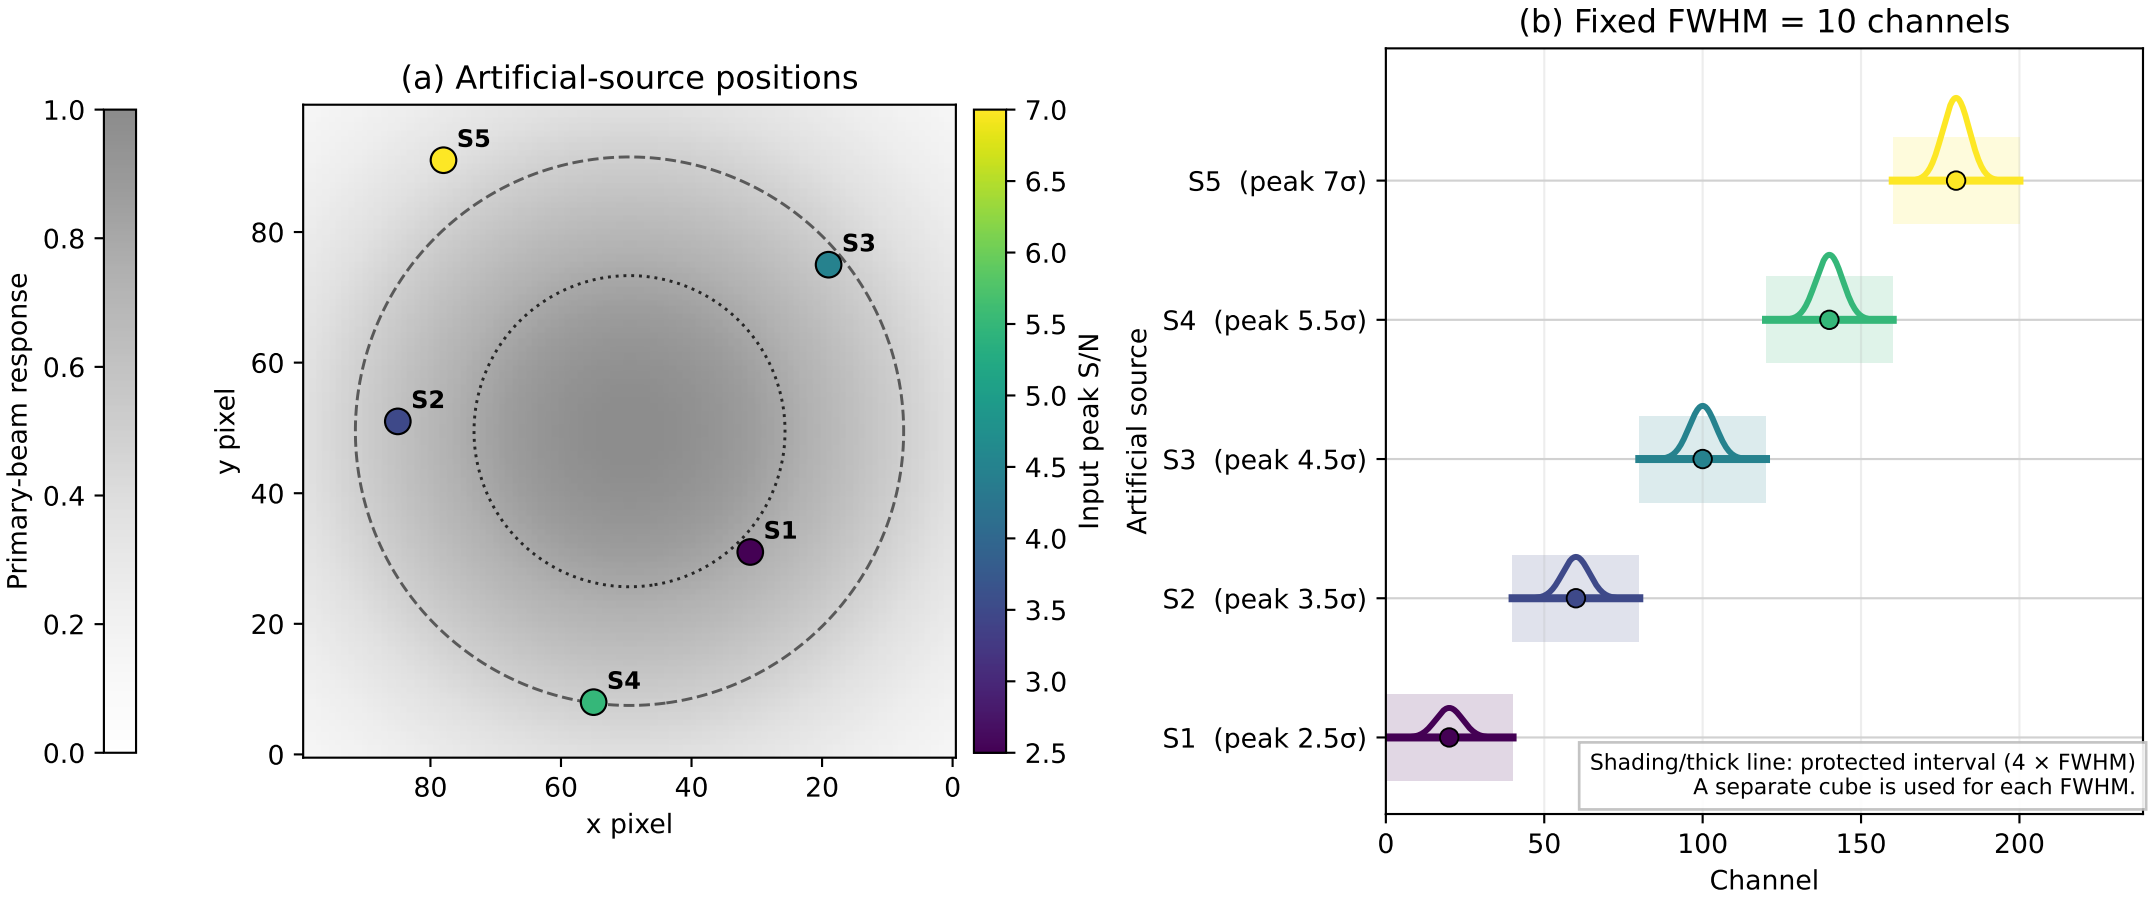
(a) Artificial-source positions
S5
S3
S2
S1
S4
y pixel
x pixel
Primary-beam response
Input peak S/N
(b) Fixed FWHM = 10 channels
S5 (peak 7σ)
S4 (peak 5.5σ)
S3 (peak 4.5σ)
S2 (peak 3.5σ)
S1 (peak 2.5σ)
Artificial source
Channel
Shading/thick line: protected interval (4 × FWHM)
A separate cube is used for each FWHM.