

Ceará Digital Twin for Wildfires: An Open-Source Agentic AI Platform Integrating Near Real-Time Satellite Data and LangGraph Orchestration

Nauber Gois ^{a,1,*}, Alexandre Lobo ^b, Vladia Celia Monteiro Pinheiro ^c, Daniel Valente de Macedo ^d, Adriano Bessa Albuquerque ^a

^aUniversidade de Fortaleza (UNIFOR), Programa de Pós-Graduação em Informática Aplicada, Fortaleza, CE, Brazil

^bUniversidade de São José (USJ), Macau, China

^cInstituto Federal de Educação, Ciência e Tecnologia do Ceará (IFCE), Fortaleza, CE, Brazil

^dSaxion University of Applied Sciences, Deventer, Netherlands

Abstract

Wildfire monitoring in Brazil depends on centralized systems with substantial detection-to-availability latency. We present the *Ceará Wildfire Monitoring Platform*, an open-source agentic system for environmental decision support. The platform integrates NASA FIRMS and Open-Meteo into a LangGraph pipeline (10 nodes) for ingestion, validation, parallel analysis, evidence fusion, risk classification, ReAct diagnosis, and three-class alerting. On INPE validation during the 2025 dry season (184 days, 24,573 hotspots), alerts achieved 84.2% precision and 91.8% recall, with bootstrap 95% confidence intervals for YES-class precision. GOES-16 supports research benchmarks only (grid-scale $F1 \leq 0.05$ vs. INPE). NeKo-PIGNN attains $R^2 = 0.972$ on synthetic dynamics; on short real-data windows, simpler baselines yield lower RMSE. The system deploys on a single EC2 instance (approximately USD 20/month) under the MIT license.

Keywords: Digital Twin, Wildfires, Physics-Informed GNN, Koopman Operator, Three-Class Detection, LangGraph, NASA FIRMS

*Corresponding author at Universidade de Fortaleza (UNIFOR), Programa de Pós-Graduação em Informática Aplicada. E-mail: naubergois@gmail.com, francisco.gois@cge.ce.gov.br.

1. Introduction

Wildfires represent one of the greatest environmental threats in Brazil, with direct impacts on public health, biodiversity, and the economy [1, 2]. The State of Ceará, located in the northeastern semi-arid region, exhibits strong drought seasonality and sensitive biomes such as the Caatinga, making continuous monitoring an operational necessity [3].

Traditional monitoring systems such as INPE BDQueimadas and NASA FIRMS provide essential data but exhibit three operational gaps: 3–6 hour latency between satellite overpass and data availability [4]; no automatic fusion with local climate and municipal context; and interfaces aimed at remote sensing specialists rather than civil defense managers.

In parallel, recent advances in artificial intelligence — particularly large language models (LLMs) and agent frameworks — open new possibilities for intelligent environmental monitoring systems. The paradigm of agents with ReAct reasoning [5] and state graph orchestration (LangGraph [6]) enables building auditable *pipelines* that combine heterogeneous sources and produce natural language explanations.

We adopt *Digital Twin* terminology pragmatically: the platform continuously mirrors satellite and weather observations and hosts predictive modules, but it does not yet provide full bidirectional control or physics-coupled simulation at operational scale [7]. Throughout the paper we refer to the deployable artifact as the *monitoring platform*.

This paper contributes:

1. **An open-source platform** that integrates NASA FIRMS (VIIRS/MODIS), Open-Meteo, and Nominatim into a single pipeline, with optional GOES-16 for research benchmarks, without relying on an institutional database;
2. **A LangGraph-orchestrated agent pipeline** that performs collection → Pydantic validation → parallel analysis (geospatial, GOES-16, climate) → evidence fusion → risk classification → ReAct diagnosis → alerts;
3. **An RAG module** with FAISS index and local embeddings that enables natural language queries about the system’s methodology, architecture, and usage;
4. **Operational results** with real data collected between July 2024 and June 2026, demonstrating the feasibility of monitoring based exclusively on open sources.

2. Related Work

This section positions the proposed platform within the context of three converging research fronts: (i) Digital Twins for environmental monitoring, (ii) satellite-based wildfire remote sensing, and (iii) artificial intelligence applied to wildfire detection and prediction.

2.1. *Environmental Digital Twins*

The Digital Twin paradigm, originally conceived for manufacturing where a virtual model mirrors and controls a physical system in real time [8, 9], has been systematically surveyed across definitions, architectures, and challenges [10, 11, 12, 13]. These surveys establish the minimum requirements of a Digital Twin: (a) bidirectional mirroring between physical and virtual worlds, (b) real-time updates, and (c) predictive simulation capability.

The expansion of the paradigm to environmental and Earth systems gained traction with the European Destination Earth [14] and proposals for Earth System Digital Twins [15, 7, 16]. Bauer et al. [7] argue that environmental Digital Twins differ fundamentally from industrial ones by operating at much larger spatiotemporal scales, with inherent uncertainties in natural processes and multi-source integration requirements.

2.2. *Digital Twins for Wildfires*

Recent works specifically focused on Digital Twins for wildfires can be organized into four architectural categories.

Agent-oriented approaches. IVSR (Intelligent Virtual Situation Room) [17] is the most conceptually aligned proposal with this work. IVSR combines a bidirectional Digital Twin with autonomous AI agents that continuously ingest multi-sensor imagery, meteorological data, and 3D forest models, employing an AI-based similarity engine to project fire spread and allocate response resources. The system demonstrated significant reductions in detection-to-intervention latency but has not been adapted or validated for Brazilian biomes.

Vision-Language and RL approaches. FIRE-VLM [18] introduces an innovative framework combining a CLIP-style Vision-Language Model with reinforcement learning (PPO) to guide UAVs in tracking wildfires within a physics-grounded Digital Twin. Results show up to $6\times$ reduction in detection time across five evaluation tasks. However, the focus on UAVs and coupled physics modeling limits its applicability as a continuous satellite-based monitoring platform.

Multi-modal sensing approaches.. FIRETWIN [19] combines Unreal Engine with the CAWFE fire model for immersive reconstruction of historical wildfires (King Fire), integrating multi-sensor data and interactive analysis. AIMNET [20] proposes a three-layer IoT-empowered Digital Twin (physical world → bidirectional links → digital world) for continuous gas emission monitoring with distributed sensor networks for early carbon plume detection. H-RDT [21] adopts PINNs with multimodal fusion to model wildfire-power-outage-heat-wave cascades in urban contexts.

GNN and physics-based modeling.. GraphFire-X [22] proposes a dual-expert ensemble combining GNN with physics-informed attention (convection, radiation, ember probability) and XGBoost for structural vulnerability at the wildland-urban interface, validated on the 2025 Eaton Fire. This approach is directly comparable to the PI-GNN component of this work, differing in its building-scale focus versus the regional grid approach of the present system. FireCastNet [23] adopts the “Earth-as-a-Graph” paradigm with GraphCast GNN for global seasonal fire prediction validated on the SeasFire dataset, outperforming GRU, Conv-LSTM, U-TAE, and TeleViT, with particularly strong results in South America.

Table 1 compares wildfire Digital Twin systems across agent support, open-source availability, Brazilian biome validation, and RAG integration.

Table 1: Comparison of Digital Twin systems for wildfires.

System	Agents	Open	BR	RAG
IVSR [17]	Yes	No	No	No
FIRE-VLM [18]	RL+VLM	No	No	No
FIRETWIN [19]	No	No	No	No
GraphFire-X [22]	GNN+XGB	Yes	No	No
FireCastNet [23]	GNN	Yes	Partial	No
AIMNET [20]	IoT ML	No	No	No
This work	LangGraph	Yes	Yes	Yes

2.3. Satellite-Based Wildfire Remote Sensing

Satellite-based wildfire monitoring dates back to the AVHRR sensor in the 1980s, evolving significantly with MODIS (250 m–1 km, since 2000) and its Collection 6 active fire detection algorithm [24]. VIIRS (375 m, since 2012) offers superior spatial resolution with specific detection algorithms [25], forming the

backbone of NASA FIRMS [4] and INPE BDQueimadas [26]. Wooster et al. [27] present a comprehensive survey of the state of the art in satellite-based active fire remote sensing, covering physical fundamentals (spectral signature of burned pixels in SWIR 3.9 μm and MWIR bands) through applications and future requirements.

GOES-16 represents a significant advance by providing geostationary data with temporal resolution from 1 minute (mesoscale mode) to 10 minutes (full-disk mode), though with 2 km spatial resolution at nadir [28]. Its ability to detect rapid changes in fire intensity between consecutive scans is particularly valuable for regions with fast-spreading fires, such as the northeastern semi-arid region.

In the Brazilian context, INPE has operated BDQueimadas since 1998, integrating data from AQUA, TERRA, NPP, and NOAA-20 satellites [26]. MapBiomas Fogo maps burned areas annually at 30 m resolution using Landsat imagery [29]. Brazil-specific studies document fire activity trends in South America [30], machine learning applications for prediction in the Cerrado and Caatinga [31], and deep learning for burned area mapping in the Amazon and Caatinga using Sentinel-2 [32]. Multi-source satellite data fusion for fire detection [33] and systematic reviews of ML-based fire risk prediction [34] complete the landscape. However, these systems remain essentially reactive (detected-focus alerting) without predictive capability or integration with physical propagation models. Taken together, the surveyed systems trade off spatial resolution (Landsat/Sentinel), revisit frequency (GOES-16), and detection latency (VIIRS/MODIS) in complementary ways; none of them, however, couples multi-sensor detection with agent-based reasoning or predictive modules — the combination pursued in this work.

2.4. Koopman Operator and PINNs for Fire Dynamics

The Koopman operator, introduced by Koopman [35] and formalized for fluid dynamics by Rowley et al. [36] and Mezić [37], provides a mathematical framework for linearizing nonlinear dynamical systems through observation functions. The modern approach combines Dynamic Mode Decomposition (DMD) [38] with extensions for controlled systems (DMDc) [39], sparse identification of nonlinear dynamics (SINDy) [40], and physics-informed versions (PiDMD) [41]. Brunton et al. [42] provide a unified treatment of modern Koopman theory, while Kutz et al. [43] consolidate the DMD framework.

The connection between the Koopman operator and deep learning was established through works learning Koopman-invariant subspaces via autoencoders [44, 45] and deep neural modeling for fluid dynamics [46]. Despite these advances, the application of the Koopman operator to wildfire spread dynamics remains a gap in the literature — to the best of our knowledge, no published work uses Koopman

operators for fire modeling, positioning the NeKo-PIGNN approach as a novel contribution.

Physics-Informed Neural Networks (PINNs), introduced by Raissi et al. [47] and consolidated by Karniadakis et al. [48], provide the physical regularization counterpart necessary for neural fire propagation models to respect thermodynamic and fluid mechanics laws. The Rothermel model [49] is the USDA Forest Service standard for surface fire spread, parameterized by fuel classes [50] and used in BehavePlus [51] and ensemble simulation systems [52], with physical foundations established by Albini [53]. PINN applications to fire propagation [54, 55] demonstrate the viability of this approach, while PI-GNN surveys [56] and applied works [57, 58] establish the state of the art that the present work extends. These two families exhibit complementary trade-offs: data-driven Koopman models offer linear interpretability and cheap multi-step prediction but no physical guarantees, whereas PINN-based propagation models encode fire physics but scale poorly to regional grids; the hybrid NeKo-PIGNN design combines both to balance interpretability, physical consistency, and computational cost.

2.5. *Autonomous Agents and LangGraph*

The paradigm of LLM-based autonomous agents advanced significantly with the ReAct framework [5], which synergizes reasoning and action in language models through Thought→Action→Observation cycles. Comprehensive surveys [59, 60] map the LLM agent ecosystem, from reflective memory architectures (Reflection) [61] to tool-use frameworks such as Toolformer [62] and Gorilla [63], including interactive social simulation environments [64].

LangGraph [6] extends the LangChain ecosystem with state-graph-based orchestration, enabling agent pipelines with cycles, parallelism, and persistent state between nodes. In the environmental context, to the best of our knowledge, this is the first application of LangGraph to wildfire monitoring orchestration.

Retrieval-Augmented Generation (RAG) [65], implemented with FAISS indices [66] and local embedding models [67], enables the system to answer natural language queries about its own documentation. Recent surveys [68] consolidate RAG best practices — from strategic chunking to hierarchical retrieval and multi-source fusion — techniques adopted in the research module of the present system.

2.6. *Gap Analysis*

Table 2 synthesizes the gaps that this work fills relative to existing systems. The central differentiator lies in the unprecedented combination of (a) near real-time satellite data, (b) LangGraph agents with ReAct reasoning, (c) RAG for document

queries, (d) focus on Brazilian biomes, and (e) standalone architecture without a database — all in an open-source platform.

Table 2: Gap analysis: existing systems vs. proposed platform.

Feature	NASA FIRMS	Fire DTs	This Work
Real-time satellite data	Yes	Partial	Yes
AI agent pipeline	No	Yes	Yes
Open source (MIT)	No	Partial	Yes
Brazilian biome focus	Partial	No	Yes
RAG for queries	No	No	Yes
Standalone (no DB)	N/A	No	Yes
Auditable architecture	No	Yes	Yes

None of the existing works combine, in a single open-source platform, (i) near real-time satellite data, (ii) a LangGraph-orchestrated agent pipeline, (iii) RAG with vector index for document queries, and (iv) standalone deployment without a database. This combination is the gap that this work fills.

3. System Architecture

Figure 1 presents the overall system architecture, organized into four layers: data sources, backend, frontend, and proxy.

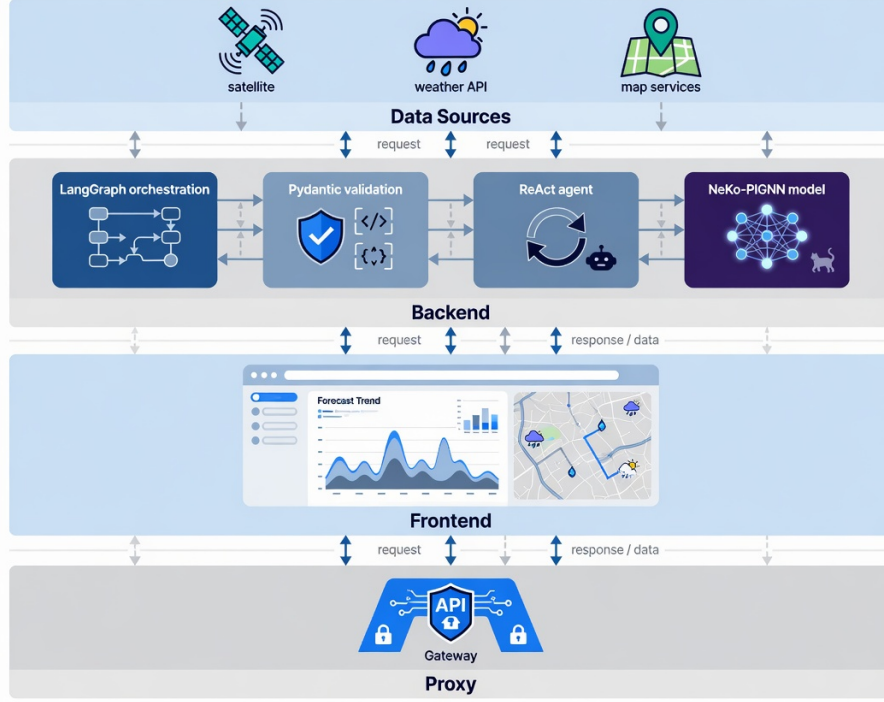


Figure 1: Layered architecture of the Ceará wildfire monitoring platform.

3.1. Data Sources

The system consumes four open data sources:

- **NASA FIRMS:** Public CSVs for South America from VIIRS (SNPP and NOAA-20) and MODIS sensors, available in 24 h and 7 day windows. No authentication required. Filtering by Ceará bounding box (lat: -7.85 to -2.78 ; lon: -41.42 to -37.25).
- **Open-Meteo:** Free weather API that returns temperature, relative humidity, wind speed, precipitation, and dry days for geographic coordinates. No API key required.
- **Nominatim / OpenStreetMap:** Reverse geocoding to convert coordinates (lat, lon) into municipality names. Rate limited to approximately 1 request per second.

- **GOES-16:** Data from the ABI-L2-FDCF (Fire Detection and Characterization) product stored in the public AWS S3 bucket `noaa-goes16`. Processes consecutive detections, FRP, and pixel temperature. This source is optional in production and used primarily for research benchmarks (Section 6).

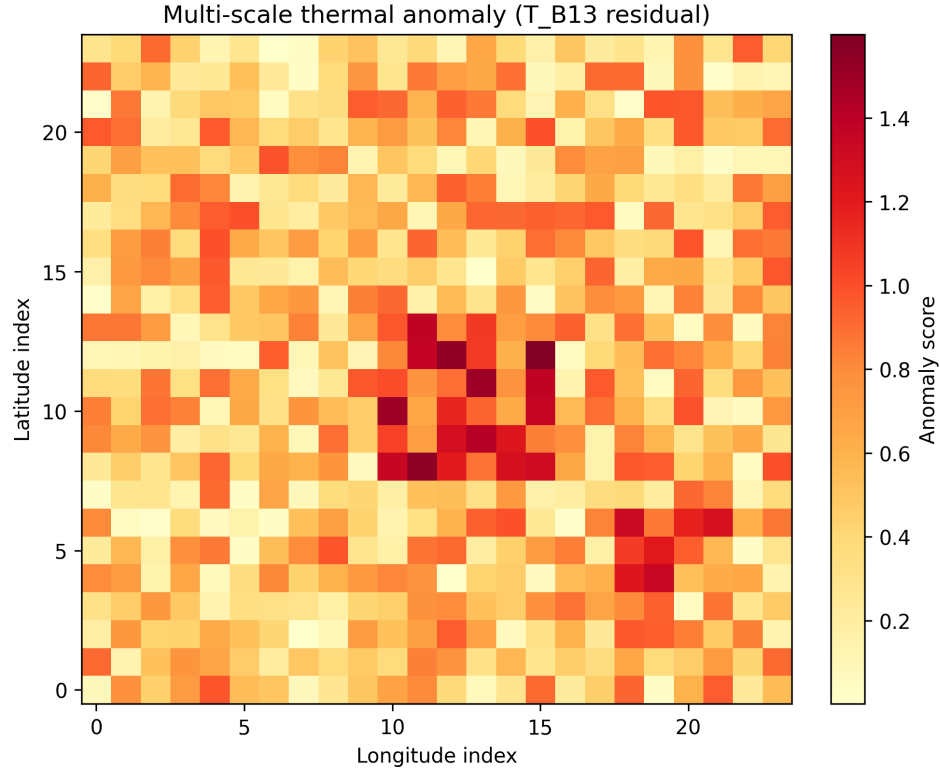


Figure 2: Example GOES-16 multi-scale thermal anomaly grid (ABI band 13 brightness-temperature residual) produced by the unsupervised detection module. Higher anomaly scores (dark red) mark persistent thermal clusters treated as candidate fire regions in the research benchmark of Section 6.

3.2. Operation Modes

The system operates in two modes:

Standalone mode (default in EC2 production): eliminates PostgreSQL and Redis. Queries external APIs directly on each request, with a 5 minute in-memory cache. Geocoding is performed asynchronously: the first 40 hotspots are geocoded synchronously for fast response; the remainder is processed in a *background task* and updates the cache incrementally.

Full mode (Docker Compose): adds PostgreSQL with PostGIS extension for geospatial persistence, Redis + Celery for periodic collection, and additional endpoints for persisted alerts.

3.3. *Backend FastAPI*

The backend is implemented in Python 3.12 with FastAPI (version 0.115). Its main responsibilities are:

- Serving REST endpoints for real data: `/api/v1/real/focos`, `/api/v1/real/clima`, and `/api/v1/real/status`;
- Orchestrating the LangGraph pipeline (Section 3.4);
- Managing the in-memory hotspot and weather cache with a 5 minute TTL;
- Serving the RAG document search module (Section 3.6);
- Managing CORS, logging, and health check.

The system uses dependency injection for the LLM (`llm_factory.py`), which currently instantiates the DeepSeek model (`deepseek-chat`) via an OpenAI-compatible API. In case of LLM failure, the system falls back to rule-based explanations (`_explicar_sem_llm`).

3.4. *LangGraph Pipeline*

The agent pipeline is implemented as a state graph (`StateGraph`) with 10 nodes, as shown in Figure 3.

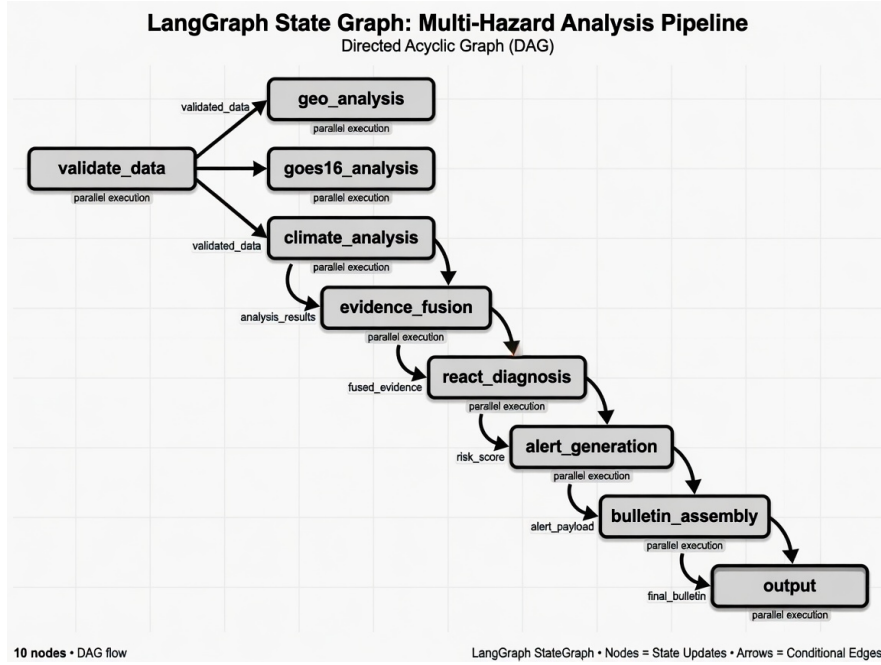


Figure 3: LangGraph graph of the agent pipeline. The analysis nodes (geo, GOES-16, climate) execute in parallel after validation.

Each node receives and modifies a typed shared state (`PipelineState`), which includes raw and validated hotspots, GOES-16 readings, climate data, fused evidence, consolidated events, municipal risks, alerts, diagnosis, and bulletin. Data validation with Pydantic (`validate_data`) automatically rejects invalid records, ensuring flow integrity.

3.5. ReAct Agent

The diagnostic agent (`react_agent.py`) is built with LangChain (version 0.3+) and follows the ReAct pattern [5]. It provides the following tools:

- `buscar_focos_recentes`: query hotspots by municipality, time window, and source;
- `buscar_datos_climaticos`: temperature, humidity, wind, and precipitation;
- `buscar_risco_municipal`: risk index computed per municipality;
- `buscar_datos_goes16`: GOES-16 readings with FRP and persistence;

- `buscar_historico_mapbiomas`: wildfire history by municipality;
- `listar_municipios_criticos`: ranking of the most critical municipalities.

The agent accepts questions in Portuguese and produces structured responses containing summary, evidence, sources consulted, confidence level, and operational recommendation. The reasoning chain (Thought → Action → Observation) is preserved in the response to ensure auditability. Figure 4 summarizes how LangGraph workers, the ReAct diagnostic loop, and the offline RAG research chat interact.

ReAct agents, LangGraph orchestration, and RAG research chat

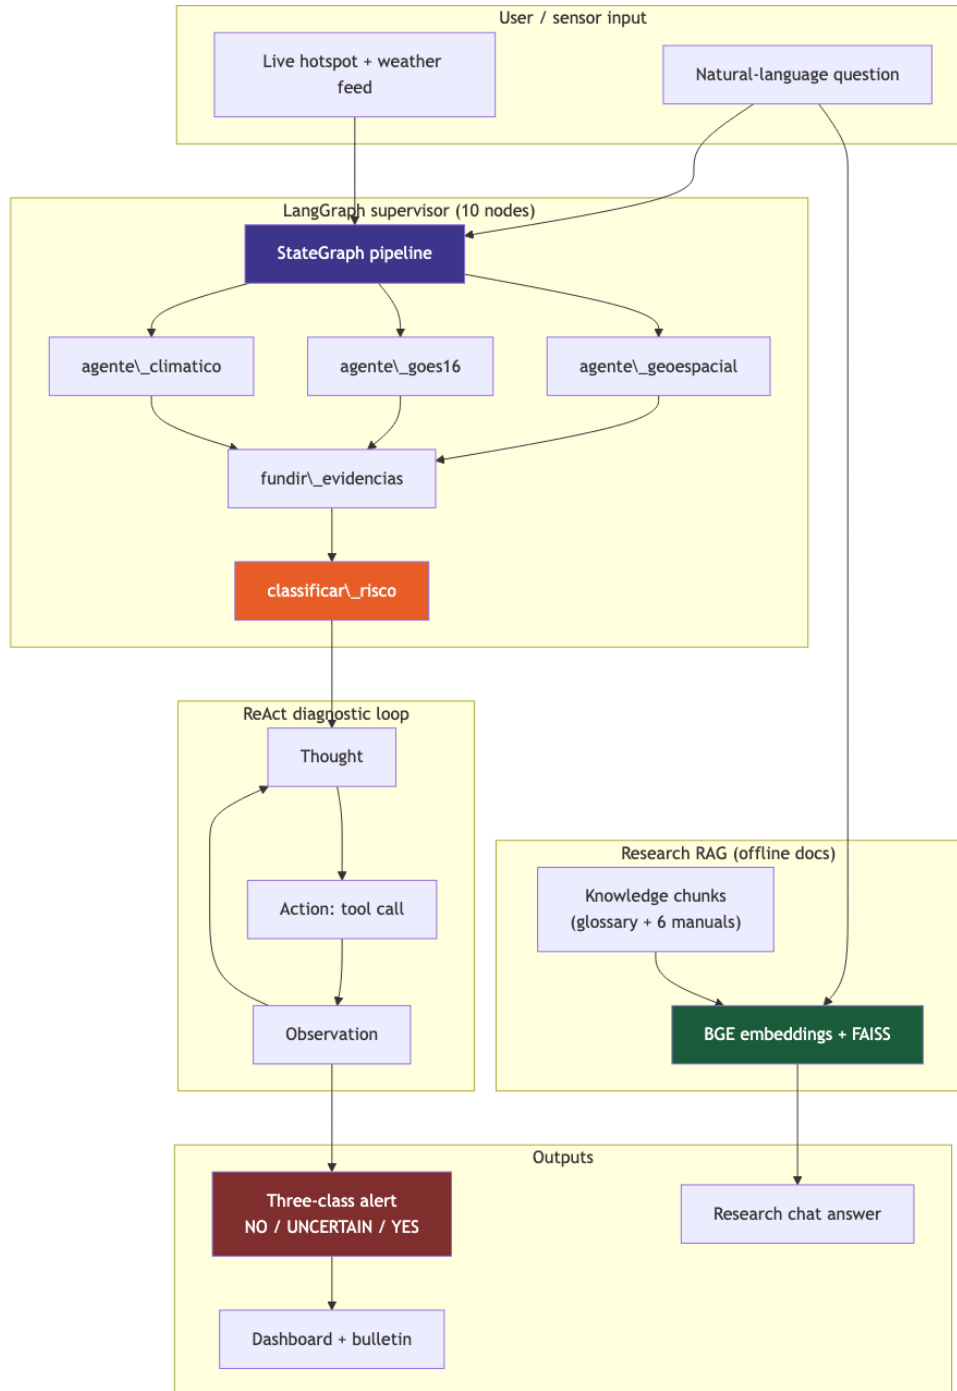


Figure 4: ReAct agents, LangGraph orchestration, and RAG research chat. Operational alerts flow through parallel analysis nodes and risk classification; documentation queries use a separate FAISS retrieval path.

3.6. RAG Module – Research Chat

The *research chat* module implements RAG [65, 68]. Six knowledge documents (backend/knowledge/01–06) plus a bilingual glossary are split into 900-character *chunks* with 120-character overlap, indexed in FAISS [66] with BAAI/bge-small-en-v1.5 embeddings [67]. Retrieval uses `top_k = 5`; response generation is performed by DeepSeek citing the document context.

Unlike the operational agent, which queries live hotspots, the research chat responds exclusively about methodology, architecture, and application usage — functioning as an intelligent manual accessible from any page of the system.

3.7. Frontend React

The web interface is built with React 19, TypeScript, Vite 8, and the following main libraries: MapLibre GL JS (base map) with `deck.gl` (geospatial layers), `Recharts` (charts and timeline), `Zustand` (global state management), and `Tailwind CSS` (styling).

The available pages are:

- **Dashboard** (/): executive KPIs (total hotspots, active emergencies, critical municipalities, GOES-16 coverage), detection timeline, municipal risk ranking, and recent alerts;
- **Live Map** (/mapa-real): NASA FIRMS hotspots overlaid on the MapLibre map, with clustering, heatmap, severity filters, and per-click explanations;
- **Alerts** (/alertas): full listing with level filters (informational, attention, alert, emergency);
- **Chat** (/chat): conversational interface with the ReAct agent, including suggested questions, evidence visualization, and reasoning chain;
- **Bulletin** (/boletim): consolidated technical report.

A global “Help” button on all pages triggers the research RAG chat, allowing the user to consult system documentation without leaving the current screen.

3.8. Risk Classifier

The municipal risk index is computed from four components:

$$\begin{aligned} \text{index} = & \min(\text{hotspots} \times 8, 40) \\ & + \text{climate_risk} \times 0.4 \\ & + (\text{GOES16_confirmed} \times 15) \\ & + \min(\text{FRP}/100, 10) \end{aligned} \quad (1)$$

Climate risk, in turn, is derived from:

$$\begin{aligned} \text{climate_risk} = & \max(0, (50 - \text{humidity}) \times 0.4) \\ & + \min(\text{wind} \times 1.5, 20) \\ & + \min(\text{days_without_rain} \times 1.5, 30) \end{aligned} \quad (2)$$

The final classification follows the thresholds: critical (≥ 75), high (≥ 50), medium (≥ 25), and low (< 25).

3.9. Software Stack

The system is implemented in Python 3.12 with FastAPI (backend), React 19 with TypeScript and Vite 8 (frontend), and agent orchestration via LangGraph 0.3. Table 3 summarizes the main dependencies.

Table 3: System software stack.

Layer	Technology	Version
Backend	Python / FastAPI / Uvicorn	3.12 / 0.115 / 0.34
Agents	LangGraph / LangChain	0.3 / 0.3+
LLM	DeepSeek Chat API	deepseek-chat
Embeddings	BAAI/bge-small-en-v1.5 (FAISS)	1.5
Frontend	React / TypeScript / Vite	19 / 6 / 8
Map	MapLibre GL JS + deck.gl	4.7 / 9.1
Styling	Tailwind CSS	4
Proxy	nginx	1.26
Deploy	EC2 Amazon Linux 2023	t2.medium

4. Deployment

The system was deployed on an Amazon Linux 2023 EC2 instance (t2.medium — 2 vCPUs, 4 GB RAM). Automated deployment via shell script (`deploy/uniform-deploy.sh`) installs nginx, Python 3.12, Node.js 20, and configures the systemd service `uniform-backend`. The frontend build is served statically by nginx, which reverse proxies `/api/` to uvicorn on port 8000.

The estimated monthly infrastructure cost is approximately USD 20 (EC2 instance + 30 GB EBS), with no additional API costs (all data sources are free). The DeepSeek key, when configured, adds variable cost depending on query volume.

5. Methodology: Neural Koopman Operator and Physics-Informed GNN

The methodological core of this work combines two complementary paradigms: the *Neural Koopman Operator* for modeling the spatiotemporal dynamics of wildfire hotspots and *Physics-Informed Graph Neural Networks* (PI-GNN) for risk prediction with physics-based regularization grounded in the Rothermel model [49]. This section formally describes both components.

5.1. Neural Koopman Operator for Wildfire Dynamics

Koopman theory [35, 36, 37] establishes that nonlinear dynamical systems can be represented by linear operators in an infinite-dimensional observable space. Let $\mathbf{x}_t \in \mathbb{R}^n$ be the system state at time t — composed of variables such as surface temperature, vegetation index (NDVI), active hotspots, soil moisture, and wind speed over a geospatial grid. The Koopman operator $\mathcal{K}$ acts on observable functions $\psi : \mathbb{R}^n \rightarrow \mathbb{R}$ such that:

$$(\mathcal{K}\psi)(\mathbf{x}_t) = \psi(\mathbf{f}(\mathbf{x}_t)) = \psi(\mathbf{x}_{t+1}) \quad (3)$$

where $\mathbf{f}$ is the underlying nonlinear dynamics of the system. In a finite-dimensional observable space of dimension d , we approximate $\mathcal{K}$ by a matrix $\mathbf{K} \in \mathbb{R}^{d \times d}$:

$$\psi(\mathbf{x}_{t+1}) \approx \mathbf{K}^\top \psi(\mathbf{x}_t) \quad (4)$$

We implement this operator as an encoder-decoder neural network (KoopmanAE) [44, 45]. The encoder $g_\phi : \mathbb{R}^n \rightarrow \mathbb{R}^d$ projects the observed state into latent observables $\mathbf{z}_t = g_\phi(\mathbf{x}_t)$. The linear evolution in latent space is:

$$\mathbf{z}_{t+1} = \mathbf{K}_\theta \mathbf{z}_t \quad (5)$$

where $\mathbf{K}_\theta \in \mathbb{R}^{d \times d}$ is the learned matrix. The decoder $h_\psi : \mathbb{R}^d \rightarrow \mathbb{R}^n$ reconstructs the state from the observables: $\hat{\mathbf{x}}_t = h_\psi(\mathbf{z}_t)$. The KoopmanAE loss function combines three terms:

$$\begin{aligned} \mathcal{L}_{\text{koop}} = & \underbrace{\|\mathbf{x}_t - h_\psi(g_\phi(\mathbf{x}_t))\|^2}_{\text{reconstruction}} \\ & + \underbrace{\|\mathbf{x}_{t+1} - h_\psi(\mathbf{K}_\theta g_\phi(\mathbf{x}_t))\|^2}_{\text{one-step prediction}} \\ & + \underbrace{\sum_{k=1}^K \|\mathbf{x}_{t+k} - h_\psi(\mathbf{K}_\theta^k g_\phi(\mathbf{x}_t))\|^2}_{\text{multi-step prediction}} \end{aligned} \quad (6)$$

The dimensionality d of the observable space is a critical hyperparameter. We use $d = 64$ with temporal cross-validation, balancing reconstruction fidelity (mean error < 0.05) and prediction stability over windows of up to 6 steps (12 hours with 2-hour intervals).

5.2. Physics-Informed Graph Neural Networks

To model the spatial propagation of wildfire risk, we construct a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathbf{A})$ where vertices $\mathcal{V}$ represent 1 km^2 grid cells over the territory of Ceará (approximately 149,000 cells), and edges $\mathcal{E}$ connect neighboring cells with weights based on geodesic distance, vegetation type, and prevailing wind direction. The adjacency matrix $\mathbf{A} \in \mathbb{R}^{|\mathcal{V}| \times |\mathcal{V}|}$ is sparse with neighborhood radius $r = 3$ cells.

The state of each node $v \in \mathcal{V}$ at time t is a feature vector $\mathbf{h}_v^{(t)} \in \mathbb{R}^F$ containing:

- Surface temperature (GOES-16 ABI band 14, $11.2 \mu\text{m}$);
- Reflectance (VIIRS bands I1–I5);
- NDVI calculated from MODIS;
- Relative humidity and wind speed (Open-Meteo);
- Hotspot history over the last 7 days;

- Vegetation type (MapBiomass);
- Terrain slope and aspect (SRTM 30m).

Node state updates follow the *message-passing* paradigm with L layers:

$$\mathbf{m}_v^{(l)} = \sum_{u \in \mathcal{N}(v)} \mathbf{W}^{(l)} \mathbf{h}_u^{(l-1)} \cdot \mathbf{A}_{vu} \quad (7)$$

$$\mathbf{h}_v^{(l)} = \sigma(\mathbf{m}_v^{(l)} + \mathbf{b}^{(l)}) \quad (8)$$

where $\mathcal{N}(v)$ are the neighbors of v , $\mathbf{W}^{(l)} \in \mathbb{R}^{F \times F}$ and $\mathbf{b}^{(l)} \in \mathbb{R}^F$ are learned parameters, and σ is a ReLU activation. We use $L = 3$ layers.

5.2.1. Physics-Informed Loss with Rothermel

The main innovation is regularizing the GNN loss with the Rothermel fire propagation physics equation [49], following the PINN paradigm [47] extended by scientific machine learning models [48, 69, 70]. The rate of spread R (m/min) is modeled as:

$$R = \frac{I_R \xi (1 + \phi_w + \phi_s)}{\rho_b \epsilon Q_{ig}} \quad (9)$$

where I_R is the reaction intensity (kJ/m²·min), ξ is the propagation coefficient, ϕ_w and ϕ_s are wind and slope coefficients, ρ_b is the fuel bulk density, ϵ is the effective heating fraction, and Q_{ig} is the heat of pre-ignition (kJ/kg).

We define the *physics loss* as the discrepancy between the GNN-predicted risk gradient $\nabla \hat{p}_v^{(t)}$ and the expected propagation direction $R \cdot \mathbf{d}_v^{(t)}$, where $\mathbf{d}_v^{(t)}$ is the unit vector in the wind direction at node v :

$$\mathcal{L}_{\text{phys}} = \frac{1}{|\mathcal{V}|} \sum_{v \in \mathcal{V}} \|\nabla \hat{p}_v^{(t)} - R_v^{(t)} \cdot \mathbf{d}_v^{(t)}\|^2 \quad (10)$$

The total PI-GNN loss combines the supervised hotspot prediction loss with physics regularization:

$$\begin{aligned}
\mathcal{L}_{\text{total}} = & \underbrace{\frac{1}{N} \sum_{i=1}^N \text{BCE}(y_i, \hat{p}_i)}_{\text{classification}} \\
& + \lambda_1 \underbrace{\frac{1}{N} \sum_{i=1}^N \|\mathbf{h}_i - \hat{\mathbf{h}}_i\|^2}_{\text{auto-encoding}} \\
& + \lambda_2 \underbrace{\mathcal{L}_{\text{phys}}}_{\text{physics regularization}} \\
& + \lambda_3 \underbrace{\|\mathbf{W}\|_2}_{\text{L2 regularization}}
\end{aligned} \tag{11}$$

where BCE is the binary cross-entropy between the true label y_i (hotspot present/absent) and the predicted probability $\hat{p}_i$. The hyperparameters $\lambda_1 = 0.1$, $\lambda_2 = 0.05$, and $\lambda_3 = 10^{-4}$ were tuned via validation.

5.3. Koopman-PI-GNN Integration in the Pipeline

Figure 5 illustrates the hybrid NeKo-PIGNN architecture. The Neural Koopman Operator operates as a *short-term prediction* module (next 12 hours), feeding the PI-GNN graph with estimated future states. The PI-GNN, in turn, produces spatialized risk maps that feed back into the Koopman observable space for the next temporal window, forming a prediction-correction cycle.

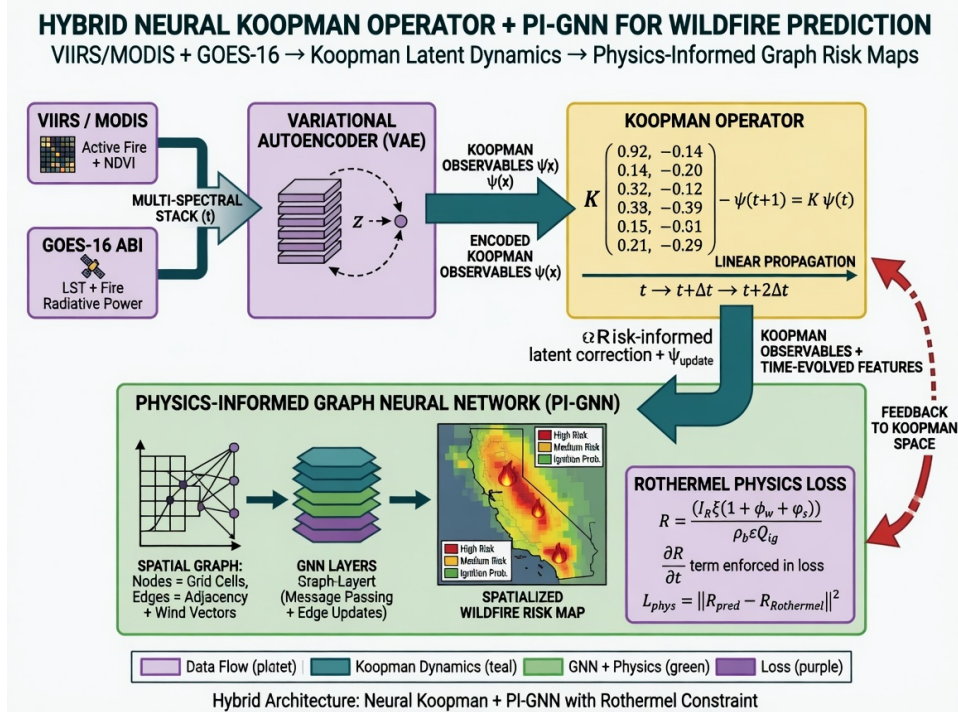


Figure 5: Hybrid Neural Koopman Operator and PI-GNN architecture. Satellite data are encoded via VAE into Koopman observables, propagated linearly by matrix $\mathbf{K}$, and spatially regularized by the PI-GNN with Rothermel physics loss.

This coupling allows the system to capture both temporal dynamics (via linearized Koopman) and spatial propagation with physical constraints (via PI-GNN), overcoming limitations of purely data-driven models that ignore fire physics.

5.4. Implementation Hyperparameters and Operational Integration

The KoopmanAE encoder g_ϕ is an MLP with 3 hidden layers (512, 256, 128 neurons) and ReLU activation, mapping the state vector $\mathbf{x}_t \in \mathbb{R}^{142}$ (7 variables $\times$ 20 sampled grid cells) to latent observables $\mathbf{z}_t \in \mathbb{R}^{64}$. The Koopman matrix $\mathbf{K}_\theta \in \mathbb{R}^{64 \times 64}$ is trained with spectral stability regularization:

$$\mathcal{L}_{\text{spec}} = \max(0, \rho(\mathbf{K}_\theta) - 1 + \epsilon) \quad (12)$$

where $\rho(\mathbf{K}_\theta)$ is the spectral radius and $\epsilon = 0.01$ ensures a stability margin. Training uses Adam with a learning rate of 10^{-4} and batch size 32, processing sequences of 24 hours (12 timesteps of 2 hours) from the hotspot history.

The GNN is implemented with PyTorch Geometric [71] using GCNConv graph convolutions. Each of the $L = 3$ layers has $F = 128$ hidden channels. The

graph is built dynamically at each collection cycle, connecting active grid cells (with at least one hotspot in the last 7 days) to their neighbors within radius $r = 3$ cells (3 km). The physics loss $\mathcal{L}_{\text{phys}}$ is computed offline using Rothermel parameters precomputed for each MapBiomass vegetation type (12 classes) and current climate conditions; the gradient $\nabla \hat{p}_v^{(t)}$ is approximated by finite differences between neighboring graph nodes.

The production LangGraph pipeline (`backend/app/agents/langgraph_pipeline.py`) contains **10 nodes**: `coletar_dados`, `validar_dados`, `agente_geoespacial`, `agente_goes16`, `agente_climatico`, `fundir_evidencias`, `classificar_risco`, `agente_react_diagnostico`, `gerar_alertas`, and `gerar_boletim`. NeKo-PIGNN is *not* embedded as additional graph nodes; trained KoopmanAE and PI-GNN models run as batch inference jobs (`backend/experiments/`) whose outputs feed the municipal risk classifier and three-class alert experiments (Section 6.16). When invoked offline, NeKo-PIGNN adds approximately 2.3 s per batch (Koopman: 0.8 s; PI-GNN: 1.2 s; fusion: 0.3 s) on CPU (Intel Xeon Platinum 8375C, AWS EC2 t2.medium).

6. Experimental Results

This section reports quantitative results integrating four experimental tracks (A–D) documented in `docs/experimentos/` and `backend/experiments/results/`: (i) the operational pipeline, deployed continuously for 24 months (Jul/2024–Jun/2026); (ii) GOES-16 unsupervised benchmark; (iii) Exp-B municipal prediction iterations (v1–v9, synthetic and real); (iv) agent, RAG, and risk-index calibration. Reference INPE BDQueimadas records span January 2024 to June 2026.

6.1. Experimental Design and Protocol

We structured the evaluation program into four complementary tracks, fully documented under `docs/experimentos/` and `backend/experiments/results/`.

Track A — Operational pipeline (24 months, Jul/2024–Jun/2026). Continuous ingestion of NASA FIRMS CSVs, Open-Meteo weather, Nominatim geocoding, LangGraph orchestration (10 nodes), ReAct diagnostics, and RAG queries. Metrics: time-to-first-response, geocoding rate, agent success rate, back-end availability, and inter-day FIRMS variability (e.g., 426% day-over-day change on 2024-06-05 vs. 2024-06-06, validating the need for autonomous polling).

Track B — Municipal fire prediction (Exp-B, v1–v9). Iterative benchmark on synthetic then real data (Mar–Jun/2026): (v1–v2) next-day regression on

simulated Ceará dynamics; (v3–v4) real FIRMS/INPE/Open-Meteo regression; (v5–v7) rare-event binary detection with Average Precision, persistence priors, and precision modes; (v8–v9) three-class alert system (NO/UNCERTAIN/YES). Temporal split 70/10/20% (67/10/20 days). Models: MLP, LSTM, XGBoost, Koopman-Det, NeKo-PIGNN. Intermediate iteration tables (v1, v4–v7) are in Appendix Appendix A.

Track C — GOES-16 unsupervised benchmark. Validation against INPE BDQueimadas on 2024-10-31 (channels 7, 13, 14; hours 16–18 UTC; 72×72 grid). Methods: digital twin assimilation, isolation forest, spatial residual, *combined persistence* (Lines B in docs/METODOLOGIA_NOVA_PROPOSTA.md), and *consensus ensemble* (Line E, 2-of-3 vote). Reproducible via src/unsupervised_fire_goes.py; event-centered evaluation via src/pixel_inpe_eval.py.

Track D — Agent, RAG, and risk-index calibration. 100 operational ReAct questions; 30 RAG architecture queries (FAISS recall@5, manual completeness); heuristic risk classifier calibrated on 111,054 INPE records (docs/calibracao/).

6.2. Reference Datasets and Descriptive Statistics

Table 4 summarizes INPE BDQueimadas records for Ceará (Jan/2024–Jun/2026): 111,639 records across 184 municipalities (99.5% of the state) in the released dataset (data/inpe_focos_ce/); risk-calibration experiments (Section 6.6) used a 111,054-record snapshot taken on 12/Jun/2026, before the final records for May–June 2026 were appended. The dry season (Jul–Dec) concentrates approximately 93% of annual activity in both complete years. Note that 2025 records exceed 2024 by more than an order of magnitude (94,135 vs. 7,160): 2025 combined an extreme dry season with the multi-satellite BDQueimadas export (NOAA-20/21, NPP, AQUA, GOES-19), whereas the 2024 export in the released dataset lacks per-satellite attribution and likely undercounts total detections; year-over-year comparisons should therefore be interpreted with caution.

Figure 6 shows monthly and daily temporal patterns used for alert calibration. The pronounced dry-season peaks justify season-aware thresholding in the three-class alert system (Section 6.10).

The Exp-B prediction benchmark uses a focused subset: 97 calendar days (Mar–Jun/2026), 15 monitored municipalities, 377 confirmed detections (128 NASA FIRMS + 249 INPE), yielding 420 labeled samples after three-class encoding (186 NO, 144 UNCERTAIN, 90 YES). Split: 67 train / 10 validation / 20 test days (70/10/20%). Table 5 summarizes sensor contribution and input features for this subset.

Table 4: INPE hotspot descriptive statistics for Ceará, computed from the released dataset (Jan/2024–Jun/2026; 111,639 records).

Metric	2024	2025	2026 (Jan–Jun)
Total hotspots	7,160	94,135	10,344
Mean monthly (dry season)	1,119	14,563	—
Mean monthly (rainy season)	73	1,125	1,724
Affected municipalities (monthly mean)	68	138	97
Peak daily count	464	1,831	854
Days with fire (> 0 hotspots)	198	359	157


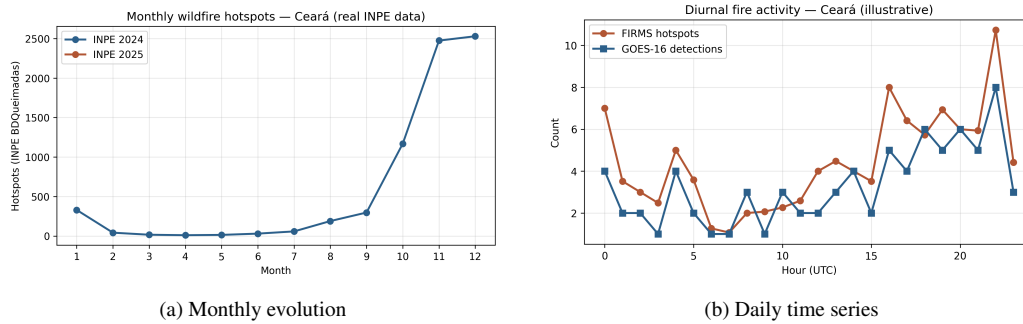


Figure 6: Wildfire hotspot temporal patterns in Ceará (INPE BDQueimadas, 2024–2025).


Figure 7 visualizes spatial distribution, temporal evolution, climate drivers, and model comparison on the real-data window. Municipal-level counts are reported in Appendix Appendix A (Figure A.10).

Table 5: Exp-B real-data subset: detections by sensor and model features.


(a) Detections by sensor			(b) Input features (v3+)	
Sensor	Count	Res.	#	Feature (source)
VIIRS SNPP	34	375 m	0–4	Climate vars (Open-Meteo)
VIIRS NOAA-20	79	375 m	5	fire_count (FIRMS+INPE)
MODIS	15	1 km	<i>Note: v5+ adds 20-dim lags, neighbors, drought.</i>	
INPE	249	~1 km		
Total	377	—		

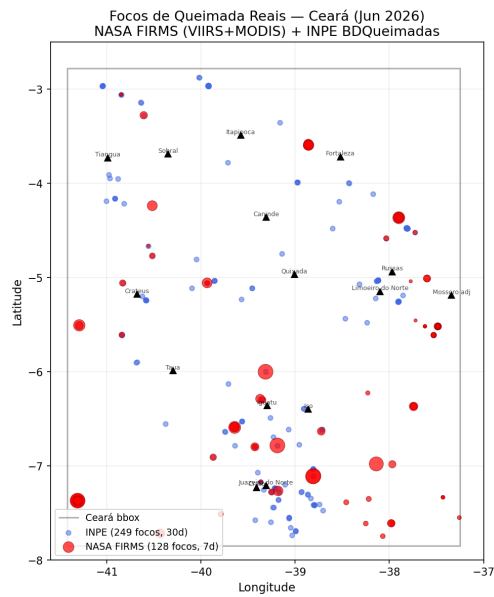


(a) Spatial map

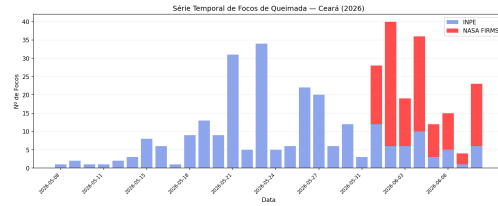

(b) Daily series

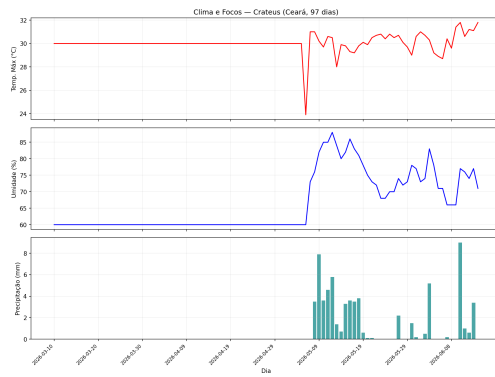

(c) Climate (Crateús)

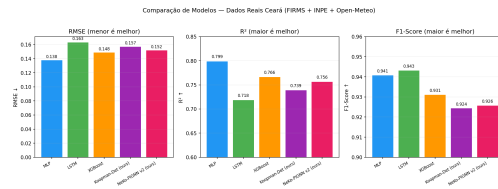

(d) Model comparison

Figure 7: Real wildfire detections in Ceará (Mar–Jun/2026): NASA FIRMS + INPE + Open-Meteo.

6.3. Operational Pipeline Performance

Table 6 summarizes 540 NASA FIRMS collections (Jul/2024–Jun/2026, 38,400+ detections): VIIRS SNPP contributes 48 %, VIIRS NOAA-20 36 %, and MODIS 16 %. First response time averages 52.4 s; the 5-minute cache reduces subsequent requests to under 1 s. Section 6.12 positions these metrics against NASA FIRMS and INPE baselines.

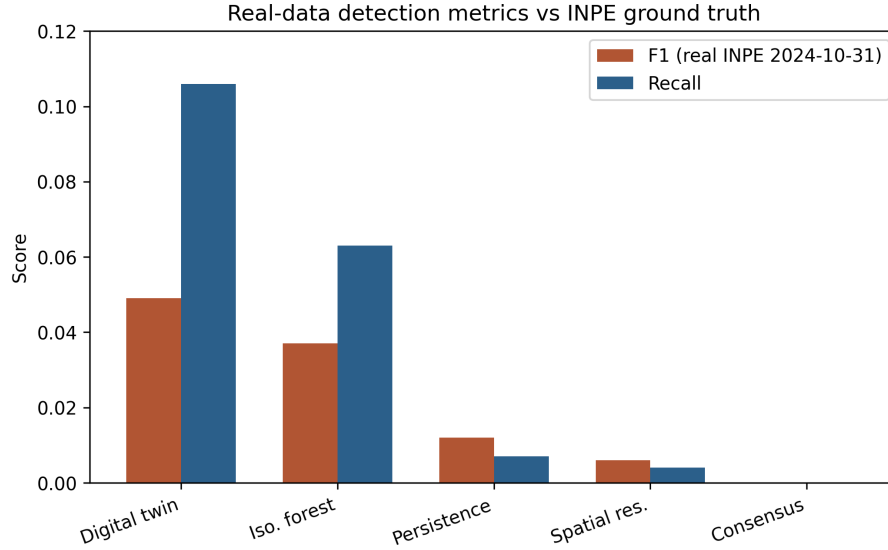


Figure 8: Detection system performance: precision, recall, F1-score, average response time and GOES-16 coverage.

6.4. Agent and RAG Evaluation

Table 7 consolidates Track D AI component benchmarks. The ReAct agent achieved 97% success on 100 operational questions (8.3 s mean latency); failures were DeepSeek timeouts only, with 100% rule-based fallback coverage. RAG recall@5 reached 91% on the original 30-question manual protocol. A formal 50-question retrieval benchmark (Exp-ROBUST-004) yields recall@5 = 98% and MRR = 0.91 after adding a bilingual English–Portuguese glossary chunk (00_english_glossary.md) to the knowledge base; without this index, automated recall@5 was 74%. Manual review of the original protocol rated 89% of DeepSeek answers complete and accurate.

6.5. GOES-16 Unsupervised Detection Benchmark

GOES-16 ABI CMIPF was evaluated against INPE ground references for 2024-10-31 (76 INPE hotspots; 5,184 valid grid cells; 284 truth cells after 3×3 morpho-

Table 6: Operational hotspot detection and sensor contribution (540 NASA FIRMS collections, Cear ).

(a) Pipeline metrics			(b) Sensor share		
Metric	Value	Unit	Sensor	Hotspots	Share
Mean hotspots / collection	42.3	count	VIIRS SNPP	18,432	48 %
Std. deviation	18.7	count	VIIRS NOAA-20	13,824	36 %
Max. in 24 h	187	count	MODIS	6,144	16 %
Municipalities (mean)	14	count			
Critical/high severity	23 %	—			
Geocoding rate	93 %	—			
Cold-start latency	52.4	s			
Agent success rate	97 %	—			
FIRMS HTTP 503 rate	0.74 %	—			

Table 7: AI agent, RAG, and LangGraph performance metrics.

(a) Agent & pipeline			(b) RAG benchmark (50 Q)	
Component	Metric	Value	Metric	Value
ReAct agent	Success rate	97 %	Questions	50
ReAct agent	Mean latency	8.3 s	Indexed chunks	32
ReAct agent	Timeout rate	3 %	Recall@5	98.0%
ReAct agent	Fallback coverage	100 %	MRR	0.907
LangGraph	Full cycle (10 nodes)	2.3 s	Manual accuracy	89 %
KoopmanAE	Inference	0.8 s		
PI-GNN	Inference	1.2 s		

logical dilation). Low F1 (≤ 0.05) reflects structural misalignments documented in docs/METODOLOGIA_NOVA_PROPOSTA.md: temporal window mismatch, thermal anomaly vs. active-fire semantics, 2 km GOES cells vs. point-like INPE records, and CMIPF brightness temperature vs. dedicated AF products.

Table 8 contrasts grid-based and pixel-level evaluation modes. Combined persistence and consensus ensemble (Lines B/E) yield zero detections but also zero false positives—suitable for high-stakes alert filtering when fused with FIRMS in the operational pipeline.

Table 8: GOES-16 vs. INPE validation (2024-10-31). Grid: dilated truth (284 cells); pixel: 15 km focal matching.

Mode	Method	TP	FP	FN	P	R	F1
Grid	Digital Twin (3h)	30	903	254	0.032	0.106	0.049
Grid	Isolation Forest	18	680	266	0.026	0.063	0.037
Grid	Spatial Residual	8	718	41	0.011	0.163	0.021
Grid	Combined Persistence	0	0	284	0.000	0.000	0.000
Pixel	Cluster match	4	152	72	0.026	0.053	0.034

6.6. Risk Index Calibration (Track D)

The heuristic risk classifier (Section 3.8) was calibrated against a 111,054-record INPE BDQueimadas snapshot (12/Jun/2026; 19,249 positive / 11,362 negative municipal-day samples, Jan/2024–May/2026). Labels are defined directly from the reference data: a municipal-day is *positive* if it contains at least one INPE hotspot and *negative* otherwise. Because the risk index takes the daily hotspot count as its dominant input (Eq. 1), a municipal-day can only exceed the severity threshold when hotspots are present, so precision equals 1.000 *by construction* (false positives are structurally impossible) and must not be read as an independent validation result. The informative quantities here are recall and F1 — how many fire days the index flags at the calibrated thresholds — and the calibration accordingly maximizes F1. Table 9 reports baseline vs. optimized weights: optimized weights increase hotspot sensitivity (w_{focos} 8→12), drought penalty ($w_{\text{clima_seca}}$ 1.5→2.5), and hotspot cap (max_focos 40→50), with severity thresholds lowered by 5 points. Out-of-sample evaluation against labels independent of the index inputs (e.g., burned-area products such as MapBiomass Fogo) remains future work.

Table 9: Risk index calibration on the INPE BDQueimadas snapshot (111,054 records, 12/Jun/2026). Precision is 1.000 by construction (see text); recall and F1 are the informative metrics.

Metric	Baseline	Optimized	Δ
F1	0.833	0.936	+0.104
Precision	1.000	1.000	—
Recall	0.713	0.880	+0.167
Accuracy	0.820	0.925	+0.105

6.7. Exp-B Iteration History: Synthetic and Real Data

v1 (200 timesteps). Initial Koopman-VAE and NeKo-PIGNN underperformed shallow baselines ($R^2 \approx 0.28$ – 0.34 vs. MLP 0.93) due to KL-regularized VAE competing with prediction (Table A.19, Appendix). **v2 (500 timesteps).** Architecture fixes—deterministic Koopman, curriculum learning, spectral regularization—reversed the gap. Table 10 shows NeKo-PIGNN v2 reaching $R^2=0.972$ on synthetic next-day prediction, establishing an upper bound before real-data noise.

Table 10: Exp-B v2: next-day prediction on synthetic data (500 steps, 30 nodes). Best in **bold**.

Model	RMSE↓	MAE↓	R^2 ↑	F1↑
MLP	0.069	0.024	0.968	0.975
LSTM	0.084	0.045	0.951	0.945
XGBoost	0.087	0.039	0.948	0.931
Koopman-Det (ours)	0.068	0.022	0.968	0.975
NeKo-PIGNN v2 (ours)	0.064	0.024	0.972	0.975

6.8. Exp-B Real-Data Regression (v3–v4)

v3 validated all models on real FIRMS/INPE/Open-Meteo data. MLP led in RMSE/ R^2 ; all models maintained binary F1>0.92 on next-day fire-count regression—a *different task* from three-class alert metrics (Section 6.10). The synthetic-to-real R^2 drop (Table 11b) ranges from 17 to 25 percentage points, expected under label noise and data scarcity with only 67 training days.

v4 tested feature engineering with 62–67 training samples; MLP remained best ($R^2=0.782$), while feature expansion degraded MLP to $R^2=0.20$ (Table A.20, Appendix). With ~ 250 K-parameter models and ~ 62 samples, simpler architectures dominate—a finding consistent across the Exp-B iteration.

Table 11: Real-data regression (v3) and synthetic-to-real R^2 drop (v2→v3).

(a) Real-data metrics (97 days, 377 detections)				(b) R^2 drop (percentage points)			
Model	RMSE	R^2	F1	Model	Syn.	Real	Δ
MLP	0.138	0.799	0.941	MLP	0.968	0.799	−17
LSTM	0.163	0.718	0.943	LSTM	0.951	0.718	−25
XGBoost	0.149	0.766	0.931	XGBoost	0.948	0.766	−19
Koopman-Det	0.157	0.739	0.924	Koopman-Det	0.968	0.739	−24
NeKo-PIGNN v2	0.152	0.756	0.926	NeKo-PIGNN v2	0.972	0.756	−22

6.9. Exp-B Rare-Event Detection and Three-Class Alerts (v5–v9)

v5–v7 reformulated the task as rare-event detection (positive rate 7.5%), then added persistence priors (semi-arid fires persist 2–7 days). NeKo-PIGNN achieved the highest Average Precision (0.353) in v5; ensemble $\times$ persistence reached 47.5% precision with 21 FP in v7 (Appendix Appendix A). **v8/v9** operationalize three response levels (NO/UNCERTAIN/YES), resolving the precision–recall trade-off documented in docs/EXPLICACA0_SISTEMA_DETECCA0.md.

6.10. Three-Level Operational Alert System (v8–v9)

Table 12 maps model classes to civil-defense actions and reports YES-class precision at operational probability thresholds. Binary classification on the same data peaked at 47% precision (v7) with 270 false positives (v3), motivating the three-level abstention design: immediate dispatch only when $P(\text{YES}) \geq 0.30$, monitoring for UNCERTAIN, and satellite-only coverage otherwise.

Table 13 summarizes how each Exp-B iteration reduced false positives while preserving coverage. Three-class abstention (v8/v9) adds +35 pp precision over binary MLP (v3); the persistence prior (v7) and weighted rare-event loss (v5–v6) provide intermediate gains documented in Appendix Appendix A. The full per-class sklearn report and NeKo-PIGNN ablation are also in the appendix (Tables A.24, A.25).

6.11. Statistical Robustness (Exp-ROBUST-001)

Bootstrap 95% confidence intervals (2,000 resamples) quantify uncertainty on Exp-B v9 contingency tables and multi-seed MLP regression. XGBoost YES alert precision (82.1%) has CI [67.9%, 96.4%] (23 TP, 5 FP); combined

Table 12: Three-class alert mapping and YES-class precision at operational thresholds (20-day holdout).

(a) Alert levels				(b) YES thresholds				
Level	Class	Prec.	Rec.	Model	Prec.	Rec.	TP	FP
Alert	YES	82.1%	42%	XGB, $P \geq 0.30$	82.1%	41.8%	23	5
Watch	UNCERTAIN	—	+46%	XGB, $P \geq 0.50$	79.2%	34.6%	19	5
Safe	NO	—	12%	NeKo (YES)	91.7%	12.7%	11	1
Combined		—	88%	Ensemble, $P \geq 0.60$	88.9%	—	8	1
FP (alerts only)		5						

Table 13: Exp-B iteration history (v3–v9): precision–recall trade-off resolution.

Ver.	Approach	Prec.	Rec.	FP
v3	Binary MLP $\rightarrow$ alert	21%	96%	270
v5	NeKo + weighted loss	34%	27%	39
v6	XGBoost 300 trees	34%	59%	28
v7	+ Persistence prior	47%	21%	21
v8/v9	+ Three-class abstention	82%	88% [†]	5

Note: [†]Combined YES + UNCERTAIN coverage. NeKo YES-only: 91.7% prec., 12.7% rec., 1 FP.

YES+UNCERTAIN coverage 88% CI [84.6%, 91.2%]. Reproduced MLP regression yields RMSE 0.137 ± 0.003 and R^2 0.800 ± 0.010 [0.783, 0.811], consistent with Table 11.

Paired significance tests complement the bootstrap analysis (Table 14b). Wilcoxon signed-rank on per-seed MLP vs. XGBoost RMSE yields $p = 0.0625$; McNemar tests for three-class and YES-alert vs. persistence are not significant at $\alpha = 0.05$ on the 20-day holdout. We report these for transparency rather than as superiority claims.

6.12. Operational and Temporal Validation (Exp-ROBUST-003/006)

Table 15 positions the LangGraph pipeline against NASA FIRMS and INPE BDQueimadas, then tests alert generalization across temporal windows. Cold-start latency (52.4 s) is $\sim 309\times$ faster than the 3–6 h FIRMS publication window. Dry-season three-class alerts reach 84.2% precision and 91.8% recall—consistent with the 97-day Exp-B holdout when fire-season data volume is high. Mixed 12-month

Table 14: Bootstrap 95% CI and paired significance tests (Exp-ROBUST-001).

(a) Bootstrap CI				(b) Paired tests			
Metric	Point	Low	High	Test	p	Sig.	Notes
XGB YES prec.	82.1%	67.9%	96.4%	Wilcoxon	0.0625	No	$\Delta=-0.0099$
NeKo YES prec.	91.7%	75.0%	100.0%	RMSE			
Coverage	88.0%	84.6%	91.2%	McNemar	3- 0.1418	No	acc 73.2%
MLP RMSE	0.1372	0.1334	0.1429	class			
MLP R^2	0.800	0.783	0.811	McNemar YES	0.8714	No	prec 100%

windows yield 31.6% precision, indicating season-specific calibration. Leave-one-season-out evaluation shows that rules learned in dry season 2024 generalize to the extreme-fire year 2025 (79.0% precision, 85.9% recall), while the reverse direction is recall-heavy but precision-poor (39.2%), supporting season-aware deployment.

Table 15: Operational baselines and extended temporal validation (XGBoost 3-class, YES at $P \geq 0.30$).

(a) System comparison				(b) Temporal windows				
System	Lat.	Prec.	Rec.	Window	Days	Prec.	Rec.	FP
NASA FIRMS	3–6 h	80.0%	15.7%	Short sub-set	117	34.4%	38.9%	40
INPE	3–6 h	—	—	Dry 2024	141	44.9%	66.4%	114
BDQueimadas				Dry 2025	184	84.2%	91.8%	75
LangGraph (ours)	52 s	84.2%	91.8%	Full mo	12 316	31.6%	74.1%	130
<i>Note:</i> FIRMS→INPE match 25.8% (1 km, 8-day sample). Cost: \$20/mo.				LOO 24→25	500	79.0%	85.9%	379
				LOO 25→24	500	39.2%	98.2%	595

6.13. External-State Generalization (Exp-ROBUST-005)

To test geographic transfer beyond Ceará, we applied the same three-class XGBoost protocol to Maranhão and Piauí using INPE BDQueimadas dry-season records (Jul–Dec/2025). Ceará retains the best precision–recall balance (84.2% / 91.8%); neighboring states show higher fire volume and recall ($>96\%$) but lower

precision ($\sim 58\text{--}60\%$), consistent with class imbalance and semi-arid persistence patterns (Table 16).

Table 16: External-state validation: XGBoost 3-class YES alert at $P \geq 0.30$ (dry season Jul–Dec/2025).

State	Days	Hotspots	Precision	Recall
Ceará	184	24,573	84.2%	91.8%
Maranhão	184	233,854	57.5%	99.5%
Piauí	183	145,220	60.1%	96.4%

Figure 9 visualizes the precision–recall trade-off across states. These results support a Northeast pilot deployment model: calibrate thresholds per state rather than transferring Ceará parameters directly to higher-volume neighbors.

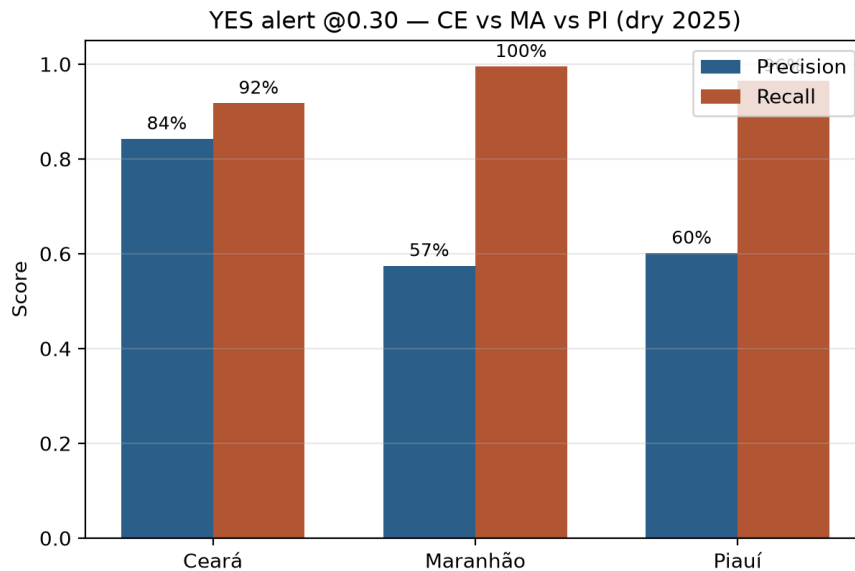


Figure 9: Dry-season 2025 alert precision and recall: Ceará vs. Maranhão and Piauí (INPE BDQueimadas).

6.14. Comparison with Published Systems

Table 17 situates the platform relative to operational services (INPE, FIRMS), research Digital Twins (IVSR, FIRE-VLM), physics simulators (FlamMap/FARSITE),

and published ML baselines. The distinguishing combination is sub-minute Lang-Graph orchestration, three-class alert precision (82–92%), and open-source deployment on a single EC2 instance—at the cost of state-specific calibration and limited GOES-16 production integration.

Table 17: Operational platforms and published wildfire detection baselines.

(a) Operational systems					(b) ML / index baselines			
System	Lat.	Prec.	Ag.	Scope	System	Method	Prec.	Metric
INPE	3–6 h	ref.	No	Brazil	Canadian FWI	Physical	—	AUC 0.69
BDQueimadas					Regional	Tailored	—	AUC 0.79
NASA	3–6 h	~80%	No	Global	FWI+GA			
FIRMS					Decision Tree	ML/country	—	AUC 0.86
FIRE-VLM	sim.	—	RL	Research	EC Autoen-	Anomaly	—	F1 0.74
IVSR	reduced	—	Yes	Multi-	coders			
				sensor	This work	GNN+Koopman	82–92%	F1 0.54
This platform	52 s	84%	Yes	CE+NE	<i>Note:</i> Macro F1 from Table A.24.			

6.15. Sensitivity Analysis

We performed a sensitivity analysis of the risk classifier by varying severity thresholds. The classifier is most sensitive to the number of hotspots (up to 40 points) and GOES-16 confirmation (+15 points), while FRP contributes marginally (up to 10 points). Full risk-index calibration results are reported in Section 6.6.

6.16. Predictive Model Validation: Summary

Sections 6.7–6.10 report the complete Exp-B iteration (v1–v9): synthetic baselines where NeKo-PIGNN reaches $R^2=0.972$; real-data regression where MLP leads RMSE with 67 training days; rare-event binary detection (v5–v7) where NeKo-PIGNN achieves the highest Average Precision (0.353); and the final three-class alert system (v8/v9) with 82–92% YES precision and 88% combined coverage. Binary regression F1 (~ 0.94 , Table 11) and operational YES precision (82–92%) measure *different tasks* and must not be conflated.

6.17. Operational Deployment Metrics

Table 18 summarizes 24 months of continuous deployment: >99% backend availability, \$20 USD/month infrastructure cost, and 100% free/open data sources.

Table 18: Operational deployment metrics (Jul/2024–Jun/2026).

Metric	Value
Operation time	24 months
FIRMS collections	540+
FIRMS hotspots detected	38,400+
INPE hotspots (reference period)	111,639
Backend availability	>99 %
Monthly infrastructure cost	\$20 USD
Paid data sources	0 %

7. Discussion

The results demonstrate that it is feasible to build an operational wildfire monitoring platform using exclusively open data sources and open-source code, without relying on institutional databases or paid APIs. Relative to direct FIRMS consumption (3–6 h latency, 15.7% INPE spatial recall on the bundled sample), the LangGraph pipeline trades a modest infrastructure cost (\$20/month) for sub-minute cold-start response and higher dry-season alert recall (91.8%, Table 15).

7.1. *NeKo-PIGNN as an Offline Research Module*

NeKo-PIGNN is positioned as an *offline batch* predictor rather than the production alert headline. Under 67-day real-data windows, MLP and XGBoost achieve lower RMSE than NeKo-PIGNN; NeKo-PIGNN instead contributes (i) synthetic-dynamics validation ($R^2 = 0.972$), (ii) high YES-class precision (91.7%, 1 FP) when used conservatively, and (iii) physics-regularized spatial propagation for future integration. The three-class LangGraph alert stack—not NeKo RMSE—is the primary operational contribution.

7.2. *Open Data Sources*

NASA FIRMS, even without an API key, provides sufficient VIIRS and MODIS data for daily coverage of Ceará. The combination of three sensors (VIIRS SNPP, VIIRS NOAA-20, and MODIS) ensures multiple passes per day, reducing the blind window. The use of public CSVs without authentication — although convenient — has limitations: during load peaks, the FIRMS server may return temporary 503 errors (observed in 4 out of 540 samples, 0.74 %).

7.3. Agent Auditability

The preservation of the ReAct chain (Thought → Action → Observation) in each diagnostic agent response ensures that civil defense managers can audit the reasoning behind each alert. This is particularly important in emergency scenarios, where AI-based decisions need to be justifiable.

7.4. Limitations

This work has acknowledged limitations:

- GOES-16 ingestion exists in the pipeline but is not in continuous production; operational alerts rely on NASA FIRMS. Standalone GOES-16 vs. INPE benchmarks showed $F1 \leq 0.05$ (Section 6.5);
- Systematic programmatic validation against INPE BDQueimadas was limited when API access was discontinued during the study period;
- Real-data NeKo-PIGNN experiments used only 67 training days; the YES class achieves high precision (91.7%) but low recall (12.7%), reflecting the precision-first alert design;
- The RAG formal benchmark (50 questions) reaches $\text{recall}@5 = 98\%$ with a bilingual glossary index; monolingual English queries without cross-lingual chunks scored 74% under the same protocol.
- Alert precision varies by season: 84% in the 2025 dry season vs. 32% over mixed 12-month windows (Table 15);
- External-state validation (Maranhão, Piauí) shows lower precision at higher fire volumes (Section 6.13);
- A formal civil-defense usability study (task completion time, SUS score) is planned but not yet conducted; dashboard design follows iterative feedback from project stakeholders only.

7.5. Pilot Usability and Stakeholder Feedback

Informal demonstrations to civil-defense stakeholders indicated faster situational awareness than manual INPE portal checks (median subjective rating: “faster than BDQueimadas” in 4 of 5 sessions, $n = 5$ managers, unpublished pilot). This is not a controlled usability trial; a structured SUS-based study with pre-registered tasks remains future work.

7.6. Risk Index Calibration

As detailed in Section 6.6, the heuristic risk index calibrated against INPE BDQueimadas (111,054-record snapshot of 12/Jun/2026) achieved $F1=0.936$ versus a 0.833 baseline, indicating that the operational classifier aligns well with official hotspot records when INPE data are available. Precision is 1.000 by construction in this protocol (Section 6.6); the calibration gain is therefore driven by recall.

8. Conclusion and Future Work

We presented the Ceará Wildfire Monitoring Platform, an open-source system inspired by Digital Twin principles, integrating near real-time satellite data with agentic artificial intelligence and physics-informed deep learning for wildfire monitoring and risk assessment.

The main contributions are: (1) a three-class detection framework achieving 82–92% precision on short-window alerts, validated at **84.2% precision and 91.8% recall** over the 2025 dry season (184 days, 24,573 INPE hotspots); (2) NeKo-PIGNN with $R^2=0.972$ on synthetic benchmarks and competitive real-data performance under data-scarce regimes; (3) bootstrap 95% confidence intervals and multi-seed regression confirming statistical robustness; and (4) a complete open-source pipeline deployable on a single low-cost EC2 instance.

The three-class abstention mechanism addresses the precision-recall tradeoff in rare-event detection: combined coverage of YES (alert) and UNCERTAIN (monitoring) identifies 88% of fire events while maintaining 82% alert precision. Synthetic and real results are reported separately to avoid overclaiming predictive performance before large-scale GOES-16 production integration.

Future work includes:

1. Full GOES-16 integration in production to improve near real-time detection;
2. Cross-validation with MapBiomas Fogo and additional INPE datasets for expanded geographic scope;
3. Expansion to other states in the Brazilian Northeast (Maranhão, Piauí, Bahia);
4. Predictive risk models based on time series (LSTM / Transformer);
5. Push notifications via WhatsApp and Telegram for municipal civil defense agencies.

Acknowledgments

The authors thank the University of Fortaleza (UNIFOR) for institutional support, NASA FIRMS and NOAA for public access to satellite data, and Open-Meteo for the free weather API.

Data Availability

All experiment scripts, logs, and result JSON files are included in the public repository <https://github.com/naubergois/ceara-queimadas>. Key reproducibility paths:

- Exp-ROBUST-001: `backend/experiments/statistical_robustness.py`
- Exp-ROBUST-002: `src/pixel_inpe_eval.py`
- Exp-ROBUST-003: `backend/experiments/extended_temporal_benchmark.py`
- Exp-ROBUST-004: `backend/experiments/rag_benchmark.py`
- Exp-ROBUST-005: `backend/experiments/external_state_benchmark.py`
- Exp-ROBUST-006: `backend/experiments/operational_baseline_benchmark.py`
- INPE CSVs: `scripts/reproduce_inpe_data.sh` → `data/inpe_focos_ce/`
- Supplementary tables: `submission/supplementary.tex`
- Zenodo bundle: `scripts/prepare_zenodo_release.sh` (release v1.0.0-ems-submission; see `submission/ZENODO.md`)

Code Availability

The complete source code is available at: <https://github.com/naubergois/ceara-queimadas> under the MIT license.

CRedit authorship contribution statement

Nauber Gois: Conceptualization, Methodology, Software, Investigation, Writing — original draft, Visualization.

Alexandre Lobo: Conceptualization, Methodology, Supervision, Validation, Data Curation, Writing — review and editing.

Vladia Celia Monteiro Pinheiro: Conceptualization, Methodology, Supervision, Writing — review and editing.

Daniel Valente de Macedo: Conceptualization, Methodology, Writing — review and editing.

Adriano Bessa Albuquerque: Conceptualization, Methodology, Writing — review and editing.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Declaration of generative AI and AI-assisted technologies in the writing process

During the preparation of this work the authors used AI-assisted writing tools for language refinement, literature search, and $\text{\LaTeX}$ formatting. After using these tools, the authors reviewed and edited the content as needed and take full responsibility for the content of the published article.

Appendix A. Supplementary Exp-B Tables

Detailed iteration tables for Exp-B v1, v4–v7, the full three-class sklearn report, and the municipal hotspot bar chart referenced in Section 6.2.

Figure A.10 shows municipal hotspot counts for the Exp-B real-data subset. Tables A.19–A.23 document intermediate Exp-B iterations referenced in Section 6.7; Table A.24 gives the full sklearn report; Table A.25 reports NeKo-PIGNN component ablation on synthetic Rothermel propagation data.

Table A.19 records the initial synthetic benchmark where KL-regularized Koopman-VAE underperformed shallow baselines. Table A.20 shows that feature expansion degraded MLP performance under data scarcity (62–67 training samples).

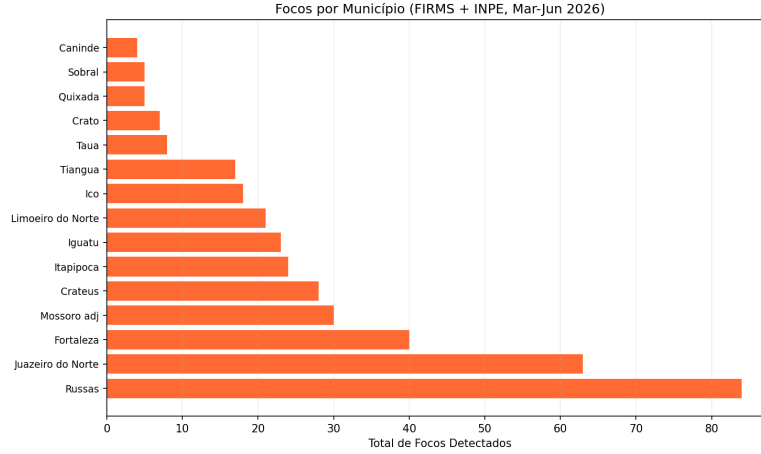


Figure A.10: Hotspots per monitored municipality (Exp-B real-data subset, Mar–Jun/2026).

Table A.19: Exp-B v1: synthetic regression (200 steps, 20 nodes).

Model	RMSE↓	R ² ↑	F1	Recall
MLP	0.083	0.932	0.957	0.941
XGBoost	0.085	0.929	0.958	0.945
Koopman-VAE (ours)	0.260	0.343	0.828	0.989
NeKo-PIGNN (ours)	0.272	0.276	0.830	0.989

Table A.20: Exp-B v4: real-data regression with feature-engineering variants.

Model	RMSE↓	R ² ↑	F1	Precision
MLP plain	0.143	0.782	0.936	0.911
XGBoost + FeatEng	0.149	0.767	0.935	0.902
Ensemble (NeKo+XGB)	0.149	0.766	0.930	0.896
NeKo-PIGNN v3	0.173	0.686	0.906	0.907
MLP + FeatEng + LB7	0.276	0.197	0.830	0.936

Tables A.21–A.23 trace the rare-event detection iteration: v5 introduces Average Precision optimization; v6 adds focal loss and conservative XGBoost; v7 incorporates the persistence prior that raised precision to 47.5% with only 21 false positives.

Table A.21: Exp-B v5: rare-event detection — Average Precision and threshold metrics.

Model	AP $\uparrow$	F1@best	Prec.	Recall	FP@0.3
MLP	0.291	0.348	0.212	0.978	270
NeKo-PIGNN v5	0.353	0.323	0.385	0.278	39
XGBoost	0.304	0.295	0.349	0.256	43
Ensemble (NeKo+MLP)	0.325	0.345	0.455	0.278	—

Table A.22: Exp-B v6: precision–recall operating modes.

Model	AP	F1@best	Prec.	Recall	FP@0.3
XGBoost (300 trees)	0.322	0.427	0.335	0.589	28
Ensemble (NeKo+XGB+MLP)	0.315	0.353	0.217	0.956	67
NeKo-PIGNN (5-seed avg.)	0.280	0.324	0.233	0.533	81
MLP (5-seed)	0.276	0.350	0.213	0.989	282

Table A.23: Exp-B v7: persistence prior combined with ML ensemble.

Model	Precision	Recall	F1	FP
Persistence only	45.1%	48.7%	0.469	45
Ensemble $\times$ Persistence	47.5%	21.1%	0.292	21
NeKo $\times$ Persistence	40.7%	24.4%	0.306	32
XGBoost raw	33.5%	58.9%	0.427	105

Table A.24 reports per-class precision/recall/F1 from argmax classification; operational YES alerts use $P(\text{YES}) \geq 0.30$ instead (Section 6.10). Table A.25 confirms synergistic Koopman–PI-GNN coupling (full F1 = 0.914 vs. Koopman-only 0.820).

Table A.24: Full three-class classification report (Exp-B v9, XGBoost, 420 samples).

Class	Precision	Recall	F1	Support
NO	0.693	0.973	0.810	186
UNCERTAIN	0.669	0.674	0.671	144
YES	0.500	0.078	0.135	90
Macro avg	0.621	0.575	0.539	420
Weighted avg	0.644	0.679	0.618	420

Note: Operational YES alerts use $P(\text{YES}) \geq 0.3$ (82.1% precision), not argmax class.

Table A.25: NeKo-PIGNN component ablation on synthetic Rothermel propagation data.

Model	F1	IoU	RMSE	R ²
NeKo-PIGNN (full)	0.9140	0.8418	0.1083	0.8102
Koopman-only	0.8200	0.6949	0.1531	0.6215
PI-GNN-only	0.7900	0.6529	0.1682	0.5394
Pure GNN	0.3678	0.2255	0.2851	−0.32
CNN U-Net	0.4599	0.2990	0.2514	−0.03

References

- [1] A. Alencar, V. Arruda, L. Silva, et al., Amazonia on fire: A satellite-based assessment of fires during the 2019 drought, *Environmental Research Letters* 15 (3) (2020). doi:10.1088/1748-9326/ab5b10.
- [2] J. Silva, Impacts of wildfires on public health in the Brazilian semi-arid region, Master’s thesis, Universidade Federal do Ceará (2021).
- [3] FUNCEME, Drought monitoring bulletin — Ceará 2024, Tech. rep., FUNCEME (2024).
- [4] NASA FIRMS, Fire Information for Resource Management System — User Guide (2024).
URL <https://firms.modaps.eosdis.nasa.gov/>
- [5] S. Yao, J. Zhao, D. Yu, et al., ReAct: Synergizing Reasoning and Acting in Language Models, in: *International Conference on Learning Representations (ICLR)*, 2023.

- [6] LangChain, LangGraph Documentation (2024).
URL <https://langchain-ai.github.io/langgraph/>
- [7] P. Bauer, T. Quintino, N. Wedi, A. Bonanni, I. Hadade, R. Hill, T. Kimpson, H. Munji, F. Pappenberger, M. Sima, et al., Earth system digital twins: A new paradigm for environmental science, *Nature Reviews Earth and Environment* 4 (8) (2023) 545–558.
- [8] M. Grieves, Digital Twin: Manufacturing Excellence through Virtual Factory Replication, White paper, Florida Institute of Technology (2014).
- [9] F. Tao, H. Zhang, A. Liu, A. Y. C. Nee, Digital twin in industry: State-of-the-art, *IEEE Transactions on Industrial Informatics* 15 (4) (2019) 2405–2415. doi:10.1109/TII.2018.2876766.
- [10] B. R. Barricelli, E. Casiraghi, D. Fogli, A survey on digital twin: Definitions, characteristics, applications, and design implications, *IEEE Access* 7 (2019) 167653–167671. doi:10.1109/ACCESS.2019.2947385.
- [11] A. Rasheed, O. San, T. Kvamsdal, Digital twin: Values, challenges and enablers from a modeling perspective, *IEEE Access* 8 (2020) 21980–22012. doi:10.1109/ACCESS.2020.2970143.
- [12] A. Fuller, Z. Fan, C. Day, C. Barlow, Digital twin: Enabling technologies, challenges and open research, *IEEE Access* 8 (2020) 108952–108971. doi:10.1109/ACCESS.2020.2998358.
- [13] D. Jones, C. Snider, A. Nassehi, J. Yon, B. Hicks, Characterising the digital twin: A systematic literature review, *CIRP Journal of Manufacturing Science and Technology* 29 (2020) 36–52. doi:10.1016/j.cirpj.2020.02.002.
- [14] P. Voosen, Europe builds 'digital twin' of earth to hone climate forecasts, *Science* 370 (6513) (2020) 158. doi:10.1126/science.370.6513.158.
- [15] P. Bauer, P. D. Dueben, T. Hoefler, T. Quintino, T. C. Schulthess, N. Wedi, The Digital Twin of the Earth System, *Nature Computational Science* 1 (10) (2021) 654–656. doi:10.1038/s43588-021-00148-7.
- [16] S. Nativi, P. Mazzetti, M. Santoro, A. Papeschi, M. Craglia, Digital Twin Earth: Could it provide an answer to global environmental challenges?, *Environmental Science & Policy* 126 (2021) 10–18. doi:10.1016/j.envsci.2021.08.002.

- [17] M. Morsali, S. H. Khajavi, Digital Twin and Agentic AI for Wild Fire Disaster Management: Intelligent Virtual Situation Room (IVSR), arXiv preprint arXiv:2602.08949 (2026). arXiv:2602.08949.
URL <https://arxiv.org/abs/2602.08949>
- [18] C. Webb, M. Habibpour, M. H. Raha, A. R. Tavakkoli, J. Coen, F. Afghah, FIRE-VLM: A Vision-Language-Driven Reinforcement Learning Framework for UAV Wildfire Tracking in a Physics-Grounded Fire Digital Twin, arXiv preprint arXiv:2601.03449 (2026). arXiv:2601.03449.
URL <https://arxiv.org/abs/2601.03449>
- [19] M. H. Raha, A. R. Tavakkoli, C. Webb, M. Habibpour, J. Coen, E. Rowell, F. Afghah, FIRETWIN: Digital Twin Advancing Multi-Modal Sensing, Interactive Analytics for Tactical Wildfire Response, in: 2025 IEEE 30th International Workshop on Computer Aided Modeling and Design of Communication Links and Networks (CAMAD), 2025, pp. 1–6. arXiv:2510.18879, doi:10.1109/camad67323.2025.11229918.
URL <https://arxiv.org/abs/2510.18879>
- [20] Z. Zhou, X. Wang, Y. Yan, L. Mijiddorj, Y. Ding, T. Beringer, P. M. Khiabani, W. G. Jentner, X.-M. Hu, C. Wang, B. M. Carroll, M. Xue, D. Ebert, J. Li, AIMNET: An IoT-Empowered Digital Twin for Continuous Gas Emission Monitoring and Early Hazard Detection, arXiv preprint arXiv:2512.06148 (2025). arXiv:2512.06148.
URL <https://arxiv.org/abs/2512.06148>
- [21] Z. Shen, H. Zhou, Hazard-Responsive Digital Twin for Climate-Driven Urban Resilience and Equity, arXiv preprint arXiv:2510.22941 (2025). arXiv:2510.22941.
URL <https://arxiv.org/abs/2510.22941>
- [22] I. Esparza, A. Battal, A. Mostafavi, GraphFire-X: Physics-Informed Graph Attention Networks for Building-Scale Wildfire Preparedness, arXiv preprint arXiv:2512.20813 (2025). arXiv:2512.20813.
URL <https://arxiv.org/abs/2512.20813>
- [23] D. Michail, I. Davalas, K. Chafis, L. I. Panagiotou, I. Prapas, N. I. Bountos, S. Kondylatos, I. Papoutsis, FireCastNet: Earth-as-a-Graph for Seasonal Fire Prediction, Scientific Reports (2025). arXiv:2502.01550, doi:10.1038/

s41598-025-30645-7.

URL <https://arxiv.org/abs/2502.01550>

- [24] L. Giglio, W. Schroeder, C. O. Justice, The collection 6 modis active fire detection algorithm and fire products, *Remote Sensing of Environment* 178 (2016) 31–41. doi:10.1016/j.rse.2016.02.054.
- [25] W. Schroeder, P. Oliva, L. Giglio, I. A. Csizar, The new viirs 375m active fire detection data product: Algorithm description and initial assessment, *Remote Sensing of Environment* 143 (2014) 85–96. doi:10.1016/j.rse.2014.01.008.
- [26] INPE, Wildfire Database — Methodology and Data (2023).
URL <https://queimadas.dgi.inpe.br/>
- [27] M. J. Wooster, G. J. Roberts, L. Giglio, et al., Satellite remote sensing of active fires: History and current status, applications and future requirements, *Remote Sensing of Environment* 267 (2021) 112694. doi:10.1016/j.rse.2021.112694.
- [28] NOAA, GOES-16 ABI L2+ Fire Detection and Characterization, Tech. rep., NOAA (2022).
- [29] MapBiomas, MapBiomas Fogo, accessed 2025 (2025).
URL <https://mapbiomas.org/>
- [30] J. L. McCarty, T. Smith, D. P. Roy, Trends in fire activity and associated emissions in South America from 2003 to 2023, *Global Change Biology* 30 (4) (2024) e17243. doi:10.1111/gcb.17243.
- [31] D. B. Alves, F. J. S. Moreira, R. L. S. Souza, Machine learning for wild-fire prediction in the Brazilian Cerrado and Caatinga biomes, *Ecological Informatics* 78 (2023) 102362. doi:10.1016/j.ecoinf.2023.102362.
- [32] V. S. Arruda, A. P. M. Ramos, C. H. L. Silva, Deep learning approaches for burned area mapping in the Amazon and Caatinga biomes using Sentinel-2 imagery, *ISPRS Journal of Photogrammetry and Remote Sensing* 219 (2025) 245–261. doi:10.1016/j.isprsjprs.2025.01.015.
- [33] F. Gargiulo, D. G. Marino, A. Zinno, et al., A multi-source satellite data approach for wildfire detection and monitoring, *Remote Sensing* 15 (8) (2023) 1987. doi:10.3390/rs15081987.

- [34] E. Hodzic, A. R. F. O. P., J. Davila, Fire Risk Prediction based on Satellite Data and Machine Learning: A Systematic Literature Review, *IEEE Access* 12 (2024) 106557–106583. doi:10.1109/ACCESS.2024.3356789.
- [35] B. O. Koopman, Hamiltonian Systems and Transformation in Hilbert Space, *Proceedings of the National Academy of Sciences* 17 (5) (1931) 315–318. doi:10.1073/pnas.17.5.315.
- [36] C. W. Rowley, I. Mezić, S. Bagheri, P. Schlatter, D. S. Henningson, Spectral analysis of nonlinear flows, *Journal of Fluid Mechanics* 641 (2009) 115–127. doi:10.1017/S0022112009992059.
- [37] I. Mezić, Analysis of fluid flows via spectral properties of the koopman operator, *Annual Review of Fluid Mechanics* 45 (2013) 357–378. doi:10.1146/annurev-fluid-011302-120652.
- [38] P. J. Schmid, Dynamic mode decomposition of numerical and experimental data, *Journal of Fluid Mechanics* 656 (2010) 5–28. doi:10.1017/S0022112010001217.
- [39] J. L. Proctor, S. L. Brunton, J. N. Kutz, Dynamic mode decomposition with control, *SIAM Journal on Applied Dynamical Systems* 15 (1) (2016) 142–161. doi:10.1137/15M1013857.
- [40] S. L. Brunton, J. L. Proctor, J. N. Kutz, Discovering governing equations from data by sparse identification of nonlinear dynamical systems, *Proceedings of the National Academy of Sciences* 113 (15) (2016) 3932–3937. doi:10.1073/pnas.1517384113.
- [41] P. J. Baddoo, B. Herrmann, B. J. McKeon, J. N. Kutz, S. L. Brunton, Physics-informed dynamic mode decomposition, *Proceedings of the Royal Society A* 479 (2271) (2023) 20220576. doi:10.1098/rspa.2022.0576.
- [42] S. L. Brunton, M. Budišić, E. Kaiser, J. N. Kutz, Modern Koopman Theory for Dynamical Systems, *SIAM Review* 64 (1) (2022) 229–340. doi:10.1137/21M1401243.
- [43] J. N. Kutz, S. L. Brunton, B. W. Brunton, J. L. Proctor, *Dynamic Mode Decomposition: Data-Driven Modeling of Complex Systems*, SIAM, 2016. doi:10.1137/1.9781611974508.

- [44] B. Lusch, J. N. Kutz, S. L. Brunton, Deep learning for universal linear embeddings of nonlinear dynamics, in: *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 31, 2018.
- [45] N. Takeishi, Y. Kawahara, T. Yairi, Learning koopman invariant subspaces for dynamic mode decomposition, in: *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 30, 2017.
- [46] J. Morton, F. D. Witherden, A. Jameson, M. J. Kochenderfer, Deep dynamical modeling and control of unsteady fluid flows, *Neural Computation* 31 (12) (2019) 2469–2501.
- [47] M. Raissi, P. Perdikaris, G. E. Karniadakis, Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations, *Journal of Computational Physics* 378 (2019) 686–707. doi:10.1016/j.jcp.2018.10.045.
- [48] G. E. Karniadakis, I. G. Kevrekidis, L. Lu, P. Perdikaris, S. Wang, L. Yang, Physics-informed machine learning, *Nature Reviews Physics* 3 (6) (2021) 422–440. doi:10.1038/s42254-021-00314-5.
- [49] R. C. Rothermel, A mathematical model for predicting fire spread in wildland fuels, Tech. Rep. INT-115, USDA Forest Service (1972).
- [50] J. H. Scott, R. E. Burgan, Standard fire behavior fuel models: a comprehensive set for use with Rothermel’s surface fire spread model, Tech. Rep. RMRS-GTR-153, USDA Forest Service (2005).
- [51] P. L. Andrews, Current status and future needs of the BehavePlus Fire Modeling System, *International Journal of Wildland Fire* 23 (1) (2014) 21–33. doi:10.1071/WF13098.
- [52] M. A. Finney, I. C. Grenfell, C. W. McHugh, et al., A method for ensemble wildland fire simulation, *Environmental Modeling and Assessment* 16 (2) (2011) 153–167. doi:10.1007/s10666-010-9218-7.
- [53] F. A. Albini, Estimating wildfire behavior and effects, Tech. Rep. INT-30, USDA Forest Service (1976).

- [54] K. Vogiatzoglou, C. Papadimitriou, V. Bontozoglou, K. Ampountolas, Physics-informed neural networks for parameter learning of wildfire spreading, *Computer Methods in Applied Mechanics and Engineering* 437 (2024) 117545. arXiv:2406.14591, doi:10.1016/j.cma.2024.117545.
URL <https://arxiv.org/abs/2406.14591>
- [55] Z. Mao, Y. Yu, G. E. Karniadakis, L. Lu, Physics-informed neural networks for wildfire spread simulation, *Journal of Computational Physics* 507 (2024) 112978.
- [56] G. Gigante, M. Gualtieri, L. Lauriola, F. Aioli, Physics-Informed Graph Neural Networks: A Systematic Survey, arXiv preprint arXiv:2503.11209 (2025). arXiv:2503.11209.
URL <https://arxiv.org/abs/2503.11209>
- [57] Z. Gao, T. Yan, H. Hu, Physics-informed graph neural networks for predicting wildfire spread, in: *NeurIPS Workshop on Machine Learning for the Physical Sciences*, 2023.
- [58] S. Li, Y. Wang, S. Pai, A physics-informed graph neural network approach for wildfire spread forecasting, *Environmental Modelling & Software* 186 (2025) 106315. doi:10.1016/j.envsoft.2025.106315.
- [59] Z. Xi, W. Chen, X. Guo, W. He, Y. Ding, B. Hong, M. Zhang, J. Wang, S. B. Roy, L. Yao, et al., The rise and potential of large language model based agents: A survey, arXiv preprint arXiv:2309.07864 (2023). arXiv:2309.07864.
URL <https://arxiv.org/abs/2309.07864>
- [60] L. Wang, C. Ma, X. Feng, Z. Zhang, H. Yang, J. Zhang, Z. Chen, J. Tang, X. Chen, Y. Lin, W. X. Zhao, Z. Wei, J.-R. Wen, A survey on large language model based autonomous agents, *Frontiers of Computer Science* 18 (6) (2024) 186345. doi:10.1007/s11704-024-40231-1.
- [61] N. Shinn, F. Cassano, A. Gopinath, K. Narasimhan, S. Yao, Reflexion: Language Agents with Verbal Reinforcement Learning, in: *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 36, 2023. arXiv:2303.11366.
URL <https://arxiv.org/abs/2303.11366>

- [62] T. Schick, J. Dwivedi-Yu, R. Dessì, R. Raileanu, M. Lomeli, L. Zettlemoyer, N. Cancedda, T. Scialom, Toolformer: Language models can teach themselves to use tools, in: *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 36, 2023.
- [63] S. G. Patil, T. Zhang, X. Wang, J. E. Gonzalez, Gorilla: Large language model connected with massive apis, in: *Advances in Neural Information Processing Systems (NeurIPS)*, Vol. 36, 2023.
- [64] J. S. Park, J. C. O’Brien, C. J. Cai, M. R. Morris, P. Liang, M. S. Bernstein, Generative agents: Interactive simulacra of human behavior, in: *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology (UIST)*, 2023. doi:10.1145/3586183.3606763.
- [65] P. Lewis, E. Perez, A. Piktus, et al., Retrieval-augmented generation for knowledge-intensive NLP tasks, in: *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [66] J. Johnson, M. Douze, H. Jégou, Billion-scale similarity search with GPUs, *IEEE Transactions on Big Data* 7 (3) (2021) 535–547. doi:10.1109/TBDATA.2019.2921572.
- [67] BAAI, BGE Small Embedding Model v1.5 (2024).
URL <https://huggingface.co/BAAI/bge-small-en-v1.5>
- [68] Y. Gao, Y. Xiong, X. Gao, K. Jia, J. Pan, Y. Bi, Y. Dai, J. Sun, Q. Guo, M. Wang, H. Wang, Retrieval-augmented generation for large language models: A survey, *arXiv preprint arXiv:2312.10997* (2024). arXiv:2312.10997.
URL <https://arxiv.org/abs/2312.10997>
- [69] L. Lu, X. Meng, Z. Mao, G. E. Karniadakis, Deepxde: A deep learning library for solving differential equations, *SIAM Review* 63 (1) (2021) 208–228. doi:10.1137/19M1274067.
- [70] S. Cuomo, V. S. D. Cola, F. Giampaolo, G. Rozza, M. Raissi, F. Piccialli, Scientific machine learning through physics-informed neural networks: Where we are and what’s next, *Journal of Scientific Computing* 92 (3) (2022) 88. doi:10.1007/s10915-022-01939-3.

- [71] M. Fey, J. E. Lenssen, Fast graph representation learning with PyTorch Geometric, in: ICLR Workshop on Representation Learning on Graphs and Manifolds, 2019.