



FactoryPulse | M-204 condition evidence

Synthetic trainer reference - invented thresholds and readings


Vibration (mm/s)

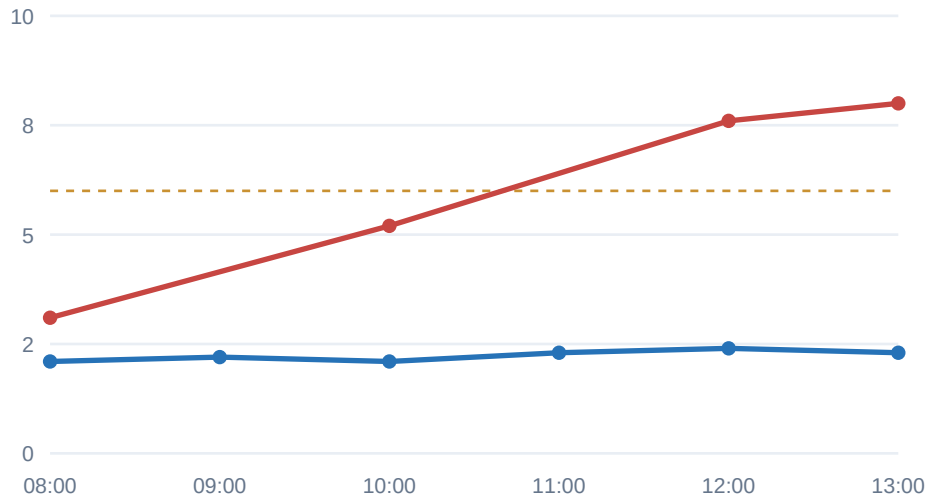

Motor temperature (C)

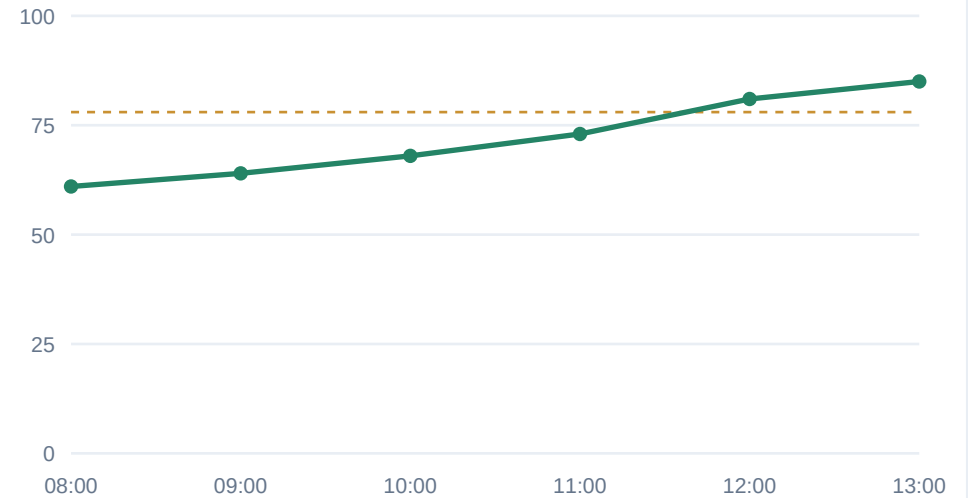

Motor current (A)

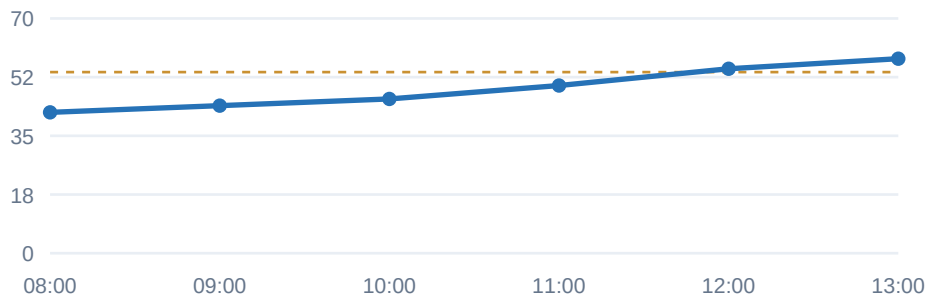

How to read the evidence

Blue vibration: S-204 dashboard stays near 2 mm/s.

Red vibration: independent checks rise above 6 mm/s.

Temperature and current rise with reject rates.

Dashed line: invented review threshold, not a real limit.

The learner must explain the conflicting readings.

FactoryPulse | M-204 condition evidence

Synthetic trainer reference - invented thresholds and readings

Selectable source table - FactoryPulse training readings

Time	S-204 mm/s	Meter mm/s	Current A	Temp C	Vib limit	Temp line
08:00	2.1	3.1	42	61	6.0	78
09:00	2.2	not taken	44	64	6.0	78
10:00	2.1	5.2	46	68	6.0	78
11:00	2.3	not taken	50	73	6.0	78
12:00	2.4	7.6	55	81	6.0	78
13:00	2.3	8.0	58	85	6.0	78

Independent readings are intermittent portable-meter checks; blanks mean no check was taken.
Temperature review line: 78 C. Motor-current review line: 54 A. Both are invented for training.
Chart and table are selectable; the Word brief repeats these training readings.
No actual equipment, operator, customer or shipment is represented.