
SENSEL TELEMATICS
PVT. LTD.

SENSEL FLEET SMART VTX 10 C

GPS Tracking solution for commercial vehicles & hazardous fleets



Industry Best Software Suit

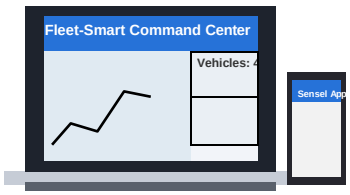

Wide Operating Voltage 6 - 30V DC Wire-Free / Hardwired	**Remote Battery Level & 2 LED Indicator** (GPS Lock & GSM Fix)	**Device Disconnect & Tampering Alerts** Instant SMS/Cloud	**OTA Firmware & Configuration Update** Remote Parameter Tune	**Dual M2M eSIM / 2G/4G SIM Support** Global Carrier Roam
Internal Battery Backup Up to 5 Hours Continuous Tracking	**10 Seconds High-Rate Real-Time Tracking** Sub-Minute Waypoints	**Bluetooth 4.0 BLE with Internal Antenna** Wireless Cargo Sensors	**Intelligent & Adaptive Power Management** Motion Sleep / Wakeup	**Web Based & Mobile Application Support** iOS, Android & Cloud
Panic / SOS Button Interface (Driver) Instant Distress Alert	**Fuel Sensor Interface Theft & Consumption** Continuous Level Data	**Temperature & Humidity Sensor Interfaces** Cold Chain Logistics	**128 MB Internal Flash Data Storage Buffer** Zero Offline Data Loss	**3-Axis Accelerometer Crash / Tilt Sensing** Harsh Driving Analytics

Dimensions

85 mm x 50 mm x 15 mm

Weight

VTX 10 C - 80 gms

Bluetooth Specification

Bluetooth 4.0 (BLE) with internal antenna
Auto-pairing with user mobile app & sensors

Sensors & Auxiliary Interfaces

Panic / SOS emergency button interface
Fuel level sensor interface (analog / digital)
Digital temperature & humidity probe interface
Air Conditioning (A/C) On/Off status alert
3-Axis precision accelerometer motion sensor
Main vehicle power disconnect & tamper alert

Certification - Compliance

GSM-GPS: CE certified
PCB and components: RoHS compliant

GPS Specifications

High-sensitivity GPS L1 (1575.42 MHz)
Horizontal Position Accuracy < 3 m CEP
Protocol: NMEA-0183 standard
Concealed internal GSM and GPS antennas
On-Demand location polling & instant query
High-frequency live update: every 10 seconds

Electrical / Environmental Specification

Wide operating input voltage: 6V to 30V DC
Internal rechargeable battery: up to 5 hours backup
Operating Temperature: -45 deg C to +80 deg C
Waterproof and dust-resistant rugged casing
128 MB non-volatile flash offline data storage

Fleet Smart Cloud Analytics & Reports

90 days history (Reports & Route Playback) on Web
Engine On/Off detection & Halt / Idling Reports
Automatic offline data recovery after reconnecting
Over Speed Alert & Reference Route deviation
Daily and monthly distance / odometer reports
Driver behaviour: harsh accel, braking, cornering