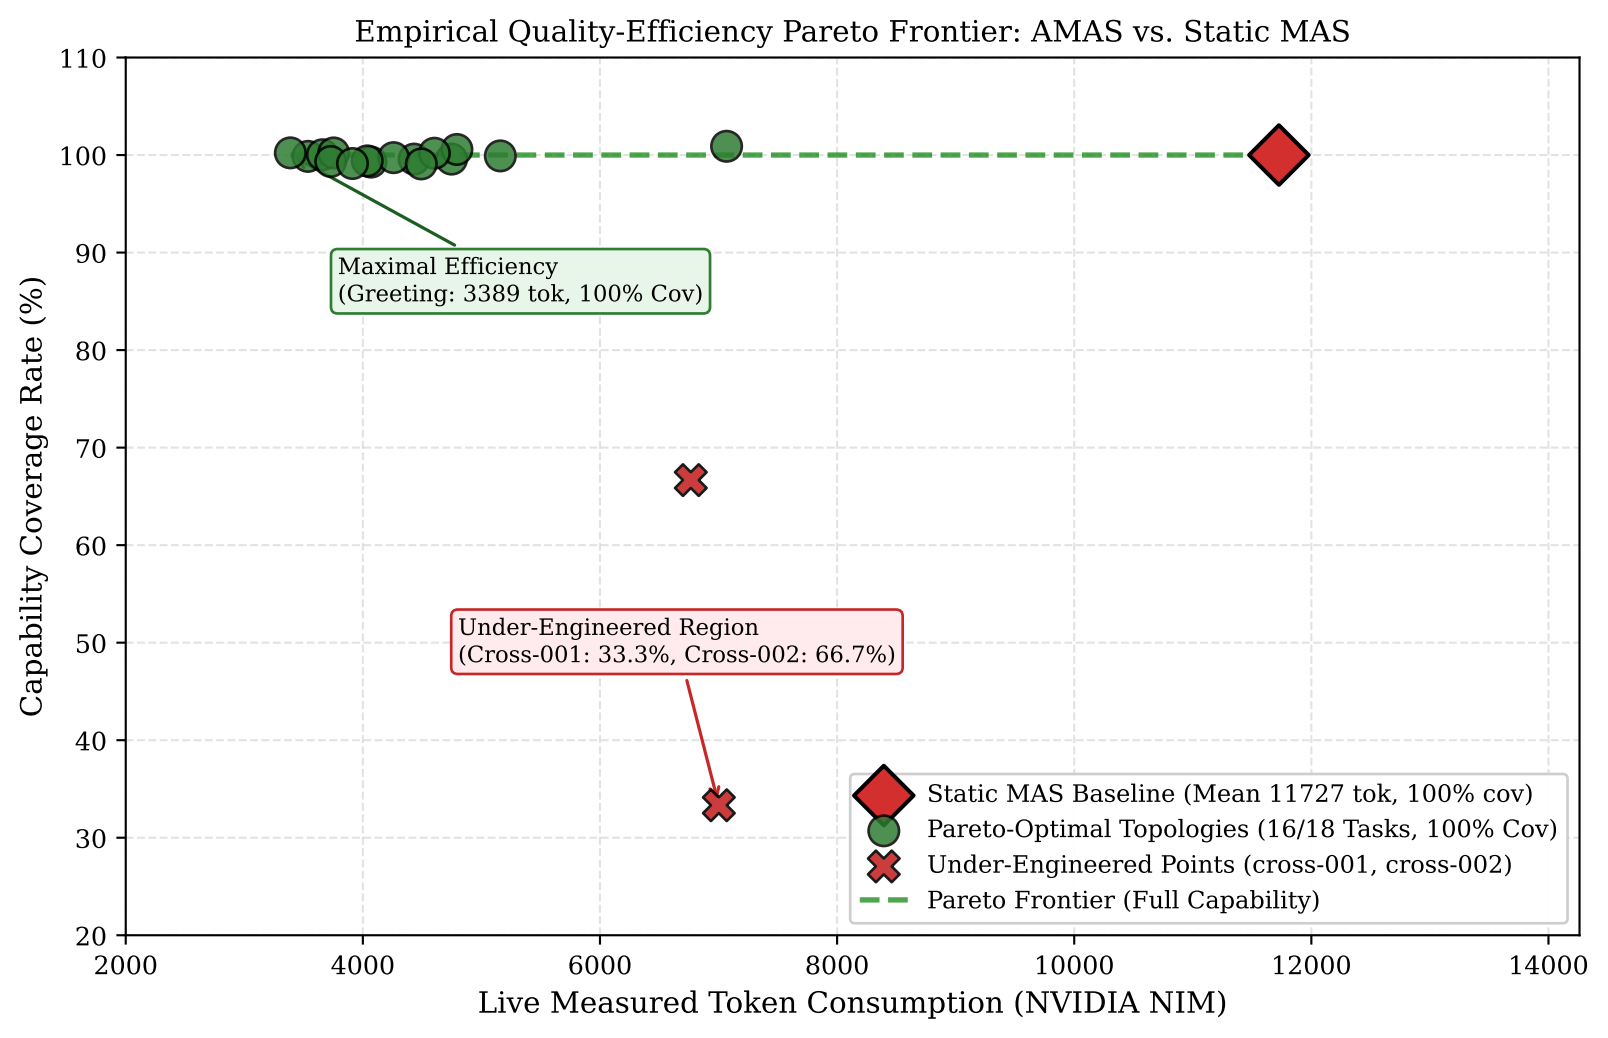
Empirical Quality-Efficiency Pareto Frontier: AMAS vs. Static MAS
Capability Coverage Rate (%)
Live Measured Token Consumption (NVIDIA NIM)
110
100
90
80
70
60
50
40
30
20
2000
4000
6000
8000
10000
12000
14000
Maximal Efficiency
(Greeting: 3389 tok, 100% Cov)
Under-Engineered Region
(Cross-001: 33.3%, Cross-002: 66.7%)
Static MAS Baseline (Mean 11727 tok, 100% cov)
Pareto-Optimal Topologies (16/18 Tasks, 100% Cov)
Under-Engineered Points (cross-001, cross-002)
Pareto Frontier (Full Capability)