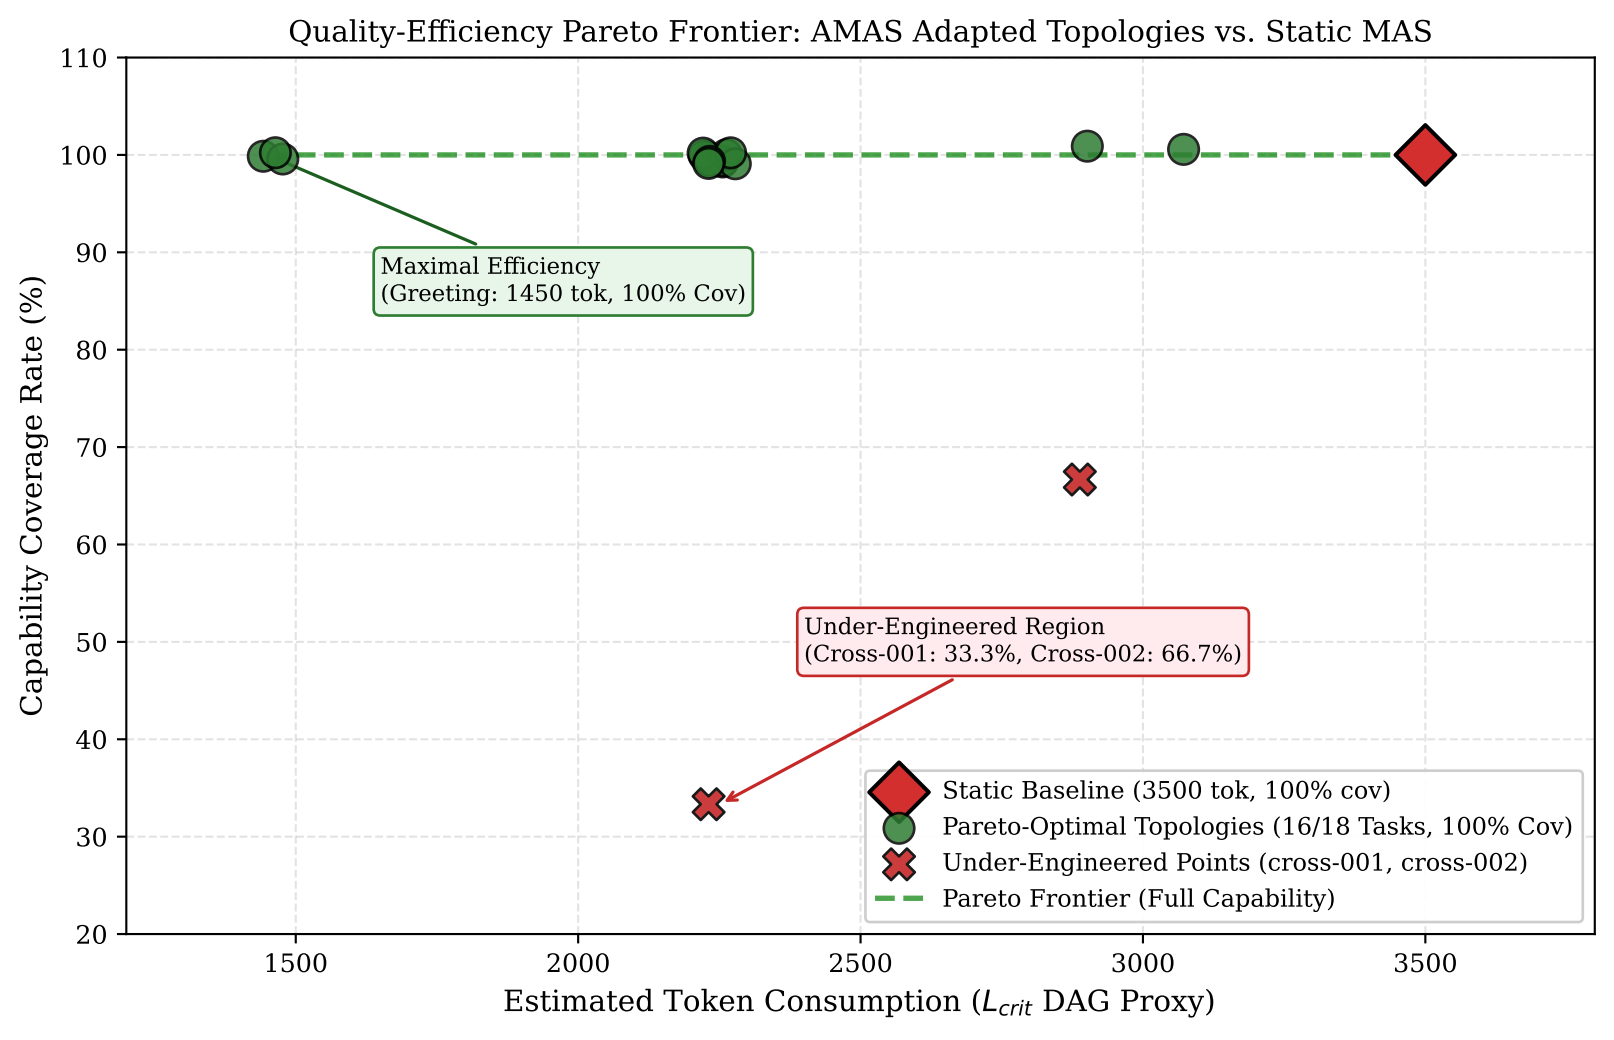
Quality-Efficiency Pareto Frontier: AMAS Adapted Topologies vs. Static MAS
Capability Coverage Rate (%)
Estimated Token Consumption (L_{crit} DAG Proxy)
110
100
90
80
70
60
50
40
30
20
1500
2000
2500
3000
3500
Maximal Efficiency
(Greeting: 1450 tok, 100% Cov)
Under-Engineered Region
(Cross-001: 33.3%, Cross-002: 66.7%)
Static Baseline (3500 tok, 100% cov)
Pareto-Optimal Topologies (16/18 Tasks, 100% Cov)
Under-Engineered Points (cross-001, cross-002)
Pareto Frontier (Full Capability)