

KREISEL **BATTERY PACK**

The Kreisel Battery Pack 63 (KBP63) incorporates all the Kreisel technology benefits into one product. The KBP63 utilizes patented immersion cooling technology for an even temperature spread and highest safety standards in relation to energy density.

UNSURPASSED LIFETIME

The Kreisel Immersion Cooling Technology ensures best thermal performance at highest efficiency on pack and system level. The minimal temperature spread on pack and cell level enables an increased service life and reliability.

MODULAR DESIGN

The battery can be connected in parallel as well as in series (400V or 800V). The robust, compact and flat design makes the battery flexible and ideal to use in demanding industrial and transport applications.

SUPERIOR SAFETY

Designed to meet the highest safety standards for a wide range of automotive and marine applications. The incorporated safety features on module level prevent propagation and lead to the highest safety in relation to energy density.

ULTIMATE PERFORMANCE


Highest power (C-rates) for charging and discharging due to the patented immersion cooling. High energy density at pack level with the best thermal performance available on the market.

- 63 kWh energy
- 400 kg total (882 lbs)
- 44 kW charging
- 250 kW discharging

kreiselelectric.com/products

KREISEL InCharge



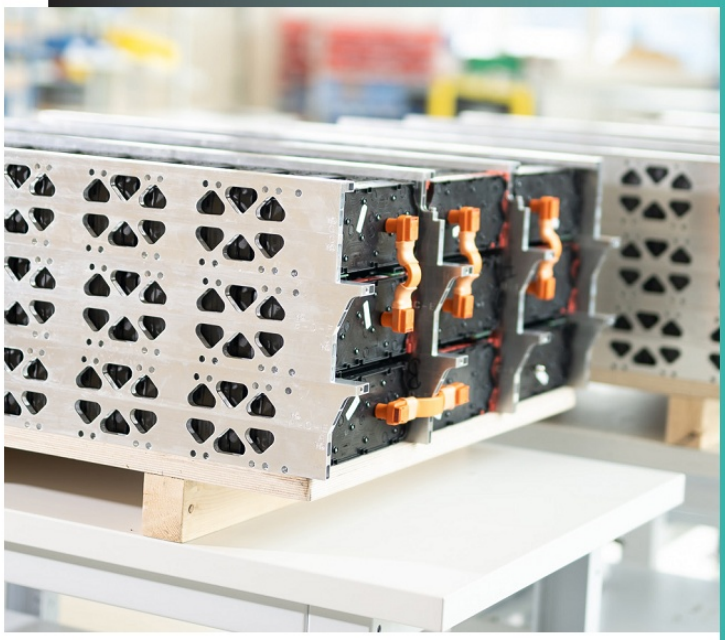

KREISEL **BATTERY PACK 63**

ELECTRICAL DATA

CAPACITY	173 Ah
ENERGY	63 kWh (nominal)
TECHNOLOGY	Li-Ion 21700
NOMINAL VOLTAGE	364 V
OPERATING VOLTAGE MAX.	407 V
OPERATING VOLTAGE MIN.	297 V
MAX. DISCHARGING POWER (10 SEC)*	690 A / 250 kW
CONTINUOUS DISCHARGING POWER (RMS) > 15 MIN*	330 A / 120 kW
CONTINUOUS CHARGING POWER*	121 A / 44 kW
CYCLE LIFE**	~ 3000 cycles (>70% SOH)
ENERGY DENSITY	157 Wh/kg
THERMAL SYSTEM	Patented direct liquid cooling and heating for optimum cell temperature

TECHNICAL DATA

AMBIENT TEMPERATURE RANGE	- 40 to 70 °C
PROTECTION CLASSES	IP67 (IP6K9K possible)
WEIGHT	~400 kg (882 lbs)
DIMENSIONS (L X W X H)	1111 x 795 x 351 mm 44" x 31" x 14"

CERTIFICATIONS

AUTOMOTIVE / COMMERCIAL VEHICLES	ECE R 100.2
TRANSPORTATION	UN38.3 compliant
APPLICATIONS	Transport, Marine, Industrial

* Depending on SoC and Temperature ** Depending on individual use profile

TECHNICAL FACTS AND FEATURES PRELIMINARY AND CAN CHANGE

KREISEL Electric GmbH & Co KG | Kreiselstraße 1, 4261 Rainbach i. M., AUSTRIA
+43 7949 21400 | info@kreiselelectric.com | www.kreiselelectric.com