
THE ALTERNATIVE:
GAS/PETROL ENGINE

COMPONENT SALES

SSG-415

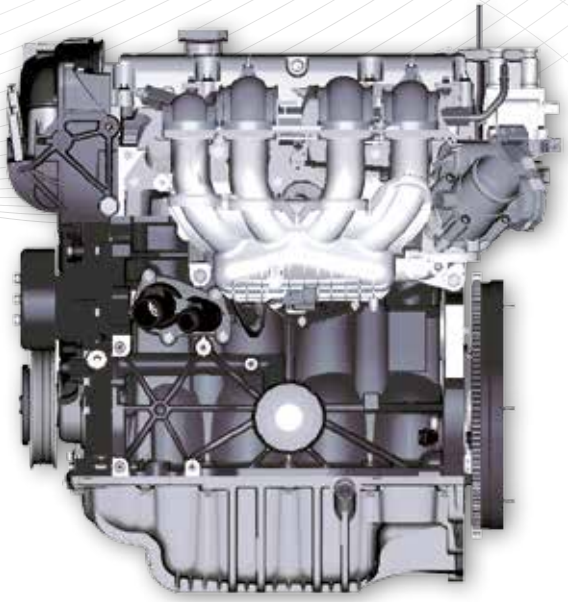

Technical specifications	
No. of cylinders	4 in-line
Bore and Stroke	79 mm x 76,4 mm
Displacement	1.5 l
Compression Ratio	11 : 1
Air Intake	naturally aspirated
Dry weight	102 kg
Dimensions incl. SAE Housing	605 mm x 590 mm x 696 mm

Performance details for petrol operation SAE J1995	
Specification fuel	min. 87 octane, unleaded
Interm. output	45 kW / 3600 min-1
Continuous output	40 kW / 3600 min-1
Interm. torque	114 Nm / 2500 min-1
Cont. torque	102 Nm / 2500 min-1

Performance details for liquid gas (LPG) SAE J1995	
Interm. output	42 kW / 3600 min-1
Continuous output	38 kW / 3600 min-1
Interm. torque	111 Nm / 2500 min-1
Cont. torque	101 Nm / 2500 min-1

Performance details for natural gas (NG) SAE J1995	
Interm. output	37 kW / 3600 min-1
Continuous output	34 kW / 3600 min-1
Interm. torque	105 Nm / 2500 min-1
Cont. torque	94 Nm / 2500 min-1

CERTIFIED TO EPA AND CARB

LOWER COST OF PURCHASE

AFFORDABLE MAINTENANCE

LIGHTER AND MORE COMPACT

ENVIRONMENTALLY FRIENDLY

sauer & sohn
motorentechnik

COMPONENT SALES

SSG-415

sauer & sohn
motorentechnik

SPECIFICATIONS

- **4 cylinders in-line**
- **Overhead camshafts (DOHC)**
- **„Long-life" valve drive** with hardened valve seats and valves for gas operation.
- **Cambelt driven camshaft with hydraulic, maintenance-free clamping system** to reduce engine noise, increase performance and durability though reduced friction
- **Variable valve control (Ti-VCT)** for best performance and emission adjustment
- **Aluminium engine block** for increased durability and weight reduction
- **Valve drive components suitable for alternative fuels** for operation with petrol/natural gas/liquid gas/biogas
- **Piston cooling nozzle** to cool pistons, for increased performance and durability
- **Integrated knock sensor** for better engine protection and higher durability
- **Crankshaft from spherulitic graphite cast iron with five main bearings** for increased strength and lower wear and tear though more even bearing and therefore increased durability
- **Cast iron exhaust manifold** for high stability at high temperatures
- **Polyamide synthetic valve cover** for lifetime corrosion protection and reduction of engine noise
- **Electronic ignition system with crankshaft and camshaft position sensor** for effective and reliable deployment of the ignition spark
- **Sequential fuel injection** for controlled fuel supply at all engine speeds, lower fuel consumption and lower emissions at high engine performance
- **Closed loop control** for constant emissions
- **Latest generation of engine control** to adapt to all customer requirements (CAN-Bus J1939)


STANDARD SCOPE OF DELIVERY

- **Flywheel housing SAE 5 optionally with or without pedestals**
- **Flywheel centered 7.5"**
- **Exhaust catalyst and installation tape**
- **Engine wiring loom fully mounted**
- **42-pin wiring loom for electric integration**
- **Engine control unit ECU CAN bus capable J1939**
- **Electronic throttle valve BOSCH**
- **Gas system optionally for liquid gas or natural gas**
- **Integrated lambda control**
- **Oil filter, dipstick**
- **Starter 12V**
- **Alternator 12V/90A**
- **Coolant pump, thermostat**
- **Poly V-belt drive for water pump/**
- **Engine lifting lugs**

OPTIONS

- **Suction fan d=380mm, engine driven**
- **Pusher fan d=380mm, engine driven**
- **Radiator cooling system mounted to engine (optional)**
- **Electronic accelerator**
- **Potentiometer to manually adjust**
- **Engine speed selector**
- **Exhaust pipe with bung for lambda oxygen sensor**
- **Dry air filtration system**
- **Electronic gas shut-off valve 12 V with gas filter**

SSG-415 AVAILABLE FROM JANUARY 2016

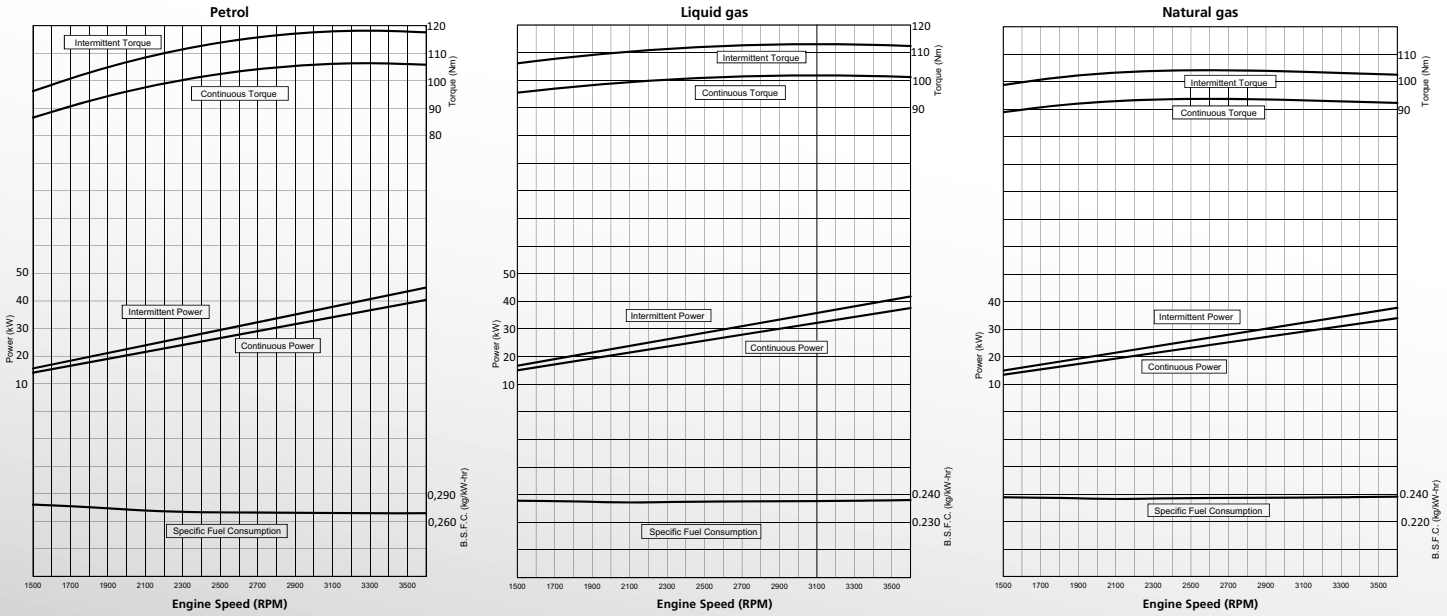

technical modifications subject to change, last updated 09/2015, 500

Peter Sauer & Sohn KG · Motorentechnik · Groß-Zimmerner-Straße 51 · D-64807 Dieburg
Phone +49 (0) 60 71-20 60 · Fax +49 (0) 60 71-20 62 19 · E-Mail: info@sauerundsohn.de · www.sauerundsohn.de