Trust the start of a CONTINUOUS PRODUCTION



SIPNA Company

Instrumentation Equipment Manufacturer

شرکت دانش بنیان سینا پرداز آپادانا (سیپنا)

تولید کننده تجهیزات ابزار دقیق

مجهز به آزمایشگاه مرجع کالیبراسیون ISO/IEC ۱۷۰۲۵

مجری پروژه های تعمیر و نگه داری ابزار دقیق، مخابرات ، الکترونیک و کالیبراسیون

ISO 45001:2018
ISO 14001:2015
ISO 9001:2015
IMS



Visit Website /Cataloge /Instagram

Sale Office:NO.12 /Omid Building / NO.128 / Third Park All. /Movahed Danesh St. /Niyavaran / Tehran / IRAN

Postsl Code:1957645464 Tel:+982191558989

Mobile:+98 -913 1001406 +98 -916 654 2371

دفتر فروش: تهران/ نیاوران/خیابان موحد دانش

نبش کوچه پارک سوم / پلاک ۱۲۸ / ساختمان امید / واحد ۱۲

کد پستی:۱۹۵۷۶۴۵۴۶۴ ۰۲۱-۹۱۵۵۸۹۸۹

همراه: ۰۹۱۳ ۱۰۰ ۱۴۰۶ ۰۹۱۶ ۶۵۴ ۲۳۷۱

Add Management Contact No. in phone

Factory:NO 4 / the second sideway / third Wested first phase / east industrial Town / Isfahan /IRAN

Mobile: +98 -919 0831876/46/47

Tel:+98 31 464 12940 -42 Fax:+98 31 464 12944

Postsl Code:8139173783

کارخانه : اصفهان/ شهرک صنعتی سجزی / فاز اول

خیابان سوم غربی / فرعی دوم جنوبی / پلاک ۴

همراه: ۰۹۱۹ ۰۸۳۱۸۷۶/۴۶/۴۷

تلفن:۰۳۱ ۴۶ ۴۱ ۲۹ ۴۰ – ۰۲ فکس: ۰۳۱ ۴۶ ۴۱ ۲۹ ۴۴

کد پستی:۸۱۳۹۱۷۳۷۸۳


WWW.SIPNACO.COM INFO@SIPNACO.IR AMIR.RASHEDIAN @SIPNA

INTRODUCTION OF SINA PARDAZ APADANA COMPANY:

Sina Pardaz Apadana Industrial Manufacturing Company (under the brand name Sipna) is one of the pioneers in the field of manufacturing instrumentation, electrical and electronic equipment in Iran, which was established in 2006 . The company, by gradually developing its production capacity and scientific and technical infrastructure, while creating employment in the country, has taken an effective step towards self-sufficiency and breaking the country's dependence on the construction and supply of this equipment. At present, this company is producing various instrumentation products in an area of 1500 square meters with an up-to-date production line, and now it has been approved by the Ministry of Oil, Energy, Electricity and its subsidiaries in all vendor lists. Sipna currently has close and sincere cooperation with some countries such as China, Syria, Turkey, Iraqi Kurdistan Region, Azerbaijan, Iraq and Afghanistan in this field and intends to expand its activities to one of the largest producers of this Convert equipment to the Middle East level.

Company goals :

1) Support and after-sales service in the best way for customer satisfaction and solving industry problems
2) Production of products in accordance with international standards, observance of safety principles and respect for the environment
3) Continuous improvement of products, services and day-to-day development in technology and equipment.

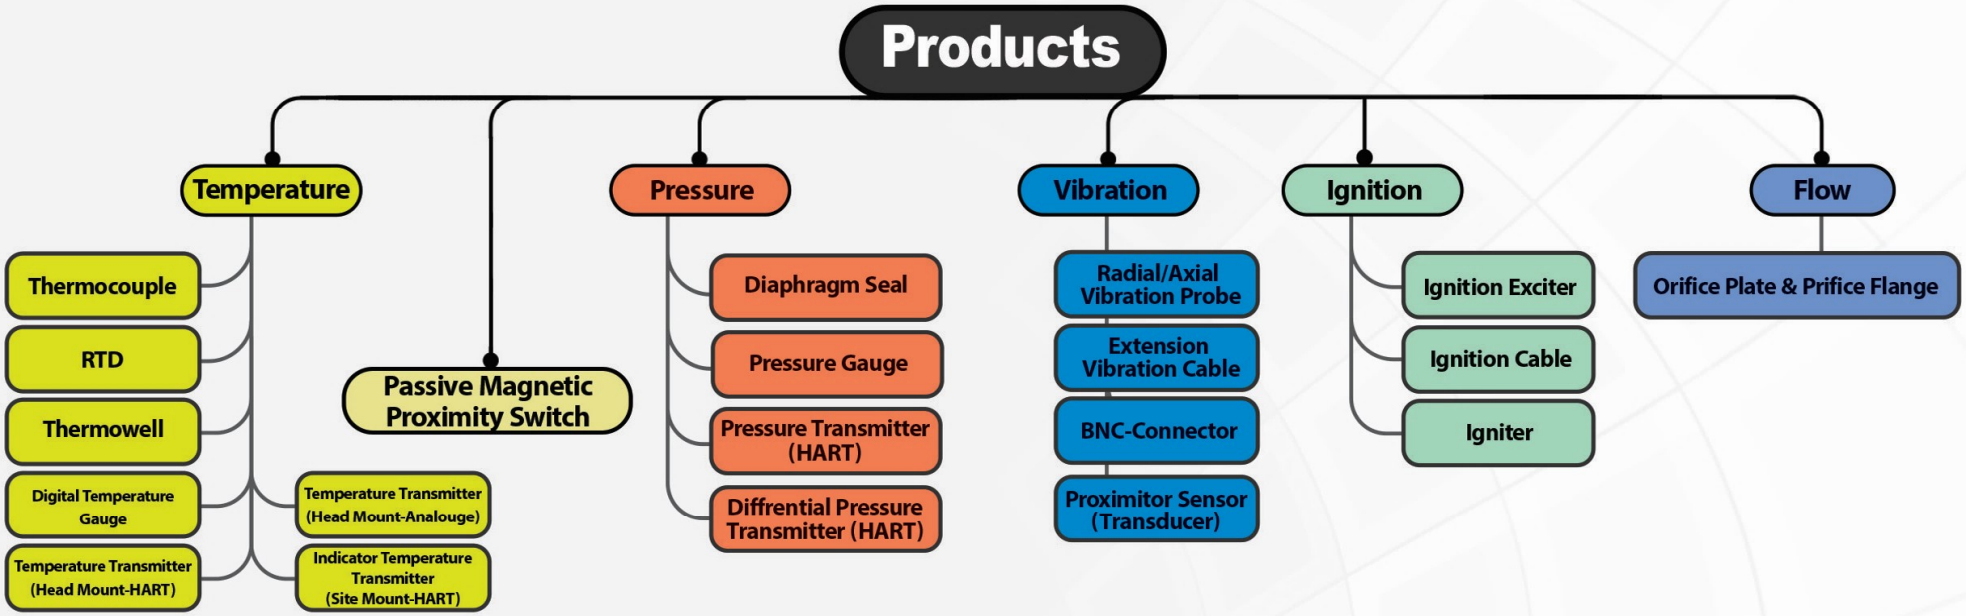

FACILITIES

- MACHINING
  - CNC turning center
  - Deep Hole drilling machines up to 1500mm
  - Milling centers
  - Manual Lathe machines
  - Cutting machines
  - Laser Marking Machines
  - Engraving Machine
  - Coil Making Machine
  - High Frequency Annealing Machine
  - MgO Filling Machine
  - Rolling Machine & Skinning Machine

- WELDING AND BRANZING
  - Laser Welding Machines
  - TIG Welding machines with pulse modulation and rotary
  - Induction brazing
  - Resistance Welding
  - Brazing sets











- TESTING AND CALIBRATION
  - Standard Accredited Calibration Lab for Pressure, Temperature, Vibration and Level
  - Continues signal of Temperature Sensors by HMI test
  - Pressure test setup Bench
  - Dye penetration test setup for weld joints
  - Microscopic junction check
  - Giga Ohm Insulation resistance testers
  - Mechanical checks - lengths, gauges, concentricity checks
  - Conductor Resistance Test
  - Physical test for Insulation and outer Sheath
  - On line High Voltage test
  - Calibration Laboratories according to ISO/17025
  - Pneumatic Pressure Test up to 300 Bar G
  - Pressure Safety Valve Test Bench Up to 300 BAR
  - Static Pressure Test Bench for DPT with DS. Up to 350 BAR G Automatic Coil Turning.








THERMOCOUPLE

MINIATURE THERMOCOUPLE

- Type : K, J, T, N, E, R, S
- Element Size (MI) : 0.25, 0.5, 1, 1.5, 3, 4.5, 6, 8 (mm)
- Protection Sheath : SS321, SS316, SS310, INCONEL 600 etc
- Configuration : Simplex, Duplex, Multi





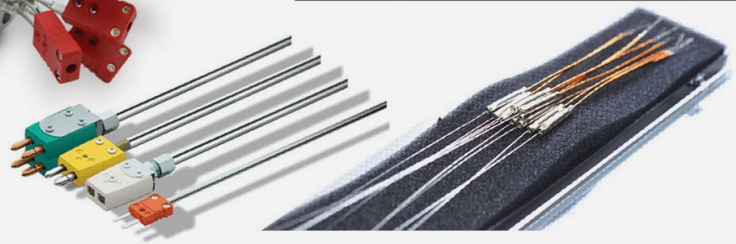

THERMOCOUPLES WITH THERMOWELLS/PROTECTION TUBES

- Type : K, J, T, N, E, R, S
- Element Size (MI) : 0.25, 0.5, 1, 1.5, 3, 4.5, 6, 8 (mm)
- (Non-MI) : 1.2, 1.6, 2, 2.5, 3.2 (mm)
- Protection Sheath : SS304, SS321, SS316, SS310 HRS 446, INCONEL 600/601/800, Nickel, Hastalloy Titanium, Tantalum, Ceramic 610 & C-799, Monel, etc.
- Configuration : Simplex, Duplex, Multi





BEARING THERMOCOUPLE SENSOR


- Type : J, K, T, E, N
- Element Size (MI) : 1, 1.5, 2, 2.5, 3 (mm)
- Cable Lenght : On request
- Configuration : Simplex, Duplex






MI THERMOCOUPLE

- Type : J, K, T, E, N
- Element Size (MI) : 3, 4.5, 6, 8, 10 (mm)
- Protection Sheath : SS321, SS316, SS310, INCONEL 600 etc.
- Configuration : Simplex, Duplex, Multi

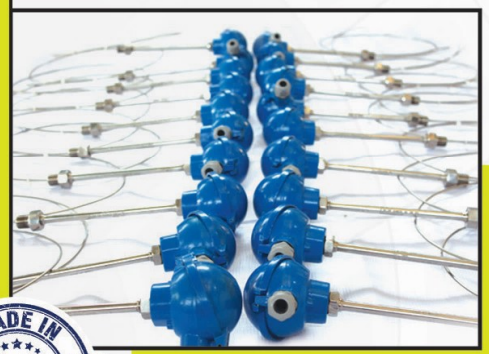

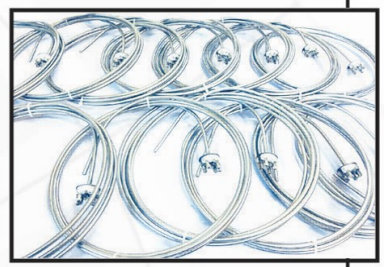


MADE IN IRAN MADE IN

Tel:+982191558989

THERMOCOUPLE

REDUCER THERMOCOUPLE

- Type : K, J, T, N, E
- Element Size (MI) : 1, 1.5, 3, 4.5, 6 (mm)
- Protection Sheath : SS321, SS316, SS310, INCONEL 600 etc
- Configuration : Simplex, Duplex








NOBLE METAL THERMOCOUPLES

- Type : R, S, B
- Element Size : 0.30, 0.35, 0.4, 0.45, 0.5 (mm)
- Protection Sheath : Ceramic (C-799), 610, Inconel
- Configuration : Simplex, Duplex, Multipoint







WELD PAD (TUBE SKIN) THERMOCOUPLE

Sheaths are formable to enable easy installation and are self-supporting within the application

-Made to your size requirements including:

Long lengths / Large diameter sheaths / Heavy walled sheaths / Long lead extensions

-Available in many high temperature alloys including Inconel 600 and 310 (316) stainless steel


-Made to your orientation requirements including:

Expansion Loops / Bends and Radii / Variety of Weld Pad Styles


-Made to your configuration requirements


Connection head Assemblies / Gas seals / Connector Combinations / Lead Wire Protection / Heat Shields / Weld Clips

- Type : J, K, T, E, N
- Element Size (MI) : 3, 4.5, 6, 8, 10, 12 (mm)
- Configuration : Simplex, Duplex
- Tip Type : Flat, Curved, Knife Edge, Curved Knife Edge





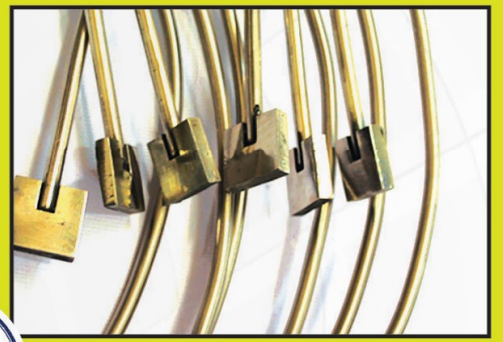

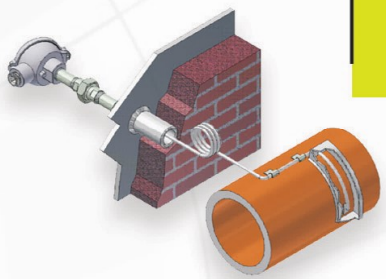

THERMOCOUPLE

MULTIPOINT THERMOCOUPLE

- Type : J, K, T, E, N
- Element Size (MI) : 1, 1.5, 2, 2.5, 3, 4.5, 6, 8 (mm)
- Protection Sheath : SS321, SS316, SS310, INCONEL 600 etc
- Configuration : Simplex, Duplex, Multi







THERMOCOUPLE INSERT WITH CERAMIC TERMINAL BLOCK

- Type : J, K, T, E, N
- Element Size (MI) : 1, 1.5, 2, 2.5, 3, 4.5, 6, 8 (mm)
- Protection Sheath : SS321, SS316, SS310 INCONEL 600 etc.
- Configuration : Simplex, Duplex, Multi





BAYONET THERMOCOUPLE

Bayonet Thermocouples, temperature sensors are commonly used in extruder and plastic processing industries. These sensors provide accurate temperature control for the best plasticizing combination of plastic material, mold and design

- Type : J, K, T, E, N
- Configuration : Simplex, Duplex, Multi
- Adjustable Immersion : Bayonet on Flex Armor, Bayonet on Flex Armor with transition, Bayonet on spring
- Fixed Immersion : Bayonet Straight, Bayonet 45° Degree Bend, Bayonet 90° Degree Bend







ISO/IEC 17025 ACCREDITED CALIBRATION SERVICES

SIPNA Offering both ISO accredited and 17025 calibration services in IRAN from 2025. Serving customers in Aviation, Marine, Manufacturing, Power Transmission, Hospitals, Oil & Gas, Defense & Water treatment we cater to customer requirements from all industries.

Pressure Calibration Services

- Pressure Gauge Calibration
- Digital Pressure Indicator Calibration
- Pressure Indicator Calibration
- Pressure Transmitter Calibration
- Pressure Transducer Calibration
- Pressure Sensor Calibration
- Pressure Switch Calibration
- Vacuum Pressure Gauge
- Pressure Datalogger






Pressure Valves Calibration

- Pressure Relief Valve Calibration
- Pressure Safety Valve Calibration
- PSV Test Certificate




The Temperature Calibration Services

- Temperature Controllers/Digital Readout Calibration
- RTD Probe Calibration
- Thermocouple Calibration
- Temperature Transmitter
- Temperature Meter
- Bath & furnace calibrator
- Autoclave(Except medial use)
- Refrigerator,Freezer
- Liquid in glass thermometer
- Industrial Furnace,Ovens,Incubators,Bain-Marie



The Vibration Calibration Services


- Acceleration Sensor/Meters Calibration
- Vibration Sensors/Meters Calibration
- Gap Meter for Axial/Radial Sensors Calibration
- Speed Sensors/Meter Calibration

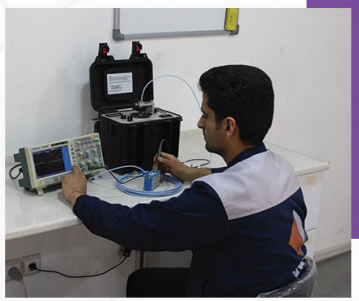

RTD

RTDs WITH THERMOWELLS/PROTECTION TUBES

- Type : Pt 100, 200, 500, 1000 etc
- Element Size (MI) : 2, 2.5, 3, 4.5, 6, 8 (mm)
- Connection : 2, 3, 4, wire
- Protection Sheath : SS304, SS321, SS316, SS316, INCONEL 600/800, HRS 446, Hastalloy, Monel etc
- Configuration : Simplex, Duplex, Multipoint

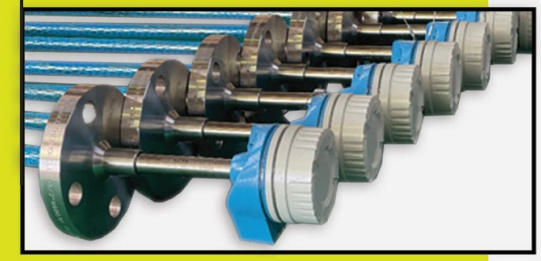



BEARING(THRUST & JURNAL) RTD SENSOR

- Type : Pt 100, 200, 500, 1000 etc
- Element Size (MI) : 2, 2.5, 3, 4.5, 6, 8 (mm)
- Connection : 2, 3, 4, wire
- Cable Length: : On request
- Configuration : Simplex, Duplext








MINERAL INSULATED RTDs


- Type : Pt 100, 200, 500, 1000 etc
- Element Size (MI) : 2, 2.5, 3, 4.5, 6, 8 (mm)
- Connection : 2, 3, 4, wire
- Configuration : Simplex, Duplex, Multipoint

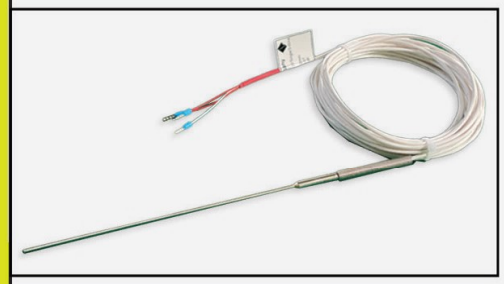



RTD INSERT WITH CERAMIC TERMINAL BLOCK

- Type : Pt 100, 200, 500, 1000 etc
- Element Size (MI) : 2, 2.5, 3, 4.5, 6, 8 (mm)
- Configuration : Simplex, Duplex, Multi

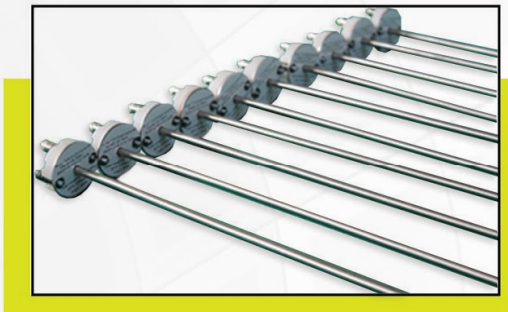



RTD & THERMOWELL

MULTIPOINT RTD

- Type : Pt 100, 200, 500, 1000 etc
- Insertion Lenght : 0.25, 0.5, 1, 1.5, 3, 4.5, 6, 8 (mm)
- Process Connection : On request
- Connection : Simplex, Duplex, Multi
- Box : IP/Explosion Proof



THERMOWELL

Thermowell is a tube, closed at one end, which protects the probe and allows its removal without breaking the liquid seal. Many materials and styles are available to match application requirements. Thermowells drilled from solid bar stock provide the highest pressure ratings, and welded models are also available. The selection of materials and the manufacturing of the Thermowells or protection tubes in accordance with global standards or to customer specifications ensure optimal protection for the sensor.

Standards:

-Standard Thermowell designs comply with ASME PTC 19.3 and wake frequency calculations are available upon request


-Our flanged thermowells are manufactured from ASME B16.5 flanges

-Non-Destructive Testing (NDT) and accompanying documentation is available upon request for any thermowell order


- Type : Drilled Bar stock, Fabricated
- Construction : Tapered, Straight, Stepped, Helical
- Thermowell Material : SS304, SS316, SS316L, SS321, SS310, HRS446 INCONEL 600/800/601, Hastalloy, Monel, Titanium etc.
- Process Connection : Screwed, Flanged, Welded

SPECIAL RTD WITH CONNECTOR OR HEAD



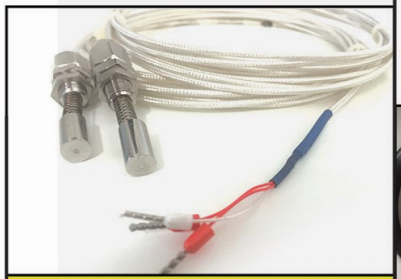



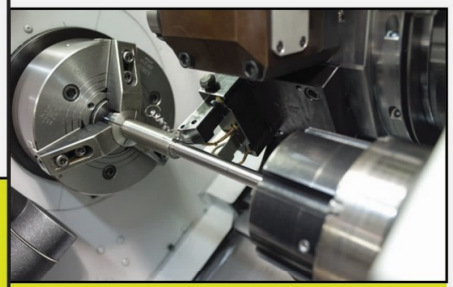

FLANGED THERMOWELL



THERMOWELL

SCREWED THERMOWELL






VAN STONE THERMOWELL





WELDED THERMOWELL



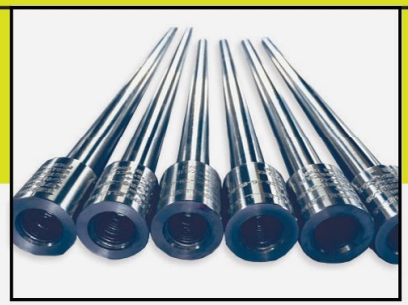

TEMPERATURE TEST GAUGE

MODEL: ZEO-300

Features:

- Large screen LCD display, High resolution, ignoring the value of error.
- Peak hold function, max value recording during the measurement
- Dynamic display temperature percentage, (the progress bar shows)
- Five engineering units' selection °C,°F, K, Ra, Re
- 1~15min Automatic shutdown function
- 6 Micro power consumption
- Parameter correction function
- The upper and lower limit range



HEAD MOUNT TEMPERATURE TRANSMITTER-HART

MODEL: ZEO-130

Features:

- 2wires 4-20 Ma Output/HART
- Input: thermocouples, RTD , resistance or voltage
- Build-in cold junction compensation
- Available with Form B temperature probe
- High accuracy 0.1% for RTD,0.2% for TC

HART COMMUNICATION PROTOCOL



MADE IN IRAN

INFO@SIPNACO.IR
WWW.SIPNACO.COM

Tel:+982191558989

INTELLIGENT TEMPERATURE TRANSMITTER (HART)

MODEL: ZEO-131

This series of temperature transmitter is a kind of intelligent type, used For field installation, with electrical isolation, support HART protocol. It Receive signal then convert 4-20mA and stack HART signal output, like Thermal resistance, thermocouple, resistance, millivolt.
The transmitter can field configuration through instrument panel button Or HART hand operated device, also can through one USB interface HART modem to connect to PC configuration



Performance Specifications:

		Measuring range	Measurement accuracy		Ambient temperature effect by each	
Standard	Sensor		Fixed	Range	Fixed	Range
Thermal resistance/resistance						
IEC60751	Pt100	-200...850°C	±0.1°C	±0.1%	±0.006°C	±0.004%
	Pt1000	-200...850°C	±0.1°C	±0.1%	±0.006°C	±0.004%
	Resistance Measurement	0...400 Ω	0.035 Ω	±0.1%	0.028Ω	±0.004%
	Resistance Measurement	0...4000Ω	0.35Ω	±0.1%	0.028Ω	±0.004%
Thermocouple/voltage						
IEC60584	N	-270...1300°C	±0.8°C	±0.1%	±0.02°C	±0.004%
	K	-270...1372°C	±0.8°C	±0.1%	±0.02°C	±0.004%
	E	-270...1000°C	±0.8°C	±0.1%	±0.02°C	±0.004%
	J	-210...1200°C	±0.8°C	±0.1%	±0.02°C	±0.004%
	T	-270...400°C	±0.8°C	±0.1%	±0.02°C	±0.004%
	B	0...1820°C	±1°C	±0.1%	±0.06°C	±0.004%
	R	-50...1768°C	±1°C	±0.1%	±0.06°C	±0.004%
	S	-50...1768°C	±1°C	±0.1%	±0.06°C	±0.004%
	Voltage Measurement	-125...125 mV	0.02mV	±0.1%	0.001mV	±0.004%

HEAD MOUNT TEMPERATURE TRANSMITTER (4-20mA)

MODEL: ZEO-240

Features:

- 2 wires 4-20 mA output
- Input: thermocouples, RTD, resistance or voltage
- USB Cable for Configuration directly via PC
- Build-in cold junction compensation
- Available with Form B temperature probe
- High accuracy 0.1% for RTD, 0.2% for TC.



Specifications:


Input	
Input signal	Thermal resistance (RTD),thermocouple (TC)
Cold junction compensation range	-20 ~ 60°C
Compensation accuracy	±1°C
Output	
Output signal	4~ 20 mA
Load Resistance	RL ≤(Ue-12)/ 0.21
Upper and Lower limit overflow alarm output current	IH=21Ma LI=3.8Ma
Power supply	
Supply voltage	DC 12 ~ 40 V
Other parameters	
Temperature drift	0.02%FSI/°C
Response time	1 S reaches 90% of final value
Working temperature	-40~60°C
Stored temperature	-40~100°C
Shock resistance	4g/2~150Hz
Installation angle	Unlimited
Installation area	b-type top box mounting
Electromagnetic	Meet the requirement of gb/118268


PASSIVE MAGNETIC PROXIMITY SWITCH

The SIPNA's switch operates without any supply voltage, requires only a magnetic field and offers two types of contact (NO / NC).
Our products are equivalent to two brands, GOSWITCH and TOPWORX, which have been used extensively in GE (nuovo pignone) gas turbines for feedback on valves and turbine doors. Max Switching Distance is 20 mm and has a current tolerance of 0.5 A and a voltage of 220 volts. This switch is fully adjustable at the installation location and the appropriate magnet (361-7011) can be purchased separately.



GO SWITCH

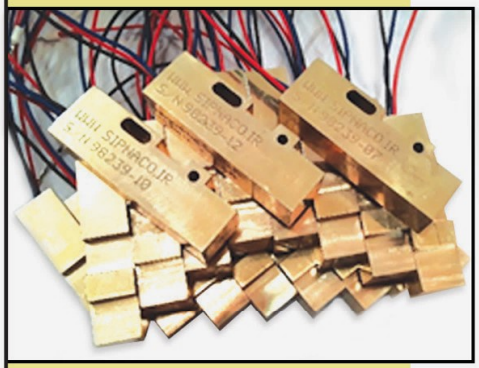

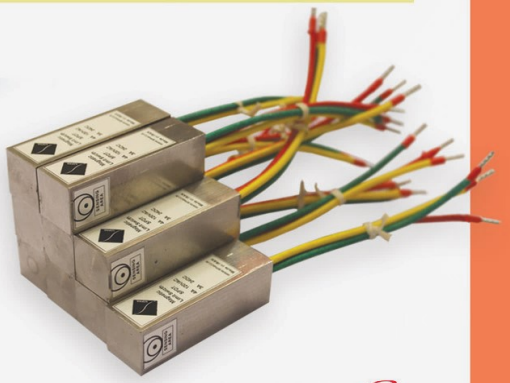

TOPWORX

PRESSURE TEST GAUGE

MODEL: PRO-300

- Size 100mm,stainless steel case,
- Large-screen LCD display, high resolution, back light, easy to read
- Automatically record the maximum pressure values during the measurement
- Pressure on the percentage of dynamic display, (the progress bar display)
- 10 engineering units: psi, bar, kpa, Mpa, Kgf(kgf / cm2) , MMH (mmH20),MH2(mH20),
- 0~ 15min auto-shut off feature.
- Micro-power consumption, over 2 years in power-saving mode, continuous work 2,000 hours
- Parameter correction, correct zero and error in field application.
- Pressure range already setted before use
- Sampling rate: 4 times / sec
- Applicable to gases and liquids compatible with stainless steel





MADE IN IRAN

Specifications:

Pressure range	**thread 0-100MPa OR More 100MPa**	**Accuracy**	**0.2% 0.50%**
Overload capacity	200%	Pressure type	Gauge pressure
Display	<0.1% /year	Battery voltage	3.6 DC
Ambient temperature	LCD	Display range	-19999~ 99999
temperature Mounting	-20C~70C	Relative humidity	≤80%
Mounting thread	1/2 NPT	Interface Material	Stainles s Steel

PRESSURE TRANSMITER (HART)

MODEL: PRO-131



Function parameters

- Use scope：liquid, gas and steam
- Signal output：Two line 4-20MA isolated DC signal superposition of the HART digital signal output, can choose linear or square root output, the maximum output current not exceeding 22MA
- Power supply：DC12-45V, HART communication, power supply voltage
- range:15.5~45VDC, general working voltage: 24DC
- Load range：HART communication , the power supply loop of the resistance 250 euro, the supply voltae is greater than or equal to 15.5 volts.
- The communication distance：connecting wire diameter greater than 0.6mm, the communication distance is about 1500 meters.
- Display: intelligent LCD LCD backlight for 5 and a half digital display
- The zero and span migration: measuring range limit is not less than the maximum measuring range lower limit, upper limit not to exceed the maximum measuring range limit value, namely the work range does not exceed the limit value of sensor, zero and range can be set in 4～ 20mA any corresponding points.

HART COMMUNICATION PROTOCOL

- The damping value: electronic damping adjustable range from 0 to 32 seconds
- Fault alarm: from diagnostic procedures for the detection of a failure, the analog output of more than 20.8mA or less than 3.9mA
- Data recovery data: when data from being damaged when, through three key scene restore corrupted data
- Temperature compensation: computer collecting temperature data sent to the transmitter with temperature compensation
- Working temperature: Electronic circuit: －40～＋85℃ With LCD liquid crystal display: －30～＋80℃
- Sensitive element (silicon oil)：－40～＋104℃；
- Storage temperature: －45～＋90℃。

HART COMMUNICATION PROTOCOL

DIFFERENTIAL PRESSURE TRANSMITER (HART)

MODEL: PRO-141



Technical parameters

- Basic error：≤±0.075%。Repeatability error：＜ 0.05%。Return
- difference：＜ 0.075%。
- Stability: in the range, within one year of no more than basic error。
- Constant flow performance：Change in volume＜ 0.075%。
- Insulating properties：Power resistance to ground ＞400MΩ。
- Response time：Electric start, response time less than 2 seconds.
- Sensitivity：Lower limit value and the range of variation＜ 0.01%。
- Supply voltage variation：Lower limit value and the range of variation＜ 0.02%。
- Steady state variation：Power interruption, Change in volume＜ 0.02%。
- Over range：Lower limit value and the range of variation＜ 0.05%。
- Installation position effect：When the sensor measuring diaphragm is not vertical, may have no more than 0.24kPa zero system error, but the error can be achieved by adjusting the zero pressure tuning to eliminate, had no effect on the range.
- Electrical connection：The transmitter housing twoM20×1.5 Screw hole, Used to connect the cable duct。The shell has a terminal and a test pad, such as communicator connected, which can be fixed on the testing pad.
- Anti explosion：FlameproofExd II BT 4；Intrinsic safety typeExia II CT6。

PRESSURE

BACK SIDE DIAPHRAGM SEAL WITH THREADED CONNECTION FOR HIGH PRESSURE

- Material : Stainless steel and special materials
- Accessories : Diaphragm seals
- Process connection : Threaded
- Range : 0...60 / 0...600bar
- Sensing element : Welded diaphragm



WELDED DIAPHRAGM SEAL WITH FLANGED CONNECTION

- Material : Stainless steel and special materials
- Accessories : Diaphragm seals
- Process connection : Flanged
- Range : 0...1 / 0...400bar
- Sensing element : Welded diaphragm



WAFER DIAPHRAGM SEAL WITH FLANGED CONNECTION

- Material : Stainless steel and special materials
- Accessories : Diaphragm seals
- Process connection : Flanged
- Range : 0...0.1 / 0...160bar
- Sensing element : Welded diaphragm



IN LINE DIAPHRAGM SEAL WITH FLANGED CONNECTION

- Material : Stainless steel and special materials
- Accessories : Diaphragm seals
- Process connection : Flanged
- Range : 0...0.1 / 0...40bar
- Sensing element : Welded diaphragm



DIAPHRAGM SEAL AND CAPILARY REPAIR SERVICE IN SIPNA'S WORKSHOP


SIPNA Company is able to repair and produce all diaphragm seal with capillaries. Sipna pressure calibration department after production or repair of diaphragm seals can perform all oil filling (fluid), ventilation and calibration operations on the :


- Any Brand Transmitter
- Gauge Pressure Transmitters
- Pressure Gauge
- Level Transmitters
- Differential Pressure Transmitter

With 1-Year Warranty







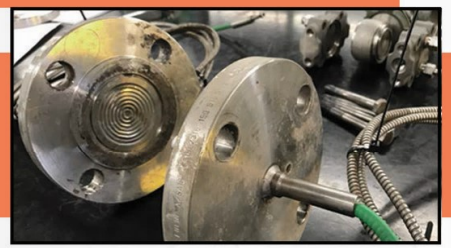

BEFORE REPAIRING



AFTER REPAIRING


VIBRATION

- The SIPNA probe series consist of 5mm and 8mm tip diameter probes. The models are available with all standard thread sizes and body configurations required in API 670 Standard. Both probes offer a full 80 mil (2mm) range, and are designed to offer full API 670-compliant performance characteristics when used with a matching extension cable and driver. SIPNA probes are fully interchangeable with :

- **Bently Nevada (BN):**
  3300 XL, 3500, 3000, 7200
  MEGGIT , SHINKAWA , METRIX
  B&K(Brüel & Kjær Vibro)




- **RADIAL/AXIAL VIBRATION PROBE**

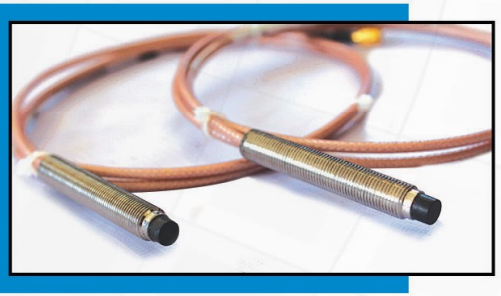



- **EXTENSION CABLE**

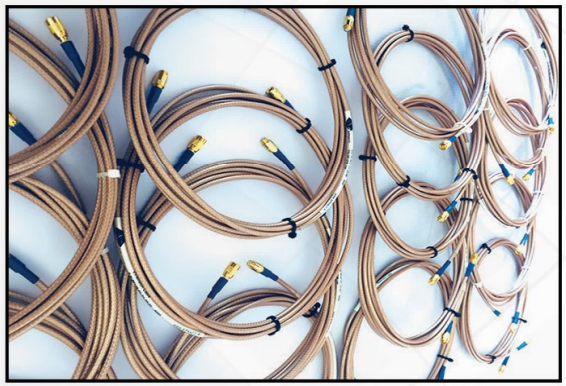



- **BNC MALE/FEMALE VIBRATION CONNECTOR**





VIBRATION

PROXIMITOR SENSOR





- SIPNA Co. Proximity Systems Measure the Static and Dynamic Displacement Between the Vibration Probe and Metal Target. SIPNA Proximity Probes Measure the Following Radial vibration and Axial Thrust Vibration. Our Designed according to API 670 Standard and Our Proximity Systems are Fully Replaceable with Vibrometer, Bently Nevada 3000, 7200 and 3300 Products for Systems Length 1,3,5 and 9 meters.
  The Products is also certified by ATEX with this classified II 1G Ex ia IIC T6, T5 Ga



IGNITION

- The SIPNA is in IRAN a leading manufacturer of ignition systems for gas turbine. SIPNA's ignition systems products are fully interchangeable with specified as original equipment on engines from General Electric, General Electric Power & Water, Honeywell, Microturbo , Pratt & Whitney, Pratt & Whitney Canada, Rolls-Royce, Solar, Sundstrand, Siemens, Turbomeca, Volvo, Wesinghouse, and Ruston.

IGNITION EXCITER

- UNISON Ignition Exciter made by SIPNA

Gas Turbine Brand: SIEMENS/Model	: SGT-400
Channel Quantity	: 6 No.
OEM P/N	: 9060316-2
SIPNA P/N	: SP-98083

UNISON






SULZER

- SULZER Ignition Exciter made by SIPNA

Gas Turbine Brand	: SULZER
Channel Quantity	: 2 No.
OEM P/N	: 00000-4582122/AGC 093032-10
SIPNA P/N	: SP-00000-4582122



CHAMPION

- CHAMPION Ignition Exciter made by SIPNA

Gas Turbine Brand: ROLLS ROYCE/Model	: AVON
Channel Quantity	: 2 No.
OEM P/N	: 305136
SIPNA P/N	: SP-95070





MADE IN IRAN

IGNITION


SAUNDERS ELECTRONICS

- SAUNDERS ELECTRONIC Ignition Exciter made by SIPNA
  - Gas Turbine Brand: ROLLS ROYCE / Model : AVON
  - Channel Quantity : 1 No.
  - OEM P/N : PL-284
  - SIPNA P/N : SP-99063



alta INDUSTRIES S.R.L.

- ALTA INDUSTRIES SRL Ignition Exciter made by SIPNA
  - Gas Turbine Brand:
  - NUOVO PIGNON (GE) / Model : F5
  - Channel Quantity : 1 No.
  - OEM P/N : RTO-44314
  - SIPNA P/N : SP-97197

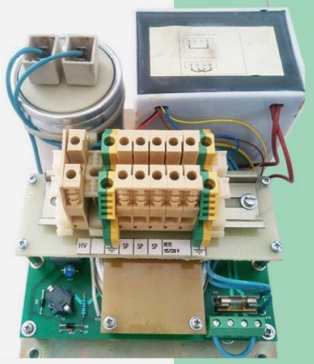

UNISON

- UNISON Ignition Exciter made by SIPNA
  - Gas Turbine Brand:
  - SIEMENS / Model (TORNADO) /Model : TA-1750, TB-5000
  - Channel Quantity : 1No.
  - OEM P/N : 10-392775-4
  - SIPNA P/N : SP-10-392775-4



CHAMPION

- CHAMPION Ignition Exciter made by SIPNA
  - Gas Turbine Brand: SOLAR CENTAUR / Model : GSC 4000
  - Channel Quantity : 1 No.
  - OEM P/N : 917560C2
  - SIPNA P/N : SP-917560C2



CHAMPION

- CHAMPION Ignition Exciter made by SIPNA
  - Gas Turbine Brand: SIEMENS / Model : SGT-600 / GT-10B
  - Channel Quantity : 1 No.
  - OEM P/N : 305076
  - SIPNA P/N : SP-96167



MEGGiTT Vibro-Meter®

- VIBRO-METER Ignition Exciter made by SIPNA
  - Gas Turbine Brand: SIEMENS / Model : SGT-600
  - Channel Quantity : 1 No.
  - OEM P/N : S26416
  - SIPNA P/N : SP- S26416



MADE IN IRAN MADE IN

IGNITION

IGNITER

The SIPNA Co. has produced igniter designs for customers, including marine power plants, oil and gas stations. Our internal Ceramic Manufacturing capability permits design and manufacture of industry leading Alumina Oxide insulators and Silicon Carbide semiconductors which sets it apart from the competition in product performance, quality and response time. Have both high energy igniters and high voltage Igniters.





Solar® Turbines
A Caterpillar Company

- SOLAR Centaure MDG-4000 Igniter made by SIPNA
  OEM P/N : 903316C1
  SIPNA P/N : SP-903316C1



- ROLLS ROYCE Igniter made by SIPNA
  OEM P/N : 2-02H99-201
  SIPNA P/N : SP-2-02H99-201



- RUSTON Igniter made by SIPNA
  OEM P/N : TA23119
  SIPNA P/N : SP-TA23119



SIEMENS

- SIEMENS SGT-100 Tyohoon Igniter made by SIPNA
  OEM P/N : 9058685-2
  SIPNA P/N : SP-9058685-2



SIEMENS SGT-200 Torando Igniter made by SIPNA
OEM P/N : 9058685-64/51009003-3
SIPNA P/N : SP-9058685

SIEMENS




SIEMENS SGT-600 Igniter made by SIPNA
OEM P/N : CV21156
SIPNA P/N : SP-CV21156

SIEMENS



IGNITION CABLE

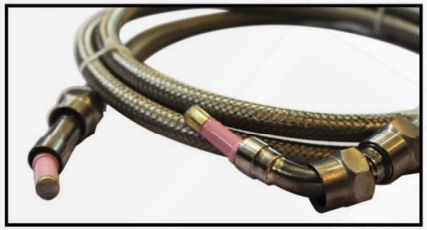




FLOW

ORIFICE PLATE & ORIFICE FLANGE

The SIPNA's Orifice plates and restriction orifices are part of our portfolio of primary flow elements. Our production are Orifice flange assembly, Integral orifice assembly, Orifice plate with carrier ring, Orifice plate assembly with RTJ holder, Orifice plate, Restriction orifice plate according to standards ISO 5167, BS1042, ASME MFC-3M, ANSI 2530, AGA 3, API-ch.14, R.W. MILLER and L.K. Spink etc.

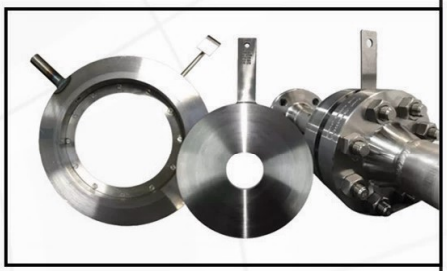

MADE IN IRAN MADE IN

- **Some of our customers and the strong presence of Sipna in their approved Vendor list (AVL) of Producers**

South Pars Gas Complex (SPGC)

National Iranian Gas Transmission Company (NIGTC)

Pars Oil and Gas Company (POGC)

National Iranian Oil Company (NIOC)

National Iranian Southern Oilfields Company (NISOC)

Iranian Offshore Oil Company (IOOC)

National Iranian Petrochemical Company (NIPC)

National Iranian Gas Engineering and Development Company (NIGCENG)

Karoon Oil and Gas Exploitation Co. (KOGPC)

Gachsaran Oil and Gas Exploitation Co. (MOGPC)

Aghajari Oil and Gas Exploitation Co. (AGOGPC)

Maroon Oil and Gas Exploitation Company (MOGPC)

National Iranian Oil Refining and Distribution Company (NIORDC)

Iran Oil Pipelines and Telecommunications Company (IOPTC)

Social Security Investment Company

Ministry of Energy

Mobarakeh Steel Company

Ta'min Petroleum and Petrochemical Investment Co (TAPPICO)

Parsian Oil and Gas Development Group

Persian Gulf Petrochemical Company

- **برخی از مشتریان ما و حضور پررنگ سیپنا در لیست تولیدکنندگان مورد تایید (AVL):**

مجتمع گاز پارس جنوبی

شرکت ملی انتقال گاز ایران

شرکت نفت و گاز پارس

شرکت ملی نفت ایران

شرکت ملی مناطق نفت خیز جنوب

شرکت نفت فلات قاره ایران

شرکت ملی صنایع پتروشیمی ایران

شرکت مهندسی و توسعه گاز ایران

شرکت بهره برداری نفت و گاز کارون

شرکت بهره برداری نفت و گاز گچساران

شرکت بهره برداری نفت و گاز آغاجری

شرکت بهره برداری نفت و گاز مارون

شرکت ملي پالايش و پخش فراورده هاي نفتي ايران

شرکت خطوط لوله و مخابرات نفت ایران

شرکت سرمایه گذاری تأمین اجتماعی (شستا)

وزارت نیرو

شرکت فولاد مبارکه

شرکت سرمایه گذاری نفت و گاز و پتروشیمی تامین تاپیکو

گروه گسترش نفت و گاز پارسیان

شرکت صنایع پتروشیمی خلیج فارس