NAVKAR ENTERPRISE

N-UltraFace
Strong Light

Face	Finger	RFID	GPRS/GPS (Optional)	WiFi	LAN	USB	Access Control
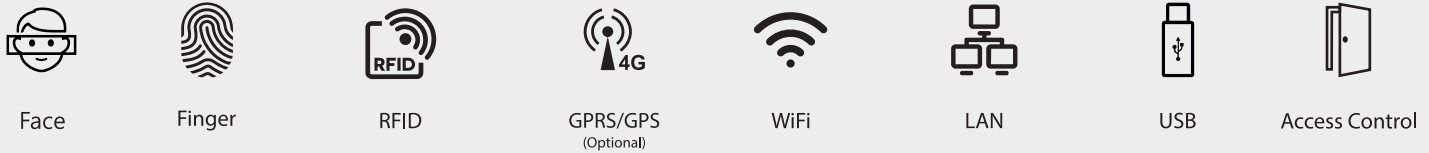
Multi-Bio Time Attendance and Access Control System

Storage Capacity

Face Capacity	3000
Finger Capacity	30,000
Card Capacity	3000
Max User	3000
Log Capacity	2,00,000

N-UltraFace

"N-UltraFace accepts face under Strong Light and Zero Light"

Features

World-class Face Identification Technology

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.

Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

N-UltraFace

Communication Interface

Communication	WIFI, TCP/IP, USB

Biometric

Push Data	Yes
4G GPRS / GPS	Optional
Sensor type	500 DPI
FAR	0.01%
FRR	0.001%
LUX	1,00,000
Processor	1 GHz
Verification time	<=1 second
RF card options	Proximity / Mifare (Optional)

Auto Focus

Strong light Verification

Zero light Verification

1 meter

Long Distance Verification

Accepts Color Finger

Audio/Visual

Display	2.8" TFT LCD color screen
Voice Instrucation	16-bit Hi-Fi voice & sound indication
Language	English

Software
Desktop, Web, Cloud

Access control

Wiegand	Input
Relay	Yes
Support Exit Reader	KR26E
Standard Functions	Record Query, Auto Status,
	T9 Input, 14 Digit User ID

Time Attendance

Access Control

Employee Self Service

Power & Enviroment

Operating Temperature	0°c ~ 50°c
Power	12V DC / 2A
Dimension (L*H*W)	200 x 125 x 95 mm

Mobile App

Connect with us on

BiomaxOfficial
biomaxsecurity
BioMax Security
BioMax Access Control

www.biomaxsecurity.com