



ESEIAAT



Cubesat Constellation Astrea

Report

Degree: Aerospace Engineering

Course: Engineering Projects

Group: G4 EA-T2016

Delivery date: 22-12-2016

Students:

Cebrián Galán, Joan	Fontanes Molina, Pol
Foreman Campins, Lluís	Fraixedas Lucea, Roger
Fuentes Muñoz, Óscar	González García, Sílvia
Herrán Albelda, Fernando	Kaloyanov Naydenov, Boyan
Martínez Viol, Víctor	Morata Carranza, David
Pla Olea, Laura	Pons Daza, Marina
Puig Ruiz, Josep	Serra Moncunill, Josep Maria
Tarroc Gil, Sergi	Tió Malo, Xavier
Urbano González, Eva María	

Customer: Pérez Llera, Luís Manuel

Contents

List of Tables	iv
List of Figures	v
I Orbit Design	1
1 Orbit Geometry	2
1.1 Keplerian Geometry	3
1.2 Dynamic equations	4
2 Orbital Coverage	6
2.1 Satellite Footprint	6
2.1.1 Introduction	6
2.1.2 Footprint Computation	7
2.2 Elevation Angle	8
2.2.1 Elevation angle cone	9
2.2.2 Atmospheric restrictive conditions	9
2.2.3 Elevation angle of other current constellations	10
2.3 Minimum Plane Inclination	11
2.4 Satellite to Satellite Visibility	13
2.5 Market Study: Current Nanosatellites in Orbit	14
2.5.1 Criteria for the orbital height of the satellites	14
2.5.2 New Space: Adapting to new society needs	16
3 Constellation Configuration	17
3.1 Introduction: The Global Positioning System Example	17
3.2 Polar Orbit Constellation	18
3.2.1 Introduction	18
3.2.2 General Configuration	19
3.2.3 The Streets of Coverage Method	20
3.2.4 Results of Streets of Coverage	23
3.3 Walker-Delta Constellation	24
3.3.1 Full Walker-Delta Constellation	25

3.3.1.1	Characteristics	25
3.3.1.2	Notation	27
3.3.1.3	Coverage	27
3.3.2	Semi Walker Delta Configuration	28
3.3.2.1	Advantages	28
3.3.2.2	Disadvantages	29
3.3.3	Other Walker Delta Configurations	30
3.3.3.1	SWDC including an additional polar orbit.	30
3.3.3.2	Mixed Walker Delta.	31
3.4	Testing Method	32
3.4.1	Introduction	32
3.4.2	Method Bases	32
3.4.2.1	Global Coverage Conditions	32
3.4.2.2	Results of Testing Method	33
4	Orbit Perturbations	37
4.1	Sources of Perturbation	37
4.1.1	Introduction to Orbit Perturbations [1]	37
4.1.2	Gravity Potential of Earth	38
4.1.3	Atmospheric Drag	39
4.1.4	3rd Body Perturbations	41
4.1.5	Other Perturbations	41
4.2	Significant Perturbations	42
4.3	Orbit Decay	43
4.3.1	Effects on the Ascension Node	43
4.3.1.1	Introduction	43
4.3.1.2	Perigee Effect	43
4.3.1.3	Ascension Node	44
4.3.1.4	Conclusion	44
4.3.2	Effects of the Solar Cicle	44
4.3.3	Orbital Decay Propagation Results	47
4.3.3.1	Introduction	47
4.3.3.2	Drag Computation Algorithm	47
4.4	Orbital Station-Keeping	48
4.4.1	Raising the orbit height to increase Lifetime	49
4.4.2	Using Thrusters to increase Lifetime	50
4.4.2.1	Energy equation	50
4.4.2.2	Delta-V	51
4.4.2.3	Time	52
4.4.2.4	Propellant	52
4.4.2.5	Orbit maintenance	52

CONTENTS

4.4.2.6	Results	53
5	Constellation Design Decision	57
5.1	Considered Designs	57
5.1.1	Introduction	57
5.1.2	Candidate 1: Polar - Global Coverage	57
5.1.3	Candidate 2: Polar - GS Coverage	58
5.1.4	Candidate 3 and 4: Walker-Delta GS Coverage	58
5.1.5	Candidate 5: Walker-Delta Lat: 0-58	59
5.1.6	Candidate 6: Polar - Walker-Delta J2 + Rotació	59
5.1.7	Candidate 7: Walker-Delta GS Coverage 3	60
5.2	Constellation Performance Analysis	63
5.2.1	Performance Evaluation	63
5.3	Ordered Weighting Average based Decision	65
II	Communications	67
6	Space Segment Protocol Stack	68
6.1	Introduction	68
6.2	Layer 2: Data Link	70
6.2.1	Functions of the DLL	70
6.2.2	Working procedure	70
6.2.3	Protocols	71
6.3	Layer 3: The Network	72
6.3.1	Functions of the Network Layer	72
6.3.2	Protocols	73
6.3.3	Protocol Selection	73
6.3.3.1	Choice of the main protocol	73
6.3.3.2	Choice of routing protocol	74
6.3.3.3	Choice of complementary protocols	74
6.3.3.4	Conclusion	74
6.4	Layer 4: Transport and Session	74
6.4.1	Protocols	75
6.4.2	Choice of protocol for the transport layer	75
7	Ground Segment Protocols	76
7.1	Ground Segment Protocols	76
7.1.1	Introduction	76
7.1.2	Protocols	76
7.2	Delivery of the data method	77

8 Design of the Ground Segment	78
8.1 Introduction	78
8.2 Localization of the Ground Stations	79
8.2.1 Method	79
8.2.2 Conclusion	80
8.3 Legislation	81
8.3.1 United Kingdom Ground Station	81
8.3.2 Canada Ground Station	81
8.4 Annual costs	82
8.4.1 Annual costs of the Ground Stations and the Mission Control Centre	82
8.5 Initial investment	82
8.5.1 Description of the systems	82
8.5.2 Investment	83
8.6 Renting of a Ground Station	84
8.6.1 Contact with GS companies	84
8.6.2 LeafSpace	84
8.6.2.1 Features	84
8.7 Decision taking	86
8.7.1 Decision	87
 III Satellite design	 88
 9 Satellite design	 89
9.1 Structure and mechanics	89
9.1.1 Structure	89
9.1.2 Thermal protection	90
9.1.3 Options chosen for the structure and thermal protection	90
9.2 Electrical Power System	90
9.2.1 Estimation of the power required	91
9.2.2 Solar arrays	91
9.2.3 Power management system	91
9.2.4 Batteries	92
9.2.5 Options chosen for the EPS	92
9.3 Propulsion Systems	92
9.4 Attitude and Orbital Control Systems	93
9.4.1 Orbital Control	94
9.5 Payload	94
9.5.1 Antennas	95
9.5.1.1 Patch antenna	95
9.5.2 Payload Data Handling Systems	96

CONTENTS

9.5.2.1	Transceivers	96
9.5.3	Options chosen for the payload module	97
9.6	Communication module	97
9.7	Astrea satellite final configuration	98
9.8	Budget	98
IV	Financial and Other Considerations	100
10	Financial Study	101
11	Environmental Impact Study	106
12	Social and Security Considerations	107
13	Bibliography	109

List of Tables

3.2.1	Streets of Coverage Method main variables	20
3.4.1	Coverage Testing Method main Variables	32
3.4.2	Testing Values for the Coverage Testing Method	33
4.1.1	Exponential Atmosphere Model main Variables	40
4.1.2	Third Body Perturbations Coefficients	41
4.3.1	Selected data to compute orbit decay extracted from figure 4.3.3	47
4.4.1	Simulation Thruster Parameters	53
4.4.2	Station-Keeping with Thrusters Simulation 1 Results	55
4.4.3	Station-Keeping with Thrusters Simulation 2 Results	55
5.2.1	Constellation parameters for the Example Constellation	64
5.2.2	Performance Parameters for the Example Constellation	65
5.3.1	Constellation Configuration OWA Decision	66
6.2.1	OWA of the DLL protocols.	71
9.1.1	Options chosen for the structure and thermal protection	90
9.2.1	Options studied for the Electric Power System	92
9.3.1	Option chosen for the propulsion system	93
9.4.1	Options studied for the AOCDS	94
9.5.1	Options chosen for the payload	97
10.0.1	Feasibility Study	103

List of Figures

1.0.1	a) Geocentric-equatorial frame and b) Classical Orbital Elements. Extracted from [2].	3
2.1.1	Single satellite coverage geometry	7
2.2.1	Elevation angle cone. Source: NOAA	8
2.2.2	Minimum elevation angle as function of latitude. Source: [3]	11
2.3.1	Minimum Inclination to provide coverage at different latitude for different orbit apogees.	12
2.5.1	Distribution of the currently in orbit nanosatellites.	15
3.1.1	Distribution of the expanded 24-slot GPS constellation. [?]	18
3.2.1	Distribution of the 66 Iridium constellation satellites. Generated using [?]	19
3.2.2	Distribution of the planes for Polar Orbits design.	20
3.2.3	Single plain street of coverage. The footprints of the satellites superpose leading to a street. [?]	21
3.2.4	Two plains streets of coverage. An optimum phasing needs to be obtained. [?]	21
3.2.5	Variation of number of satellites for different heights and elevation angles	23
3.2.6	Variation of number of satellites for different heights between 500 and 600km.	24
3.3.1	Definition of the inclination δ . Extracted from [4]	25
3.3.2	Delta pattern as seen from the North Pole. Extracted from [5]	26
3.3.3	Delta pattern 65° : 30/6/1	26
3.3.4	Minimum altitude for continuous global coverage. Comparison between polar patterns and Walker delta patterns. Extracted from [6]	27
3.3.5	12 plane SWDC. Note the gap and the equidistant planes	28
3.3.6	This geometry distribution induces a large anti-symmetric gap	29
3.3.7	Added polar orbit to the 11 plane based SWDC	30
3.3.8	8 plane based MWDC generated for 210 degrees	31
3.4.1	Geometrical conditions needed to fulfill global coverage. On the left: Condition between satellites of different planes. On the right: Condition between satellites of the same plane	33
3.4.2	Possible satellite configurations for a 210° Walker Delta configuration .	34

LIST OF FIGURES

3.4.3	Ground track and spherical representation for a 180° Walker Delta configuration	34
3.4.4	Ground track and spherical representation for a 210° Walker Delta configuration	35
3.4.5	Ground track and spherical representation for a 360° Walker Delta configuration	35
4.2.1	Logaritmic plot of the modulus of the increases in Angular Arguments of the orbit	42
4.3.1	Ascention node perturbation On the left: Perigee deviation in terms of time. On the right: Ascending node deviation in terms of time	43
4.3.2	Deviation of densities in the upper atmosphere due to the 19th solar cycle. Source: [?]	45
4.3.3	Measured intensities of the 23rd and 24th solar cycles. Source: NOAA	46
4.3.4	Orbit Decay computed for several values of	48
4.4.1	Increase in the Lifetime obtained by setting the constellation in a higher orbit	49
4.4.2	Hohmann transfer. Extracted from [6]	51
4.4.3	Height variation of the satellite	54
4.4.4	Height variation of the satellite with a more restrictive minimum height	56
5.1.1	Candidate 1. Full Polar constellation with global coverage. h= 560km; Np=20; Npp=21; Tsat=420	60
5.1.2	Candidate 2. Full Polar constellation with total ground station coverage. h= 550km; Np=18; Npp=20; Tsat=288	61
5.1.3	Candidate 3. 210° Walker-Delta constellation configuration. h= 542km; in=72; Np=8; Npp=21; Tsat=168	61
5.1.4	Candidate 4. 225° Walker-Delta constellation configuration. h= 542km; in=72; Np=9; Npp=17; Tsat= 153	61
5.1.5	Candidate 5. 210° Walker-Delta constellation configuration with total coverage of the lattitudes from 0 to 52 degrees. h= 560km; in=72; Np=9; Npp=17; Tsat= 153	62
5.1.6	Candidate 6. 225° Walker-Delta constellation configuration. h= 542km; in=72; Np=9; Npp=21; Tsat= 189	62
5.1.7	Candidate 7. Full Walker-Delta constellation configuration.	62
5.2.1	Length of the passes on the example GS.	65
5.3.1	Astrea Constellation Final Configuration.	66
6.1.1	Protocols recommended by the CCSDS, classified in their respective OSI layer. Extracted from [7]	69
6.1.2	Possible combinations of the CCSDS recommended protocols. Extracted from [7]	70

LIST OF FIGURES

8.2.1	Options for placing the 3 Ground Stations.	80
8.5.1	S-band Equipment	83
8.5.2	X-band Equipment	83
8.6.1	LeafSpace Ground Stations	86

Part I

Orbit Design

Chapter 1

Orbit Geometry

Throughout this chapter, the bases of orbital geometry will be explained in order to correctly understand the parameters that will later be exposed when dealing with the constellation orbits (or the position of the satellites in them). However, long theoretical explanations will be avoided so as not to distract the reader from the main objective of the project.

To understand the movement in space is enough to apply the Newton's laws. These, however, need an inertial non-rotating frame to be correctly described. When dealing with Earth-orbiting, one usually chooses a reference system called *geocentric-equatorial system* which is shown in the figure 1.0.1.a. As can be seen, the XY plane coincides with the plane Equatorial with the X axis pointing in the direction of the vernal equinox ¹. The Z axis correspond the axis of rotation of the earth and points to the north (following the right-hand rule).

¹an imaginary line found by drawing a line from the Earth to the Sun on the first day of spring

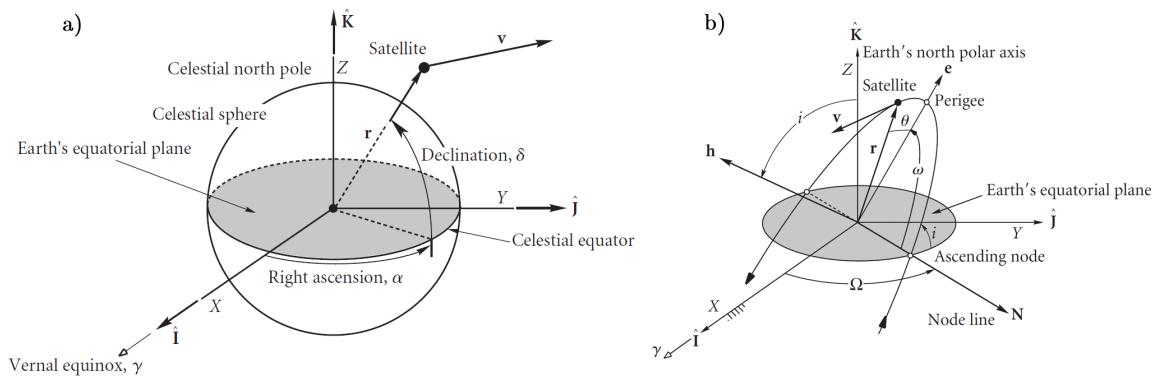


Figure 1.0.1: a) Geocentric-equatorial frame and b) Classical Orbital Elements. Extracted from [2].

By defining this system, any point in the space can be depicted by its position vector r and we can study its movement by the velocity vector \dot{r} . These elements are useful especially for computational work but they nearly do not provide information about the orbit. For these reason, the orbital elements were developed.

1.1 Keplerian Geometry

The *Classical Orbital elements*, also known as the *Keplerian elements* as an attribution to Johannes Kepler, are six independent quantities which are sufficient to describe the size, shape and orientation of an orbit. This set of elements are shown in the figure 1.0.1.b and are defined as follows:

- **Semi-major axis (a):** It is related to the size of the orbit and its defined by the sum of the apogee (furthest point) and the perigee (closest point) divided by two.
- **Eccentricity (e):** It defines the shape of the orbit with respect to that of a circle. Thus, the eccentricity of a circular orbit is null while hyperbolic orbits have an eccentricity greater than one.
- **Inclination (i):** the inclination is the angle between the positive Z axis and the angular momentum vector (\mathbf{h}) which is perpendicular to the orbital plane. The inclination of the orbit can take a value from 0 deg to 180 deg. For $0 \text{ deg} \leq i \leq 90 \text{ deg}$ the motion *posigrade* and for $90 \text{ deg} \leq i \leq 180 \text{ deg}$ the motion is *retrograde*.
- **Right ascension of the ascending node - RAAN (Ω):** This parameter, along with the inclination define the orientation of the orbital plane. It is the angle between the positive X axis and the intersection of the orbital plane with the equatorial plane XY in counterclockwise direction. The intersection mentioned is called the node line

and the point where the orbit passes through the node line (from south to north) is the ascension node ($0 \text{ deg} \leq \Omega \leq 360 \text{ deg}$).

- **Argument of perigee (ω):** Is defined as the angle between the ascending node and the perigee. It describes the orientation of the ellipse with respect to the frame ($0 \text{ deg} \leq \omega \leq 360 \text{ deg}$).
- **True Anomaly (ϕ or ν):** This last quantity is used to describe the satellite's instantaneous position with respect to the perigee. Is the angle, measured clockwise, between the perigee and the satellite position. From all the orbital elements, the true anomaly is the only that changes continuously. Sometimes, true anomaly is substituted by the mean anomaly, which can be calculated using another auxiliary angle called the eccentric anomaly.

$$\begin{aligned}\cos E &= \frac{e + \cos \theta}{1 + e \cos \theta} \\ M &= E - e \sin E\end{aligned}\tag{1.1.1}$$

1.2 Dynamic equations

As aforementioned, the motion of an object in the space can be described using the Newton's laws. The basic idea developed by Newton is to study the Cubesat and the Earth as a spherical bodies in mutual gravitational attraction and neglect the gravitational forces caused by other objects (this is called the *two body* problem). The forces balance is simple since we only have the Earth gravitational attraction, which must compensate the centripetal acceleration of the satellite. Thus, using the law of universal gravitation,

$$-G \frac{M_E m_{sat}}{r^3} \vec{r} = m_{sat} \vec{a}_{sat}\tag{1.2.1}$$

Where G is the gravitational constant and r represents the distance between the satellite and the Earth. From the last equation, we only want to obtain the acceleration, therefore:

$$-G \frac{M_E}{r^3} \vec{r} = \vec{a}_{sat} = \frac{d^2 \vec{r}}{dt^2}\tag{1.2.2}$$

For simplicity, it usual to denote $\mu = GM_{earth}$ resulting in the following equation:

$$-\frac{\mu}{r^3} \vec{r} = \frac{d^2 \vec{r}}{dt^2}\tag{1.2.3}$$

This expression is a second order equation that models the motion of the Cubesat relative to the Earth and it can be analytically solved. The only problem is that several hypotheses have been applied that make the case different from reality. The formulation should be modified to take into account the effects due to:

- More bodies attracting the satellite (Sun, Moon, Venus, etc.)
- The existence of more forces like the drag, the solar radiation pressure, etc.
- The earth is not an spherical body.

The corrections for considering these things are called perturbations and they are explained in the Chapter 4 of this part of the report.

Chapter 2

Orbital Coverage

2.1 Satellite Footprint

2.1.1 Introduction

The first step to build a satellite network with global coverage is to compute a single satellite footprint.

The footprint of a satellite is defined as the region of Earth where a single satellite can be seen. This Earth coverage surface provided is spherical and depends on some orbital parameters such as:

- Height

When increasing height the footprint of a satellite grows.

- Elevation angle

When increasing the elevation angle, which is the angle between the satellite and the horizontal plane of an arbitrary point of the Earth, the surface seen by the satellite decreases. (This parameter will be later studied in detail)

2.1.2 Footprint Computation

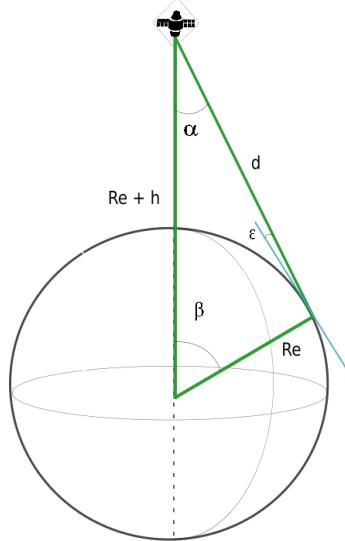


Figure 2.1.1: Single satellite coverage geometry

In order to compute the coverage area we must solve the triangle depicted in figure 2.1.1 where the basic geometry of a satellite footprint is shown.

The most needed parameters are the distance from a random point on Earth (where we can suppose our ground station to be) to the satellite denoted by d and the central angle, denoted with a β .

Applying cosines law to the triangle shown in figure 2.1.1, we obtain the following expression:

$$r^2 = R_{\text{earth}}^2 + d^2 - \cos(90 + \epsilon) \quad (2.1.1)$$

Isolating d from the equation above and changing $r = R_{\text{earth}} + h$, where h is the actual height of the satellite regarding the Earth surface, we arrive at:

$$d = R_{\text{earth}} \left[\sqrt{\left(\frac{h + R_{\text{earth}}}{R_{\text{earth}}} \right)^2 - \cos^2 \epsilon} - \sin \epsilon \right] \quad (2.1.2)$$

From the figure 2.1.1 we can also extract a relation between the central angle, the distance d and the elevation angle. This relation together with the equation 2.1.2 allow us to find β .

$$d\cos\epsilon = (R_{earth} + h) \sin\beta$$

$$\beta = \frac{1}{R_{earth} + h} \arcsin [d(\epsilon)\cos\epsilon] \quad (2.1.3)$$

Once the central angle β has been computed we are able to obtain the footprint satellite's are using the equation below:

$$S = 2\pi R_{earth}^2 (1 - \cos\beta) \quad (2.1.4)$$

The size of the footprint will determine the level of coverage our constellation provides, therefore when deciding the value of the orbital parameters it has to be a factor to consider.

2.2 Elevation Angle

The angle of elevation is essential to calculate the geometry of our constellation. As discussed previously, our aim in this project report is to justify how global coverage will be fulfilled. First, we define for a given groundstation the angle between its beam pointing right to the satellite and the horizontal local plane as the elevation angle. Secondly, a study is conducted in order to relate the height of the satellite, the elevation angle and the coverage of the Earth. Finally, we complete our orbital design by configuring a constellation that will securely define a global coverage fulfillment. Next, we will be defining how these parameters are related.

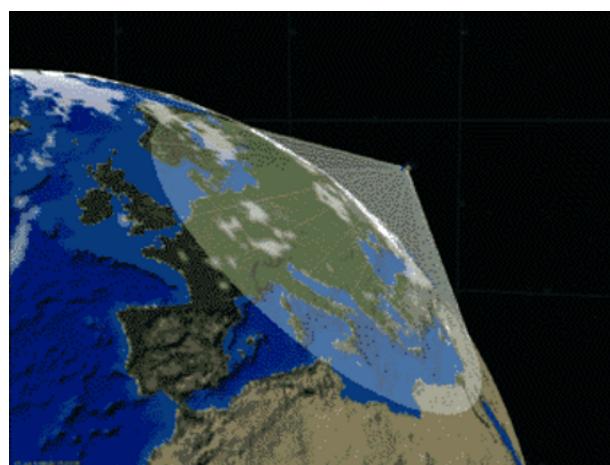


Figure 2.2.1: Elevation angle cone. Source: NOAA

2.2.1 Elevation angle cone

Global coverage will be discussed considering the elevation angle and its resulting footprint on Earth. The elevation angle is described by the angular orientation of the antennas in the ground station. However, this angle is also perceived by the satellite in a similar way - it will vary depending on the orientation of the satellite and the angle between horizontal local planes. In order to describe the footprints we must define a cone which vertex is set at the antennas of the satellite, pointing down to Earth, and which generatrix is given by the angle of elevation. This elevation angle based cone is the description of the paths that our communications can take place. In other words, the generatrix of this cone is setting the limits in which the antenna will operate as function of the elevation angle. This implies that our satellite will be able to communicate to all the points contained in the cone. Finally, this cone will be describing a circular surface on top of the Earth which we will call the footprint of the satellite. Additionally, this footprint is the coverage that a single satellite can generate, hence we will be distributing satellites all around the Earth in order to fulfill global coverage.

2.2.2 Atmospheric restrictive conditions

In order to obtain the final restrictive angle of elevation needed to contact the ground stations some considerations have to be made. Then, we will relate these to our bandwidth in order to analyse if they must be taken into account when communicating with ground stations [8]. The most important parameters are the following:

- **Atmospheric gases:** water vapour and oxygen absorptions; important when frequencies are above 3 GHz. More information [9] and [10].
- **Precipitations and Clouds:** these conditions are relevant for signals above 10GHz.

By means of these physical phenomena we can subtract the elevation angle as function of the latitude. However, we must take into account that these physical conditions give a value for the elevation angle which may not be the most restrictive. Global coverage conditions, bandwidths, inclination and the final distribution of our constellation will be

considering this elevation angle and viceversa, iteratively.

The ASTREA CONSTELLATION was designed and optimized in order to fulfill global coverage for a constant elevation angle - respect to the latitude - of 20 degrees. This corresponds to a predefined model.

Our constellation will be operating at S-band for telemetry and X-band for data relay. Therefore, the satellites need to be operating up to 10 GHz. This directly implies that physical conditions such as atmospheric gases, precipitations and clouds must be studied when determining the elevation angle needed. We can obtain a more realistic model for the elevation angle comparing the the frequencies of our constellation to others that are currently operative. For this model we find the following:

- At low latitudes (between 0 and 30 degrees) the constellation fulfills global coverage generously.
- At ground station latitude (60 degrees) the constellation is covering the station succesfully. For the previous model coverage was well established with margin - as we set global coverage from the equator. Note: each orbit could be reduced to a lower number of satellites per plane, but this would endanger the correct and stationary behaviour of the constellation. In fact, in this case we would not be able to control possible incidencies such as unoperative satellites with enough margin.
- The ground stations are covered at all time for at least one satellite.

2.2.3 Elevation angle of other current constellations

Analysing the minimum elevation angle needed in order to fulfill global coverage requieres, as mentioned before, the understanding first of the restrictive conditions of the atmosphere and how these will alter it. As a consequence of the different physical conditions given before we will be able to determine a relation between latitude and elevation angle. All the same, the elevation angle depends on the bandwith in which the satellites operate, hence different distributions of this angle respect to the latitude will be described depending on the bandwidths used.

- Celestri: 18.8 to 20.2 GHz at 48 degree inclination.
- GlobalStar: 2.4 GHz at 52 degree inclination.
- Iridium: 20 to 30 GHz at 90 degree inclination - polar orbits.

Comparing our configuration to other present constellations some clarifications can be made:

- The minimum elevation angle peak is proportional to the bandwidth at which the satellite is communicating with Earth. For instance, Iridium's peak of elevation angle is the highest relative to the other configurations since it is also working with the highest frequency signals.
- The latitude position of the peaks is related to the inclination of the constellation. Iridium, - a polar orbit based configuration - describes a peak at 90 degrees of latitude whereas Celestri and GlobalStar are near 40 to 50 degrees.

With these tendencies our model can be likewise described. This model would be defined by a peak at about 70 degrees latitude, smaller than those of the Celestri and Iridium constellations, but higher compared to the Iridium constellation peak. Thus, the previous model of a constant 20 degree elevation angle fulfills these requirements.

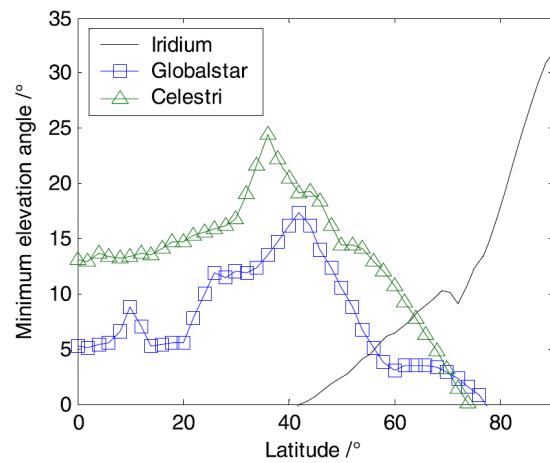


Figure 2.2.2: Minimum elevation angle as function of latitude. Source: [3]

2.3 Minimum Plane Inclination

As it has been pointed before, there are several factors to take into account in order to design a constellation that provides global coverage on Earth. In this section the minimum

Minimum Plane Inclination

inclination to achieve that purpose is assessed. Using the theory previously developed, we can observe the following results:

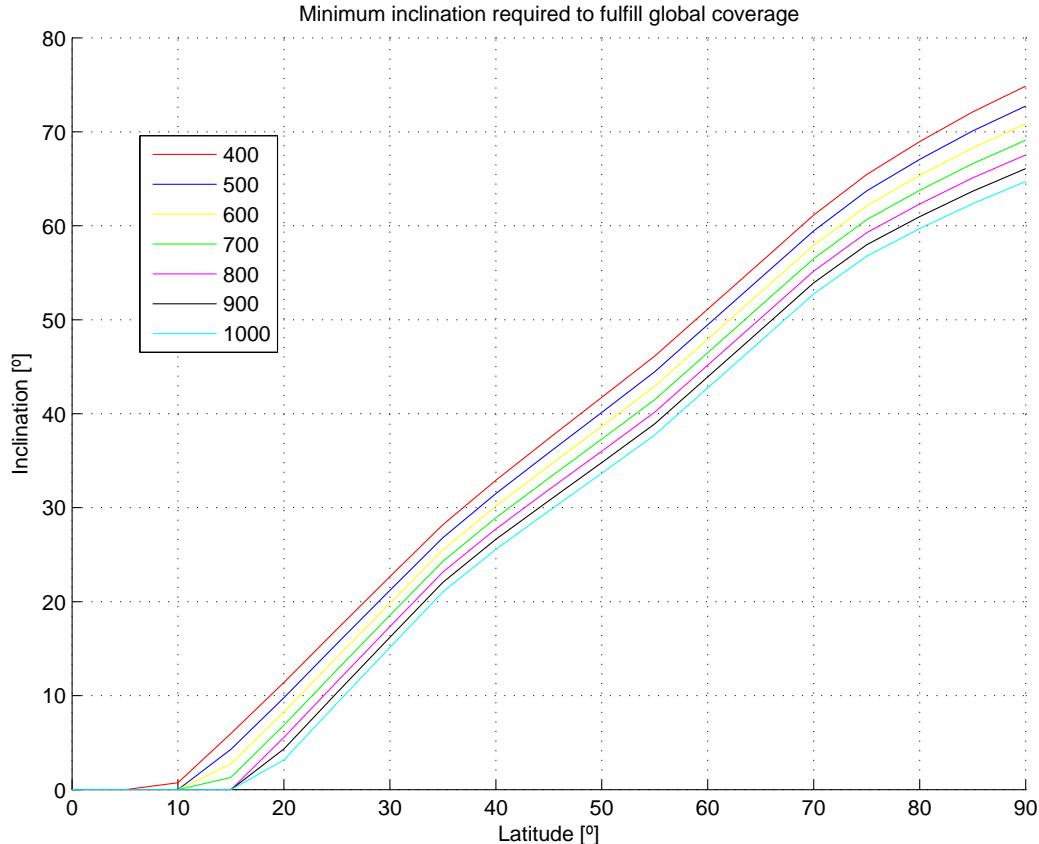


Figure 2.3.1: Minimum Inclination to provide coverage at different latitude for different orbit apogees.

As it can be observed, if the goal of the design is to provide full global coverage, the distribution of elevation angles with latitude is not significant, since the inclination is required to be higher than approximately 75° . In the other cases, the change of minimum elevation angle distribution causes changes of tendency in the distribution of inclination required.

In conclusion

The main point is that there is a limit inclination for a Walker-Delta constellation configuration in order to provide global coverage at the desired latitude. With this study, this limits in the design algorithms can be set.

2.4 Satellite to Satellite Visibility

One of the restrictive conditions that we must take into account is the visibility between satellites. Communications among different satellites is they key point of our constellation. Therefore, this has to be guaranteed considering a model which will represent the conditions of the atmosphere for LEO communications.

In order to fulfill communications among satellites we must consider that a straight beam can be described between two consecutive satellites, which will then communicate with others. These two satellites will need to be at a distance such that the Earth itself doesn't interfere in this straight beam. Depending on the bandwidth of our constellation we will also have to consider that this communication beam will not interfere with a given element of the atmosphere such as the upper layers of the ionosphere. Thus, a model will be developed in order to limit the minimum altitude at which this beam is guaranteed to pass through safely.

This model is a restrictive condition that we need to satisfy when designing our constellation. The highest restrictive conditions are the upper layers of the ionosphere, specifically the E layers at 150 km above the surface of the Earth. Reflections and absorptions can occur for both E layers and sporadic E layers. E layers may reflect signals of frequencies below 10 MHz whereas Sporadic E layers can be a problem up to 225 MHz. Working for S bands and X bands implies that neither of these layers will alter the signals of our constellation.

Operating and computing with these conditions a maximum distance is obtained which defines how far these satellites can be from each other. A simple equation is used to calculate this distance considering the height of the satellites and the height of the E layers in the atmosphere.

$$d = 2\sqrt{(R + h_{sat})^2 - (R + h_{atm})^2}$$

$$h_{sat} = 550 \text{ km}$$

$$h_{atm} = 150 \text{ km}$$

$$R = 6371 \text{ km}$$

The final expression for the distance between two satellites indicates that distance between two satellites has to be smaller than 4640 km approximately. For this result we conclude that this restrictive condition is actually less restrictive than the 9 planes needed for our constellation. Thus, satellite to satellite visibility is a parameter which will not affect the design of our constellation after all.

2.5 Market Study: Current Nanosatellites in Orbit

2.5.1 Criteria for the orbital height of the satellites

Satellites currently in Orbit

If only geometric considerations were to be applied in the design of a satellite constellation, it is clear that the higher the orbit the broader is the footprint in the surface leading to a smaller number of satellites. However, if the service of communications is to be offered, the satellites currently in orbit or in design phases need to be at higher orbit than the one of the constellation. The purpose of that requirement is to intersect the field of view of the satellites that nowadays point to Earth.

From source [?] we can study how the currently on orbit satellites are launched and specially, in which orbits. The results of the study of this source is presented below. All of them are in Low Earth Orbits, and half of them above 550km. In total, there are 203 operational satellites.

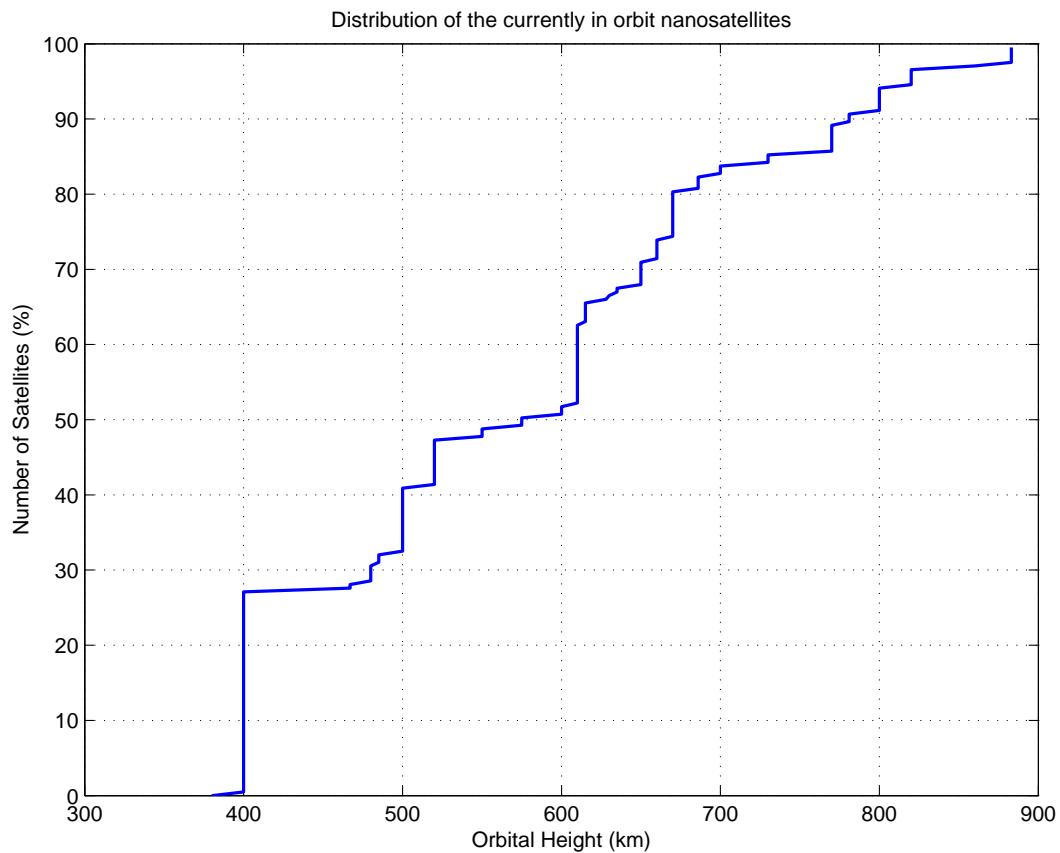


Figure 2.5.1: Distribution of the currently in orbit nanosatellites.

The most interesting potential clients

Lots of satellites are orbiting at heights lower than 500km, mainly because one of the most feasible way of launching a small satellite is from the International Space Station. However, this very low LEOs are related to very high speeds and specially to low lifetimes, since drag affects them in a more significant way. To the interest of the constellation, the satellites at higher altitudes are a better commercial target, since they are going to be in orbit for longer missions. In addition, the same orbit decay problems are avoided for the constellation satellites.

2.5.2 New Space: Adapting to new society needs

Nowadays new satellites willing to provide services to Earth are being positioned closer than ever. Where closer can be applied in many points of view. Physically, the satellites are placed every time at lower orbits, since the energetic requirement is lower. Technically, the space certified materials and hardware are becoming more feasible, and new launchers are smaller. In the end, everything comes down to an economic approach, launching satellites is becoming cheaper every time and this means closer to the private pocket.

In the future, the possibility of using the Astrea constellation to contact Earth can reduce the requirements for the antennas and AOCSSs to communicate with ground, leading to a whole new level of resources for the satellite payload. For instance, by communicating to the constellation pointing to outer space instead of pointing down to Earth. That is just a way in which Astrea is in the New Space Generation.

In conclusion, In the decision process one of the statistics considered with certain weight will be the following: the ratio of satellites at which the constellation will be able to provide service considering that nowadays all of them point down to Earth.

Chapter 3

Constellation Configuration

"Our two greatest problems are gravity and paperwork. We can lick gravity, but sometimes the paperwork is overwhelming."

Werner von Braun, 1958

3.1 Introduction: The Global Positioning System Example

Depending on the application the Space Segment of a mission can vary in an infinite number of ways. Probably the most famous and widely used satellite constellation is the Global Positioning System satellite network. In this case, it uses an irregular geometry.

The GPS Constellation: An example of irregular distributed orbits [?]

The GPS is a constellation property of the U.S. It provides positioning, navigation and timing. The constellation was designed with a 24-slot arrangement to ensure a visibility of at least four satellites from any point on the planet. Nowadays the constellation has expanded to a total operative number of 27-slot since June 2011. Some characteristic parameters of the satellites are the following:

- Orbit: Almost Circular
- Height = 20,200 km (MEO);
- Lifetime = 12.5 years;

- Satellite Cost = 166 million USD;
- Inclination = 55° ;
- Number of planes = 6;
- Phasing: 30° - 105° - 120° - 105° ;

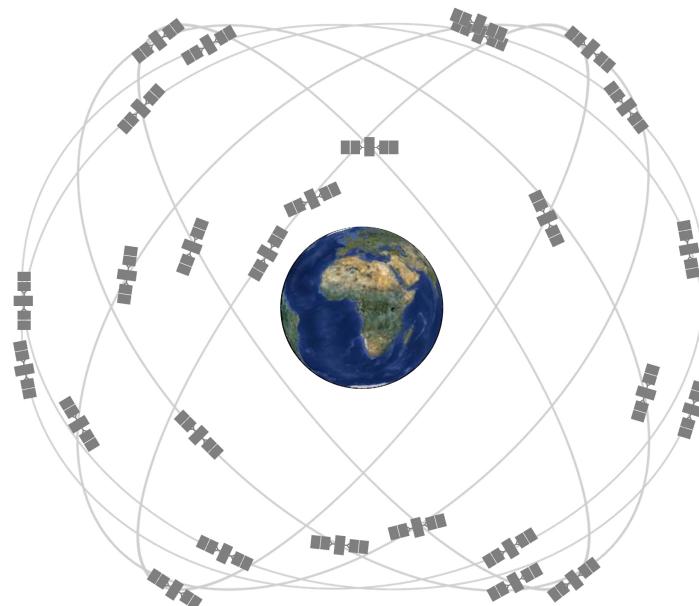


Figure 3.1.1: Distribution of the expanded 24-slot GPS constellation. [?]

3.2 Polar Orbit Constellation

3.2.1 Introduction

Polar Orbits are probably the simplest way to configure an evenly spaced constellation. As we will see in the section **Orbit Perturbations** when the inclination is the same for all the planes, the deviations tend to be the same for all the satellites. In addition, the computation of the number of satellites required is also easier.

The Iridium Constellation: An example of near polar orbits [?]

The Iridium constellation is a private constellation. It provides voice and data coverage to satellite phones among other services. The constellation was designed with 77 satellites, giving name to the constellation by the chemical element. The constellation was reduced to a number of 66. Sadly, Dysprosium is not such a good commercial name. Some characteristic parameters of the satellites are the following:

- Orbit: Almost Circular
- Height = 781 km (LEO);
- Satellite Cost = 5 million USD;
- Inclination = 86.4° ;
- Number of planes = 11;
- Phasing: Regular;

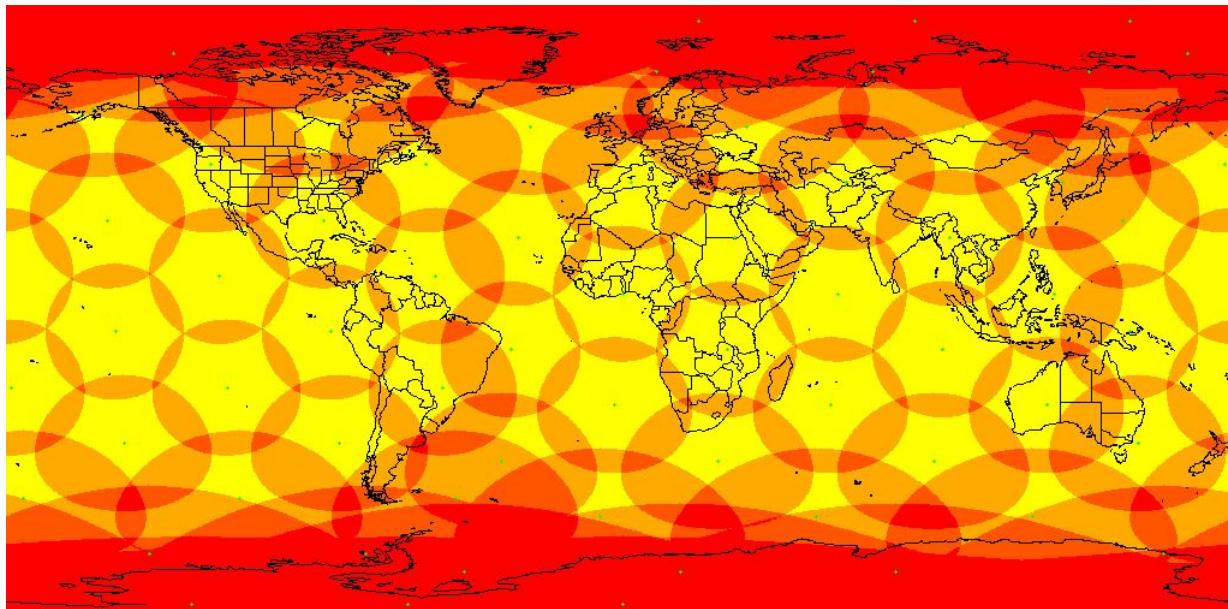


Figure 3.2.1: Distribution of the 66 Iridium constellation satellites. Generated using [?]

3.2.2 General Configuration

The Polar Orbits configuration consists in the distribution of plains with inclination equal to 90 degrees. Note that the satellites will be travelling parallel to the satellites of the next plain except for the communications between the first and the last plane.

The communications between satellites in antiparallel directions require less space between plains to be fulfilled. In order to solve this inconvenience the separation between the first and the last plain is reduced.

The plains are splitted in the following pattern:

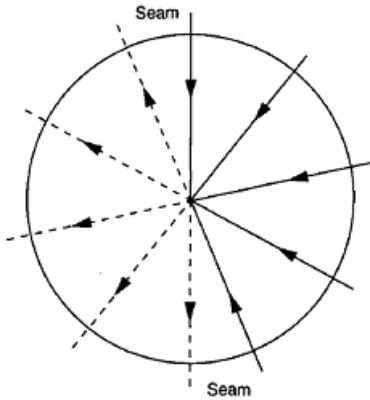


Figure 3.2.2: Distribution of the planes for Polar Orbit design.

3.2.3 The Streets of Coverage Method

This Street of Coverage Method is obtained from [6]. As you can see in the figure below, the relations between angles seen from different satellites can be easily computed. The main variables are the following:

Streets of Coverage Method Variables	
N	Number of Satellites
n_p	Number of Planes
N_{pp}	Number of Satellites per plane
S	Separation between satellites of the same plane
D	General space between planes [$^{\circ}$]
D_0	Space between antiparallel planes [$^{\circ}$]
ε	Elevation angle [$^{\circ}$]
λ_{street}	Street of coverage Width [$^{\circ}$]
λ_{max}	Maximum footprint Radius [$^{\circ}$]

Table 3.2.1: Streets of Coverage Method main variables

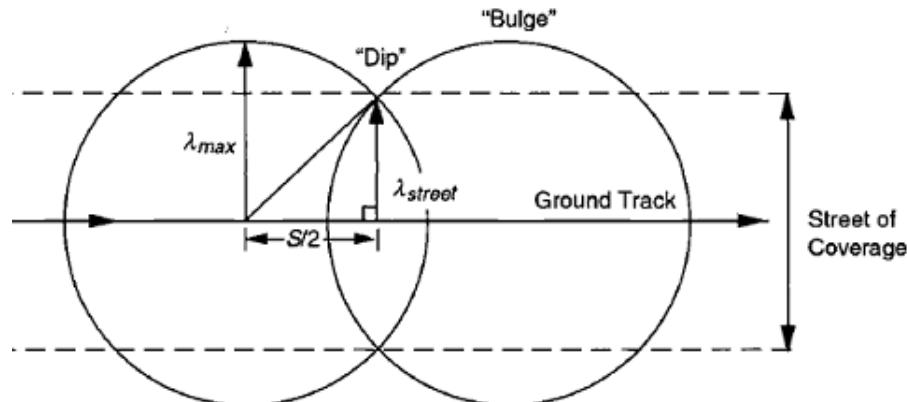


Figure 3.2.3: Single plain street of coverage. The footprints of the satellites superpose leading to a street. [?]

From the figure it can be inferred:

$$S < 2\lambda_{max}$$

$$\cos(\lambda_{street}) = \cos(\lambda_{street})/\cos(S/2)$$

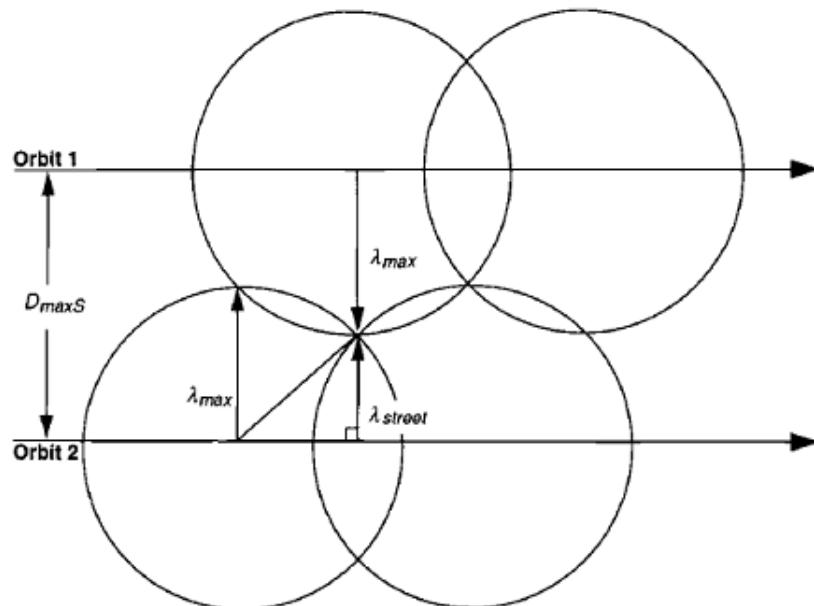


Figure 3.2.4: Two plains streets of coverage. An optimum phasing needs to be obtained. [?]

From this point of view, in general:

$$D = \lambda_{street} + \lambda_{max}$$

n For the antiparallel planes:

$$D_0 = 2\lambda_{street}$$

And the overall relationship between planes sums:

$$180 = (n_p - 1)D + D_0$$

The algorithm for computing the Streets of Coverage Results is defined in the following way:

$$\begin{aligned} \text{Inputs: Height, elevation, inclination...} &\rightarrow \lambda_{max} \rightarrow N_{pp} = \left\lceil \frac{360}{2\lambda_{max}} \right\rceil \rightarrow \\ S = 360/N_{pp} &\rightarrow \lambda_{street} \rightarrow n_p \rightarrow N = N_{pp} * n_p \end{aligned}$$

3.2.4 Results of Streets of Coverage

A MATLAB routine has been designed to compute the previously described algorithm. In this conceptual design phase, different heights are computed in order to see the evolution of the number of satellites.

General Solution

The program is run in a broad range of parameters to see the evolution of the number of satellites. As it can be predicted, as the height increases the number of satellites is reduced. The reason is that the footprint of the satellites increases with the height. In addition, as the minimum elevation over the horizon to contact the satellites is reduced, the number of satellites is also reduced for the same reason.

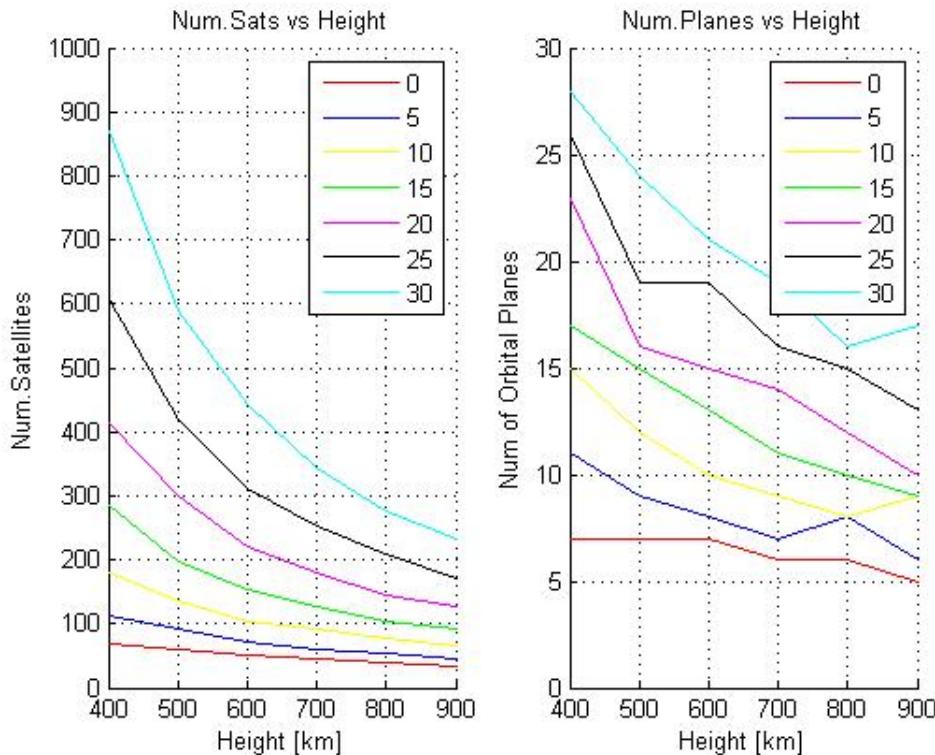


Figure 3.2.5: Variation of number of satellites for different heights and elevation angles

Detailed Solution

Given the previously justified assumptions, the same simulation is computed for a more reasonable range of results. In this case, the elevation is set as:

$$\varepsilon = 20^\circ$$

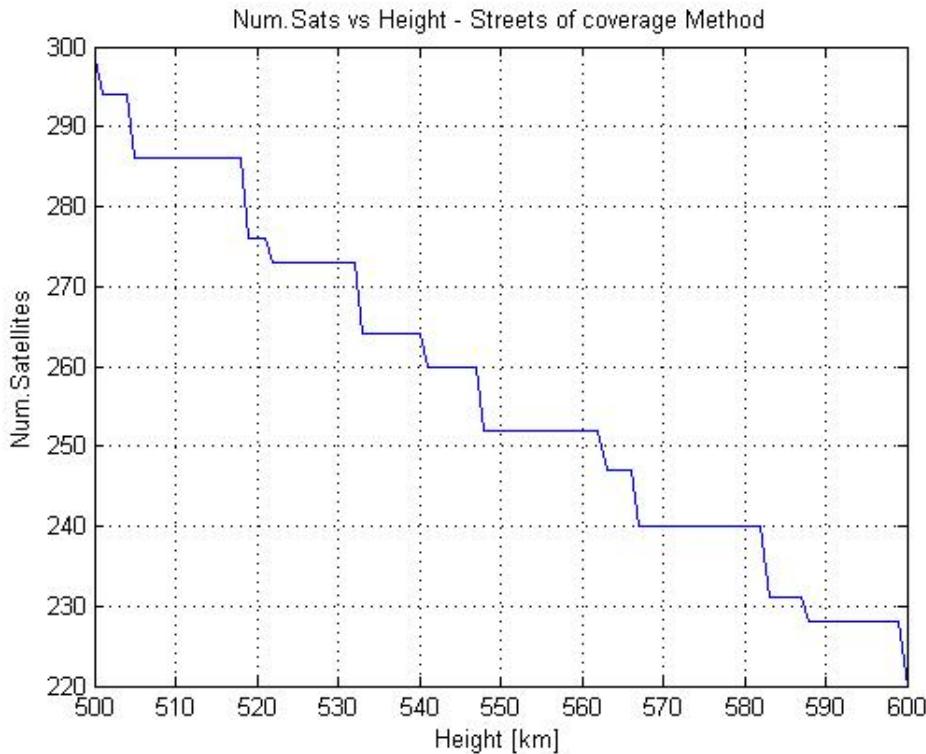


Figure 3.2.6: Variation of number of satellites for different heights between 500 and 600km.

Conclusion

The computation and the design of this constellation requires small computational and conceptual effort. However, the number of satellites and planes is greater than expected. Even though the technical complexity can be reduced, the availability of small launchers to reach this particularly inclined orbit is also small. In conclusion, more constellation configurations need to be assessed to compare and select the most feasible one.

3.3 Walker-Delta Constellation

Walker Delta Pattern constellations are a type of symmetric, inclined constellation made of equal-radius circular orbits, with an equal number of satellites each one. There are several ways to construct a Walker-Delta Constellation:

- Full Walker-Delta Configuration
- Semi Walker-Delta Configuration
- Custom Walker-Delta Configuration

3.3.1 Full Walker-Delta Constellation

3.3.1.1 Characteristics

A typical delta pattern has the following characteristics:

- The constellation contains a total of T satellites evenly spaced in each of the P orbital planes. All planes have the same number of satellites, defined as S , equally distributed. Thus:

$$T = SP \quad (3.3.1)$$

$$\Delta\varphi = \frac{2\pi}{S} \quad (3.3.2)$$

Where $\Delta\varphi$ is the angle between satellites in the same plane.

- All orbits have equal inclinations δ to a reference plane. If this plane is the Equator (it usually is), then the inclination δ equals the orbital parameter inclination i [4].

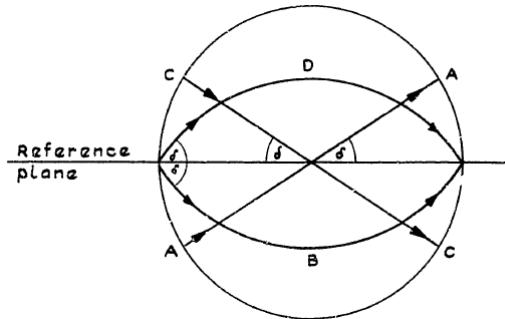


Figure 3.3.1: Definition of the inclination δ . Extracted from [4]

- The ascending nodes of the orbits are equally spaced across the full 2π (360° of longitude) at intervals of:

$$\Delta\Omega = \frac{2\pi}{P} \quad (3.3.3)$$

- The position of the satellites in different orbital planes is measured through the factor F . When a satellite is at its ascending node, a satellite in the most easterly adjacent plane has covered a relative phase difference F . The real phase difference is defined as:

$$\Delta\Phi = F \frac{2\pi}{P} \quad (3.3.4)$$

In order to have the same phase difference between all orbital planes, F is defined as an integer, which may have any value from 0 to $(P-1)$.

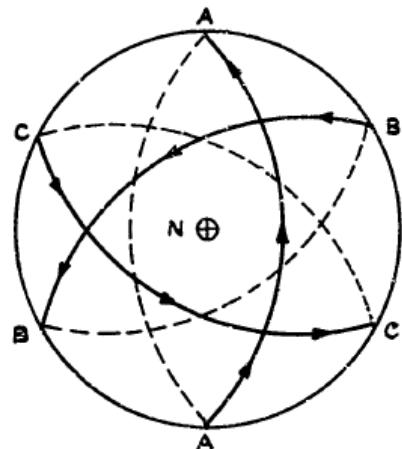
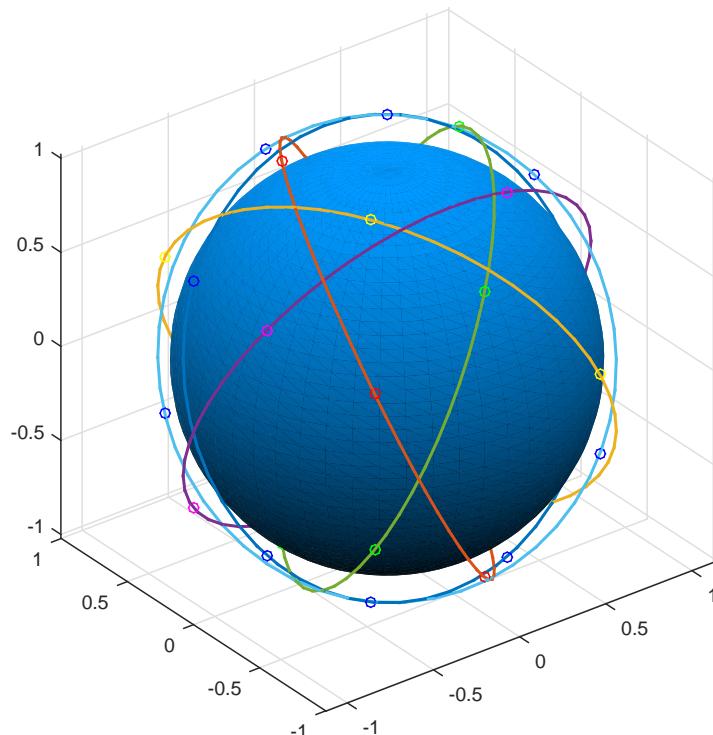


Figure 3.3.2: Delta pattern as seen from the North Pole. Extracted from [5]

With these characteristics, delta constellations are more complex than polar constellations. Because of the inclination of the orbits, the ascending and descending planes and the coverage of the satellites continuously overlap. This characteristic is a constraint on intersatellite networking because the relative velocities between satellites in different orbital planes are larger than in a polar constellation. Consequently, tracking requirements and Doppler shift are increased [?].


 Figure 3.3.3: Delta pattern 65° : 30/6/1

3.3.1.2 Notation

J.G. Walker developed a notation to define this constellations with only 4 parameters [5]:

$$i : T/P/F$$

Since all satellites are placed at the same altitude, with these notation the shape of the pattern is completely determined. However, to determine all the orbital parameters it is necessary to know the radius of the orbits.

3.3.1.3 Coverage

The previous section has shown that in polar orbits the coverage of the constellation could be determined with the streets of coverage method. On the other hand, in delta patterns it is necessary to study each configuration to verify its coverage. J.G. Walker determined that delta patterns gave better coverage than polar orbits, but not substantially better in the case of single coverage. This kind of patterns are more useful for double or triple coverage constellations, as it can be seen in Figure 3.3.4. However, his calculations were for a low number of satellites, so it is necessary to compute new results for the number of satellites of the Astrea constellation.

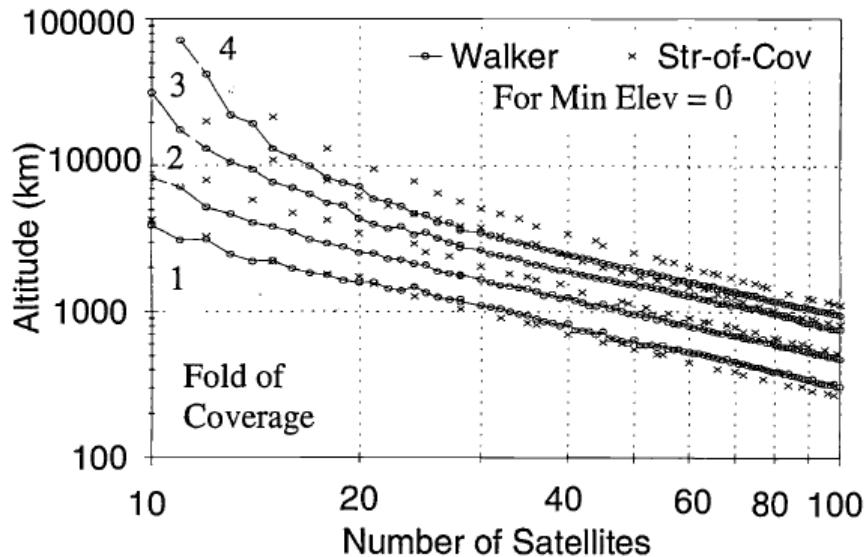


Figure 3.3.4: Minimum altitude for continuous global coverage. Comparison between polar patterns and Walker delta patterns. Extracted from [6]

3.3.2 Semi Walker Delta Configuration

In order to reduce the necessary costs to design this satellite-based constellation some other configurations will be discussed. The Walker Delta Configuration (WDC) represents the most general constellation for a given inclination different to 90 degrees, i.e. 75 degrees. The WDC is a uniform based 360 degree generated configuration with equidistant orbits, which implies a certain redundant Earth coverage as described in the previous chapter. However, this can and will be solved by generating a 180 degree constellation - Semi Walker Delta Configuration (SWDC) - which will also fulfill global coverage although having some inconveniences.

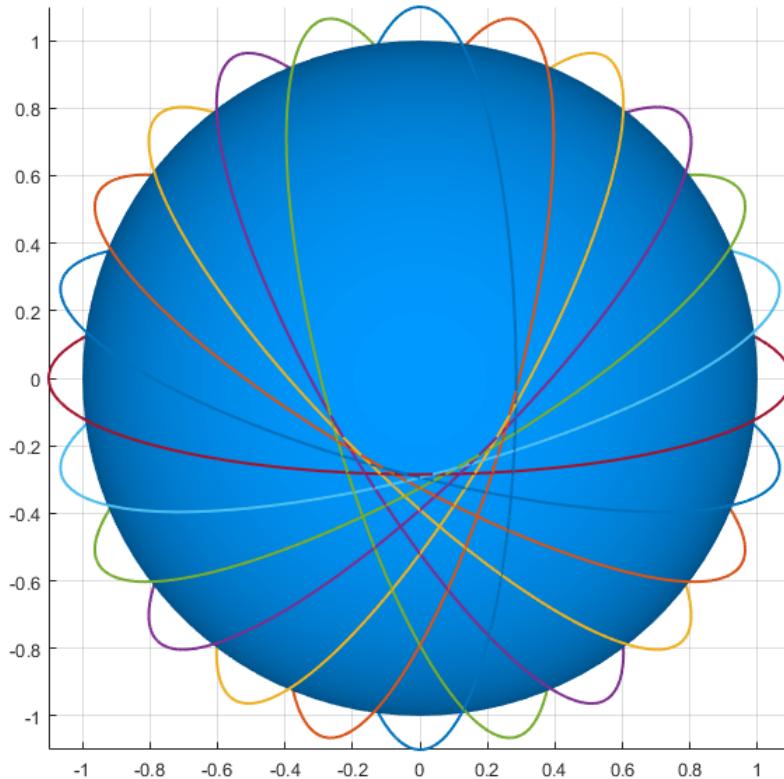


Figure 3.3.5: 12 plane SWDC. Note the gap and the equidistant planes

3.3.2.1 Advantages

- Distance between planes reduced.** With the SWDC constellation the redundant orbits are directly corrected, thus the distance between planes is reduced to half, as

results from the geometry itself.

- **Less number of planes needed.** This means that in order to approach global coverage fewer planes will be required due to the decrease in distance between planes.

- **Satellites following the same direction - sense** With the SWDC constellation the orbits have no interaction with each other, thus the satellites for each orbit can be set following the same direction. This will significantly improve the communications among satellites from different planes; also, we will be avoiding the Doppler Effect.

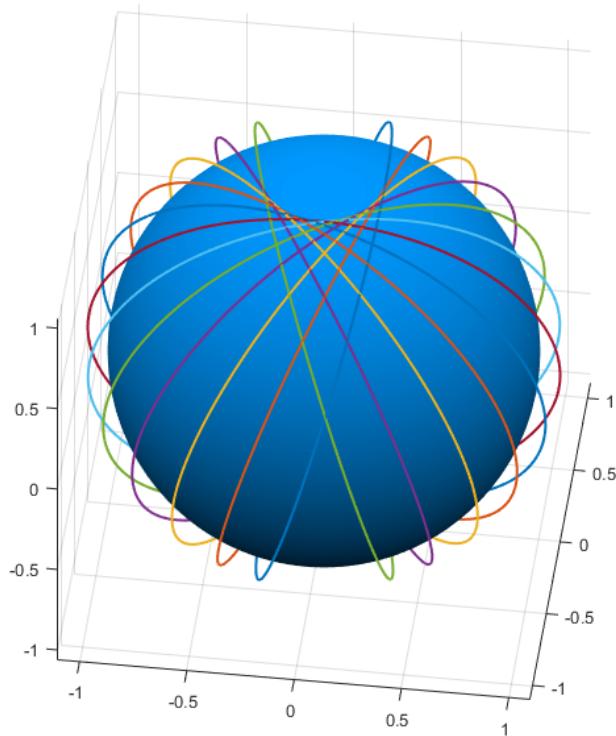


Figure 3.3.6: This geometry distribution induces a large anti-symmetric gap

3.3.2.2 Disadvantages

- **Gap configuration.** With the SWDC constellation the main problem is the gap that results from configuring the constellation at a given inclination and describing equidistant orbits. In order to fulfill global coverage this gap will have to be covered by means of auxiliary orbits.

3.3.3 Other Walker Delta Configurations

As we have discussed for the SWDC, the main disadvantage respect to the Walker Delta Configuration is the fact that a gap is obtained, thus a global coverage network cannot be described. In order to cover the entire Earth we have analysed some ways of covering the gap with auxiliar orbits.

3.3.3.1 SWDC including an additional polar orbit.

This polar orbit would be set directly on top of the gap described by the SWDC. The main issue with polar orbits, as discussed before in this report, is the complex reorientation and decay in inclination that takes place. We must take into account these considerations when covering the entire Earth, especially if we only have one polar orbit in our constellation.

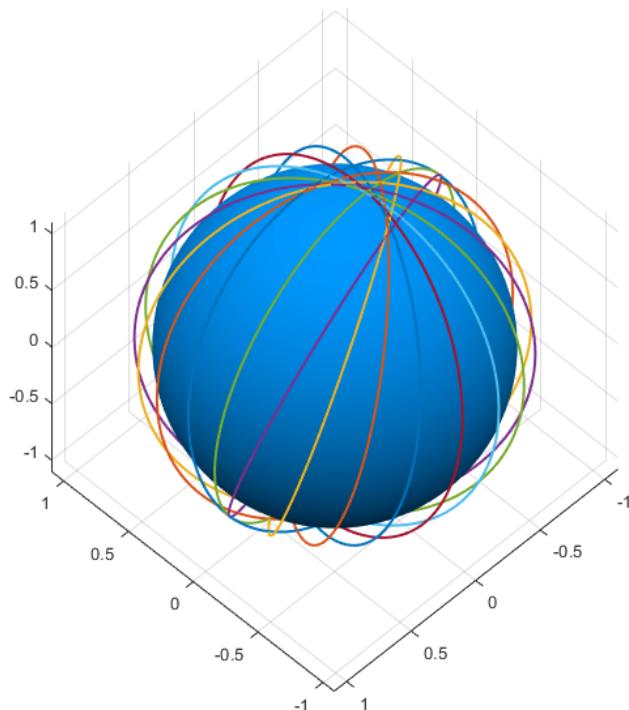


Figure 3.3.7: Added polar orbit to the 11 plane based SWDC

3.3.3.2 Mixed Walker Delta.

In order to avoid using polar orbits and their complex reorientations, we can contemplate adding planes to the SWDC. In result, different configurations distributed around the Earth can be described and set in order to fulfill global coverage. As discussed before, the SWDC constellation is generated around 180 degrees whereas the Walker Delta Constellation is a 360 degree generated configuration. This Mixed Walker Delta (MWDC) is the result of adding some planes to the SWDC, thus a constellation can be generated for different degree values, such as 200, 225, 240, etc.

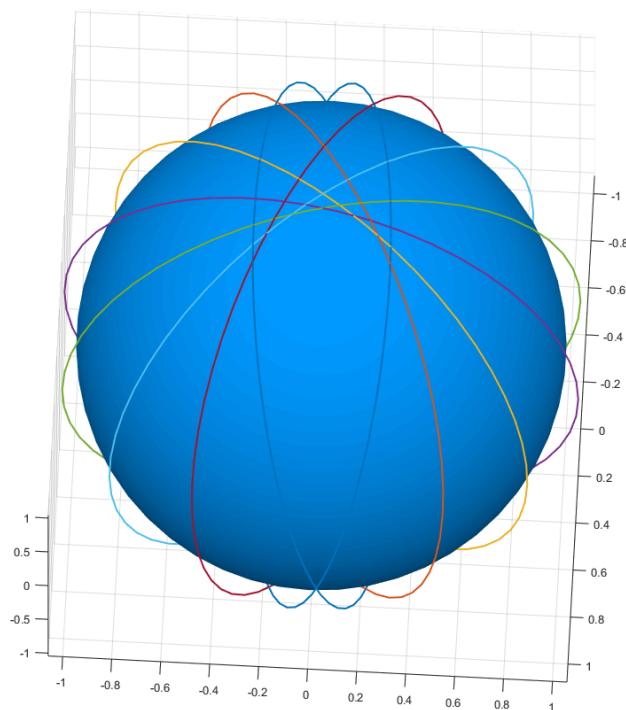


Figure 3.3.8: 8 plane based MWDC generated for 210 degrees

After different mathematical approaches and optimal solutions, the department of Orbital Design considered that the best option in order to have a global coverage constellation with the least economic and strategic issues - exposed and discussed in previous chapters - would be that of a 225 degree generated MWDC, defined by 9 planes and 21 satellites per plane. This configuration was found optimizing the whole Earth in order to have full coverage without gaps (except for the limitations of this model at high latitudes). An important consideration is that we also analysed other Mixed Walker Delta Configurations for 210 and 240 degrees, but these resulted in a more expensive distribution of satellites.

3.4 Testing Method

3.4.1 Introduction

To design Astrea constellation the orbit parameters must be decided following the established requirements. As seen in the previous sections, there are different types of constellation that must be considered when selecting those parameters.

The main requirement in the bases of this chapter is to fulfill global coverage of the Earth. Therefore all the possible solutions have to be tested to ensure they pass this specification.

3.4.2 Method Bases

The testing method is designed to evaluate the achievement of global coverage. The main variables needed for the development of it are the following:

Coverage Testing Method Variables	
typeC	Type of constellation
ε	Elevation angle [°]
h	Height [km]
in	Inclination angle [°]
n_p	Number of Planes
N_{pp}	Number of Satellites per plane

Table 3.4.1: Coverage Testing Method main Variables

It consists in evaluating all the possible variables combinations within established margins and testing them to know if they fulfill the determined conditions than ensures global coverage.

3.4.2.1 Global Coverage Conditions

Same plane condition

In order to fulfill the desired coverage, the distance between two satellites on the same plane must not be more than two times the central angle β . This condition is visually represented in Figure 3.4.1 .

Different plane condition

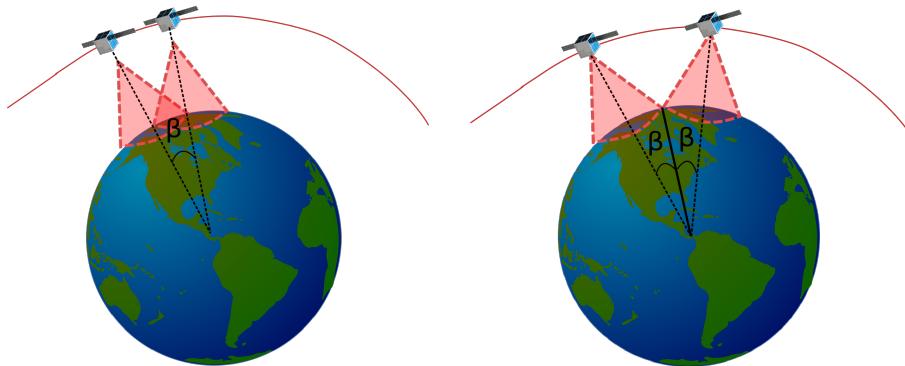


Figure 3.4.1: Geometrical conditions needed to fulfill global coverage.

On the left: Condition between satellites of different planes.

On the right: Condition between satellites of the same plane

To accomplish the coverage requirements, the distance between two satellites on different planes must not be more than the central angle β . This condition is visually represented in Figure 3.4.1 .

3.4.2.2 Results of Testing Method

A MATLAB routine has been designed to compute the describe algorithm. In this phase different values of all the variables have been computed in order to found the most suitable solution. The values tested are the following:

Coverage Testing Method Variables	
typeC	[180 210 225 240 360] [°]
ε	[20] [°]
h	[540-550] [km]
in	[70-80] [°]
n_p	[5-12]
N_{pp}	[10-24]

Table 3.4.2: Testing Values for the Coverage Testing Method

General Solution

The program has been runned for all the range specified above to see the evolution of a satellite network configuration regarding the variation of the orbital parameters in order to find the best constellations options.

As it can be deduced both the number of planes and satellites decreases when increasing

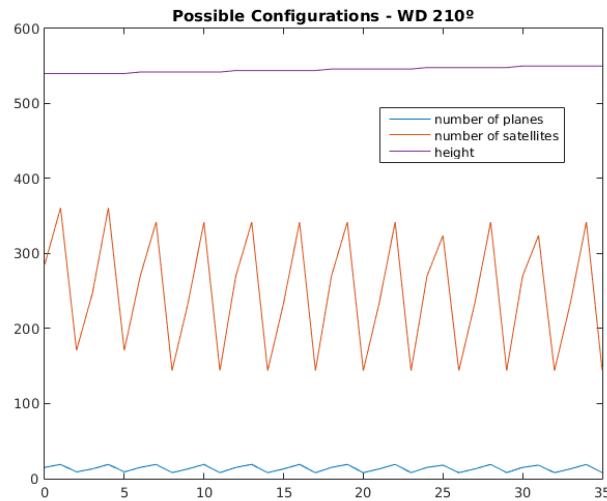


Figure 3.4.2: Possible satellite configurations for a 210° Walker Delta configuration

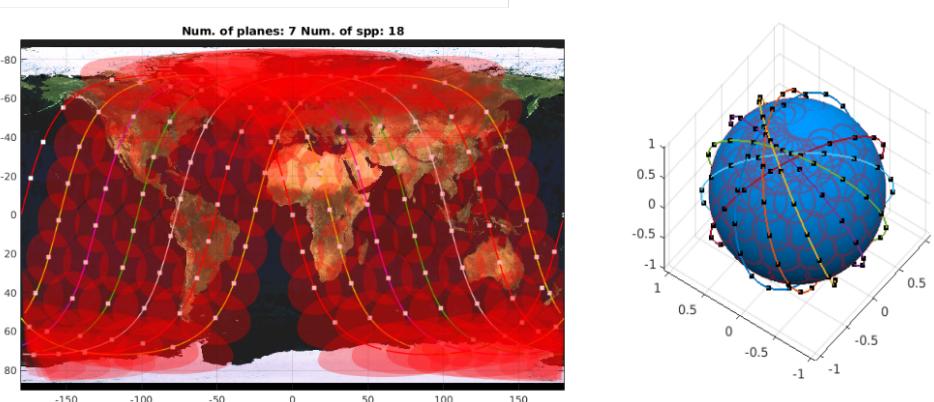


Figure 3.4.3: Ground track and spherical representation for a 180° Walker Delta configuration

height because as explained before the footprint of the satellites gets incremented with height. If height is left as a constant, a less intuitive results are obtain. We have now different configurations in terms of number of satellites an planes due to the variation of the inclination angle of the planes. In the Figure 3.4.5 is shown the results obtained for one of the analysed configurations.

Once all the possible configurations have been computed, the ground track of three of them has been plotted to visually check the coverage obtained.

Conclusions

From the developed code that runs all the parameters needed to define a Walker Delta configuration it is possible to obtain for a chosen requirement which are the optimum

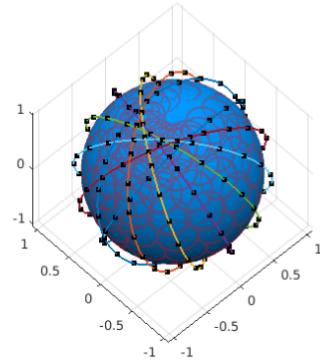
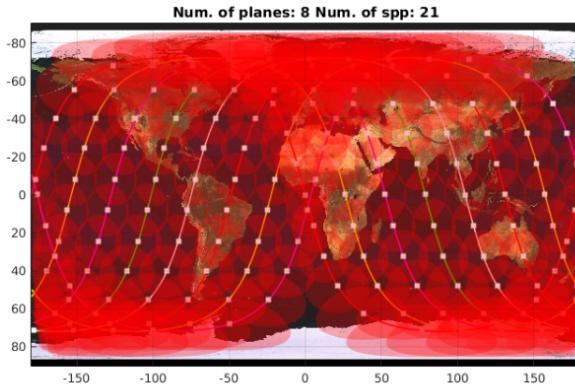


Figure 3.4.4: Ground track and spherical representation for a 210° Walker Delta configuration

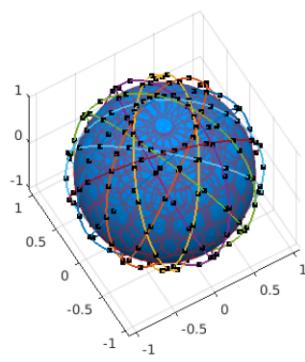
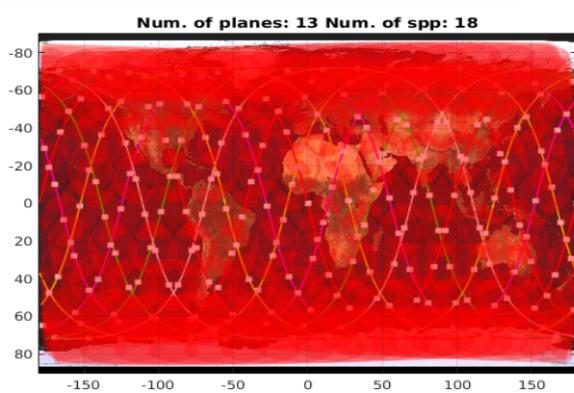


Figure 3.4.5: Ground track and spherical representation for a 360° Walker Delta configuration

Testing Method

configuration. Therefore defining the criteria in function of the constellation needs it will be possible to optimize the design. The configurations that will be later considered to perform an analysis of weighted weights are extracted from this routine.

Chapter 4

Orbit Perturbations

4.1 Sources of Perturbation

4.1.1 Introduction to Orbit Perturbations [1]

In this chapter it is seen how the designed orbit configuration varies in time due to external perturbation sources. While some of them can be neglected, there are other of major importance to the future of the constellation. For instance, atmospheric drag determines in plenty of cases the lifetime of the constellation. A first classification of perturbations depending on the time in which their effects are present is the following:

- Secular terms (Sec): They depend on the semimajor axis, the excentricity and the inclination.
- Short Period terms (SP): They depend on the anomalies, this leads to a strong variation in each period.
- Long Period terms (LP): They depend on the argument of the periapsis or the ascendent node.

Even though most of the outer space is vacuum, there ideal models need to consider some factors that escape the typical two body problem. For instance, we can no longer consider Earth as a punctual mass, neither the atmospheric density equal to 0. To enumerate, here is a typical list of the main perturbation sources:

Sources of perturbation:

- Gravity Field of the Central Body

- Atmospheric Drag
- Third Body perturbations
- Solar-Radiation Pressure
- Other Perturbations

All the perturbations can be deeply studied. Consequently, analytical solutions are very hard to find, and even they were found, they do not show clearly a meaning or are not really useful. Instead, there are two mainly used approaches:

- Special Perturbation: Step-by-step numerical integration of the motion equations with perturbation.
- General Perturbation: Through analytical expansion and integration of the equations of variation of orbit parameters.

The Approach of the Perturbations Study For the purposes of these study the different approaches will be assessed. The first analysis will discuss which of the perturbations are the most significant to the study. This analysis will be done considering General Perturbation Techniques. In a deeper second analysis, the two approaches for the perturbations will be assessed and compared considering only the most significant perturbation sources.

4.1.2 Gravity Potential of Earth

Earth's aspherical shape can be modelled as a sum of terms corresponding to the Legendre polynomials. These polynomials can be empirically measured and consider radial symmetry. If one would like to compute also variations in longitude, then should use associated Legendre polynomials.

$$V(r, \delta, \lambda) = -\frac{\mu}{r} \left[\sum_{n=1}^{\infty} \left(\frac{R_e}{r} \right)^n \sum_{m=0}^n P_{nm} \cos(\delta) (C_{nm} \cos m\lambda + S_{nm} \sin m\lambda) \right] \quad (4.1.1)$$

General Legendre associated polynomials developed Gravitational Potential

$$V(r, \delta) = -\frac{\mu}{r} \left[1 - \sum_{n=2}^{\infty} J_n \left(\frac{R_e}{r} \right)^n P_n(\sin \delta) \right] \quad (4.1.2)$$

General Legendre polynomials developed Gravitational Potential

For Earth, the J_n coefficients are the following:

$$J_2 = 0.00108263 \quad J_3 = -0.00000254 \quad J_4 = -0.00000161$$

Given this distribution, the only significant term J_2 .

$$V(r, \delta) = -\frac{\mu}{r} \left[1 - \frac{1}{2} J_2 \left(\frac{R_e}{r} \right)^2 (1 - 3\sin^2 \delta) \right] \quad (4.1.3)$$

Aproximated Gravitational Potential

If we integrate the force that derives from this potential we can afterwards compute the effect of J_2 On the different orbital elements:

- $\Delta a = 0$

- $\Delta e = 0$

- $\Delta i = 0$

-

$$\Delta\Omega = -3\pi \frac{J_2 R_e^2}{p^2} \cos i \text{ [rad/orbit]} \quad (4.1.4)$$

-

$$\Delta\omega = \frac{3}{2}\pi \frac{J_2 R_e^2}{p^2} (4 - 5\sin^2 i) \text{ [rad/orbit]} \quad (4.1.5)$$

4.1.3 Atmospheric Drag

In order to compute the effect of the remaining atmosphere we use the typical definition of atmospheric drag knowing a drag coefficient:

$$\vec{a}_{drag} = \frac{1}{2} \frac{C_d A}{m} \rho v_{rel}^2 \frac{\vec{v}_{rel}}{|\vec{v}_{rel}|} \quad (4.1.6)$$

The **ballistic coefficient** B_c is defined as $\frac{m}{C_d A}$, characterizing the behaviour of the satellite against atmospheric drag.

Modelling the Atmosphere

There are several models for the atmosphere. For instance, the most commonly used, the exponential model:

$$\rho = \rho_0 e^{-\frac{h-h_0}{H}} \quad (4.1.7)$$

$$H = \frac{kT}{Mg} \quad (4.1.8)$$

Where:

Exponential Atmosphere Variables	
ρ	Density at given height
ρ_0	Density at a reference height
h	Height over the ellipsoid
h_0	Reference height
H	Scale Height
k	Boltzmann Constant
T	Temperature
M	Molecular Weight
g	Gravity

Table 4.1.1: Exponential Atmosphere Model main Variables

In addition, other models for the exospheric temperature and the molecular weight need to be used. For this study the ones proposed by The Australian Weather Space Agency are used.

In addition, it is important to note that the following phenomena interfere with the previsions:

- Diurnal Variations
- 27-day solar-rotation cycle
- 11-year cycle of Sun spots
- Semi-annual/Seasonal variations
- Rotating atmosphere
- Winds
- Magnetic Storm Variations
- Others: Tides, Winds,...

Again, if we integrate this force in a period of time, considering the orbit nearly circular, we obtain:

$$\Delta r = -2\pi\rho r^2/B \text{ [/orbit]} \quad (4.1.9)$$

4.1.4 3rd Body Perturbations

The effects of this extra bodies in the system can be computed considering the motion equations. However, some approximations can be found in the reference as:

$$\dot{\Omega} = \frac{A_m + A_s}{n} \cos i \text{ [°/day]} \quad (4.1.10)$$

$$\dot{\omega} = \frac{B_m + B_s}{n} (4 - 5 \sin^2 i) \text{ [°/day]} \quad (4.1.11)$$

Where n stands for the rate of rotation in orbits/day. In that case, the A_m, A_s, B_m and B_s coefficients take as values:

	$A_m + A_s$	$B_m + B_s$
Moon	-0.00338	0.00169
Sun	-0.00154	0.00077

Table 4.1.2: Third Body Perturbations Coefficients

4.1.5 Other Perturbations

In this bag the following low-intensity can be classified:

- Solar Radiation Pressure
- Solid-Earth and Ocean Tides
- Magnetic Field
- South Atlantic Anomaly

4.2 Significant Perturbations

Propagation Algorithm

Given the definitions and approximations to compute perturbations described in the previous section, a propagation in time for the change in orbital parameters is solved. The results are plotted in the graph below:

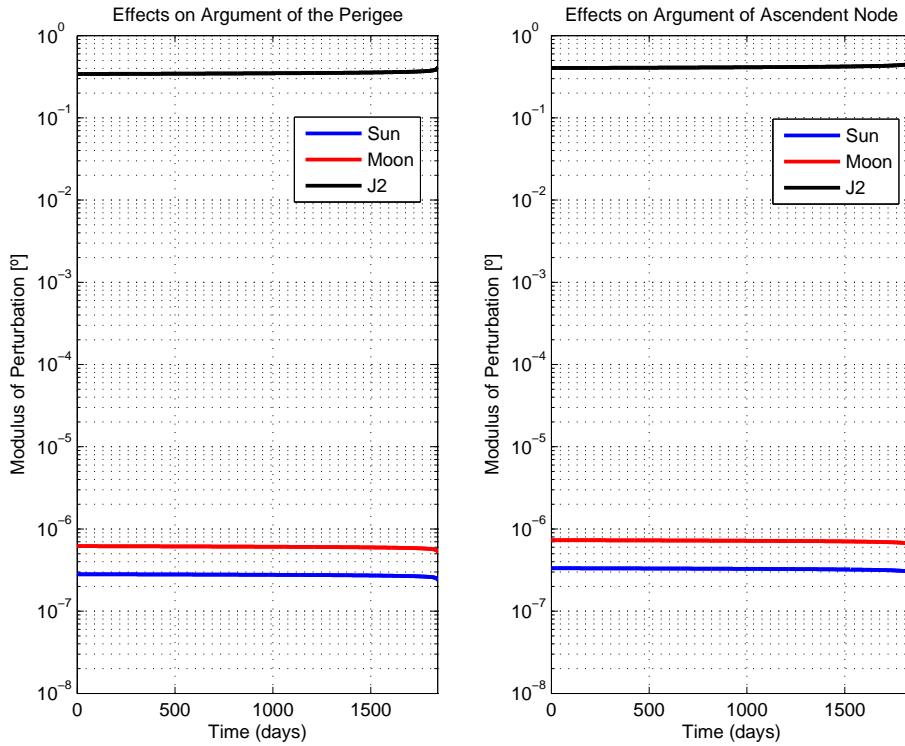


Figure 4.2.1: Logarithmic plot of the modulus of the increases in Angular Arguments of the orbit

As it can be seen, the perturbations caused by 3rd bodies are several orders of magnitude below the order of magnitude of the variation caused by Earth's oblateness. It is also remarkable that the moon has a higher effect than the sun given the relative distance to Earth, even if the sun is way more massive.

Another important observation is that given the very low eccentricity we are considering, the deviation of the argument of the perigee does not affect the performance of the constellation. In other words, since the orbits are considered almost circular there is not a defined Perigee for the orbit.

In conclusion

The effects of the Moon and the Sun are neglected in comparison with the effects of J2 for the Argument of the ascendent node as well as for the argument of the Perigee.

4.3 Orbit Decay

In this chapter the effects of the main perturbations are deeply studied. Firstly, an introduction on the effects of Earth's oblateness on the orbital parameters. Secondly and in more detail, the effects of Atmospheric drag. This is significant because it deviates the power and mass budget to engines and propellant.

4.3.1 Effects on the Ascension Node

4.3.1.1 Introduction

Due to the non sphericity of the Earth, two deviations exist in terms of perigee and ascendent node. This perturbations are related to the J2 effect described before. Both effects are related to the orbital planes inclination angle, so depending in which inclination they are positionated, the perturbation will be more or less significant.

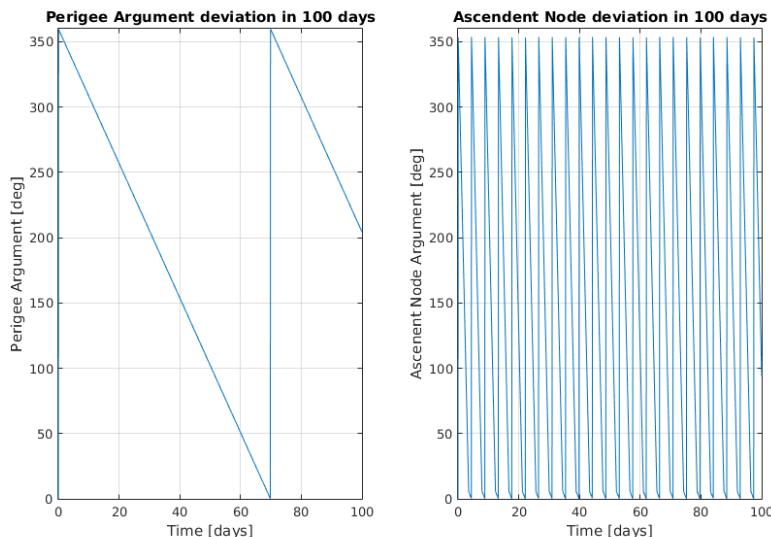


Figure 4.3.1: Ascension node perturbation

On the left: Perigee deviation in terms of time.

On the right: Ascending node deviation in terms of time

4.3.1.2 Perigee Effect

The Perigee effect is the responsible of the rotation of the orbit regarding the Earth and is found inside the orbital plane itself. Therefore the perigee of an elliptical orbit is not static in an Earth's point but moves around it.

This effect is noticed when having elliptical orbits. Consequently Astrea constellation will not be affected because the satellites describe almost circular orbits.

4.3.1.3 Ascention Node

In this case the perturbation affects the rotation of the orbital plane. So the plan longitude variates with time. That means, that if we had just one orbital plane it would not cover always the same fraction of Earth.

This effect is noticed when having planes with different inclinations. That is not Astrea's constellation case since all its planes are positioned in the same inclination angle.

4.3.1.4 Conclusion

As explained, both perturbations do not affect Astrea's constellation so they will not be considered as atctive agents on the orbit decay proces

The Figure 4.3.1 shows the propagation in time of both effects which are periodic due to the constant velocity of orbits.

4.3.2 Effects of the Solar Cicle

It is important to consider many parameters when calculating the orbital decay of a satellite. The most important of these parameters for LEO based constellations is drag. As discussed in other chapters, the drag of a satellite depends on the coefficient of drag, its surface, the density of the air and the velocity at which operates. Solar cycles will directly affect the density of the upper atmosphere. This phenomena is relevant when calculating the drag of the satellite and therefore is essential to compute the orbital decay.

Solar cycles are periodic changes in the Sun's activity of approximately 11 years. In each period a solar maximum and minimum can be determined, referring to the amount of periods of sunspot counts. The intensities for these periods vary from cycle to cycle.

Different studies have been made throughout the 20th century cycles. In order to understand the change density of the air changes as consequence of these solar cycles we considered the result data of an old study regarding the 19th solar cycle, which had a duration of 10.5 years between 1958 and 1968. This solar cycle had the highest maximum smoothed sunspot number ever recorded (since 1755), which was of 201.3. This maximum

value was recorded in March 1958. This value is high in comparison to other cycles, especially when comparing it to the current 24th solar cycle. In this chapter an analysis will be developed in order to study the influence of the solar cycles on the drag of our satellites. Data obtained of [?].

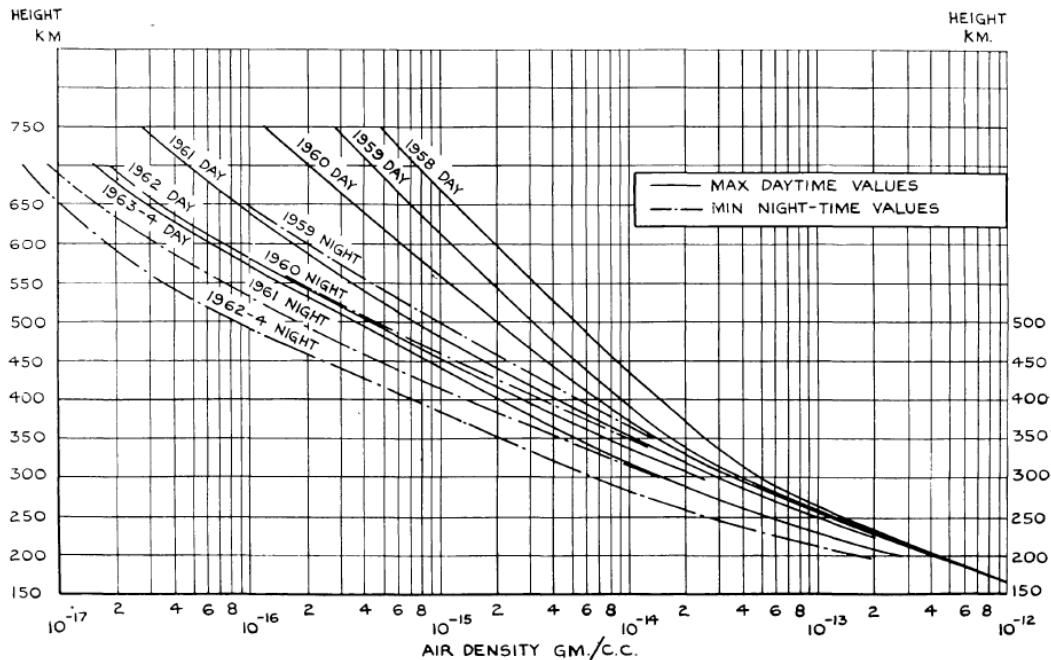


Figure 4.3.2: Deviation of densities in the upper atmosphere due to the 19th solar cycle. Source: [?]

At 550 km:

Year	D/N	Density at 550km [g/cc]
1958	Day	3.2E-14
1958	Night	5.0E-15
1964	Day	1.35E-15
1964	Night	3.35E-16

These values referring to day and night are the densities of the upper atmosphere at 550 km of altitude respect to the surface of the Earth. The upper atmosphere densities rise during the day following the increase of temperature caused by the radiation of the Sun whereas these values are reduced at night. The orbital decay is on the order of several years whereas these deviations appear every few hours. Thus, in order to compute the orbital decay we will not be taking into account these daily deviations but rather a main value. Therefore the mean density for 1958 will be of 1.85E-14 g/cc and the solar minimum's density of 1964 will be of 8.4E-16 g/cc.

In order to analyse how these values may apply to our constellation we first must adjust these - which belong to the 19th solar cycle - to those of the current 24th cycle, which is noticeable less intense. A way of operating this adjustment is comparing the mean solar maximum achieved by each cycle. The maximum monthly smoothed sunspot number of the 19th cycle had a value of 201.3 and a minimum of 9.6 whereas the current 24th ranges between 11.7 and 81.9 approximately. This means that for the 19th cycle a total deviation of 191.7 was measured whilst for the 24th cycle this deviation was only of 70.2. This is crucial if we want to analyse the solar maximum densities.

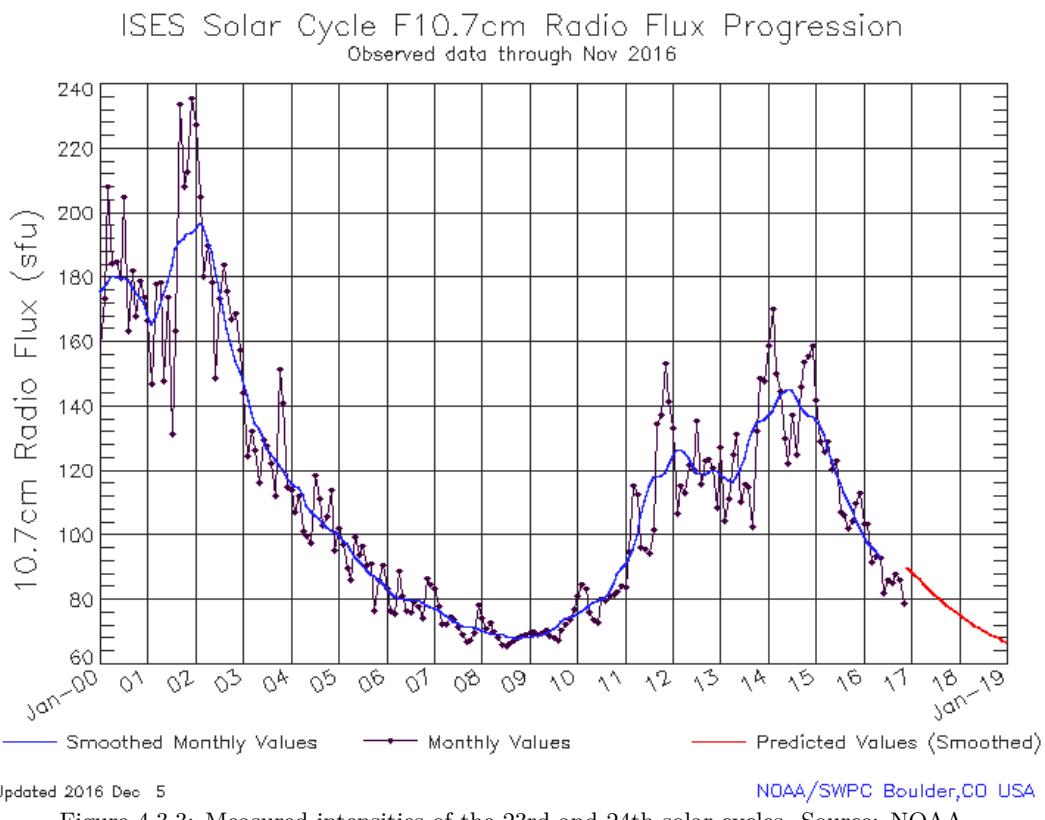


Figure 4.3.3: Measured intensities of the 23rd and 24th solar cycles. Source: NOAA

We must now adjust the mean constant density defined initially to the conditions that this 24th cycle imposes. It is important to note that our satellites will be launched in 2017, and that the 24th cycle is currently decreasing its intensity. Thus, our calculations will be near the conditions of solar minimum, meaning that the drag of our satellite will be smaller than first considered.

Our new approach to the density of the atmosphere at 550 km is near the first approximation, but will consider that we are now entering the solar minimum which will remain more or less constant until 2022. As discussed before, the solar minimum

Table 4.3.1: Selected data to compute orbit decay extracted from figure 4.3.3

Selected Values	
Year	F10 Radio Flux
2002	195
2004	115
2009	70
2013	120
2016	100

represents a singularity with a minimum density of 8.4E-16 g/cc. The approximation taken will be the resulting constant value which represents the mean smoothed densities between 2017 and 2022.

The final density at 550 km considering the solar minimum during 2017 to 2022 will be of 2.0E-15 g/cc.

4.3.3 Orbital Decay Propagation Results

4.3.3.1 Introduction

In this section a first approach of the drag computation have been done in order to determine the orbit decay and consequently compute how much time a satellite last until it reenters the Earth atmosphere.

4.3.3.2 Drag Computation Algorithm

Given the definitions to calculate orbital perturbations described in 4.1.1 a computation of the atmosphere drag has been done together with the computation of the other main perturbations that have been discussed in previous sections.

As explained in the last section the atmospheric drag depends on the drag's coefficient and it surface, that are constant values, on the velocity at which the satellite operates and on the air density.

So in order to see the effects of variations in air density the orbit decay has been estimated and plotted for several F10 Radio Flux values corresponding to different moments of a solar cycle. (This data has been extracted from the figure 4.3.3).

The data selected and the results obtained are shown in 4.3.1 and 4.3.4 respectively.

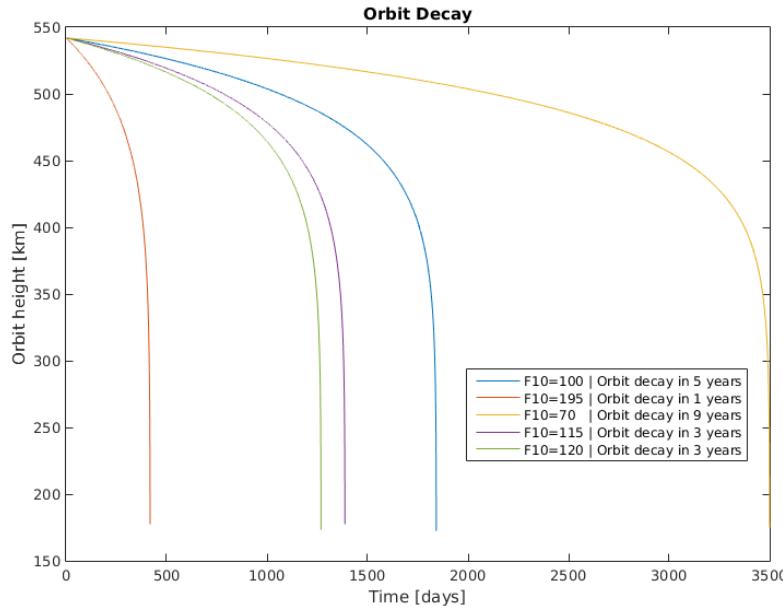


Figure 4.3.4: Orbit Decay computed for several values of

As it can be seen, the orbit decay strongly depends on the positioning in time of a solar cycle. (In 7 years the difference in lasting time of the satellite is reduced in 4 years).

In conclusion The lasting time in orbit of satellites is affected by period of the the solar cycle we are in. According to the data then Astrea's satellites will have an approximated orbit decay of 5 years.

In order to verify if the results obtained by the approximation used are valid, a more advanced analysis has been carried out using what was previously defined (in 4.1.1) as General Perturbations method. This method is based on propagating the perturbations making use of the numerical integration on the dynamics equations. Both the algorithm and the obtained results can be consulted in the Attachment I of this Report.

4.4 Orbital Station-Keeping

We will study:

- Increased height
- Thrusters

4.4.1 Raising the orbit height to increase Lifetime

The key to understand this solution is to see from another point of view the atmospheric drag phenomena. Once we have designed the constellation to provide certain coverage to specific points of the globe, the action of increasing the height of the orbit has the effect of increasing the footprint area on the surface of the earth. As the constellation is set, the time that take the satellites to reach the design height is extra lifetime.

From this point of view, the atmospheric drag phenomena can be recomputed and plotted it in this new way:

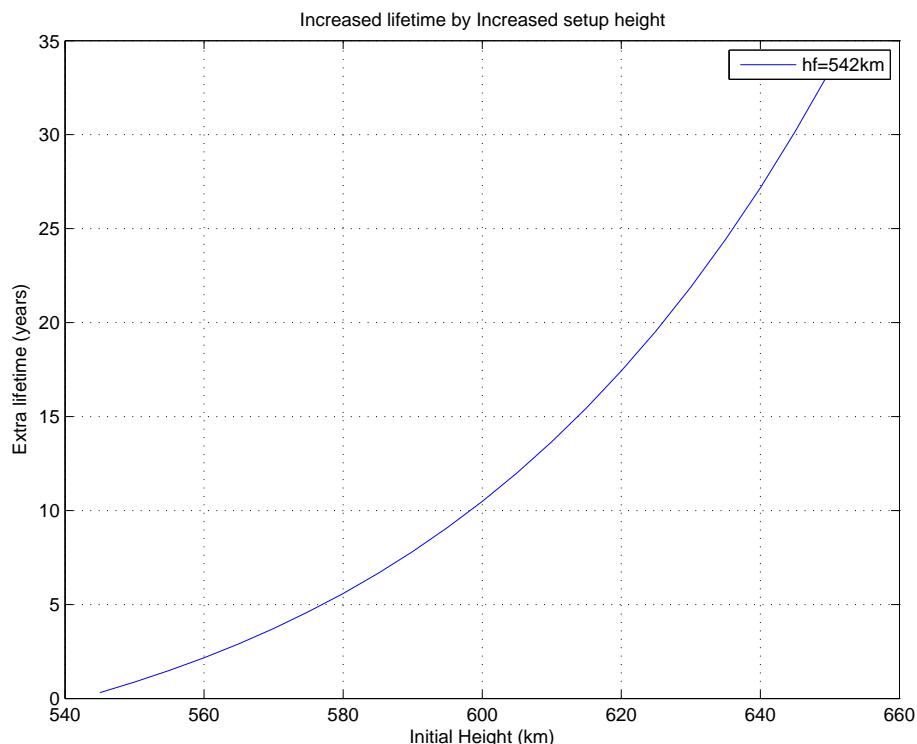


Figure 4.4.1: Increase in the Lifetime obtained by setting the constellation in a higher orbit

As it can be seen, the lifetime increases radically with time. However, this is a dangerous solution, since the coupling with another design parameters is compromised. To list the complications that can lead to:

- **Clients:** With the current technology, the satellites currently in orbit are set to point towards Earth. This means, if the constellation's satellites are at a higher orbit, the contact is impossible. As the market study reveals, it is important to place the satellites as low as possible.
- **Spacecraft Subsystems:** A higher orbit means a higher gain for the antennas and

therefore an increase in the required power.

- **Constellation Reconfiguration:** The overall time to reconfigure the constellation increases with height, since the period of the transition orbits is higher.

In conclusion

This tool is a very powerful option to deal with the orbit decay, even though it is not exactly an operation of Station Keeping itself. Given the high correlation it shows with other subsystems, the possibility of using it needs to be considered while the other design decisions are taken.

4.4.2 Using Thrusters to increase Lifetime

In order to maintain the configuration of the constellation for a longer time, a thruster is installed in each satellite to correct the decrease in altitude due to the orbit decay. The most optimal way to maintain the altitude is through a low-thrust maneuver. However, since this is a preliminary study, the calculations will be computed for a Hohmann transfer maneuver, which is simpler and more effective, but requires more propellant and greater increases of velocity. That is, by computing the velocity and propellant needed for a Hohmann maneuver, the results will be safe for a low-thrust maneuver, because the latter one requires less energy.

4.4.2.1 Energy equation

The deduction of the equations needed to solve the Hohmann maneuver begins with the energy equation:

$$\frac{V^2}{2} - \frac{\mu}{r} = -\frac{\mu}{2a} \quad (4.4.1)$$

where V is the orbital velocity of the satellite, r is the distance from the focus, a the semimajor axis of the orbit and μ the gravitational constant of the attracting body, in this case, the Earth. This expression shows that the total energy of the satellite equals the sum of its kinetic and potential energy (per mass unit).

This equation can be arranged to obtain the velocity of the satellite. In the case of a circular orbit, the radius is constant, and equal to the semimajor axis. Replacing $a = r$ in the energy equation and after some operations, the expression of the velocity of a circular orbit is obtained:

$$V_c = \sqrt{\frac{\mu}{r}} \quad (4.4.2)$$

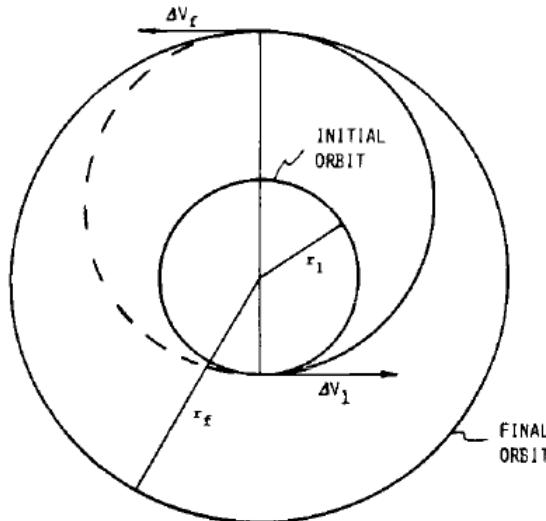


Figure 4.4.2: Hohmann transfer. Extracted from [6]

As it can be deduced from the energy equation, a change in orbital velocity leads to a change in the value of the semimajor axis. This property is used in satellites to change their orbit through a velocity increment ΔV . This process is called an orbital maneuver.

4.4.2.2 Delta-V

If the velocity increment ΔV is done instantaneously, the maneuver is called an impulsive maneuver. The Hohmann transfer is a two-impulse transfer between coplanar circular orbits. From an initial circular orbit, a tangential velocity increment ΔV_1 is applied to change the orbit to an ellipse. This ellipse is the transfer orbit, in which the perigee radius is the radius of the initial circular orbit and the apogee radius equals the radius of the final circular orbit. When the satellite reaches the apogee, a second velocity increment ΔV_2 is applied, so that the satellite reaches the final circular orbit with the apogee radius. If this second velocity is not applied, the satellite will remain in the elliptic orbit.

With the energy equation defined above, it is easy to determine the velocity of the satellite in each orbit. The first orbit and the final ones are circular:

$$V_1 = \sqrt{\frac{\mu}{r_1}} \quad (4.4.3)$$

$$V_f = \sqrt{\frac{\mu}{r_f}} \quad (4.4.4)$$

The velocity in the transfer orbit can be easily calculated with the energy equation applying the definition of the semimajor axis of an ellipse:

$$a = \frac{r_1 + r_f}{2} \quad (4.4.5)$$

The velocities in the perigee and apogee are:

$$V_p = \sqrt{\frac{2\mu r_f}{r_1(r_1 + r_f)}} \quad (4.4.6)$$

$$V_a = \sqrt{\frac{2\mu r_1}{r_f(r_1 + r_f)}} \quad (4.4.7)$$

Therefore the velocity increments are:

$$\Delta V_1 = V_p - V_1 = \sqrt{\frac{2\mu r_f}{r_1(r_1 + r_f)}} - \sqrt{\frac{\mu}{r_1}} \quad (4.4.8)$$

$$\Delta V_2 = V_f - V_a = \sqrt{\frac{\mu}{r_f}} - \sqrt{\frac{2\mu r_1}{r_f(r_1 + r_f)}} \quad (4.4.9)$$

4.4.2.3 Time

It is also necessary to know the time needed to do the maneuver. This time is equal to half of the period of the transfer ellipse:

$$t = \frac{T}{2} = \frac{1}{2} \sqrt{\frac{4\pi^2 a^3}{\mu}} \quad (4.4.10)$$

4.4.2.4 Propellant

In order to know the mass of propellant needed in the maneuver, the Tsiolkovsky rocket equation is applied:

$$\Delta V = g_0 I_{sp} \ln \frac{m_1}{m_f} = g_0 I_{sp} \ln \frac{m_1}{m_1 - m_{prop}} \quad (4.4.11)$$

where $\Delta V = \Delta V_1 + \Delta V_2$ is the total velocity increment of the maneuver, g_0 is the Earth's gravity, I_{sp} is the specific impulse of the thruster used, m_1 is the initial mass of the satellite, m_f is its final mass and m_{prop} is the mass of propellant used in the maneuver.

$$m_{prop} = m_1 \left(1 - \exp \left(- \frac{\Delta V}{g_0 I_{sp}} \right) \right) \quad (4.4.12)$$

4.4.2.5 Orbit maintenance

As explained at the beginning of the section, the orbital maneuvers exposed are intended to maintain the altitude of the satellite for a longer time and, consequently, lengthen its life. The method proposed begins when the satellite is deployed at a given height. This

Thrust	100 μN
Specific Impulse	2150 s

Table 4.4.1: Simulation Thruster Parameters

height will decrease due to the orbit decay, reaching a critical value, the limit altitude in which the constellation provides global coverage or another given height. Once this critical altitude is achieved, the satellite is put once again at its initial height through a Hohmann maneuver. The process is repeated several times until the satellite runs out of propellant or until it reaches its desired lifetime.

In reality the satellite will perform a low-thrust maneuver, which is more practical for an electric thruster. In this non-impulsive maneuvers, the thruster is constantly providing a velocity increment to the satellite, but it is so small that the whole transfer maneuver requires a lot of time. This means that it is not necessary to wait until the satellite reaches the critical altitude. The maneuver will start when the satellite is deployed or when it reaches a given altitude (higher than the critical altitude) so that it counteracts the effect of the orbital decay.

4.4.2.6 Results

The results are computed for a 3U CubeSat with an ion thruster. The characteristics of the thruster are the ones shown on table 4.4.1.

The first parameters to be defined are the maximum and minimum height of the orbit, measured from the surface of the Earth. The maximum height is the altitude at which the satellite is deployed, and minimum height is the altitude at which the Hohmann transfer maneuver is applied. The satellite has to be above the minimum height to be functional.

Figure 4.4.3 is an example of the height variation of the satellite using the Hohmann maneuver to reach the maximum height once the satellite is in the minimum height. The results of this maneuver are:

Since the thruster used is an ion thruster, the specific impulse is big, and the mass propellant is very low. In this case, the variation of height due to the orbit decay is approximately 3 km per year, so the thruster needs to do a Hohmann maneuver per year. With only 10 g of propellant, the lifetime of the satellite is over 30 years.

Figure 4.4.4 is another example of the Hohmann maneuver with the same amount of propellant but with a more restrictive range of operational heights, only 80 m. It should have the same shape as Figure 4.4.3, but since a lot of maneuvers are applied, the lines have overlapped. The characteristics of this maneuver are:

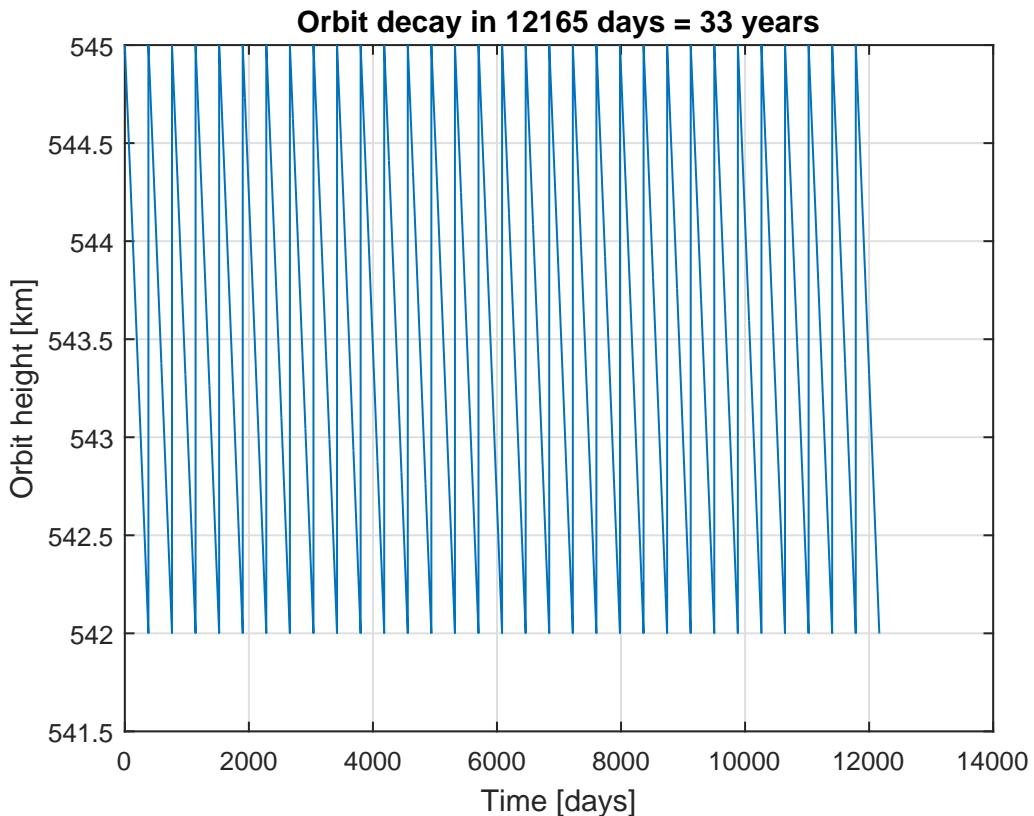


Figure 4.4.3: Height variation of the satellite

Comparing these results with the previous ones, it can be seen that with a more restrictive range of heights, the lifetime of the satellite is practically the same. The velocity increments are lower because the difference in the heights is extremely low, but at the same time, the satellite reaches before the minimum height and the maneuvers needed to maintain the satellite in this range are many more than on the other case. Since the ΔV budget is practically the same in both cases, it can be assured that the only difference between them is the number of maneuvers computed.

As mentioned earlier, the results obtained are for a Hohmann maneuver when in reality the satellite will compute a low-thrust maneuver, that requires less velocity increments and less propellant. In conclusion, taking into account these results, it can be stated that the lifetime of the satellite will not be determined by its orbit decay but for the failure of its systems or other external causes. It can also be assured that the satellite is capable of carrying enough propellant to maintain its altitude and to compute other maneuvers if necessary.

Maximum height	545 km
Minimum height	542 km
Number of Hohmann Maneuvers	32
Maximum ΔV_1	0,8237 m/s
Maximum ΔV_2	0,8236 m/s
Total ΔV Budget	52,7116 m/s
Propellant mass	10 g
Lifetime of the satellite	33,3288 years

Table 4.4.2: Station-Keeping with Thrusters Simulation 1 Results

Maximum height	545 km
Minimum height	544,92 km
Number of Hohmann Maneuvers	1200
Maximum ΔV_1	0,0221 m/s
Maximum ΔV_2	0,0221 m/s
Total ΔV Budget	52,7570 m/s
Propellant mass	10 g
Lifetime of the satellite	34,5726 years

Table 4.4.3: Station-Keeping with Thrusters Simulation 2 Results

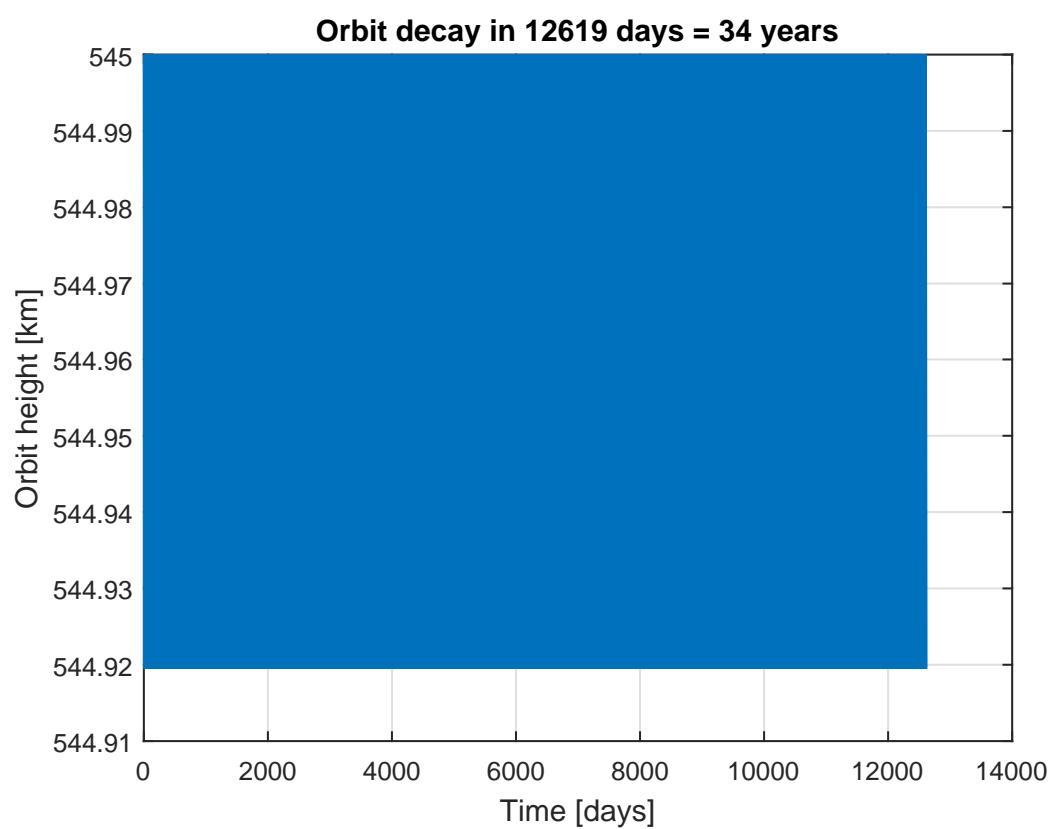


Figure 4.4.4: Height variation of the satellite with a more restrictive minimum height

Chapter 5

Constellation Design Decision

*"Aerospace Engineering is the way to
the universe."*

Marc Cortés Fargas, 2012

5.1 Considered Designs

5.1.1 Introduction

In this chapter it is seen how the final constellation decision is made. To do that an analysis of weighted weights will be performed.

The constellations candidates selected to their later evaluation are the following:

5.1.2 Candidate 1: Polar - Global Coverage

This polar constellation (Figure 5.1.1) came from the street coverage method explained in [??.](#) It is a network of polar orbits that provides global coverage. Its characteristics orbit parameters are the following:

- Height: 560 km
- Inclination of the planes: 90 °

Considered Designs

- Number of planes: 20
- Number of satellites per plane: 21
- Total number of satellites: 420
- Range of argument of ascending node: 360 °

5.1.3 Candidate 2: Polar - GS Coverage

The second candidate that will be compared is a polar orbit extracted from the coverage method explained in ??(Figure 5.1.2). This constellation provides total coverage to the Astrea's team ground stations. The network orbits parameters are:

- Height: 550 km
- Inclination of the planes: 90 °
- Number of planes: 18
- Number of satellites per plane: 16
- Total number of satellites: 288
- Range of argument of ascending node: 360 °

5.1.4 Candidate 3 and 4: Walker-Delta GS Coverage

Two Walker-Delta constellation configurations have been also chosen due to their reduced number of planes and satellites while being able of providing total coverage on the latitudes where the ground stations are located.(Figures 5.1.3 and 5.1.4). This constellations have been obtained with the algorithm explained in ??

Candidate 3

- Height: 542 km
- Inclination of the planes: 72 °
- Number of planes: 8
- Number of satellites per plane: 21

Considered Designs

- Total number of satellites: 168
- Range of argument of ascending node: 210°

Candidate 4

- Height: 542 km
- Inclination of the planes: 72°
- Number of planes: 9
- Number of satellites per plane: 17
- Total number of satellites: 153
- Range of argument of ascending node: 225°

5.1.5 Candidate 5: Walker-Delta Lat: 0-58

Another Walker-Delta constellation has been selected with the criteria of total coverage of a range of latitudes going from 0 to 58 (Figure 5.1.5). Therefore the parameters needed to fulfill this particular condition of the constellation obtain from ?? are the following:

- Height: 560 km
- Inclination of the planes: 72°
- Number of planes: 14
- Number of satellites per plane: 19
- Total number of satellites: 226
- Range of argument of ascending node: 210°

5.1.6 Candidate 6: Polar - Walker-Delta J2 + Rotació

With the goal of providing constant coverage at the Ground Stations we can design a constellation that takes profit of the rotation of the Earth. If we also consider Earth's oblateness that causes another Ω derivative with time, we can exactly compute the longitudinal position of a plane after an orbit has passed. Now, if we design the constellation in a way that this deviation after an orbit matches the separation between planes, a line of satellites will always be on the GS. (Figure 5.1.6)

Considered Designs

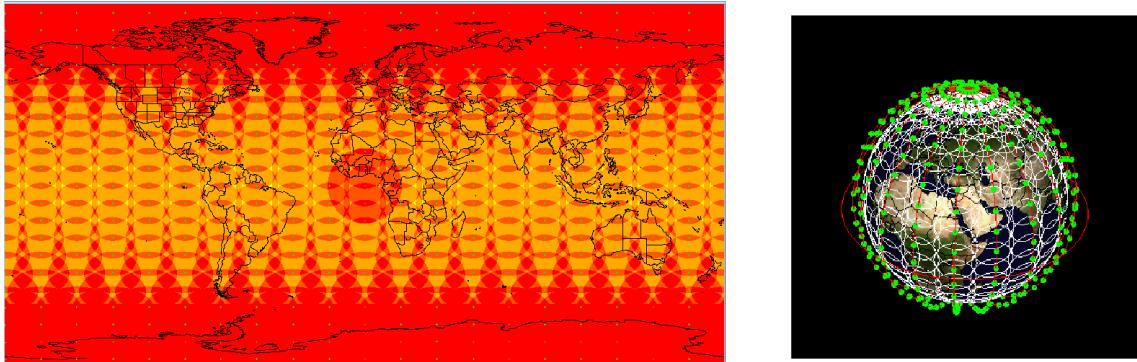


Figure 5.1.1: Candidate 1. Full Polar constellation with global coverage. $h = 560\text{ km}$; $N_p = 20$; $N_{pp} = 21$; $T_{sat} = 420$

- Height: 560 km
- Inclination of the planes: 72 °
- Number of planes: 14
- Number of satellites per plane: 19
- Total number of satellites: 226
- Range of argument of ascending node: 210 °

5.1.7 Candidate 7: Walker-Delta GS Coverage 3

The last configuration to be studied is a Walker-Delta constellation configuration designed to provide total coverage to the ground stations (Figure 5.1.7). It came up from candidate 3 constellation adding one more plane in order to increase its global coverage and minimize the gaps. As can be seen below, its parameters are the same as candidate 3 adding a single plane.

- Height: 542 km
- Inclination of the planes: 72 °
- Number of planes: 9
- Number of satellites per plane: 21
- Total number of satellites: 189
- Range of argument of ascending node: 225 °

Considered Designs

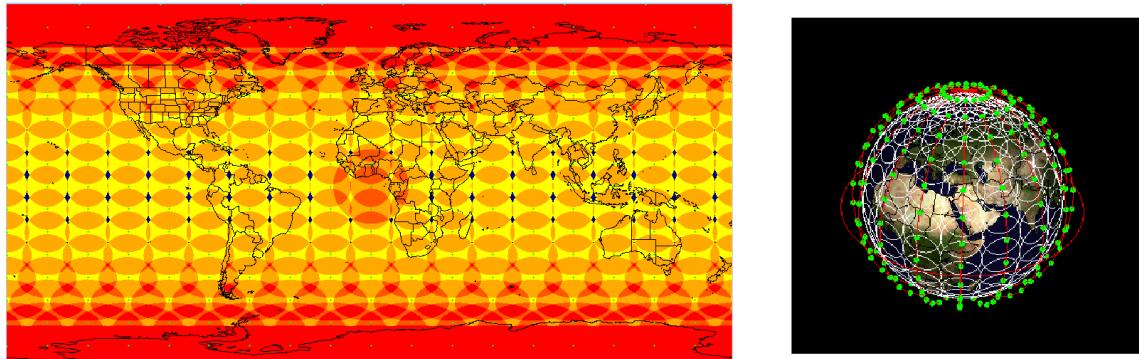


Figure 5.1.2: Candidate 2. Full Polar constellation with total ground station coverage. $h = 550\text{km}$; $N_p=18$; $N_{pp}=20$; $T_{sat}=288$

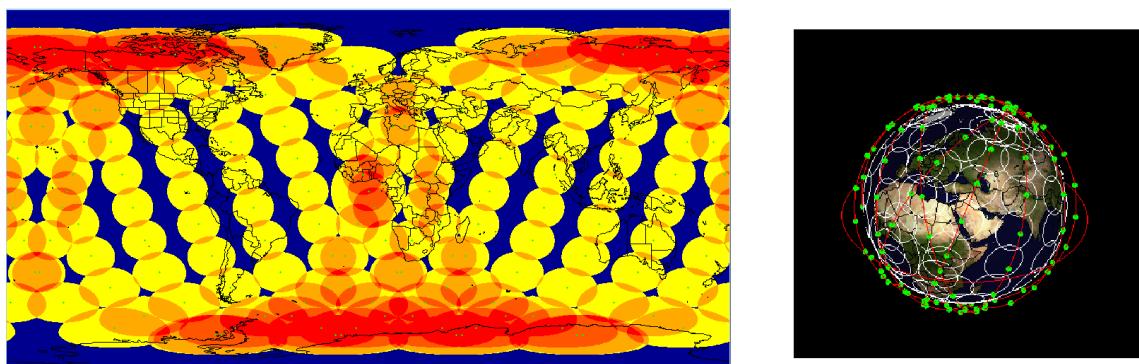


Figure 5.1.3: Candidate 3. 210° Walker-Delta constellation configuration. $h = 542\text{km}$; $i_n=72$; $N_p=8$; $N_{pp}=21$; $T_{sat}=168$

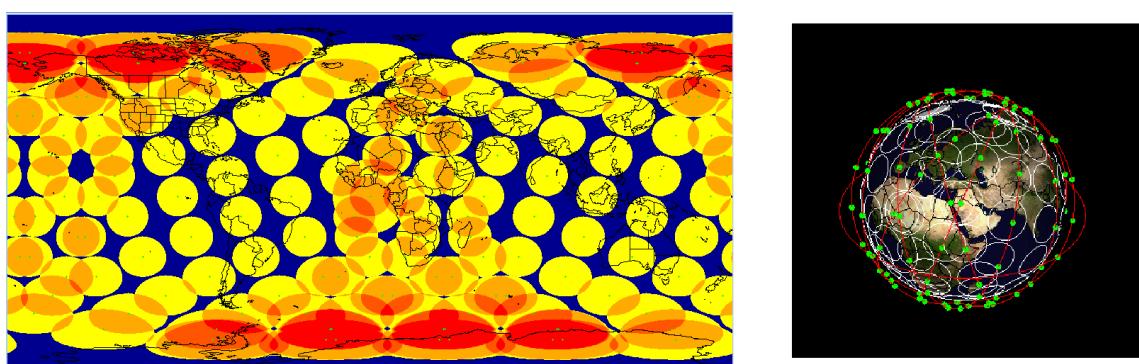


Figure 5.1.4: Candidate 4. 225° Walker-Delta constellation configuration. $h = 542\text{km}$; $i_n=72$; $N_p=9$; $N_{pp}=17$; $T_{sat}=153$

Considered Designs

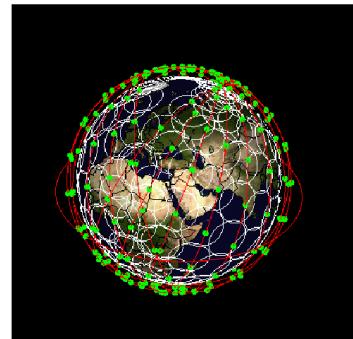
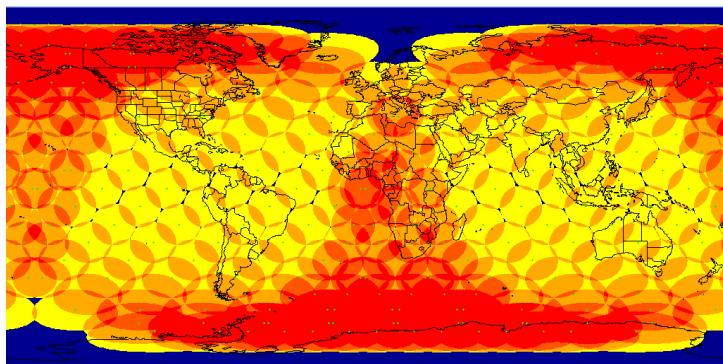


Figure 5.1.5: Candidate 5. 210° Walker-Delta constellation configuration with total coverage of the latitudes from 0 to 52 degrees. $h = 560\text{km}$; $in=72$; $Np=9$; $Npp=17$; $Tsat= 153$

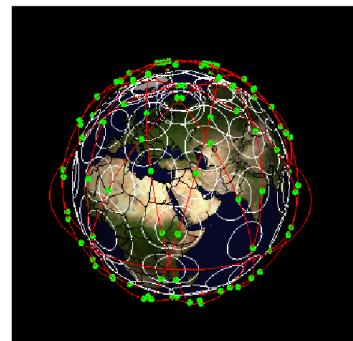
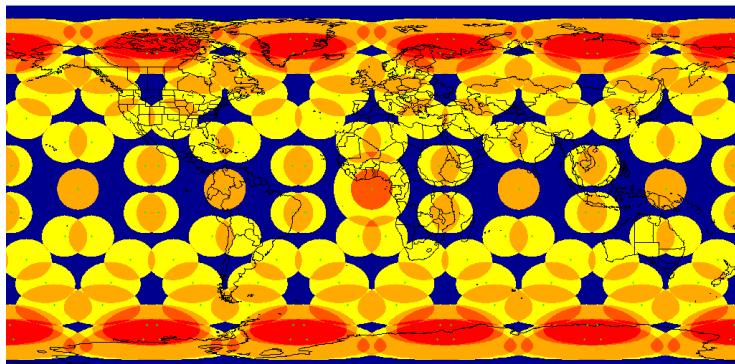


Figure 5.1.6: Candidate 6. 225° Walker-Delta constellation configuration.
 $h = 542\text{km}$; $in=72$; $Np=9$; $Npp=21$; $Tsat= 189$

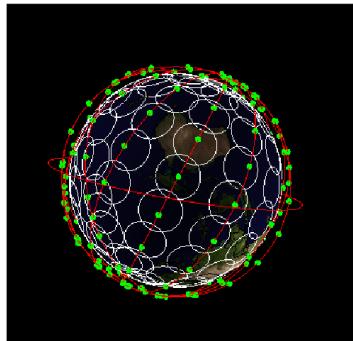
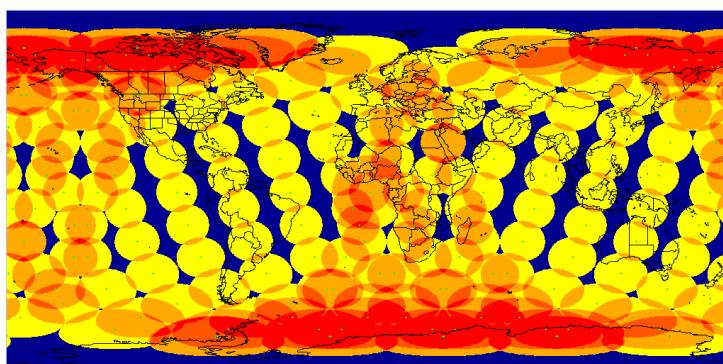


Figure 5.1.7: Candidate 7. Full Walker-Delta constellation configuration.

5.2 Constellation Performance Analysis

Even though the design requirements are included in the computation of the different configurations, it is necessary to evaluate how does the constellation perform when deployed. With this purpose, another MATLAB routine was developed.

Time factor

It is important to remark that the design methods used so far did not consider coverage in a certain period of time, but the coverage at a given instant. This section summarizes a method to compute this variation.

Quality Time

Another factor that was not considered in the design process was the pass times of the satellites. If a pass is too short the contact with the satellite cannot be produced.

5.2.1 Performance Evaluation

In order to determine if the performance of the Constellation is good enough and to compare different constellations, we define the following parameters that are to be used in the weighted ordered average decision 5.3.1.

Simulation parameters important to clarify:

- Simulation time: 25h. This time is enough to observe the motion of the whole constellation on Earth considering its rotation and the rotation of the plains due to the Earth's oblateness.
- Minimum contact time: 3 minutes. Time enough to download data, tracking and Telecommanding the satellite.
- Time precision: 10 seconds. It is empirically observed to be precise enough.

The computed parameters:

- Fraction of time with flybys on the GS: Ratio between the time in which there is any satellite in the field of view of the Ground Station and the total simulation time. (Referred in table 5.3.1 as % Coverage)
- Mean number of links with the satellite

- Fraction of time with flybys longer than 3 minutes: In this case the ratio is with the time in which there is a satellite doing a useful pass, since a full contact can be done. (Referred in table 5.3.1 as %Quality Time)
- Mean pass time: This parameter is used to guarantee a minimum of quality and to compare different configurations. (Referred in table 5.3.1 as Average Pass Time)
- Number of gaps: Gaps are in this chapter defined as periods of time without a pass that is lasting/will last more than 3 minutes. (Referred in table 5.3.1 as Num Gaps)
- Maximum gap time: At high latitudes all the Walker-Delta configurations show a characteristic gap that can last even for hours, which is not admissible. This parameter will tell us if we exceed a maximum defined as 3 minutes for this study. (Referred in table 5.3.1 as Max Gap Time)
- Mean gap time: As it is obvious, a minimum or a 0 is desired.

You can find below an example of the analysis, for a constellation in a Semi Walker-Delta configuration.

Constellation	Full WD
Number of Planes	$p = 8$
Satellites per plane	$spp = 18$
Inclination	$i = 75^\circ$
GS Latitude	$\lambda = 80^\circ$
GS Longitude	$\phi = 0^\circ$

Table 5.2.1: Constellation parameters for the Example Constellation

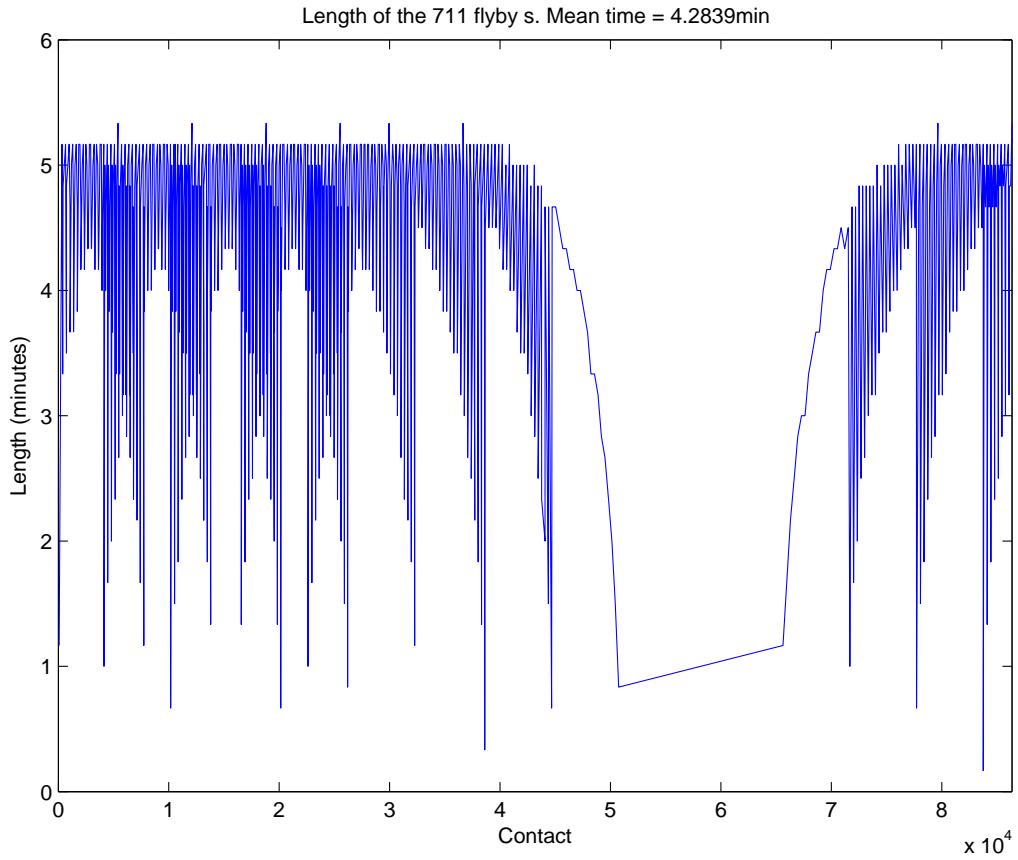


Figure 5.2.1: Length of the passes on the example GS.

Pass Time Ratio	77.53%
Quality Time Ratio	75.77%
Mean Pass Time	4.28min
Number of gaps	37
Maximum Gap Time	314.33min

Table 5.2.2: Performance Parameters for the Example Constellation

Given the high latitude of the Ground Station plus the Semi Walker-Delta Configuration there is an enormous gap. In addition, between planes some gaps are also observed.

5.3 Ordered Weighting Average based Decision

The Described Constellations are weighted and averaged in the table below. The detailed explanation of the parameters can be found in 5.2.1:

Criteria	W	Candidates						
		1	2	3	4	5	6	7
Price	15	1	2.35	5	4.94	3.21	3.92	4.67
% Coverage	4	5	4.77	2.94	2.14	4.43	1	3.86
Max Gap Time	3	3.12	3.62	1	2.88	3.51	5	4.75
% Quality time	5	4.91	4.49	4.05	1	3.19	5	4.98
Average Pass Time	5	1.21	1.14	1.14	1	1.90	5	4.72
Num Gaps	2	4.73	4.44	4.23	1	3.03	4.99	5
% Sats above	6	1	1	5	5	1	5	5
SUM (p*g)	40	90.42	108.17	154.19	133.29	113.94	167.71	188.21
OWA		0.452	0.541	0.771	0.666	0.570	0.838	0.941

Table 5.3.1: Constellation Configuration OWA Decision

With this comparison table, the optimum Constellation is option number 7:

The Astrea Constellation

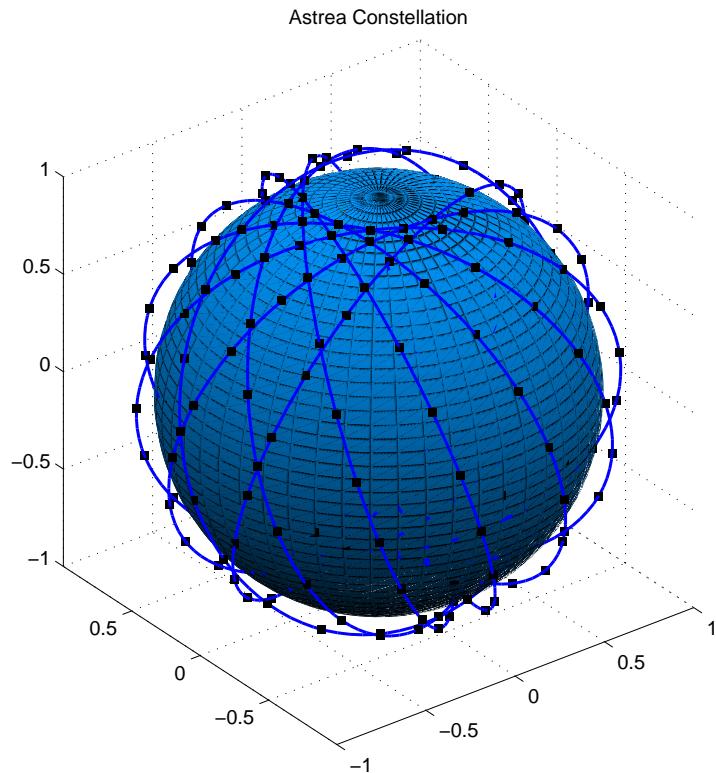


Figure 5.3.1: Astrea Constellation Final Configuration.

Part II

Communications

Chapter 6

Space Segment Protocol Stack

"The wonder is, not that the field of stars is so vast, but that man has measured it."

Anatole France, 1894

6.1 Introduction

Over this chapter, the **space communication protocols** are going to be defined. That is, a set of rules are going to be established in order to achieve the actual node-to-node communication. Although the scope of the chapter is limited to the space segment, this initial introduction on the protocol definition is useful for the ground segment. Having said that, several factors constrain the design of this relation of rules:

- **Speed:** As it has already been mentioned, each node should be capable of handling at least **25 Mbit/s**. Even though this doesn't mean that the design should be able to fit 25 Mbit/s of pure customer data, it is still a strong requirement with many effects over the system. For example, some protocols are just too slow establishing the connection; those will be directly discarded.
- **Reliability:** The protocols have to assure that the messages are going to arrive to their destination. In order to achieve this, a routing protocol has to be used as well.
- **Security:** Messages are not just required to arrive to their destination but they also must be ordered and coherent when they reach the client. That is the reason why error control is taken into consideration very seriously along the design process.


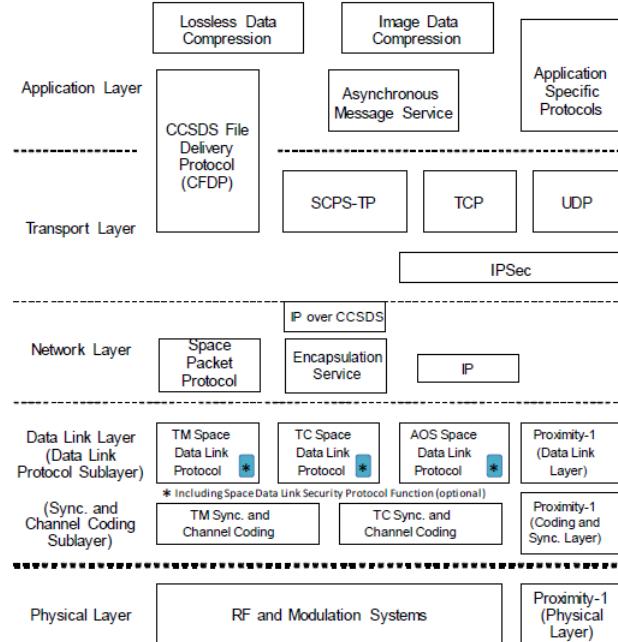


Figure 6.1.1: Protocols recommended by the CCSDS, classified in their respective OSI layer. Extracted from [7]

In order to define the protocols, the standards of the Consultive Committee for Space Data Systems will be followed. The CCSDS define a set of standards that become part of ISO and enhance operability between different satellites. The protocols recommended by the CCSDS and the possible combinations between them are shown in the Figures at the end of this section.

As far as *Astrea constellation* is concerned, the physical layer is already defined in detail in the **Satellite Desgin** part. Since the **Data Link layer**, the **Network layer** and the **Transport/Session layer** are of vital importance for the communication to work, the aim of the next sections will be to define the protocol that the constellation will be using for each one of those layers.

The presentation and the application layer are more client oreinted. In other words, if one client's satellite sends some data formatted with an unknown application protocol, *Astrea* will not be affected in any way. What astrea will do is add to this stream of bits, some headers, in order for the message to arrive in time to its destination. This methodology is undoubtedly positive for *Astrea* since the respobility of the application data will be solely for the customer.

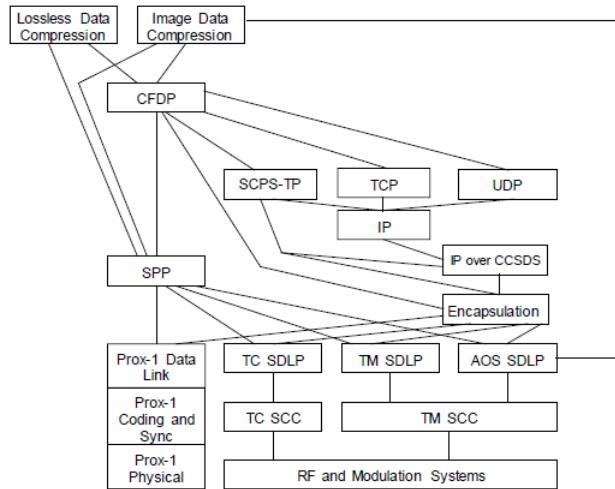

SCPS-SP and IPSec can be used between the Transport and Network layers in any combination of protocols.

SPP = Space Packet Protocol
 SDLP = Space Data Link Protocol & Space Data Link Security (opt.)
 SCC = Synchronization and Channel Coding

Figure 6.1.2: Possible combinations of the CCSDS recommended protocols. Extracted from [7]

6.2 Layer 2: Data Link

6.2.1 Functions of the DLL

The functions of the Data Link Layer are the following ones:¹.

- Framing
- Addressing
- Synchronization
- Flow control

6.2.2 Working procedure

There are five possible working procedures:

- Simplest Protocol
- Stop-and-Wait Protocol

¹They are explained in Annex II 7.1.1

- Stop-and-Wait Automatic Repeat Request
- Go-Back-N Automatic Repeat Request

They are explained in an extensive manner in Annex II 7.1.2. These working procedures had to be ordered according to its suitability for their application in Astrea constellation. To do so, an Ordered Weight Average (OWA) have been done. The decisive factors and its weights are:

- Efficiency: 40
- Time: 30
- Error correction: 60

Then, the results of the OWA are the following ones:

Protocol	Efficiency	Time	Error correction	OWA
Stop-and-Wait Protocol	0	0	0	0
Stop-and-Wait ARQ	0	0	1	0,46
Go-Back-N ARQ	1	0	1	0,69
Selective Repeat ARQ	1	1	1	1

Table 6.2.1: OWA of the DLL protocols.

6.2.3 Protocols

The standards of the CCSDS will be followed in order to allow interoperability with other satellites such as the one of the client. The CCSDS has developed four protocols for the Data Link Protocol Sublayer of the Data Link Layer [11]:

- TM Space Data Link Protocol
- TC Space Data Link Protocol
- AOS Space Data Link Protocol
- Proximity-1 Space Link Protocol-Data Link Layer

These protocols provide the capability to send data over a single space link. TM, TC, and AOS can have secured user data into a frame using the Space Data Link Security (SDLS) Protocol.

CCSDS has also developed three standards for the Synchronization and Channel Coding Sublayer of the DLL:

- TM Synchronization and Channel Coding
- TC Synchronization and Channel Coding
- Proximity-1 Space Link Protocol—Coding and Synchronization Layer

TM Synchronization and Channel Coding is used with the TM or AOS Space Data Link Protocol, TC Synchronization and Channel Coding is used with the TC Space Data Link Protocol and the Proximity-1 Space Link Protocol—Coding and Synchronization Layer is used with the Proximity-1 Space Link Protocol—Data Link Layer.

After comparing the TC and Proximity-1 Protocols (more information at Annex II 7.1.3), the decision taken is to use the TC Space Data Link Protocol with the TC sync and channel coding together with the Space Data Link Security Protocol. The reasons for doing so are mainly:

- Security: Incorporating the SLDS authentication and confidentiality is provided.
- More virtual channels: This feature allows more clients communicating with their satellites at the same time.

More information about the chosen protocols such as the amount of bits occupied by the header, its configuration and total length can be found at Annex II 7.1.4 and Annex II 7.1.5.

6.3 Layer 3: The Network

6.3.1 Functions of the Network Layer

The Network layer provides the following functions²

- Routing
- Network flow control
- Package fragmentation

²Explained in Annex II 7.2.1

- Logical-physical address allocation
- Message forwarding

6.3.2 Protocols

According to the CCSDS the protocols to use can be divided into three different protocols³

- Main protocol
- Routing protocol
- Auxiliary protocols

The possible protocols are:

- Main protocol: Space Packet Protocol (SPP), Internet Protocol version 4(IPv4) and Internet Protocol version 6(IPv6).
- Routing protocol: Enhanced Interior Gateway Routing Protocol (EIGRP), Open Shortest Path First (OSPF) and Routing Information Protocol (RIP).
- Auxiliary protocols: Encapsulation service, IP over CCSDS (IPvC), Internet Control Message Protocol (ICMP), Internet Control Message Protocol version 6(ICMPv6), Internet Group Management Protocol (IGMP), Internet Protocol Security (IPsec) and Protocol Independent Multicast (PIM).

6.3.3 Protocol Selection

6.3.3.1 Choice of the main protocol

The choice of the main protocol will be between SPP, IPv4 and IPv6. To make the choice, it is important to take into account that the Astrea constellation is a network that can be of more than two hundred satellites, which will communicate point-to-point. Each node can be the source, the destination or an intermediate node of a communication route. For this reason, the SPP has to be discarded, because it requires a Path ID. In Astrea constellation there are 29800 possible routes while the Path ID parameter only has 11 bits, that means that could work in a network with a maximum of 2048 routes. Between IPv4

³They are explained ad Annex II 7.2.2

and IPv6, is logical to choose IPv6 for its amplified benefits. Then, IPv6 will be the main protocol of the network layer. More details about this decision can be found in Annex 7.2.3.1.

6.3.3.2 Choice of routing protocol

First of all, RIP will be discharged because it has poor scalability and needs more time to converge. Then, the decision remains between EIGRP and OSPF. The difference between these two protocols is the way they update the routing table. With the EIGRP, 2000 entries are updated frequently while with OSPF, only 205 entries are needed to be updated. For this reason, OSPF is chosen. From more details about this selection, see Annex 7.2.3.2.

6.3.3.3 Choice of complementary protocols

The choice of which protocols include will depend on the main protocol of the network layer and the degree of services featured by the communication process.

Since IPv6 has been chosen, IP over CCSDS and Encapsulation Service are necessary. Additionally, ICMPv6 greatly expand the features of IPv6 such as flow control. Security features are already provided in the Data Link layer and, therefore, IPsec is not necessary. Also, no multicast features are required, so no multicast protocols will not be used.

6.3.3.4 Conclusion

It has been decided that IPv6 will be the network layer protocol, complemented with IPoC, Encapsulation Service and ICMPv6, and with OSPF as the routing protocol. In Annex II 7.2.4 the headers of the different protocols are shown.

6.4 Layer 4: Transport and Session

The objective of this layer is to provide and guarantee a reliable and cheap flow of the data.

The transport layer is responsible for process-to-process delivery, i.e, the delivery of a packet, part of a message, from one process to another. Two processes communicate in a client/server relationship.

More information about the functions of the Transport Layer and of the protocols recommended by the CCSDS can be found at Annex II 7.3.

6.4.1 Protocols

The protocols recommended to be used over this layer are:

- User Datagram Protocol (UDP)
- Stream Control Transmission Protocol (SCTP)
- Transmission Control Protocol (TCP)

6.4.2 Choice of protocol for the transport layer

The UDP has some disadvantages which make it not suitable for the purpose of the project, such as the fact that no reliability is guaranteed, for example, amongst others. The SCTP is designed mostly for Internet applications, which does not fit the goals of this project. Therefore, the only candidate suitable for the project is the TCP, Transmission Control Protocol. More information had to be compiled in order to know the full suitability of it to the project. The exposition of all its parameters is not shown in this report for its large length. See Annex II 7.3.3 for more information. As it has the required features that the project demands, it is the chosen protocol for this layer. Also, as it has been established during the deep research done, it is very recommended to use the extension SCPS, due to adaptation to space needs.

Chapter 7

Ground Segment Protocols

7.1 Ground Segment Protocols

7.1.1 Introduction

In the previous chapter the space protocols have been selected, so in this one the focus will be on the ground segment protocols. The information will be transmitted to the client using the Internet, so a part of the protocol is already established by the system. However, a secure protocol has to be defined above the Internet protocol to assure confidentiality to the client. The protocol used in the Internet is the TCP/IP protocol suite, that provides an end-to-end data communication specifying how data should be packeted, addressed, transmitted, routed and received. In the following lines the characteristics of the different available protocols that can be adapted to the needs of the project are presented. More information about the suitability of them can be consulted in Annex II 8.2.

7.1.2 Protocols

The protocols are the following ones:

- File Transfer Protocol (FTP)
- Secure Shell (SSH)
- Simple Mail Transfer Protocol (SMTP)
- Hypertext Transfer Protocol (HTTP)
- Transport Layer Security (TLS)

- Hypertext Transfer Protocol Secure (HTTPS)

7.2 Delivery of the data method

At first, it has to be take in account that this layer provides the platform in which the client will make contact with the service. At this point, not only the technical criteria should be considered, but also how do the service is presented. It has to be found a friendly use method for the client keeping the technical efficiency.

Analazng the previous protocols, avoiding the techincal details of each one, there are considered this 3 ways of working, with its advantages and drawbacks. In the following page the systems proposed are shown toguether with the decision, but in Annex II 8.3 the advantages and drawbacks of each method is extensively explained.

- **Web.** This system would be based in HTTP an implemented with the corrseponding security protocols in order to ensure the privacy of the data. In this case the client wolud entry with its computer a https adress where he/she wolud sign in with an account. When the user is verified, the client could request to download informaton of his satellite.
- **Mail.** This method would be implemented over a SMTP with the corresponding security protocols. If the client wants to download data of his satellite, he/she would have to send a mail specifying the request. Then the client will receive an email with the information.
- **Application.** The idea is that the cient would operate in his computer with this software, and when he/she want to upload or download something, the program would use a secure internet channel to transfer the information. This system wolud be implemented over a FTP or a SSH. For using this method it has to be implemented a plataform for the client use.

The chosen method to deliver the data is using an application that would be instaled in the client's computer and where data could be extracted. This is a secure, efficient and user-friendly solution. The application will ensure a high security of the data and a robust access to it. Moreover, for the point of view of the Astrea team, the efforts in mainting a computer application are less than in other cases such as the Mail, where automatization is more difficult to implement.

This system could work with a FTP or with a SSH. Both would work properly in the system and have very similar characteristics, but SSH is more secure than FTP, so the system would be ruled by a SSH protocol.

Chapter 8

Design of the Ground Segment

8.1 Introduction

The Ground Segment is an indispensable part of almost any space mission. Such is its importance that it can even be seen as a subsystem of the mission.

This subsystem is composed of Ground Stations (GS) and the Mission Control Centre (MCC) and will be responsible of the extraplanetary communications with the spacecrafts. Furthermore, it will operate as a telecommunication port, which means that it will work as a hub, connecting the satellites to the Internet.

In order to establish communication in such high distances ($\approx 600\text{km}$ for LEO) high bands radio waves are going to be used. This is a requirement that is going to conditionate the overall Ground Station architecture.

- Since radio waves are going to be used, communication is established only when the Satellite has the Ground Staion in its line-of-sight. That will affect the location. Moreover, the orbits of the satellites will affect the GS location as well. The GS should be placed in a way that it gets maximum coverage time. This point will be further explained.
- Depending on the target band to cover, which is the one used by the satellites for ground segment communication, the GS parts will vary in shape, size and prize significantly.

To use a GS there are two possibilites: building or renting one. In order to know which of the possibilities is the best, in the following lines they will be explained giving some numbers about the cost. First of all, a study about building the Ground Segment will

we done, analyzing the location of the GS and the MCC, the legal aspect, the costs and maintenance, and the initial investment necessary to build them. After that, an analysis about renting GS will take place. Finally, a decision will be made.

8.2 Localization of the Ground Stations

The place where the Ground Stations would be placed has to be studied in order to obtain maximum performance of them. This decision will depend mainly of the constellation characteristics, the earth topography and the country legislation and resources. In this chapter the analysis and procedures for arriving to the final decision of where the Ground Stations would be placed are exposed.

Given the constellation topology, the coverage of a Ground Station depending on its longitude and latitude will be studied. The aim of this analysis is to show where a Ground Station would have more coverage and give a first approximation and proposal of the 3 Ground Station placement.

8.2.1 Method

For the purpose above explained, a Matlab algorithm is developed. This algorithm calculates, on a given moment, how many satellites can be seen from a Ground Station. This calculation will be done several times in order to obtain results along time. In order to elaborate the algorithm the steps showed below are followed:

1. Calculate where the satellites are refereed to an inertial Cartesian coordinates system, with the origin at the center of the Earth. This state analysis is done for several time periods with an adequate time-step.
2. Calculate the Ground Station position refereed to the mentioned system. Since the system is inertial, the Ground Station will describe a circle in the rotational plane of the Earth relative to this system. This trajectory depend on the latitude and longitude of the place. This position is calculated for the same time period used before.
3. Calculate, for each time step, how many links can the GS establish. It will depend on the angle between the station and every satellite, and also on the minimum elevation angle.

Once the algorithm is tested and verified, the links during the day for several longitudes and latitudes and how this parameters affect to the coverage of the station are studied. The

code used can be found in [REF TO ANNEX of matlab codes. Chapter to be determined. Section to be determined], while the study of localization can be found in [REF TO ANNEX III. Chapter 9. Section 1].

8.2.2 Conclusion

To summarize the results of the analysis, for an optimum performance of every Ground Station, they should be located at latitudes between -62.5° and -57.5° or between $+57.5^{\circ}$ and $+62.5^{\circ}$. For a better performance of the system every Ground Station should be 120° of longitude away of the other GSs if they are at the same latitude or 60° of longitude away if they are at the opposite latitude. Taking in account the topography of the Earth, the following options are proposed (every color represent the options for one Ground Station):



Figure 8.2.1: Options for placing the 3 Ground Stations.

Given this possibilities a study of the legislation of the involved countries has to be done in order to know the viability of placing there the Ground Stations. The candidate countries, as is shown in the map, are: Canada, Argentina, Chile, Falkland Islands (Islas Malvinas), United Kingdom, Denmark, Norway, Sweden and Russia.

For the Mission Control Centre, as it does not communicate with any satellite, it has no restrictions on where to build it. It is decided that it will build in Terrassa, since ETSEIAAT is located there and it holds the headquarters of the UPC Space Program.

8.3 Legislation

The legislation will determine the location of the three GS between the locations pre-selected in the previous section. This is done because all the places pre-selected are more or less equivalent, and to choose between them governmental easy will be used. After doing a research on the legislation of all the places where the GS could be placed, only two countries have available legislation: Canada and United Kingdom. For this reason, the location for the 3 Ground Stations are United Kingdom, Falkland Islands and Canada. Falkland Islands are administered by United Kingdom, so the same license must be requested.

8.3.1 United Kingdom Ground Station

Non-Geostationary Earth Stations (Non-Geo). A Non-Geostationary Earth Station is a satellite earth station operating from a permanent, specified location for the purpose of providing wireless telephony links with one or more satellites in non-geostationary orbit. Therefore, this is the license required for United Kingdom and Maltese Islands.

The form required to ask for the license can be found at [12]. The fees can be obtained from [13] and [14]. The frequency allocation can be found in [15].

8.3.2 Canada Ground Station

The Minister of Industry, through the Department of Industry Act, the Radiocommunication Act and the Radiocommunication Regulations, with due regard to the objectives of the Telecommunications Act, is responsible for spectrum management in Canada. As such, the Minister oversees the development of national policies and goals for spectrum resource use and ensures effective management of the radio frequency spectrum.

In Canada, the fees vary depending on the zone. There are three zones:

- High Congestion Zones: There are six metropolitan areas of Canada designated as zones of intense frequency use. They are in and/or around the following cities: Calgary, Edmonton, Montréal, Toronto, Vancouver and Victoria.
- Medium Congestion Zones: There are 21 areas of Canada designated as zones of moderate frequency usage. These zones can be either stand-alone areas or areas that are adjacent to the six intense frequency use zones listed above. These moderate zones are as follows: Calgary, Chicoutimi, Chilliwack, Edmonton, Halifax, London,

Montréal, Ottawa, the City of Québec, Regina, Saint John, Saskatoon, St. John's, Sudbury, Thunder Bay, Toronto, Trois-Rivières, Vancouver, Victoria, Windsor and Winnipeg.

- Low Congestion Zones: These zones comprise all other areas of Canada.

It would be wise to choose a low congestion zone, which would have additionally less interferences.

The process to fulfill can be found at [16]. The fees might be estimated using [17].

8.4 Annual costs

8.4.1 Annual costs of the Ground Stations and the Mission Control Centre

In order to know the cost that involves having three Ground Station and a Mission Control Centre always operative, an economical study will be done. In this study, parameters such as salaries, electricity and internet services will be taken into account, among othes. This study canbe found in [REF TO ANNEX III. Chapter 9. Section 2].

From this study, the following results are obtained:

- Annual cost of the three Ground Stations: 770,000€
- Annual cost of the Mission Control Centre: 460,000€
- Annual cost of the whole Ground Segment: 1,200,000€

8.5 Initial investment

8.5.1 Description of the systems

An S-band system will be used for telemetry and telecommand purposes and for receiving housekeeping data. It is intended to have uplink and downlink capabilities in half-duplex. The model can be found at [18] and [19].

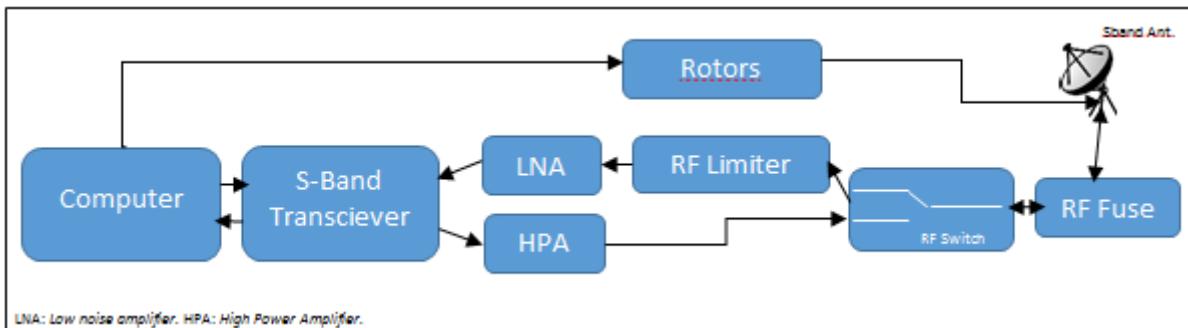


Figure 8.5.1: Equipment needed for S-band communications.

A X-band system will be used for receiving the data requested by the client from the satellites. It will only have downlink capabilities. The model can be found at [20]. beginfigure[H]

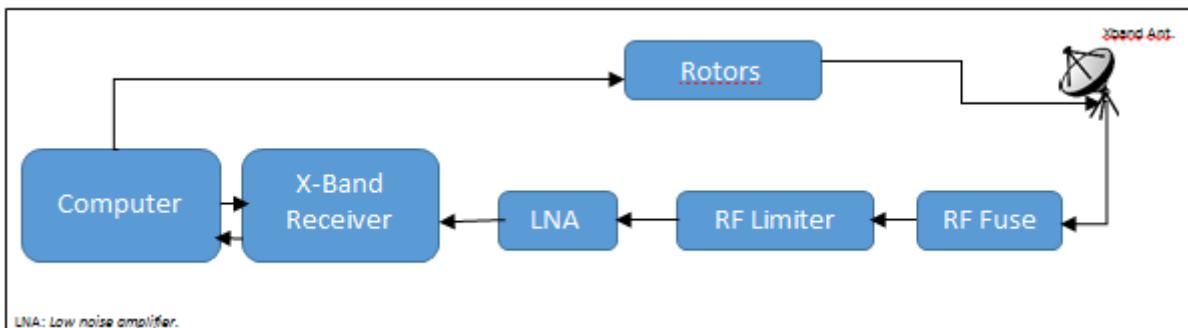


Figure 8.5.2: Equipment needed for X-band communications.

8.5.2 Investment

In order to calculate the initial investment in order to build the entire Ground Segment, another economical study must be done. Same as the previous studies, this one can also be found in [REF TO ANNEX III. Chapter 9. Section 3]. The results of said study will be exposed in the following lines:

- Initial investment of one Ground Station: 356,000€
- Initial investment of the three Ground Stations: 1,070,000€
- Initial investment of the Mission Control Centre: 150,000€
- Initial investment of the whole Ground Segment: 1,220,000€

8.6 Renting of a Ground Station

There are a lot of ground stations spared all over the world. In [REF TO ANNEX III. Chapter 9. Section 4], a list of the most important Ground Stations and their specifications can be found.

8.6.1 Contact with GS companies

Some companies that own a Ground Station have been contacted in order to get some information about costs and conditions of renting their stations. However, it is important to notice that no answer is given for this type of project (students project). Moreover, information is not available on the Internet. If the project goes ahead, more information could be given to these companies and a cost can be obtained, so the option of renting one of the above cited GS is not discharged. Nevertheless, a cost is needed to know if it is better to rent the GS or to build one. To do so, a company named LeafSpace will be used.

8.6.2 LeafSpace

LeafSpace is an Italian company which provides a GS network, specifically designed to exchange data with micro and nanosatellites in a fast and simple way. Their global distribution ensures a high visibility time for a wide range of orbits, allowing their customers to download massive amounts of data.

This means that LeafSpace lets customers use their GS to download data, but does not permit to rent them in exclusive, which is the main idea of this project. Due to the small amount of information existing, LeafSpace will be considered in order to get a first approximation and to develop an OWA to decide.

8.6.2.1 Features

Antenna LeafSpace allows to receive data from VHF (137-144 MHz), UHF (400-402 MHz), S-Band (2.2-2.4 GHz) and X-Band (8.025-8.5 GHz), but only can transmit UHF (401-403 MHz) and S-Band (2.025-2.11 GHz). The polarization is RHCP/LHCP (Right and Left Hand Circular Polarization, respectively). The modulation and the protocol are totally configurable. The datarates depend on the bandwidth: for UHF, up to 100 Kbps; for S-Band, up to 30Mbps; and for X-Band, up to 100Mbps.

Pricing The prices, expressed in euros/Mbyte, depend on the bandwidth too: for receiving, VHF 5, UHF 5, S-Band 0.4 and X-Band 0.1, while for transmitting it is UHF 20 and S-Band 2 (recall that they can only transmit in those two bandwidths).

Nevertheless, it is also stated that customized subscriptions are available for missions with large data transfers and constellations. Then, it is highly probable that a better pricing can be achieved.

Boost Performance Within 2017, 20 Ground Stations are scheduled to be implemented all around the World, ensuring a telecommunication service with a considerable increase of visibility time, together with a drastic reduction of communication latency for a wide range of Low Earth Orbits.

Way of use Data management is achieved with a user-friendly web-based interface, along with cloud storage granting direct access to download data at any time.

Since this is all granted by LeafSpace, there would be no need to develop the Ground Segment discussed before.

Services It is claimed to be 24/7 full availability of downloaded data, API access for constellations management, full redundant cloud storage for up to 10 days, advanced levels of data encrypting on demand, automatic scheduling, uplink and downlink, ranging and tracking, and 24/7 alert service.

Map In the following image there is the planification of Ground Stations to be built in the following years by LeafSpace.



Figure 8.6.1: List of planned LeafSpace Ground Stations.

Operation No information relative to operation is given. It is certainly stated that its working way is automatic. Despite so, some maintenance is surely required, though its cost is probably low.

8.7 Decision taking

In this subsection the decision between building GS or renting existent ones will be taken. There are a few things to be taken into account before starting to talk about the benefits and drawbacks of each of the options.

First of all, the number of ground stations required is needed. If there is no communication with the satellites, the mission would not be accomplished. For this reason, the nodes of the ground stations are very important. The number of ground stations required is the minimum number that, with two failures, can still transfer the data from the satellite of the client to the client itself in less than 5 minutes. Supposing that three ground stations are built or rent, if two of them fail the communication between the client and its satellite can still be done using the left ground station.

Regarding the latency, as it has been already exposed, the communication will take place with a latency of less than 5 minutes, as only one ground station that may fall will be in the communication path and is very improbable that if the ground station fails and the information is redirected to another, the latter falls too in less than three minutes. Regarding the position of the ground station, as the code developed shows, the ideal will be to have them close to the equator, because they would be capable to establish more links with different satellites and then the communication to the client's satellite is assured.

The decision will be performed using an Ordered Weighted Average method (OWA) that can be found in [REF TO ANNEX III. Chapter 9. Section 5]. The conclusion of the decision process are explained in the following lines:

8.7.1 Decision

The results of the OWA have been the following ones:

- Building a GS: 0.83
- Renting a GS: 0.67

Looking at the results, building a ground station is the best option for Atrea Constellation in order to accomplish its requirements and to give a high-quality service.

Part III

Satellite design

Chapter 9

Satellite design

9.1 Structure and mechanics

The design and operation of a CubeSat is a complex process that must be completed keeping in mind the huge differences between all subsystems as well as the role they will play during the lifetime of the mission. And since these systems will operate in space, they have to be prepared and certified to withstand extreme temperature and radiation conditions.

The satellite used by Astrea must have high compatibility between all the systems to avoid potential problems and has to be tested (either all the systems together or one by one). Their correct functioning has to be ensured, especially the critical systems such as the solar arrays, batteries and antennas should be fully operational for at least four years.

9.1.1 Structure

The mission of the structure is to sustain and protect all the electronic devices carried by the satellite. In order to ensure that all the electronic and mechanical systems can be mounted upon the structure, a high compatibility between these systems is required; therefore, the structure must be very flexible regarding the arrangement of the subsystems.

The structure chosen is manufactured by **Innovative Solutions In Space (ISIS)**. Among its features it is worth mentioning that it can withstand the high range of temperature it will face in the space (from -40°C to 80°C) and it is highly compatible; almost every physical system used can be placed within the structure or on its faces (such

as the antennas or the deployable solar arrays). Finally, the mass of the structure is relatively low, and given that the mass of the other subsystems is sometimes a drawback, it is plus point.

9.1.2 Thermal protection

The CubeSat is vulnerable to suffer extreme temperatures while operating in space, both below zero and above zero. The thermal protection system consists of a set of layers (MLI) made of insulating materials and it aims to protect the CubeSat from potential thermal shocks. The satellite must remain within an optimal range of temperature, despite of the variation of the external temperature, in order to work properly. Furthermore, the thermal protection system should also dissipate the heat produced by the other systems.

Dunmore Aerospace has been chosen to provide us its MLI product. The product, **Dunmore Aerospace Satkit**, has been designed for small satellites operating in LEO and it will provide the CubeSat with the protection required during operation.

9.1.3 Options chosen for the structure and thermal protection

The options chosen are presented in the table 9.1.1.

System	Brand and model	Price per unit (€)	N. of units
3U Structure	ISIS	3900	1
Thermal Protection	Dunmore Satkit	1000	1

Table 9.1.1: Options chosen for the structure and thermal protection

9.2 Electrical Power System

The Electrical Power System (EPS) of the satellite must provide and manage the energy generated efficiently in order to have all the systems operating under typical conditions during the lifetime of the mission. The role of this system is to control and distribute a continuous power to the Cubesat, to protect the satellite against electrical bus failures and to monitor and communicate the status of the EPS to the on-board computer. The EPS of the Cubesat is, probably, the most fundamental requirement of the satellite, since its failure would result in a mission failure.

9.2.1 Estimation of the power required

To select the adequate electrical power systems it is essential that the power consumed by the CubeSat is known *a priori*. Thus, to select the solar arrays and the batteries, as well as the power management system, an estimation of the power consumed has to be made.

The total power required is 52W and it has been estimated considering that all the subsystems are working under typical working conditions.

9.2.2 Solar arrays

Given that the space of a 3U CubeSat is very limited, the primary source of electrical power has to be photovoltaic cells. The photovoltaic cells will collect and convert the energy of the sun into electrical energy and they have to be fully efficient for at least four years (this is: it has to be ensured that the mission does not run out of power for at least four years).

Every cubesat will come with at least 4 deployable solar panels (manufactured by **EXA-Agencia Espacial Civil Ecuatoriana** providing it with 67.2W of power, approximately, to supply peak demands. Note that these 4 deployable solar panels are a basic requirement. If more space is available on the faces of the satellite, additional panels can be placed providing extra power.

9.2.3 Power management system

The role of the power management system is to distribute the power and supply the energy to the different systems used in the CubeSat. Since these systems have different power and energy needs, the power management system has to be highly compatible and must have a high enough number of buses to supply the different voltage and intensity required to the systems.

The selected option for the mission is the **NanoPower P60** by **Gomspace**, a high-power EPS for small satellites that comes with 1 motherboard, 1 ACU module (Array Conditioning Unit) and 1 PDU (Power Distribution Unit), allowing multiple configurations in just one motherboard and saving a lot of space.

9.2.4 Batteries

The role of the batteries is to provide the subsystems of the satellite with the power needed when the solar arrays are working less efficiently or not properly. Astrea is looking for decent capacity batteries that provide a *slightly higher* than typical energy and power supply, since all the systems will not usually operate under peak conditions.

Astrea has chosen the **BA01/D** batteries manufactured by **EXA-Agencia Espacial Civil Ecuatoriana**. The CubeSat will have two of these batteries, with a total capacity of 28800mAh or 106.4Wh.

Through the lifetime of the mission, the solar arrays will face an important unfavorable condition; in the worst case scenario, the satellite will be in the dark during half of the period of the orbit. So, it is clear that the batteries are a critical system. If the satellite was in the dark during half of the period of the orbit, the estimated energy that it would need would be 50Wh. Thereby, the capacity of the batteries is more than enough to supply the energy required in the worst case scenario. Furthermore, they will supply energy when the energy demand of the CubeSat is higher than the energy collected by the solar cells. And logically, they will store the energy collected by the solar arrays when the energy demand of the systems is lower than the energy collected.

9.2.5 Options chosen for the EPS

Finally, the options chosen are presented in the table 9.4.1.

System	Brand and model	Price per unit (€)	N. of units
Solar arrays	EXA	17000	4
Additional solar arrays	-	4000-12000	depends
Batteries	EXA	6300	2
Power Management	Gomspace NanoPower P60	16000	1

Table 9.2.1: Options studied for the Electric Power System

9.3 Propulsion Systems

The propulsion system is an important part of the satellite given the needs of the satellite to perform different maneuvers, such as reach the desired orbit after it has been deployed from the rocket, and to maintain the orbit and avoid falling to the Earth. The main

parameters that have to be consider are thrust, total specific impulse, power required, weight of the propulsion system and its volume, since the size and weight of the CubeSat are very restrictive.

At the moment, the most used and modern thrusters for small satellites are: ionic, pulsed plasma, electrothermal and green monopropellant thrusters. An important aspect to consider is that the goal is to reduce the mass required although this will imply smaller accelerations than conventional propulsion systems.

The **BGT-X5**, a green monopropellant propulsion system, has been chosen as the thruster for the CubeSat. The high thrust and delta V that BGT-X5 provides has predominated at expenses of other variables as weight or specific impulse where others options were better. With this thruster the CubeSat will be able to carry out the necessary actions to keep the satellite in orbit, to relocate the satellite or to change its orbit.

The option chosen is presented in the table below 9.3.1.

System	Brand and model	Price per unit (€)
Propulsion	Busek BGT-X5	50000

Table 9.3.1: Option chosen for the propulsion system

9.4 Attitude and Orbital Control Systems

The attitude and orbital control system (AOCS) is needed to enable the satellite to keep a specific position within its orbit and to control the antennas in order to remain oriented to the assigned area, because the satellite tends to change its orientation due to torque. The AOCS receives telecommands from the central computer and acquires measurements (satellite attitude and orbital position) from different sensors. The AOCS can also be referred as the ADACS (Attitude Determination and Attitude control system).

Attitude control for CubeSats relies on miniaturizing technology without significant performance degradation. Tumbling typically occurs as soon as a CubeSat is deployed, due to asymmetric deployment forces and bumping with other CubeSats. Some CubeSats operate normally while tumbling, but those that require pointing to a certain direction or cannot operate safely while spinning, must be detumbled. Systems that perform attitude determination and control include **reaction wheels**, **magnetorquers**, **thrusters**, **star trackers**, **Sun sensors**, **Earth sensors**, **angular rate sensors**, and **GPS receivers**

and antennas. Combinations of these systems are typically seen in order to take each method's advantages and mitigate their shortcomings. (*wikipedia extract, [?]*).

Pointing to a specific direction is necessary for Earth observation, orbital maneuvers, maximizing solar power, and some scientific instruments. Directional pointing accuracy can be achieved by sensing Earth and its horizon, the Sun, or specific stars. Determination of a CubeSat's location can be done through the use of on-board GPS, which is relatively expensive for a CubeSat, or by relaying radar tracking data to the craft from Earth-based tracking systems (*wikipedia extract, [?]*).

9.4.1 Orbital Control

Orbital control will be achieved as a combination of two systems. ADCS will orient the thrust (given by the propulsion system) and the operation will be controlled by the on-board computer. Mainly, the orbit control will be necessary to mitigate orbital debris effect on every satellite.

Taking into account several very restrictive variables: low power consumption, low weight and size, high pointing accuracy and really versatile systems that can integrate multiple subsystems; **CUBE ADCS** is chosen. It has the lowest mass and power consumption, it also offers a higher attitude determination systems and integrates also and On-Board Computer (OBC).

Finally, the options chosen are presented in the table 9.4.1.

System	Brand and model	Price per unit (€)	N. of units
ACDS	CUBE ADCS	15000	1

Table 9.4.1: Options studied for the AOCDs

9.5 Payload

The payload needs to provide a radio link with the client's satellite(s) for real time data relay with no less than 25MB/s of data rate. For achieving its purpose, the payload will consist on a pack of arrays of antennas and data handling computers.

The CubeSat will have three types of radio links for transmitting in every condition the data received from the clients:

- **Space to Ground link:** Connection between satellite and Ground Station when it is possible.
- **Inter-satellite Space to Space link:** Communication between Astrea satellites for data relay, looking for the nearest satellite with Ground Station link available, to transmit the data.
- **Client Space to Space link:** Communication between client and Astrea satellites.

The radio frequencies used to establish the previous described links are regulated in [21] by frequency, bandwidth and type of communication . So, for the **Space to Ground link** frequencies from **70MHz** to **240GHz** will be used; for **Inter-satellite Space to Space link** plus data relay type of communication, frequencies are **2-2.4GHz**, **4-4.4GHz** and **22-240GHz**. Finally, **Client Space to Space link**, they exist to cases; on the one hand, the client points towards the Earth like a standard satellite, we capture its signal and make the data relay, since it is like a Space to Ground communication and also like a inter-satellite communication, we can combine the two previous restrictions. On the other hand, if the client satellite is below our constellation, we only had inter-satellite communication, therefore **Inter-satellite Space to Space link** rules are applied.

9.5.1 Antennas

The antennas are essential in this mission, since their role is to transmit and receive the data from other satellites as well as the ground stations. In order to provide fast and reliable communication, several options have been studied and information about their main parameters is presented below.

9.5.1.1 Patch antenna

A **patch antenna** is a type of radio antenna with a low profile, which can be mounted on a flat surface, It consists of a flat rectangular sheet or "patch" of metal, mounted over a larger sheet of metal called a ground plane. They are the original type of microstrip antenna described by Howell in 1972. [?, wikipedia]

The antenna that will be equipped in the CubeSat is the patch antenna manufactured by **AntDevCov**. The satellite will come with 8 of this type of antenna; 4 of them will be

placed on each side face of the CubeSat and they will occupy a 1U face and the other 4 of them will be placed on the top and the bottom.

9.5.2 Payload Data Handling Systems

Every satellite will act as a router to transmit client data to the ground. This initial raw data, should be temporally stored into the satellite in order to process it, if necessary. Since, to down-link the data, first the satellites need to establish connection, data can not be directly retransmitted to other sources (Ground Station nor satellite) as it enters to the satellite. Furthermore, non loss compression algorithms can be applied to reduce the data size load and achieve higher data transmission velocities.

To sum up, Payload Data Handling System (PDHS) will be able to receive, process and send the client data, using the integrated transceivers (transmitter + receiver) for sending the data and the PDHS computer to process it. PDHS have a hard disk associated which will temporally store the client data.

The PDHS selected for the mission is the **Nanomind Z7000** because of its two 667MHz processor can handle a high data payloads and processit at a high velocity velocities, reducing in last term delay between communications.

9.5.2.1 Transceivers

A transceiver is a device comprising both a transmitter and a receiver that are combined and share common circuitry or a single housing. For the preliminary design, because we know that they should satisfy all the connectivity options, we are restricted to the S, K or higher bands for **Inter-satellite communication** and not restriction virtually at all for **Space to Ground** communication. Nevertheless, together with the communications department, X band is chosen as the frequency to talk to the floor because several factors: the use in

The **NanoCom TR-600** by **GOMspace** has has been selected as the inner-satellite tranceiver since its manufacturer offers it in combination with the **NanoMind Z7000**. Both integrated on a board able to hold three TR-600 transceivers and one computer. The low dimensions, high bandwidth (associated to high data rates) and low mass of TR-600 makes it a great choice for Inter-Satellite communication.

The **SWIFT-XTS** has been selected as the space-to-ground transceiver. Its high bandwidth will make possible higher communication data rates.

9.5.3 Options chosen for the payload module

Finally, with the aim to clarify all the information of this section, the chosen systems and components are presented in the table 9.5.1.

System	Brand and model	Price per unit (€)	N. of units
Antenna	Patch antenna AntDevCo	18000 1st (7000 others)	8
Transceiver	NanoCom TR-600	8545	3
Transceiver	SWIFT-XTS	5500	1
PDHS	NanoMind Z7000	5000	1

Table 9.5.1: Options chosen for the payload

9.6 Communication module

The telemetry subsystem analyses the information of the ground station and other sensors of the satellite in order to monitor the on-board conditions. With this system, the CubeSat is able to transmit the status of the on-board systems to the ground station. The command and control subsystem (TT&C) allows the ground station to control the satellite.

Every CubeSat of the constellation, will need to report its operating status to the ground and receive commands from the ground. TT&C operations will usually be performed when the satellite flights over the coverage of the constellation ground station, but since the satellites are interconnected, there is the possibility to perform this operations via data relay links between satellites. As a collaboration with the communications department, S band frequency is chosen for TT&C operations, since there is no need for high data rates, the lower band will significantly reduce the power consumption.

Communication to the ground will be perform with a NanoCom TR-600 transceiver module attached to AntDevCo Patch antenna, both configured for S band frequency communication.

9.7 Astrea satellite final configuration

System	Weight/unit (g)	Sizes (mm)	N. of units
STRUCTURE AND MECHANICS			
Structure	304.3	100 x 100 x 300	1
Thermal protection	38	Covers all	1
Total	342.3		
ELECTRIC POWER SYSTEM			
Solar arrays	175	98 x 83 x 8.50	4
Batteries	155	90 x 63 x 12.02	2
Power management	126	92.0 x 88.9 x 20.5	1
Total	1136		
PAYLOAD			
Patch antenna	30	90 x 90 x 4.35	8
Transceiver inter-satellite	16.4	65 x 40 x 6.5	3
Transceiver space to ground	101.5	86 x 86 x 45	1
Data handling system	28.3	65 x 40 x 6.5	1
Antenna Deployable	83	100 x 83 x 6.5	1
Variable	150	-	1
Total	652		
AOCDS			
Thruster	1350	90 x 90 x 95	1
ADACS	506	90 x 90 x 58	1
Total	1856		
TOTAL ESTIMATION	3986.3		

Additional information regarding the systems used in the CubeSat and the final configuration, calculations and decision taking can be found on the appendix.

9.8 Budget

System	Cost/unit (€)	Total cost (€)	N. of units
Structure and mechanics			
Structure	3900	3900	1
Thermal protection	1000	1000	1
Total		4900	
Electrical power system			

Budget

Solar arrays	17000	68000	4
Batteries	6300	12600	2
Power management	16000	16000	1
Total		96600	
Payload			
Patch antenna	18000 1st unit 7000 others	67000	8
Transceiver inter-satellite	8545	25635	3
Transceiver space to ground	5500	5500	1
Data handling system	5000	5000	1
Antenna Deployable	3000	3000	1
Variable expenses	4000	4000	1
Total		110135	
AOCDS			
Thruster	50000	50000	1
ADACS	15000	15000	1
Total		65000	
Total CubeSat		276635	
Total estimation CubeSat		297000	
+Fixed cost	(includes all CubeSats)	150000	

The difference between the total cost and the total estimation is due to the fact that every satellite has to go through a process to be ready for operation. This is, the CubeSat has to be assembled and has to be tested to ensure that all the systems are working properly. Thus, an estimation of the costs related with this operation has to be made.

The fixed cost for assembling the satellites will be 150000€(cost of renting the building, the electricity, ...) and an additional cost 20000€/*unit*, which will include the wages of the people assembling and testing the satellite and also other variable costs that may appear in the process (such as the purchase of additional solar arrays), is added to every satellite. Furthermore, this extra 20000€ includes the costs of transport to launch site. The payload's variable expenses stand for cable, adaptors and several minor components that have to be purchased.

Several options have been studied for assembling and testing the satellite, and the option chosen is *OpenCosmos*. Astrea is committed to encourage the growth of the local economy and *OpenCosmos* would be a perfect partner for the mission. They provide companies and individuals with simple and affordable access to space offering integration and testing services.

Part IV

Financial and Other Considerations

Chapter 10

Financial Study

*"The first rule is to never lose money.
The second rule is to never forget the
first one."*

Warren Buffett

The different departments have estimated the main costs of the project. It is high time to start performing a deep analysis on the economical solvency of the project. The analysis carried on will be of 12 years. The decision of this amount of years has been done taking into account that every 5 years there is a re-launching of the whole constellation, which means a considerable increase in the costs. In order to have a good view of the whole project, it has been decided that at least two full cycles had to appear complete (years 0 to 4 and 5 to 9) and also to see the tendency it was recommended to add some more time. This is the reason why the studied is carried on for 12 years.

From an analysis carried on by Astrea's team, it has been found that the annual estimation of the demand can be approximated by 295650000 Mbits hired per year. An economical study is going to be performed using that estimation as the sales. The determination of the price of Astrea's service is made upon this feasibility study.

When performing the feasibility study, all the costs must be taken into account. This means that all the costs derived from the different departments (communications, satellites, launching, ...) are considered, as well as other costs such as the engineering hours, which were stated in the Project Charter and the Gantt Chart. All those costs have already been explained. Nevertheless, some last costs which must be taken into account are the administration costs and the insurance service. The estimations of those costs are of 259000 and 2245320 € per year, respectively. For further details on the studies mentioned, please refer to the [REF TO ANNEX: Anex V. Section 11]. All the costs can

be found in the Budget as well.

TIME	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Year 9	Year 10	Year 11	Year 12
INVESTMENT	-4,07												
INCOME													
Percentage (learning curve)	0,75	0,80	0,85	0,90	0,95	1,00	1,00	1,00	1,00	1,00	1,00	1,00	1,00
Number of Mbits hired	221,737,500,00	236,520,000,00	251,302,500,00	266,085,000,00	280,867,500,00	295,650,000,00	295,650,000,00	295,650,000,00	295,650,000,00	295,650,000,00	295,650,000,00	295,650,000,00	295,650,000,00
Gain (M euros)	22,17	23,65	25,13	26,61	28,09	29,57	29,57	29,57	29,57	29,57	29,57	29,57	29,57
TOTAL	0,00	22,17	23,65	25,13	26,61	28,09	29,57						
COSTS													
n planes/year	9	189	0	0	0	9	0	0	0	9	0	0	0
Satellites/year	-0,0395	-0,259	-0,259	-0,259	-0,24532	-0,24532	-0,24532	-0,24532	-0,24532	-0,24532	-0,24532	-0,24532	-0,24532
Engineering hours													
Administration	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532	-2,24532
Insurance													
Web hosting, maint. and promotion	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005	-0,005
Launching													
Planes	-48,256	0,000	0,000	0,000	0,000	-48,256	0,000	0,000	0,000	-48,256	0,000	0,000	0,000
Satellites	-3,024	0,000	0,000	0,000	0,000	-3,024	0,000	0,000	0,000	-3,024	0,000	0,000	0,000
System													
<i>Assembly (individual)</i>	-3,78	0,00	0,00	0,00	0,00	-3,78	0,00	0,00	0,00	-3,78	0,00	0,00	0,00
Structure	-0,15	0,00	0,00	0,00	0,00	-0,15	0,00	0,00	0,00	-0,15	0,00	0,00	0,00
Thermal protection	-0,737	0,000	0,000	0,000	0,000	-0,74	0,000	0,000	0,000	-0,74	0,000	0,000	0,000
<i>Electric power system</i>	-0,189	0,000	0,000	0,000	0,000	-0,19	0,000	0,000	0,000	-0,19	0,000	0,000	0,000
Solar arrays	-12,852	0,000	0,000	0,000	0,000	-12,85	0,000	0,000	0,000	-12,85	0,000	0,000	0,000
Batteries	-2,381	0,000	0,000	0,000	0,000	-2,38	0,000	0,000	0,000	-2,38	0,000	0,000	0,000
Power management	-3,024	0,000	0,000	0,000	0,000	-3,02	0,000	0,000	0,000	-3,02	0,000	0,000	0,000
Payload													
Patch antenna	-10,595	-0,011	-0,011	-0,011	-0,011	-10,60	0,000	-0,011	-0,011	-10,60	0,000	-0,011	-0,011
Antenna deployment	-0,567	0,000	0,000	0,000	0,000	-0,57	0,000	0,000	0,000	-0,57	0,000	0,000	0,000
Transceiver inter-satellite	-4,845	0,000	0,000	0,000	0,000	-4,85	0,000	0,000	0,000	-4,85	0,000	0,000	0,000
Transceiver space to ground	-1,040	0,000	0,000	0,000	0,000	-1,04	0,000	0,000	0,000	-1,04	0,000	0,000	0,000
Data handling system	-0,945	0,000	0,000	0,000	0,000	-0,95	0,000	0,000	0,000	-0,95	0,000	0,000	0,000
Variable expenses	-0,756	0,000	0,000	0,000	0,000	-0,76	0,000	0,000	0,000	-0,76	0,000	0,000	0,000
AODDS													
Thruster	-9,450	0,000	0,000	0,000	0,000	-9,45	0,000	0,000	0,000	-9,45	0,000	0,000	0,000
CubeSpace ACDS	-2,835	0,000	0,000	0,000	0,000	-2,84	0,000	0,000	0,000	-2,84	0,000	0,000	0,000
Communications													
Maintenance GS Canada	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011	-0,011
Maintenance GS Scotland (UK)	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015
Maintenance GS Malvinas	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015	-0,015
Salaries GS Canada	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382	-0,382
Salaries GS Scotland (UK)	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226	-0,226
Salaries GS Malvinas	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082	-0,082
Salaries MCC	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430	-0,430
Licenses	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010	-0,010
TOTAL	-109,54	18,48	19,96	21,44	-31,22	-39,16	25,87	25,87	25,87	-28,26	-25,39	-25,72	25,72
CASH FLOW	-113,61	40,66	43,61	46,57	-4,61	-11,07	55,44	55,44	1,30	4,17	55,29	55,29	
DISC CF	-113,61	38,36	38,82	39,10	-3,65	-8,27	38,08	34,78	0,77	2,33	29,13	27,48	
CUM CF	-113,61	-72,95	-29,34	17,23	12,62	1,55	56,99	112,43	167,87	169,18	173,35	228,63	285,92
DIS CUM CF	-113,61	-75,25	-36,44	2,67	-0,99	-9,26	29,82	66,89	101,48	102,25	104,58	133,70	161,18

Table 10.0.1: Feasibility Study

- Pay Back Time: The Cumulative Cash Flow is plotted next. It can be seen that the Pay Back Time is between years 2 and 3. Assuming linearly distributed, it will be of 2.68 years. The value of the first PBT (2.63 years) found seems reasonably acceptable, taking into account that this project requires a great budget, as all space projects do, due to its own nature. In year 4, the satellites that are going to be launched in year 5 are made. This means an increase in the cost, due to the fabrication and assembly. Moreover, in year 5, there is also a increase, even more significant, because of the re-launching itself of those satellites. This is what causes that interval of time in which the Cumulative Cash Flow does not increase, but even decreases a bit: that year, the income is slightly smaller than the re-launching costs. A second Pay Back Time might be found of 5.05 years. Since the investment was done in year 4, it means an actual Pay Back Time of 1.05 years, for the second investment. In years 9 and 10, the same process takes place again: the fabrication and re-launching of the new satellites. Nevertheless, profit is high enough at this point so that the Cumulative Cash Flow does not get to negative values again.



- Updated Pay Back Time. The Discounted Cumulative Cash Flow has already been plotted too. It can be seen that the Updated Pay Back Time is between 2 and 3 years. If again linearly distribution is assumed, the Updated Pay Back time will be of 2.99 years. This value seems reasonably acceptable, because of the nature of the project, within the space sector, a very demanding and expensive one. This time, because of the significat costs during year 4 (building and assembling of satellites) and especially year 5 (re-launching of satellites), added to the fact that the discount rate is now being taken into account to, it makes the Discounted Cumulative Cash Flow negative again, as can be seen in the graphic. Therefore, there will be another Updated Pay Back Time for the inversion done during years 4 and 5, exactly at year 5.33. Taking into account that this inversion was made during the year 4, it turns out to be an actual UPBT of 1.33 years. There won't be a third UPBT. In years 9 and 10 there is a big investment again, but by then, the profit is high enough so as to make it possible for the Discounted Cumulative Cash Flow to not become negative any more.
- Break Even Point. By changing manually the parameter "Number of Mbits hired" of

first year, it is found that the Break Even Point is of 18375000 Mbits (with this value of Mbits hired the first year, the Cash Flow is approximately 0). This means that under no account there can be less Mbits hired than that, because otherwise the Cash Flow would be negative and the Cumulative Cash Flow, negative at beginning since first year is fully just invest, would never reach a positive value, generating losses. From the assumptions of demand already explained, it can be seen that having a greater demand than the BEP is very likely to happen. Thus, the cash flow will be positive and consequently there will be a time in which there is benefit.

- Net Present Value. From the table, it can be immediately seen that the Net Present Value (for the period of time studied, of 12 years) is of +156.01M€. The Net Present Value is the difference between the present value of cash inflows and the present value of cash outflows over a period of time. It is clearly positive, which indicates that the project earnings generated by the investment exceeds the costs. In other words, it will be profitable. The Net Present Value coincides with the value of the Discounted Cumulative Cash Flow of the twelfth year.
- Internal Rate of Return. The internal rate of return is the interest rate at which the Net Present Value of all the cashflows is equal to zero. This is used to evaluate the attractiveness of a project. If the Internal Rate of Return of a project exceeds a company's required rate of return, the project is desirable, and if on the other hand the IRR falls below the required rate of return, the project should be rejected. The studied carried on uses a 6% as the discount rate, and this value gives a positive Net Present Value, as has been already explained. By manually changing the discount rate, it can be achieved that the Net Present Value gets to 0, or very closely. This value of the discount rate is the Internal Rate of Return, and is used to evaluate the attractiveness of a project. In this case, it has been found that the IRR is of 26.80%. The higher the IRR is, the more desirable is to undertake the project. In any case, it must be greater than the actual discount ratio. In this case, not only the IRR is greater, but it is actually a very high rate. Therefore, the project is very attractive, feasibly speaking.

The Pay Back Time and the Updated Pay Back Time are of approximately 3 years, quite acceptable in the space sector. The Net Present Value is really great, as well as the Internal Rate of Return. Moreover, the estimation of demand is far higher than the Break Even Point. In conclusion, all the parameters analysed happen to indicate the same thing: the investment is strongly recommended and the project is feasible. Nevertheless, it must not be forgotten that this study is done upon some important assumptions, which provide a certain degree of uncertainty. Nonetheless, the results of the study have been so positive that a slight variation of the hypothesis done could not lead to an unfeasible situation.

Chapter 11

Environmental Impact Study

This chapter pretends to assess the environmental consequences (positive and negative) of developing the project. The target of this study is to identify, predict, evaluate and mitigate the biophysical and social negative effects that the project could generate during the execution of it. The entire study can be seen at the [REF TO ANNEX: Anex V. Section 13], since in this document there are only exposed the conclusions of it. The study is focused in these 3 aspects:

- **Ground stations.** It is concluded that they would not represent any environmental impact if they are in a place where they do not interfere with the normal behaviour of any ecosystem.
- **Satellites.** The study analyses the impact of the fabrication and the performance. The satellites are certificated by all the corresponding regulations and there is no significant environmental impact during the fabrication. On the other hand the satellites are designed to be burned out in the atmosphere in a period of 5 years, and they would not be orbital waste.
- **Launching.** The launching is the most critical part in environmental terms and it is depth analysed. Basing in a Environmental Assessment done by the Ministry for the Environment of New Zealand [?] it is concluded that there is no significant damage in the environment at short term.

In conclusion the project is environmentally viable.

Chapter 12

Social and Security Considerations

The potential of the CubeSats is very high and they might be the future of satellites. Their low cost and the easiness to construct them, compared to large satellites, make them accessible to countries with fewer resources, universities and people in general, making them able to explore the space and to pursue different missions.

This project is based on the design of a satellite constellation dedicated to communications relay between LEO satellites and between LEO satellites and the ground. This project is helping to develop the CubeSat industry and its use and it will demonstrate that these small satellites can carry out different missions that were previously done only by large satellites, as for example the communication.

Currently, the constellations of CubeSats dedicated to the communication are in development and this is why this project, and the global coverage that it provides, could have a privileged place in this industry. The main commitment that this project has with the customers is to ensure that they will be able to communicate with any part of the world without problems. Another important aspect to consider is that the constellation will provide total privacy to the customers, ensuring that they make a correct use of it and avoiding that third people interfering in the communication.

In relation to security, it must ensure the proper functioning of the constellation. To do this, it must be considered different factors, where CubeSats could be in danger. The launch stage is one of the most important, because it is where the mission has more probability to fail. In the [REF TO ANNEX: Anex V. Section 14] it can be observed the success rate of orbital launches in the last 57 years. In 2014, there were a total of 92 unmanned launches and only 4 of them were failed. This indicates that the fail rate is only a 4,34 %, which is very low.

Once the constellation is in orbit, CubeSats can find dangers such as colliding with other

satellites, which is not probably due to the distance between satellites is around hundred of miles, or with space debris, whose movement is unpredictable. In order to avoid this space debris, a CubeSat can perform a Debris Avoidance Manoeuvre (DAM). The responsible to control these fragmentation debris is *The United States Space Surveillance Network*.

Finally, the ground stations will have its operator, to control the operation of the installation, and a security system, to avoid intrusions.

Chapter 13

Bibliography

- [1] D.A. Vallado. *Fundamentals of Astrodynamics and Applications*. Springer-Verlag New York, 3 edition, 2007.
- [2] Howard D. Curtis. *Orbital Mechanics for Engineering Students*, volume 3rd editio. Elsevier, 2014.
- [3] Yongjun Li, Shanghong Zhao, and Jili Wu. A general evaluation criterion for the coverage performance of LEO constellations. *Aerospace Science and Technology*, 48:94–101, 2016.
- [4] J.G. Walker. Some Circular Orbit Pattern Providing Continuous Whole Earth Coverage. *Journal of the British Interplanetary Society*, 24:369–384, 1971.
- [5] J.G. Walker. Continuous whole-Earth coverage by circular-orbit satellite patterns. *Royal Aircraft Establishment. Technical report 77044*, 1977.
- [6] Vladimir A Chobotov. *Orbital Mechanics*. 2002.
- [7] CCSDS. *Report Concerning Space Data System Standards - Overview of Space Communications Protocols*. Number CCSDS 130.0-G-3. 2014.
- [8] Jorge Cantero Gómez. Communication link design at 437 . 5 MHz for a nanosatellite. (June), 2013.
- [9] Muhammad Zubair, Zaffar Haider, Shahid a Khan, and Jamal Nasir. Atmospheric influences on satellite communications. *PRZEGŁĄD ELEKROTECHNICZNY (Electrical Review)*, 87(5):261–264, 2011.
- [10] Lorenzo Luini, Carlo Capsoni, Carlo Riva, and Luis David Emiliani. Predicting total tropospheric attenuation on monthly basis. pages 1–6, 2015.

-
- [11] CCSDS Secretariat. Overview of Space Communications Protocols. (CCSDS 130.0-G-3):43, 2014.
 - [12] UK Government. https://www.ofcom.org.uk/__data/assets/pdf_file/0023/47138/ofw564.pdf.
 - [13] UK Government. https://www.ofcom.org.uk/__data/assets/pdf_file/0020/27461/fees.pdf.
 - [14] Government UK. https://www.ofcom.org.uk/__data/assets/pdf_file/0038/66899/fees_for_grant_of_
 - [15] UK Government. https://www.ofcom.org.uk/__data/assets/pdf_file/0028/44875/ofw_241_mar_201
 - [16] Canada Government. <http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf00023.html>.
 - [17] Canada Government. <http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf01027.html#a4>.
 - [18] ISISpace. <https://www.isispace.nl/product/full-ground-station-kit-s-band/>.
 - [19] IQ wireless. <http://www.iq-wireless.com/images/pdf/SLINK-PHY-Datasheet.pdf>.
 - [20] Dartcom. <http://www.dartcom.co.uk/files/DartcomXBandEOSSystemBrochure.pdf>.
 - [21] Secretaría de Estado de telecomunicaciones y para la sociedad de la información. Cuadro Nacional de Atribución de Frecuencias (CNAF) revisado 2015. pages 3–110, 2015.
 - [22] Craig Clark. Constellations of CubeSats are revolutionising how we use satellites.