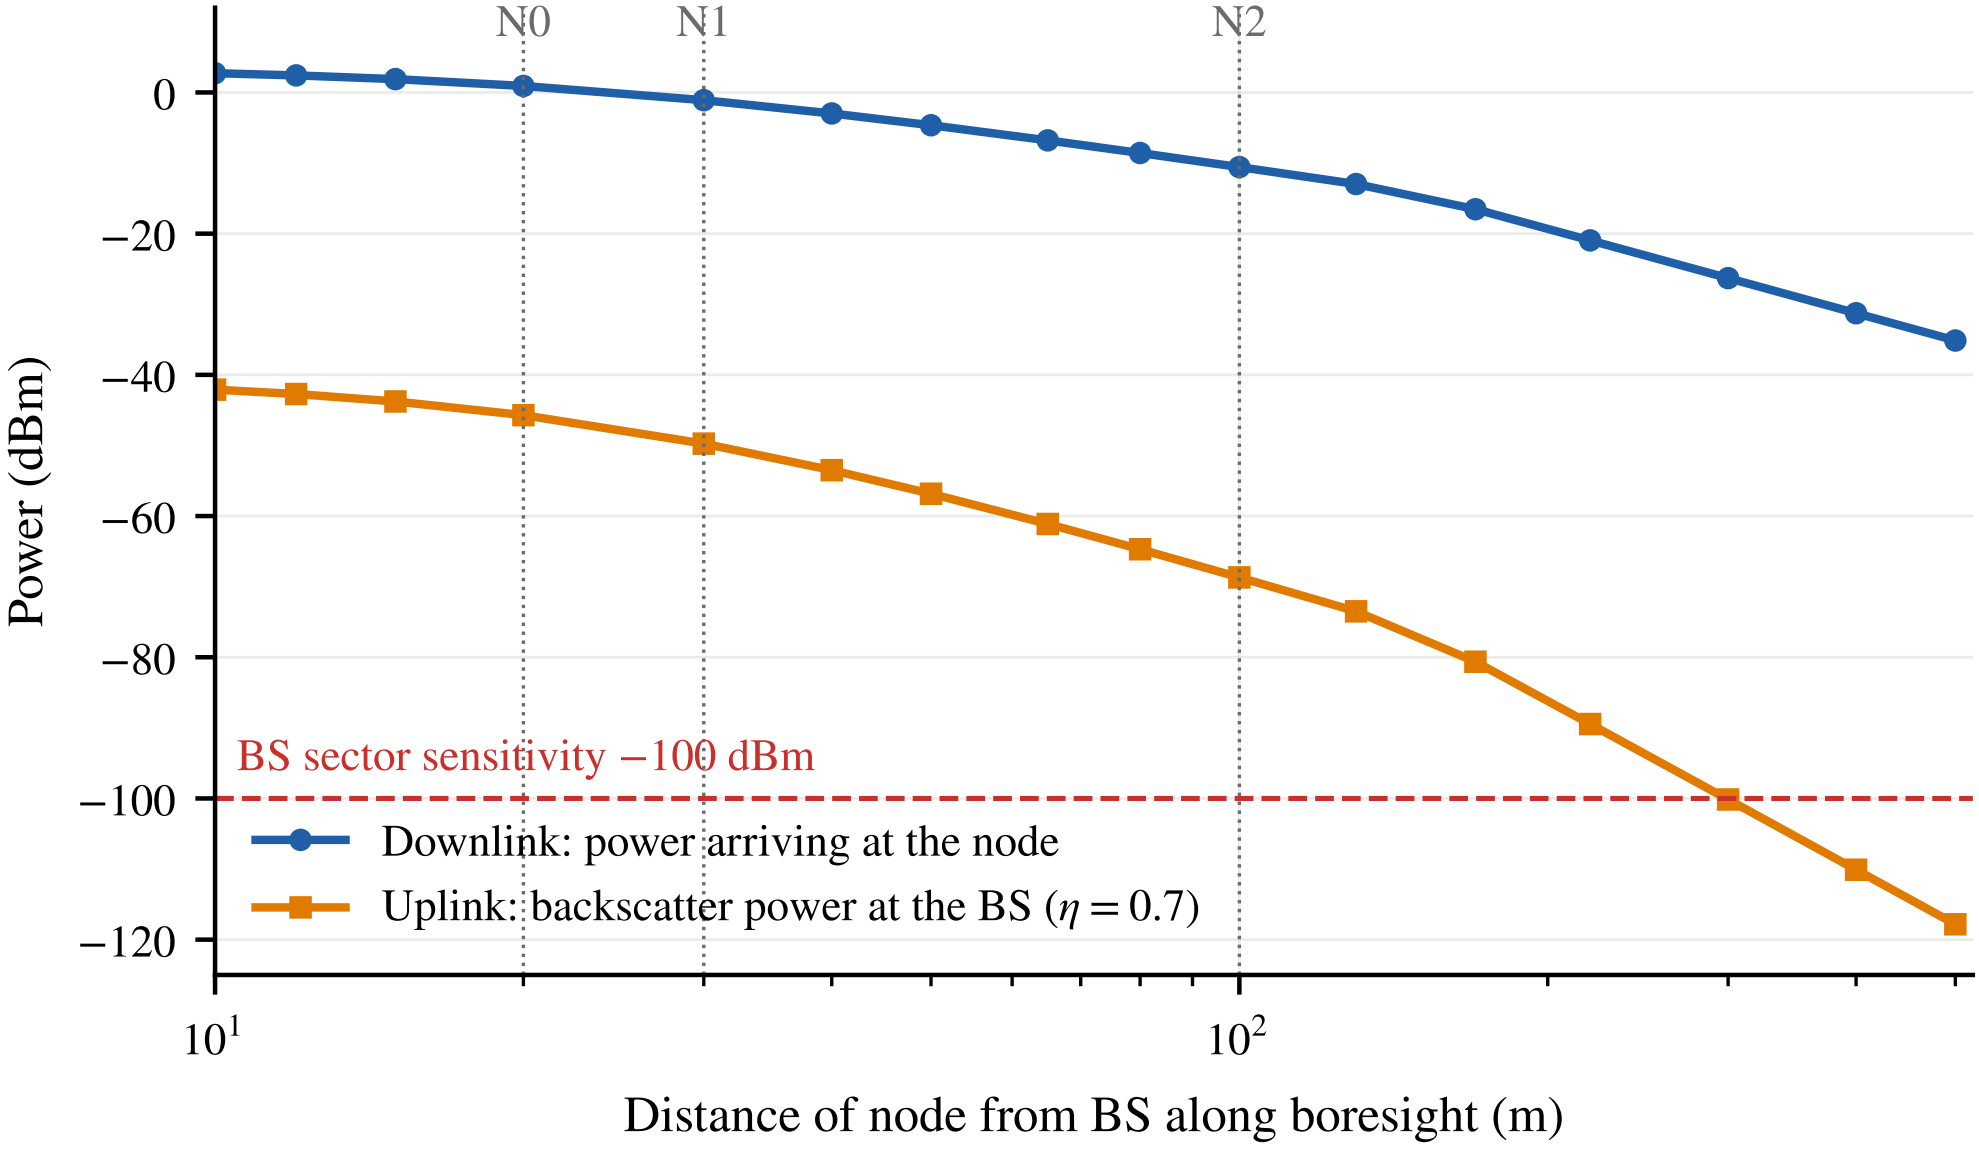
N0
N1
N2
0
−20
−40
−60
−80
−100
−120
Power (dBm)
BS sector sensitivity −100 dBm
Downlink: power arriving at the node
Uplink: backscatter power at the BS (η = 0.7)
10^1
10^2
Distance of node from BS along boresight (m)