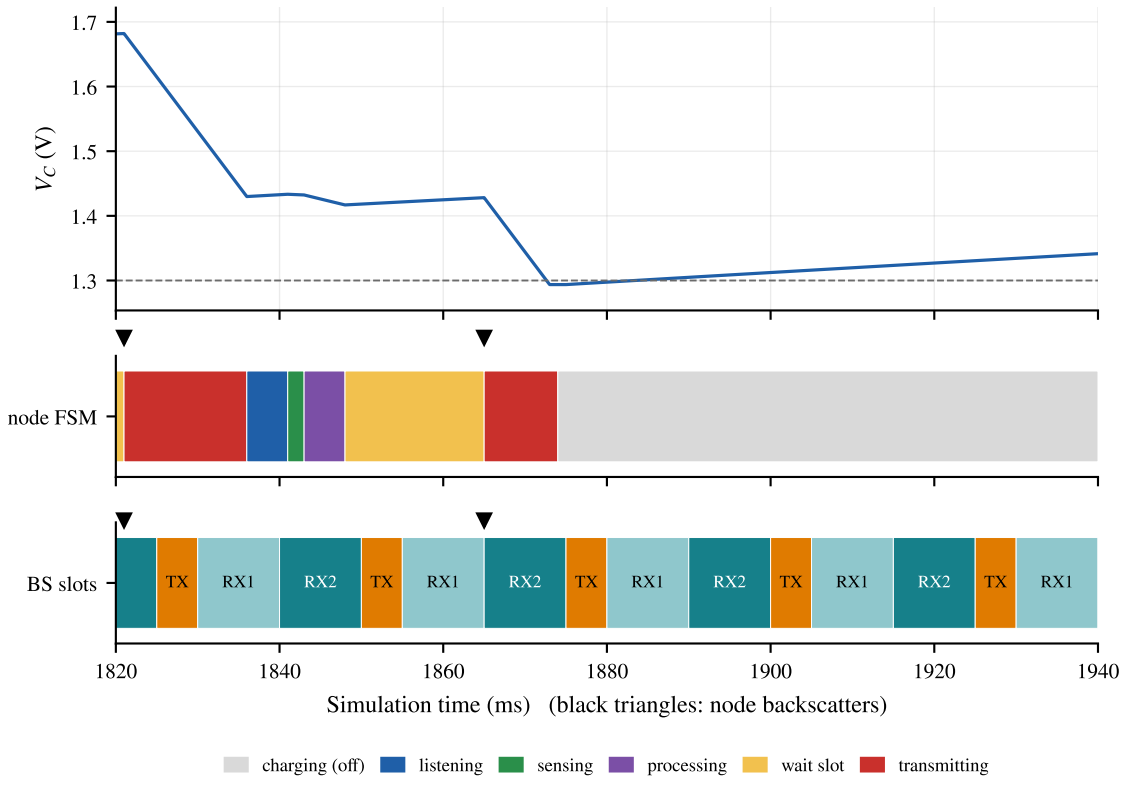
1.7
1.6
1.5
1.4
1.3
V_C (V)
node FSM
BS slots
TX
RX1
RX2
TX
RX1
RX2
TX
RX1
RX2
TX
RX1
RX2
TX
RX1
1820
1840
1860
1880
1900
1920
1940
Simulation time (ms) (black triangles: node backscatters)
charging (off)
listening
sensing
processing
wait slot
transmitting