


Technical characteristics

Model	Speed (r.p.m.)	Abs. power at free discharge (W)	Voltage (V) 50 Hz	Airflow at free discharge (m³/h)	Sound pressure level (dB(A))*	Weight (kg)	IP
EBB-175	1400	70	220-240	175	45	2,2	□ IPX4
EBB-250	1800	125	220-240	230	52	2,2	□ IPX4

* At 1,5 m distance.


Dimensions (mm)

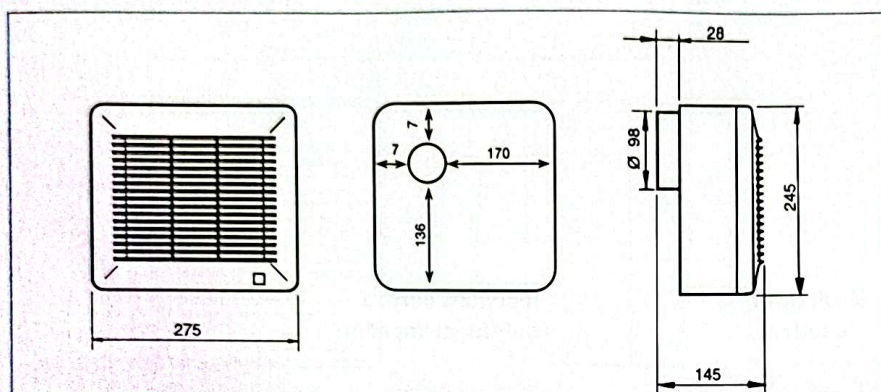


Features

	S	T
Neon light	•	•
Backdraft shutter	•	•
Adjustable Run-On-Timer		•

Performance curves

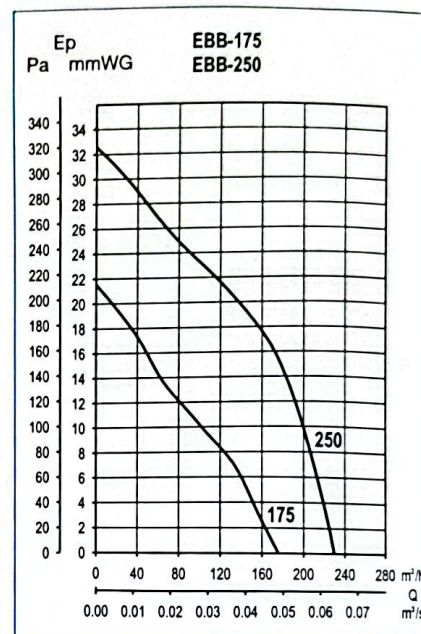

Accessories




REB
Electronic single-phase
speed controllers




MRT-100
Circular duct joining
piece



GSA-100
Aluminium flexible
ducting



CX-80/125
Worm drive duct
connection clip



GRA-70
Aluminium exterior grille