

BATHROOM EXTRACT FANS

EDM-200 Series



Range of axial extractors with airflow rates of approx. 180 m³/h, for connection to 120 mm diameter circular ducting.

All the fans are manufactured from injection moulded plastic, fitted with neon light indicator and single single phase 230V-50Hz, class B motor equipped with overload thermal protection. The "Z" versions incorporate long life motors fitted with ball bearings. All the fans are class II insulation, IP44 rated (1) and suitable to operate with air temperature up to 40°C.

(1) H versions: IP40

Models features

	S	T	H	C	CT	CR	CH
Neon pilot light		•	•	•	•	•	•
Fixed period Run-On-Timer		•			•		
Adjustable period Run-On-Timer						•	•
Automatic shutter				•	•	•	•
Adjustable humidistat			•				•
On/off pull cord switch			•				•

Technical characteristics

Model	Speed (r.p.m.)	Absorbed power at free discharge (W)	Voltage (V) 50 Hz	Airflow at free discharge (m ³ /h)	Sound pressure level (dB(A))	Weight (kg)	IP
EDM-200	2500	25	220-240	180	42	0,9	□ IP44

* At 1,5 m distance.

Accessories



GSA-125
Flexible
aluminium
ducting



PER-125W
Back draft shutter



CX-125/215
Worm drive
ducting clip




GRA-100
Aluminium exterior
grille



CAR-100
CM-130
Back draft shutter

Performance curve

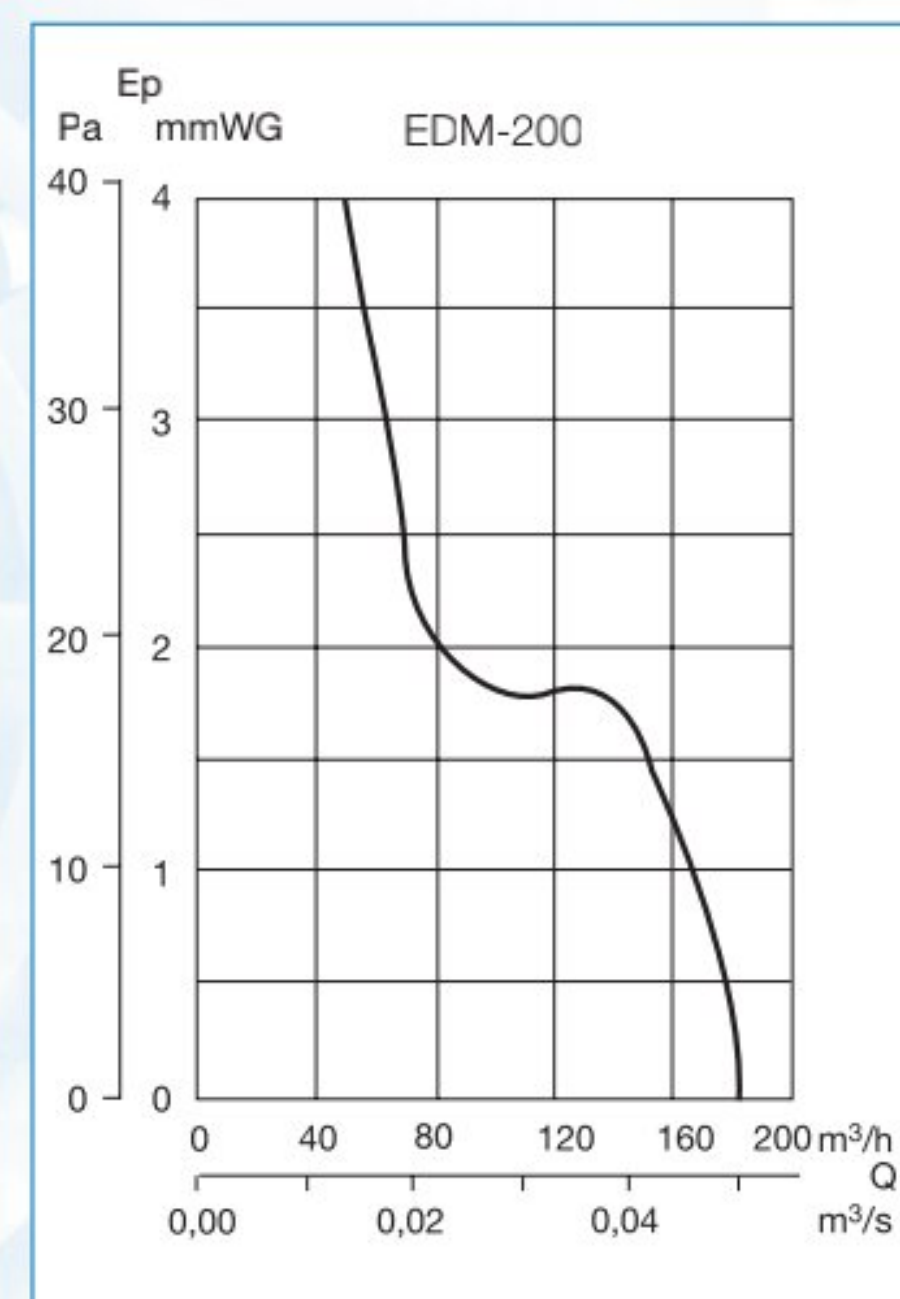

Dimensions (mm)

