



## Models features

	S	T	R	H	C	CT	CR	EC	CH	M	VM	VMH	12V S	12V C
Neon pilot light		•	•	•	•	•	•	•	•	•	•	•	•	•
Fixed period Run-On-Timer		•				•								
Adjustable period Run-On-Timer			•				•	•	•			•	*	*
Automatic shutter					•	•	•	•	•	•	•	•		•
Photoelectric cell								•						
Adjustable humidistat				•					•			•		
On/off pull cord switch				•					•	•	•	•		
Adaptation for glass											•	•		
External fixed shutter											•	•		
Extra low safety voltage													•	•


\* Adjustable Run-On-Timer between 1 and 30 using CT-12/14 T transformer.

## Technical characteristics



Model	Speed (r.p.m.)	Absorbed power at free discharge (W)	Voltage (V) 50 Hz	Airflow at free discharge (m³/h)	Sound pressure level (dB(A))	Weight (kg)	IP
EDM-100	2450	13	230	95	40	0,48	□ IP44 *
EDM-100S 12V	2100	7	12	85	37	0,48	⬢ IP57
EDM-100C 12V	2100	11	12	85	37	0,48	⬢ IP57

\* H versions: IP40

## Dimensions (mm)

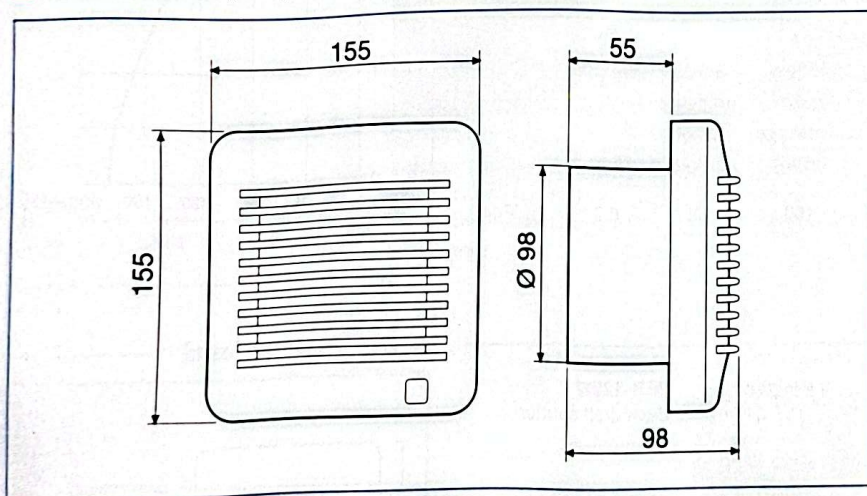

## Performance curve

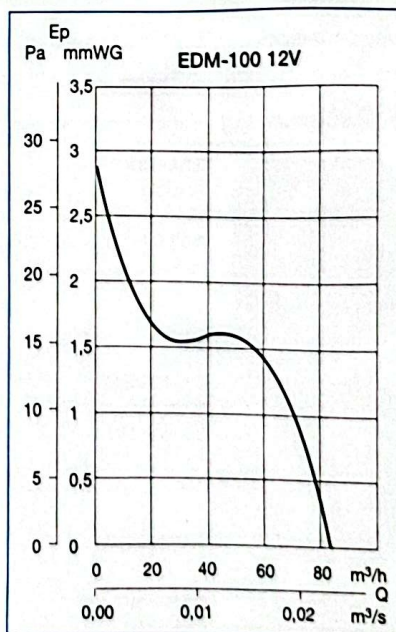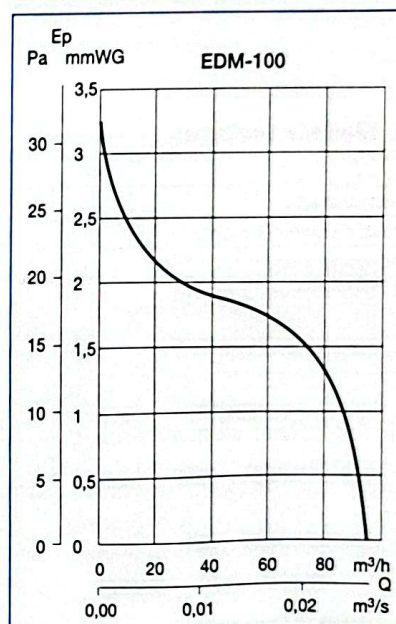

## Accessories



**GSA 100**  
Flexible  
aluminium  
ducting




**GRA-70**  
Aluminium  
exterior  
grille



**CX-80/125**  
Worm drive  
ducting  
clip



**Fixed  
shutter  
and  
telescopic  
duct (200  
to 420 m)**



**PER-W**  
Back draft  
shutter



**CAR-100  
CM-130**  
Back draft  
shutters

EDM

Bathroom extract fans