

PRIME
SOFTSHADE



PRIME SOFTSHADE SPECIFICATION

V5 | SPEC71

PRIME SOFTSHADE SPECIFICATION


Essentials Collection

	STANDARD	OPTIONAL VARIATION	ADDITIONAL INFORMATION
System Type	Open Cassette	Closed Cassette	Min/ Max Sizes. Open Cassette Width: 350mm-2300mm Drop: 500mm-1900mm Closed Cassette Width: 350mm-2300mm Drop: 500mm-2300mm Softshade Blinds are produced within an operating tolerance of +/-3mm (width & drop) No Installation screws included. No special instructions are available on Softshade Blinds. Default chain length will be 100mm shorter than the drop of the blind, and this will be rounded down to the nearest chain length as above, unless overridden by Child Safety restrictions.
System Colour	White	N/A	
Bottom Bar Colour	White	N/A	
Operating Chain	White Plastic	Nickel	
Raise Control	Right hand side	Left hand side	
Bracket	Universal Top /Side Fix	N/A	
Child Safety	Supply installation height or chains will be 2/3 of the overall blind drop. Tie Down Clip supplied with all chains.	N/A	
Minimum Control Length	300mm	N/A	
Deduction from floor for Control Length (when install height is provided)	1500mm	N/A	


SYSTEMS

SYSTEMS

Open Cassette

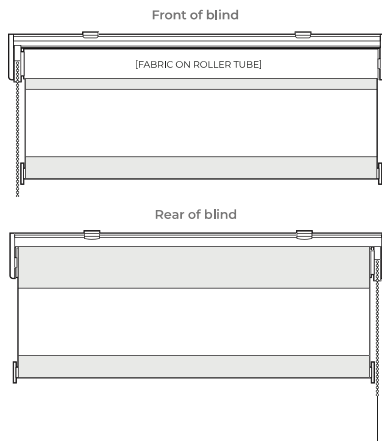


Closed Cassette

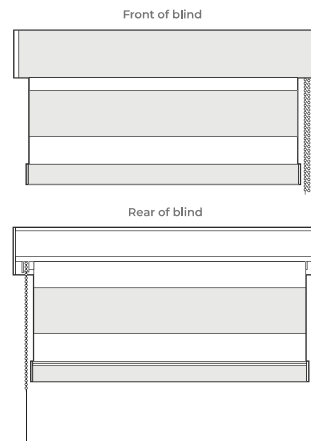


HEAD RAIL INCLUDING BRACKETS

Open Cassette




Closed Cassette




BRACKETS

Open Cassette




Closed Cassette




BOTTOM BAR & END CAPS

Open Cassette

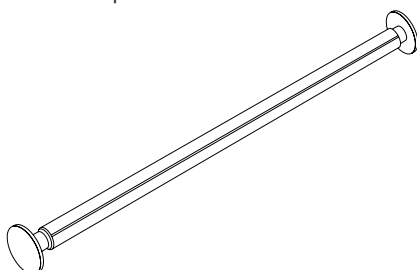

Closed Cassette

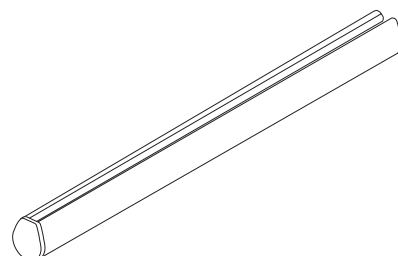

CRUZE 40MM OPEN/70MM CLOSED FASCIA SYSTEMS


	STANDARD	OPTIONAL VARIATION	ADDITIONAL INFORMATION
System Type	Must be Specified	40mm Open and 70mm Closed Systems available	Width: 200mm-2500mm Drop: 500mm-3000mm Softshade Blinds are produced within an operating tolerance of +/-3-5mm (width & drop) Motorisation available with Cruze No special instructions are available on Softshade blinds For all chains, the chain length will be rounded down to the nearest continuous chain length of 300/500/750/1000mm. Default chain length will be 100mm shorter than the drop of the blind, and this will be rounded down to the nearest chain length as above, unless overridden by Child Safety restrictions.
System Colour	White	Anthracite or Black	
Type of Roller*	Standard	Reverse	
Bottom Bar Colour	Colour matched to system colour	N/A	
Operating Chain	The colour of the chain will default based on the system colour.	Nickel	
Raise Control	Right hand side	Left hand side	
Control	Friction	Motorised	
Clutches	32mm Colour matched to Fascia	40mm Colour matched to Fascia	
Bracket	Top Fix Colour matched to Fascia	Face Fix, Face Fix extension	
Bracket Covers	Linear End Cap Colour matched to Fascia	Curved End Cap Colour matched to fascia	
Finish	Cruze Softshade Bottom Bar	N/A	
Child Safety	Tie Down Clip	N/A	
Minimum Control Length	300mm	N/A	
Deduction from floor for Control Length (when install height is provided)	Fixed Tension 1500mm	N/A	

* Standard- Fabric attached to the back of the Cassette.
Reverse- Fabric attached to the front face of the Cassette.
Fabric Insert is available.

CRUZE 40MM OPEN/70MM CLOSED FASCIA SYSTEMS

The Cruze Roller Blind System offers two fascia profiles available in 3 colourways, elevating the aesthetic profile of any roller blind. Choose from 40mm or 70mm fascia profiles.

- Compatible with both 32mm and 40mm systems.
- Half and full coverage options are available.
- Available in three colour profiles: White, Anthracite & Black.
- Engineered with high quality engineering-grade aluminium.
- Powder coated for corrosion resistance.
- Reduce light entering the interior from above the roller tube.

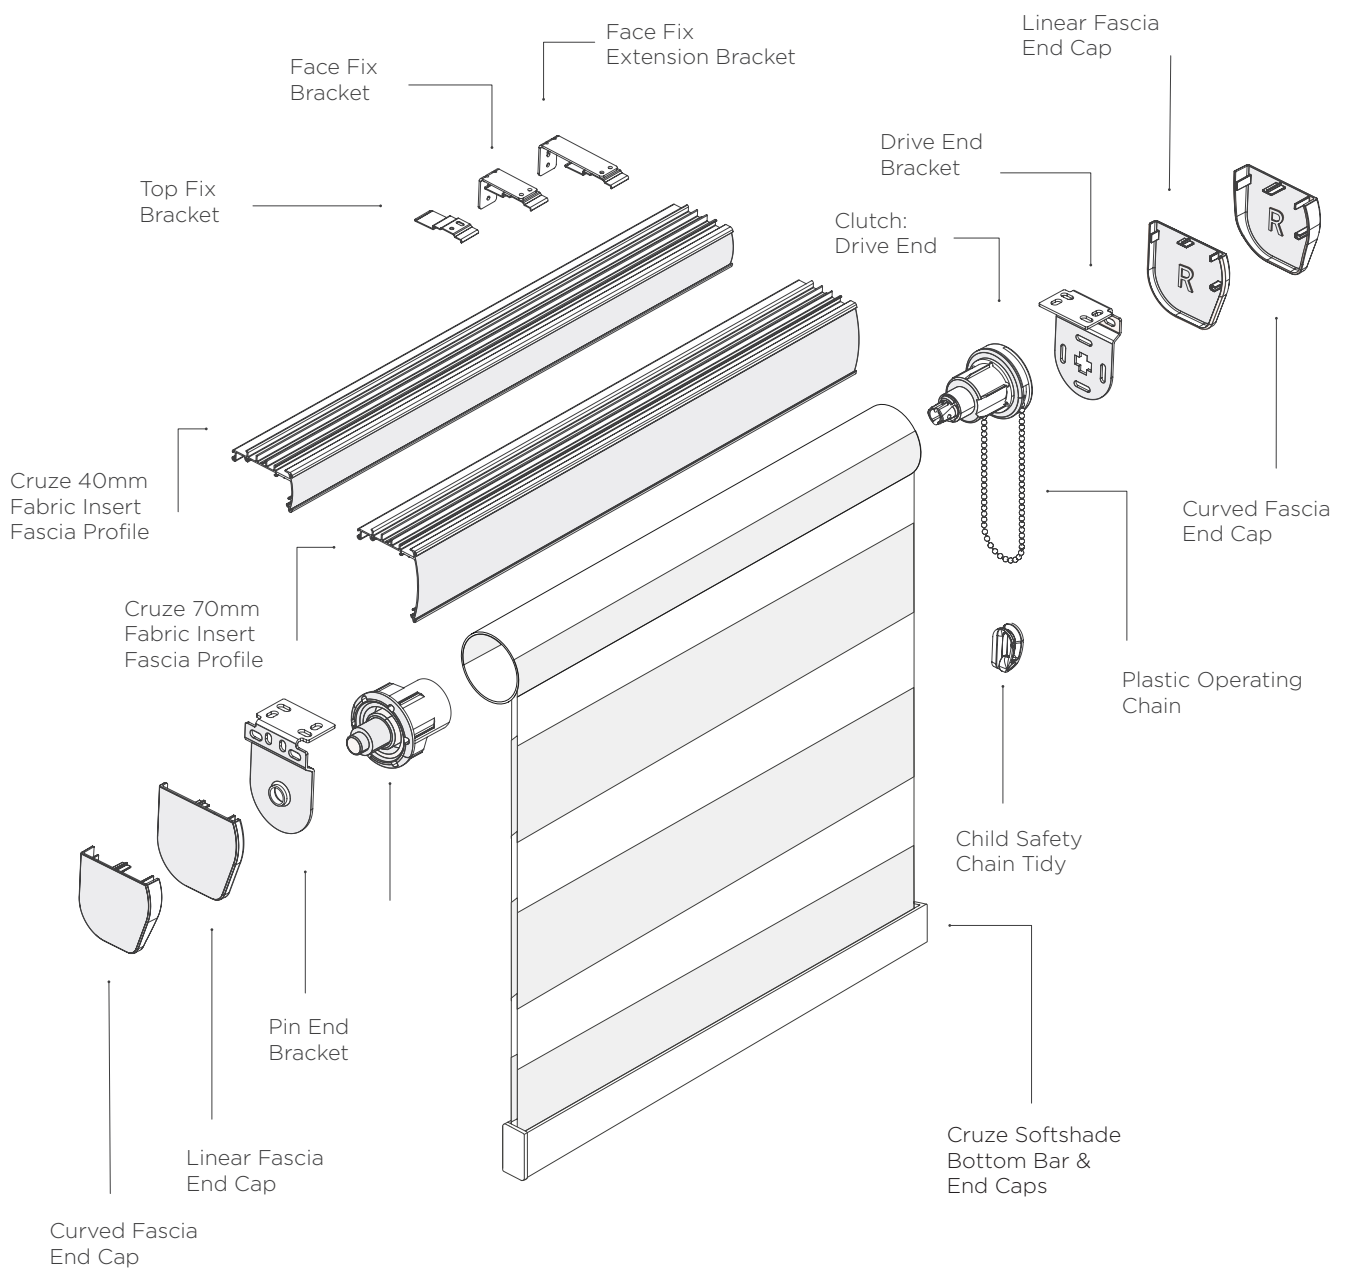

MOTORISATION

Prime Softshade Blinds offer a range of motorised blind solutions.
Create a safe, comfortable and more energy efficient home with motorised Softshade Blinds.

- Motorisation is available across all systems.
- When connected to smart home devices, motorised blinds create safe, comfortable and energy efficient homes.
- Motorised blinds enhance child safety with the elimination of cords.

Specification	CRUZE 32MM RTS	CRUZE 40MM RTS
Blind Type	Open Cassette/Cruze Cassette	38mm Closed Cassette/ Cruze Cassette
Operation	Raise/Lower	Raise/Lower
Power Supply	2600 mAh (integrated Li-ion Battery)	2600 mAh (integrated Li-ion Battery)
Voltage	12v	12v
Torque	0.55Nm	1.1Nm
Speed	28Rpm	20Rpm
Width*	555mm- 2000mm	650mm-3000mm
Drop*	200mm-2000mm	200mm-3000mm
Battery Life	Nominal 6-8 Months	Nominal 6-8 Months
Warranty	2 years	2 years
Controls	4 Channel Remote/ Cruze X Somfy app/Somfy Connectivity Kit	4 Channel Remote/ Cruze X Somfy app/Somfy Connectivity Kit

**PRIME
SOFTSHADE**

FABRIC RANGE	COLOUR NAME	MAX WIDTH	MAX DROP
Kanza	Calm	2500mm	3000mm
Kanza	Haze	2500mm	3000mm
Kanza	Novo	2500mm	3000mm
Kanza	Seek	2500mm	3000mm
Luna	Crème	2500mm	3000mm
Luna	Hush	2500mm	3000mm
Luna	Mist	2500mm	3000mm
Luna	Jet	2500mm	3000mm
Luna	Pure	2500mm	3000mm
Luna	Shadow	2500mm	3000mm
Nobis	Boutique	2500mm	3000mm
Nobis	Glimpse	2500mm	3000mm
Nobis	Mode	2500mm	3000mm
Nobis	Mute	2500mm	3000mm
Rift	Camel	2500mm	3000mm
Rift	Dream	2500mm	3000mm
Rift	Fossil	2500mm	3000mm
Rift	Hessian	2500mm	3000mm

SERVICE INFORMATION

- Prime Softshade Blinds offer a 7-10 working day leadtime.
- Prime Softshade Blinds are a custom made product. Once ordered and processed the blind is manufactured immediately, hence there will be no facility to amend or cancel the order once submitted.
- All orders are subject to account status.
- There may be a 3-4 day delay from the dispatch notification, to the point that the order can be tracked.
- Deliveries to NI/ROI will incur an additional 2-3 day leadtime.

WARRANTY

Prime Softshade Blinds are covered by a 12 month guarantee from the date of delivery based on the following points:

- 1) The product has not been altered/ adjusted or customised post production.
- 2) The product has not been affected through installation by any third party.
- 3) The product order does not sit outside Decora's recommended specification.

Any defective blinds must be detailed to Decora accompanied with photos showing defects. Any remake or repair will be subject to stock conditions and alternatives may be used if and where necessary.

**Fabric flaws visible from 1m will be deemed as unacceptable*