
ASAv 설정

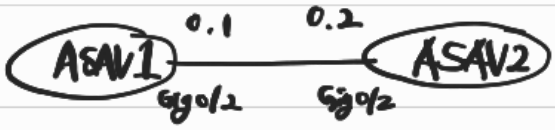

conf t : failover lan interface Failover gi 0/2

failover interface ip Failover 172.16.0.1 255.255.255.0

standby 172.16.0.2

1번

failover key test123#

failover lan unit primary

failover # failover 1번 확인

failover link Failover gi 0/2

show failover

conf t : interface gi0/0

ip address 192.168.250.2 255.255.255.0 standby 192.168.250.1

namif inside

exit

interface gi0/1

ip address 1.1.1.2 255.255.255.0 standby 1.1.1.1

name if outside

2번

exit

failover lan interface gi0/2

failover interface ip Failover 172.16.0.2 255.255255.0

standby 192.16.0.1

failover key test1234

failover lan unit secondary

failover

failover link Failover gi0/2

다양한 장비들 넣어 보안설정

pfsense

네트워크 어댑터 1 : 어댑터에 브릿지

2 : 내부네트워크

DHCP : 192.168.16.14/24

webfarm # ip address add 10.10.20.3/24 dev eth0

ip link set eth0

ip route add default via 10.10.20.1

↳ gateway