

Bead configuration




Homogeneous (1 mm)



Mixed (1 + 4 mm)

Flow rate (mL min^{-1})

4 20

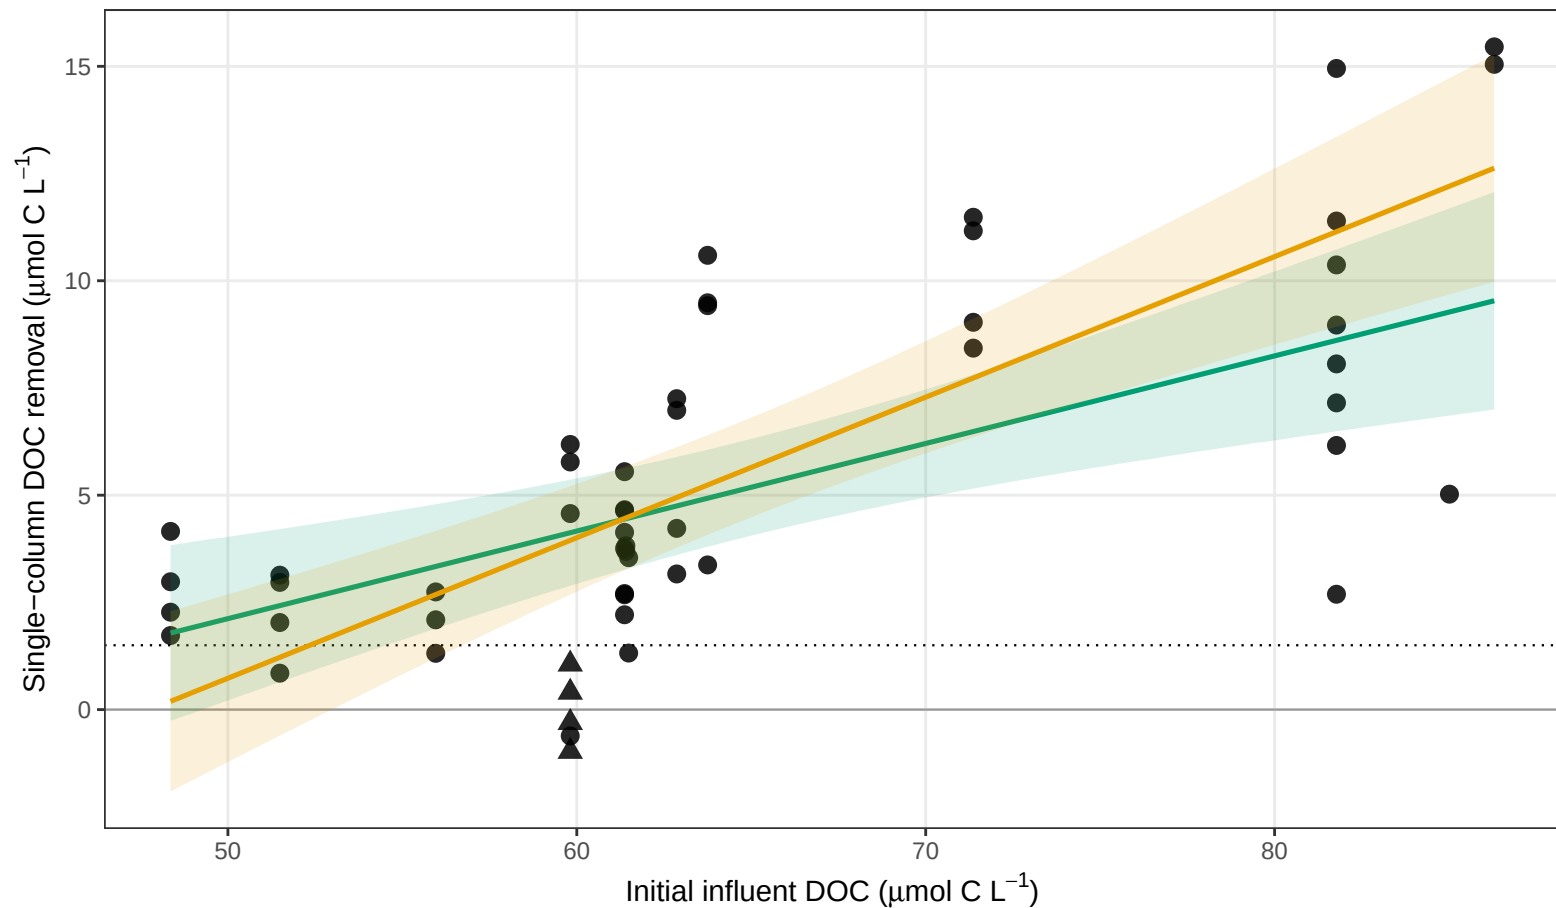

These are unadjusted bead-specific OLS fits with 95% confidence intervals; the accompanying model adjusts for water source, treatment, and flow rate.