

Voltages/Currents

Phase Voltages
(Peak, RMS):
Phase_A: 680V, 480V
Phase_B: 680V, 480V
Phase_C: 680V, 480V

Phase Currents
(Peak, RMS):
Phase_A: 1915A, 1312A
Phase_B: 1915A, 1312A
Phase_C: 1915A, 1312A

Transformer Voltages
(Peak, RMS):
Trans_A_IN: 680V, 480V
Trans_B_IN: 680V, 480V

Transformer Currents
(Peak, RMS):
Trans_A_IN: 18A, 12.5 A
Trans_B_IN: 18A, 12.5 A

LSX Cooler Phase A

LSX Cooler Phase B

LSX Cooler Phase C

LS-1000 Cooler Phase A

LS-1000 Cooler Phase B

LS-1000 Cooler Phase C

Utility Ground

N

Relay Circuit

Pre-Charge_Control_24VDC

Pre-Charge_Control_DC_GND

Contactor_Control_24VDC

Contactor_Control_DC_GND


Trans_A_IN

Trans_B_IN

GND_Trans

Legend

- Optical Fiber Connection
- Shielded Ethernet Connection
- Standard Electrical Connection
- Coolant Tubing

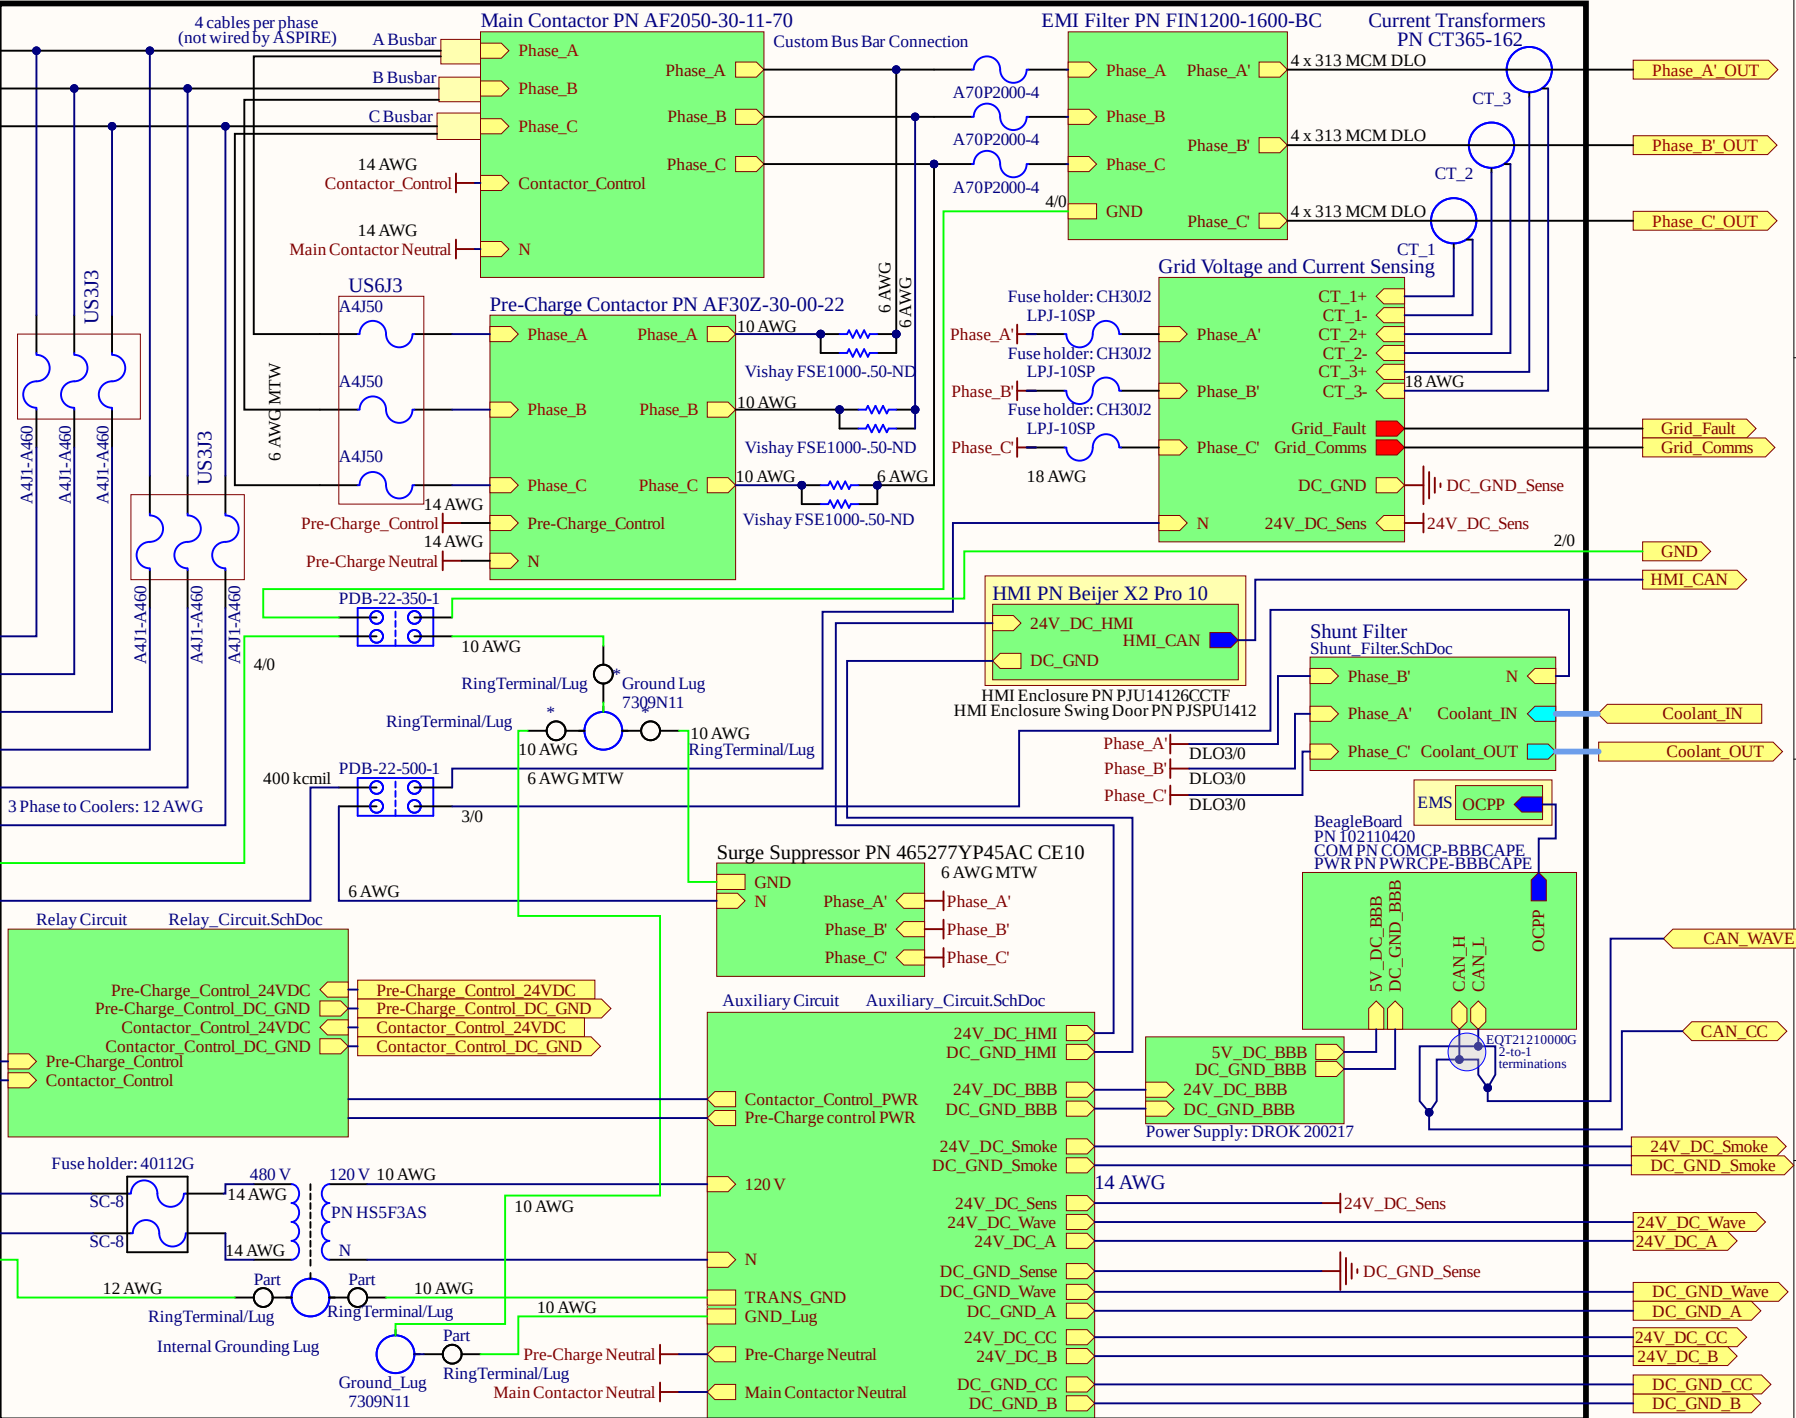

Cabinet PN A903636FSDAG

Document: Special_Equipment_Cabinet_Overview.SchDoc

Project: Kenworth_Overview_2.PrjPcb

Engineer: <Engineer>

Approved By: *

File: C:\Users\savog\OneDrive - USU\Desktop\UPEL\kenworth-overview-schematics\Special_Equipment_Cabinet_Overview.SchDoc

Revision: v1

Date: 3/18/2026

USU Power Electronics Lab
USTAR Building 620, RM 118
1600 N 620 E
North Logan, UT 84341

