



SCHEMATIC

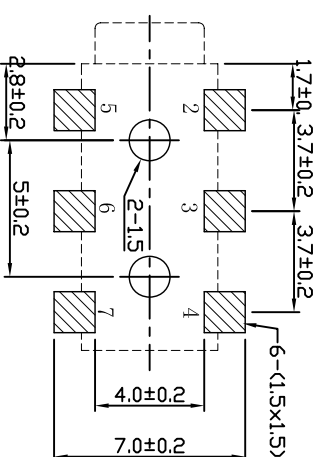

P.C.B LAYOUT
TOP VIEW

PJ-242	PJ-242-1	PJ-242-2

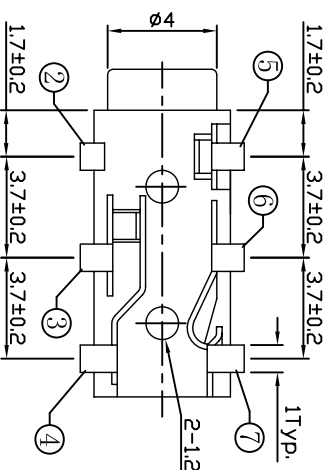

- SPECIFICATION
1. Rating : DC 12V 1.0A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V) ;
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 300-3000grams;
 6. life test: 5,000 cycles.

UNITS:	mm	CSCONN				SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD			
GENERAL TOLERANCE		PART NO.(INTENDED USE)				TITLE:			
X. ° ±5°		CPJ-242				PHONE JACK			
X.1±2°		APPD:				DWG NO.			
X.X±1°		CHKD: SK11a				JACK			
XXX.±0.5°		DR: Kitty				SCALE			
						SHEET			
						1 OF 1			
						REV			
						A			