


Email



Password

Login

Don't have an account? [Register](#)



Email



Password



Display Name

Register

Already have an account? [Login](#)



Fuji Technology, 
Fuji



Make a new Scan



Catalogues



App Guide



A BRAND OF 20 YEARS High-end elevator part in **ELEVATOR INDUSTRY**


FUJI TECHNOLOGY CO.,LTD

24-3, Minamihanadacho, Kita-ku Sakai-shi, Osaka, 591-8011, Japan

Tel: +81(0) 723 55 12 03

Email: contact@ml.fujitech.co.jp

Website: fuji.technology

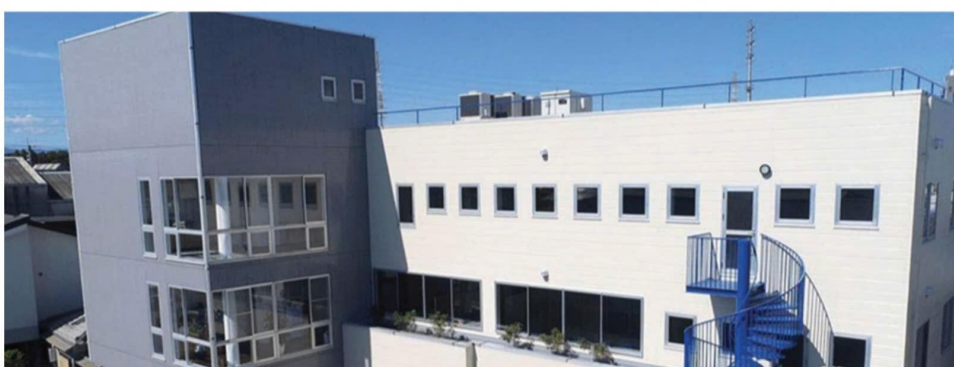




● FUJI ELEVATOR CONTROLLER

Main Features

- Redundancy control via multi-CPUs equipped with CAN-bus, Modbus, and GSM communication technology.
- Displacement calculation methods derive the N velocity profile to achieve optimum direct-to-point distance control.
- Simple 2-wire serial communications to commission duplex group control.
- Group control of up to 8 elevators is based on fuzzy logic control theory.
- In-built real-time clock to facilitate time-sharing control and elevator management.
- Flexible emergency backup power; 220 VAC power input makes emergency evacuation easy with automatic light load direction search.
- Automatic identification operation between short-floors.
- Handheld operation tools: mini keypad, PC to facilitate easy commissioning.
- 60 fault codes to facilitate easy diagnostics.

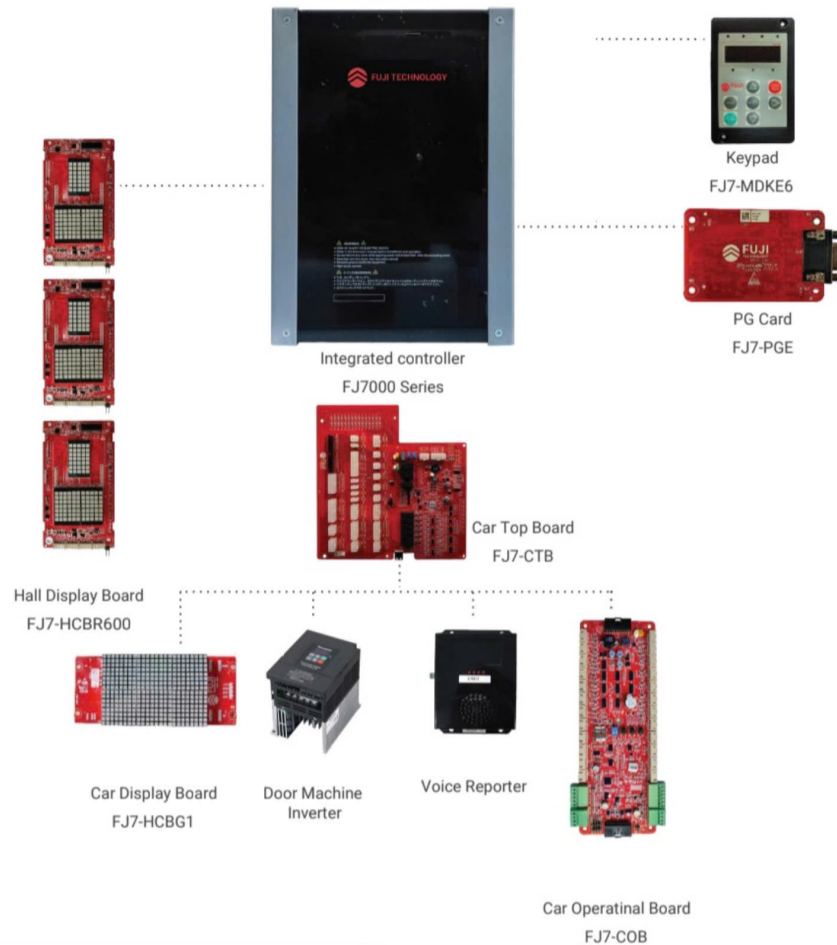

FUJI TECHNOLOGY CO., LTD

Address: 24-3, Minamihanadacho, Kita-ku Sakai-shi, Osaka, 591-8011, Japan
Address: 大阪府堺市北区南花田町 24 - 3



FUJI TECHNOLOGY

Technical indicators

Power	5.5KW-30KW
Elevator speed	0.4-2.5m/s
Maximum stops	64 stops
Cabinet dimension	1030 * 650 * 300 (Power 5.5KW-22KW) 1100 * 700 * 300 (Power 30KW)
Controller	FJ7000 series
Wiring connection	Modularized connecting board
Voltage	3P 380V 50Hz 5.5KW-30KW
Adaptive brake specification	DC110V, ≤ 3A
Control method	Single/ Duplex/ Group control





24M08-C08001



Cabinet series FJ7000

Stock Status: In Stock

Model: FJ7000-30A-4A

Capacity: 30

Input: 62

Output: 60
