## Description

Note！！: PWR LED does not light up when powered on. Driver of the ESP32

Product Title: DC 12V 24V 8AI-8DI-8DO ESP-WROOM-32 ESP32 Expansion Boa 0-5V 0-10V Analog Collection Wifi Relay Switch DIY

**Product Features:**

1 Operating voltage: DC 12V/24V

2 Operating Current : Standby current (Digital tube OFF) 14MA, Standby current 5 ON), 1 relay open 76MA, 2 relays open 107MA, ... 8 relays open 291MA

3 On-board resources: 1x RS485 Interface 8x opto-isolated inputs (low level trigger, 0/4-20MA Current Input,4x 0-5V/10V Voltage Input,4x buttons, 1x 4 bit digital tube slots, 8x relay outputs

ES32A08
Relay Module:
4 size 180*72*20mm(Only Board)
5 Weight : 189g(Only Board), 317g(with shell)

ES33B08
Darlington tube Module:
4 size 123*72*20mm(Only Board)
5 Weight : 93g(Only Board), 184g(with shell)

Please contact me for more information!

**Purchase Notes:**

1 ES32A08/ES33B08 can not work independently, must be under the control of the to work,If you do not have a 38PIN ESP32 board, purchase it separately or purchase ESP32


2 This is an expansion board based on 38PIN ESP32. We only provide three vscode hardware. More codes and functions need to be developed by yourself.

3 If you need more functionality, write your own code. We do not provide additiona support

4 The acquisition accuracy of analog quantities is determined by the ESP32 board. I collect multiple times to obtain the average value.


**Application examples:**

As long as you write ESP32 code,You can use it to achieve a variety of delay timer f
WIFI remote control switch
WIFI Current and voltage collection
RS485 Master-Slave Device(PLC MCU),
4x 0/4-20MA Current Collection,
4x 0-5V/10V Voltage Collection,
Motor forward and reverse,
Timing on,
Timing off,
Power-up delay,
Trigger delay,
Infinite loop delay,
A finite number of cyclic delays,
Power sequencer,
And so on.

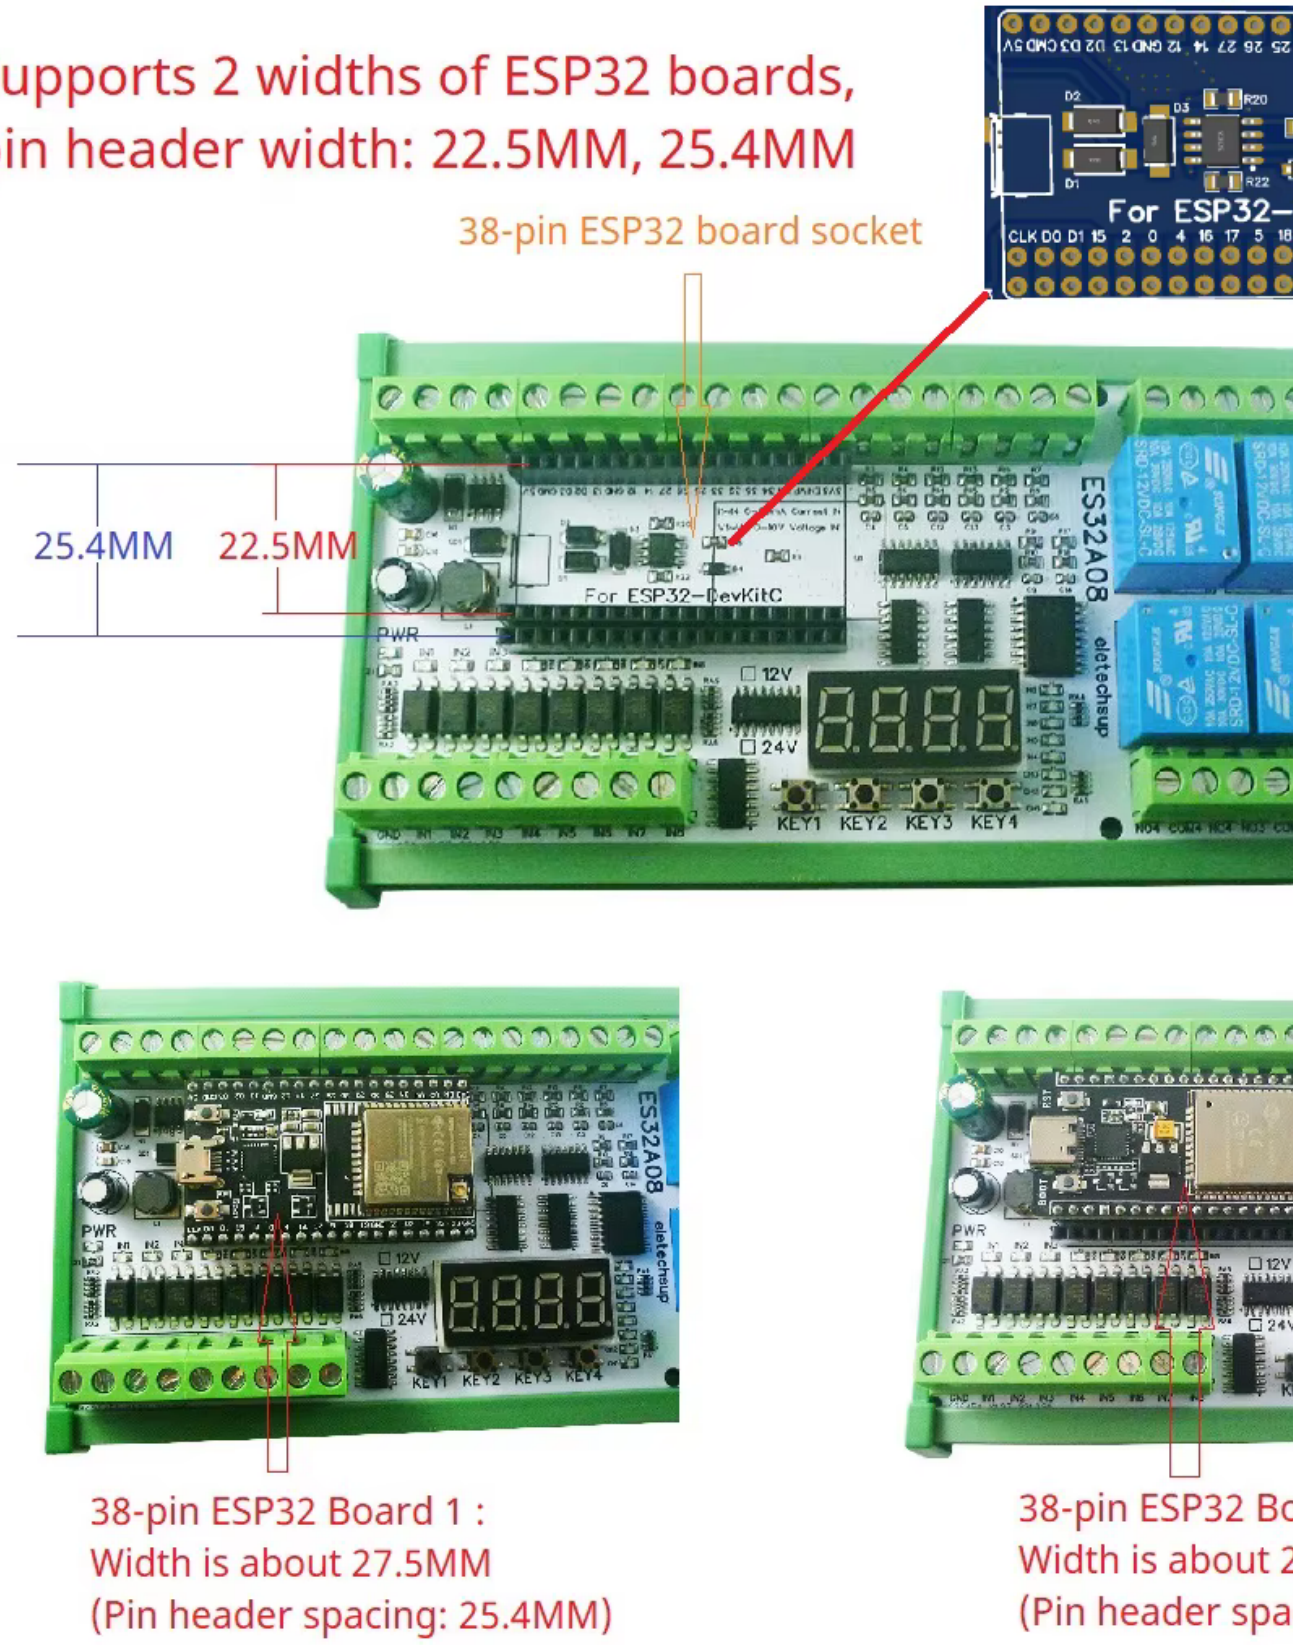


**Application 1: Through the programming of 38Pin ESP32, various delay custor can be realized instead of PLC.**


Application : Through the programming of ESP32 , variou
delay customization functions can be realized instead of

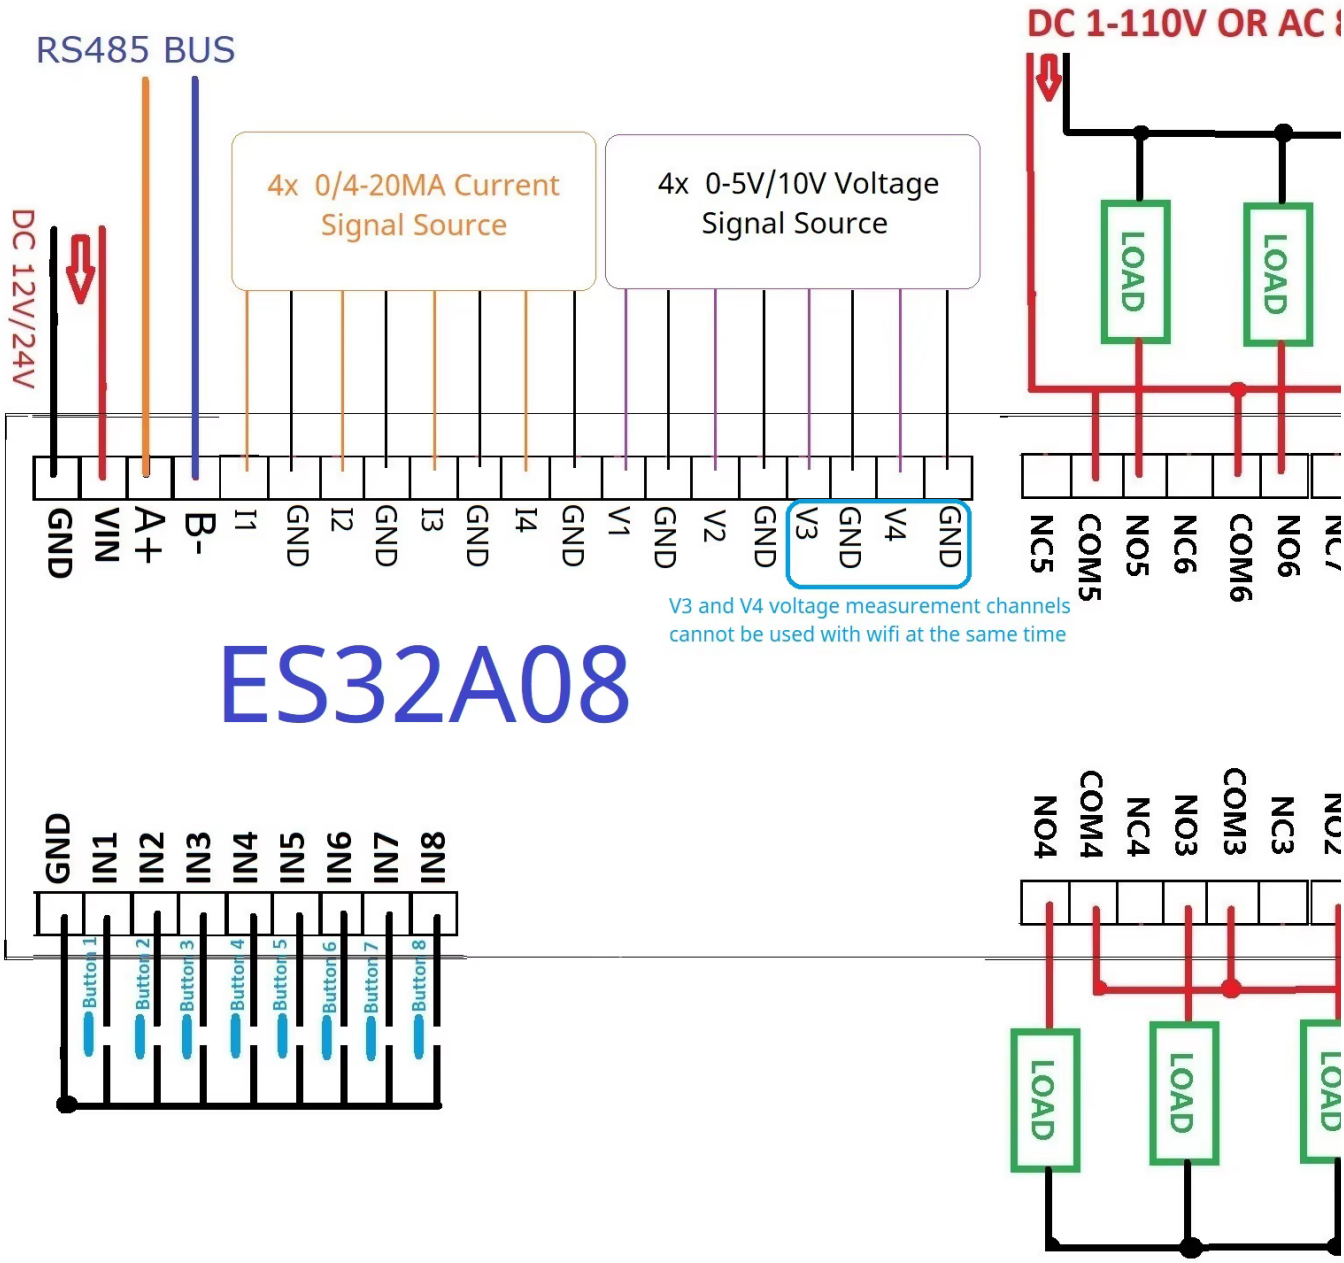


NOTE: This is an ESP32 expansion board only, you also need to plug in an ESP32 board

**Application 2: It can be used as an RS485 master device instead of PLC/PC/tou various RS485 slave devices.**

# Application 2: It can be used as an RS master device instead of PLC/PC/touch to control various RS485 slave devices

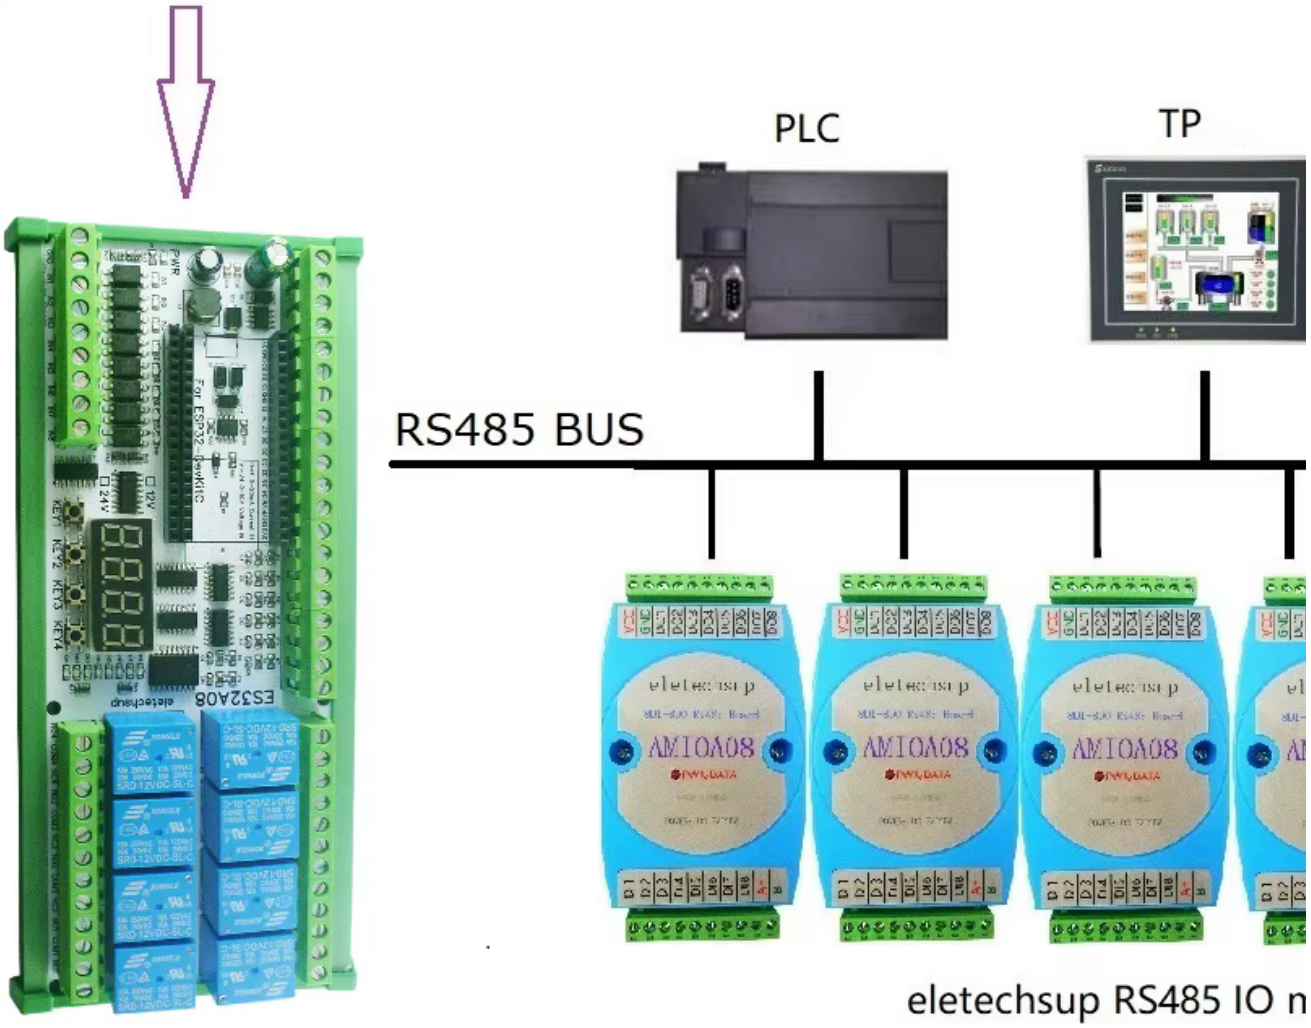


NOTE: This is an ESP32 expansion board only, y need to plug in an ESP32 board for it to work p