


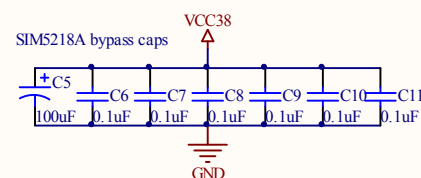
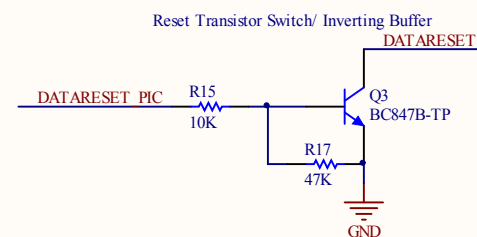
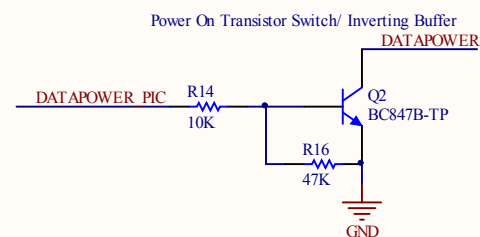
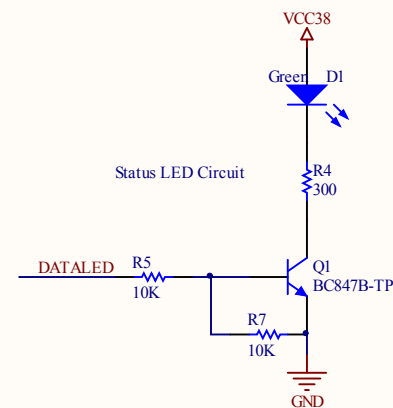
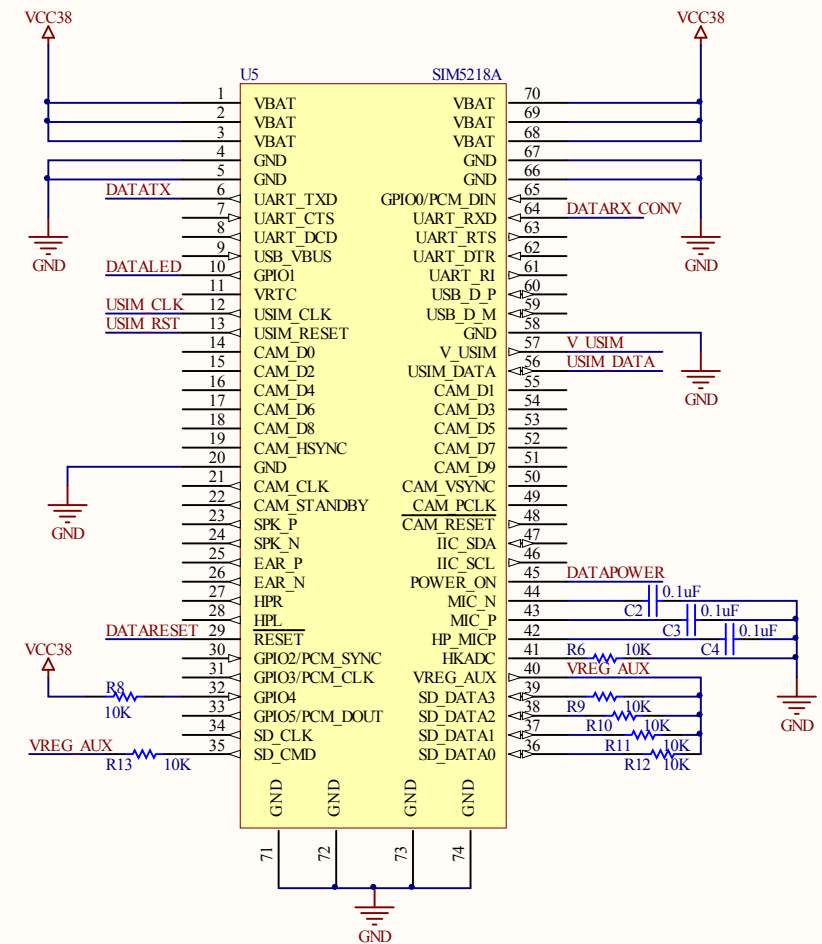
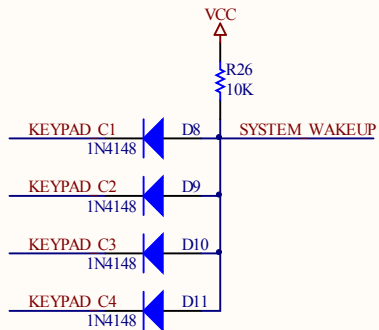
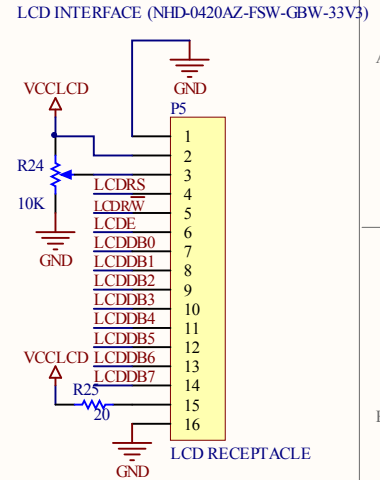





Keep USIM peripheral circuit close to USIM card socket



Title		
Data Module (SIM5218A)		
Size B	Number	Revision
Date:	10/9/2017	Sheet of
File:	C:\Users\...\Data_SchDoc	Drawn By: <u>Nnoduka Eruchalu</u>


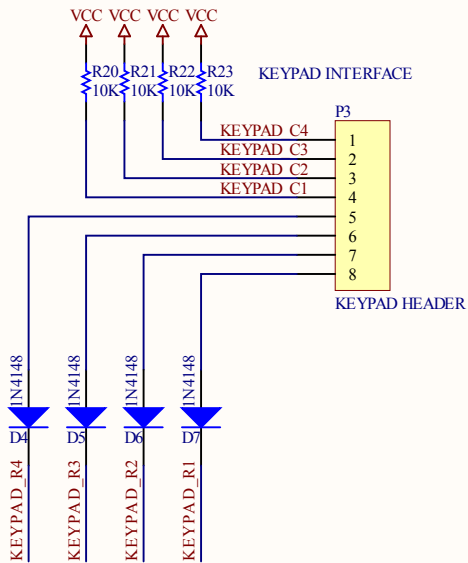


Diode-Resistor AND Gate




Title		
User Interface		
Size	Number	Revision
A		
Date:	10/9/2017	Sheet of
File:	C:\Users\...\Peripherals.SchDoc	Drawn By: Nnoduka Eruchalu

VinMin=4.372, VinMax=7.3, Vout = 3.3, Iout=1, Optimization Goal=Efficiency



Title Power Module		
Size B	Number	Revision
Date: 10/9/2017	Sheet of	
File: C:\Users\...Power.SchDoc	Drawn By: Nnoduka Eruchalu	

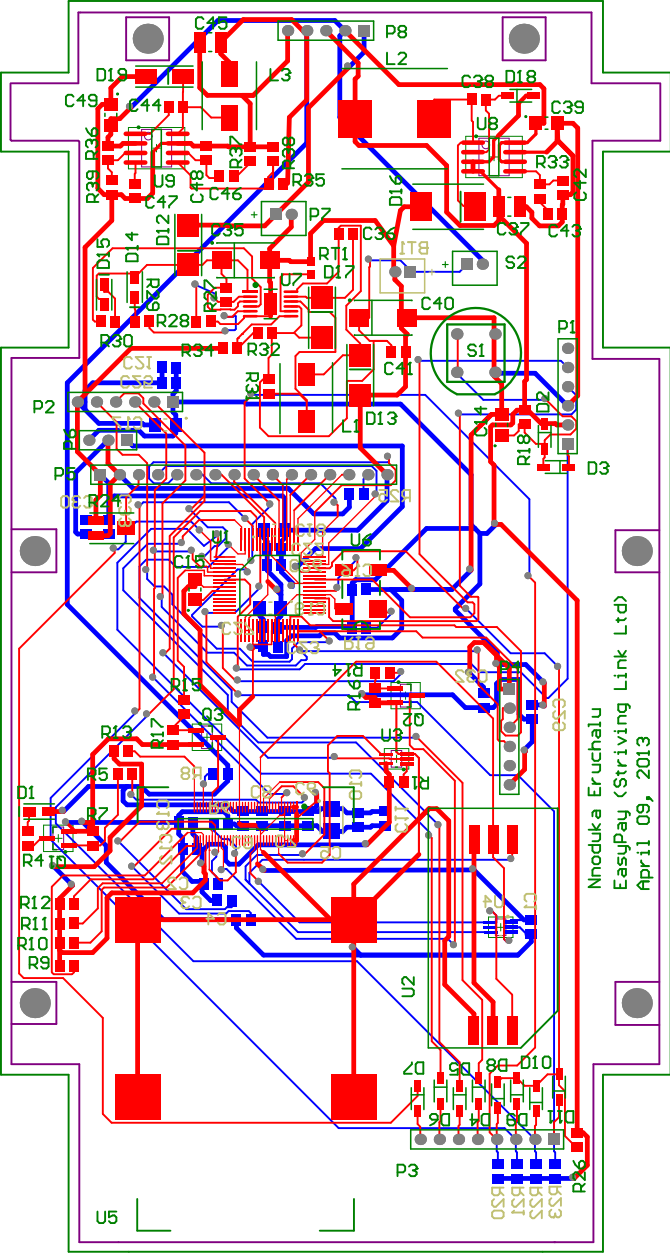

Nnoduka Eruchalu
EasyPay (Striving Link Ltd)
April 09, 2013