

1. Cell and protection power path

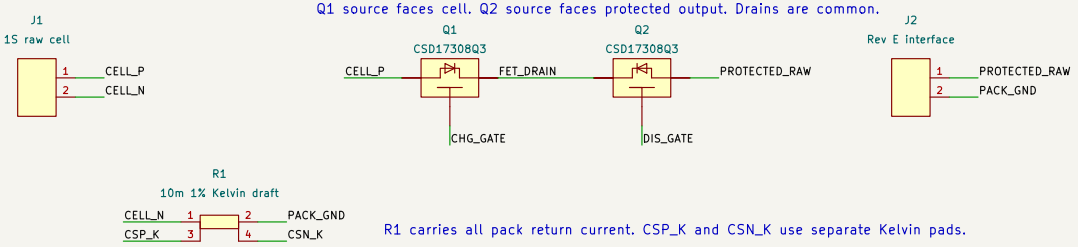


R1 carries all pack return current. CSP_K and CSN_K use separate Kelvin pads.

2. MAX17301G+T and local supply

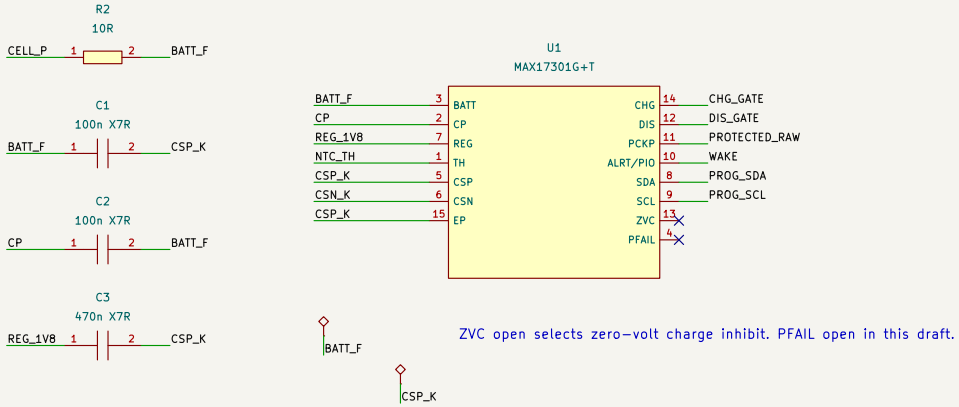

ZVC open selects zero-volt charge inhibit. PFAIL open in this draft.

3. Wake, provisioning and cell probe

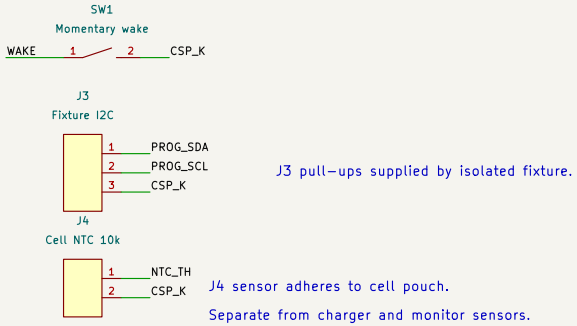

J3 pull-ups supplied by isolated fixture.

J4 sensor adheres to cell pouch.

Separate from charger and monitor sensors.

Integration review only. Confirm cold insertion and charger fault recovery before layout.

See PROGRAMMING.md for settings and OPEN_ISSUES.md for integration gates.

Nate		
Sheet: /		
File: rev_f_protection.kicad_sch		
Title: Omni rover | battery protection		
Size: A4	Date:	**Rev: F draft**
KiCad E.D.A. 10.0.8		Id: 1/1