

## Lecture 12 - Bending

Dr. Nicholas Smith

Wichita State University, Department of Aerospace Engineering

17 March, 2021

1

## schedule

- 17 Mar - Bending
- 22 Mar - Transverse Shear
- 22 Mar - Homework 5 Due, Homework 4 Self-grade due
- 24 Mar - Transverse Shear
- 29 Mar - Exam 2 Review
- 29 Mar - Homework 6 Due, Homework 5 Self-grade due
- 31 Mar - Exam 2

2

- flexure formula
- moment of inertia
- group problems
- compound centroids

## flexure formula

---

- If the beam is a linear material that follows Hooke's Law, the stress must be linearly proportional to the strain
- Thus the stress will vary linearly through the beam, just like the strain does

4

## neutral axis

- We have already hypothesized that a neutral axis must exist, we will now find its location
- To be in equilibrium, the resultant force(s) produced by the stress must sum to zero, which means

$$\begin{aligned}\sum F_x = 0 &= \int_A dF = \int_A \sigma dA \\ &= \int_A -\left(\frac{y}{c}\right) \sigma_{max} dA \\ &= -\frac{\sigma_{max}}{c} \int_A y dA\end{aligned}$$

5

## neutral axis

- Since  $\sigma_{max}$  and  $c$  are both non-zero constants, we know that

$$\int_A y dA = 0$$

- Which can only be satisfied at the horizontal centroidal axis, so the neutral axis is the centroidal axis

6

## bending moment

- The internal bending moment must be equal to the total moment produced by the stress distribution

$$\begin{aligned} M &= \int_A y dF = \int_A y(\sigma dA) \\ &= \int_A y \left( \frac{y}{c} \sigma_{max} \right) dA \\ &= \frac{\sigma_{max}}{c} \int_A y^2 dA \end{aligned}$$

7

- We recognize that  $\int_A y^2 dA = I$ , and we re-arrange to write

$$\sigma_{max} = \frac{Mc}{I}$$


8

## procedure

- Find the internal moment at the point of interest, or draw a moment diagram to find the maximum point (if needed)
- Determine the moment of inertia for the beam section
- Find the neutral axis and/or the distance from the neutral axis to the point of interest
- Use the flexure formula to find the stress

9

## example 6.12



Find the maximum bending stress and draw the stress distribution through the thickness at that point.

**Figure 1:** A 6 meter long beam is pinned at both ends and subjected to a uniformly distributed load of 5 kN/m.

10

## moment of inertia

---

- We know that  $I = \int_A y^2 dA$
- For common shapes, this integral has been pre-calculated (about the centroid of the shape)
- For compound shapes, we use the parallel axis theorem to combine inertias from multiple areas

11

## parallel axis theorem

- The parallel axis theorem is used to find the moment about any axis parallel to an axis passing through the centroid
- If we consider an axis parallel to the x-axis, separated by some  $dy$  we have

$$I_x = \int_A (y + dy)^2 dA$$

- Which gives

$$I_x = \int_A y^2 dA + 2dy \int_A y dA + dy^2 \int_A dA$$

12

## parallel axis theorem

- The first integral is the moment of inertia about the original  $x$ -axis, which we will call  $\bar{I}_x$
- The second integral is zero since the  $x$ -axis passes through the centroid
- This gives the parallel axis theorem

$$I_x = \bar{I}_x + Ady^2$$

13

## parallel axis theorem

- Similarly for the  $y$ -axis and polar moment of inertia we find

$$I_y = \bar{I}_y + Adx^2$$

$$J_O = \bar{J}_C + Ad^2$$


14



## group problems

---


### group one



Determine the moment of inertia about the neutral axis

**Figure 2:** A hollow rectangular tube 0.4m tall and 0.2m wide on the outside and 0.2 m tall and 0.1 wide on the inside

## group two




Find the neutral axis and determine the moment of inertia about the neutral axis

**Figure 3:** An upside-down t-section is 0.2m wide at the base, which is 0.1 m tall, the web is 0.1

16

## group three

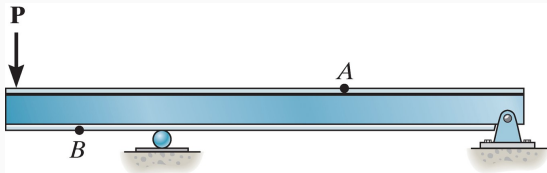

**Figure 4:** A beam is supported by pins at the right end and a point some distance away from the left end. A vertical load is applied at the left end, point B as it at the bottom side of the beam between the load and the first pin support, point A is between the two pin supports.

Show how the bending stress acts on a differential volume at

17

## compound centroids

---

### composite bodies

- Often we have to deal with bodies that are not described by a continuous function, but are made of different materials or different shapes
- We can use the same logic previously, but with a finite sum instead of an integral

$$\bar{x} \sum W = \sum \tilde{x} W$$

$$\bar{y} \sum W = \sum \tilde{y} W$$

$$\bar{z} \sum W = \sum \tilde{z} W$$

- Use a sketch to divide the body into sub-bodies
- If a body has a hole, it may be easier to treat that volume as whole and then subtract the hole
- Take note of any symmetry (an object symmetric about any axis will have a centroid along that axis)