


Name:


Homework 5

Due 29 Sep 2020


1. Draw a free-body diagram of the beam and sketch the general shape of the shear-moment diagram

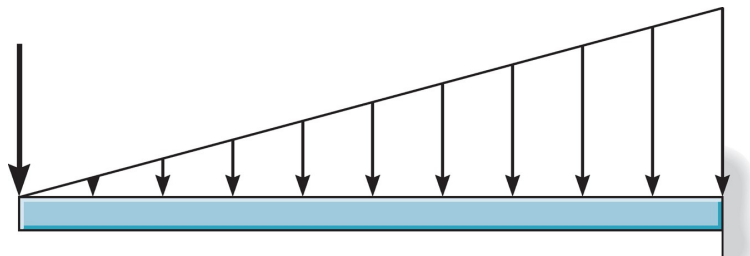


2. Draw the shear-moment diagram for the simply supported beam

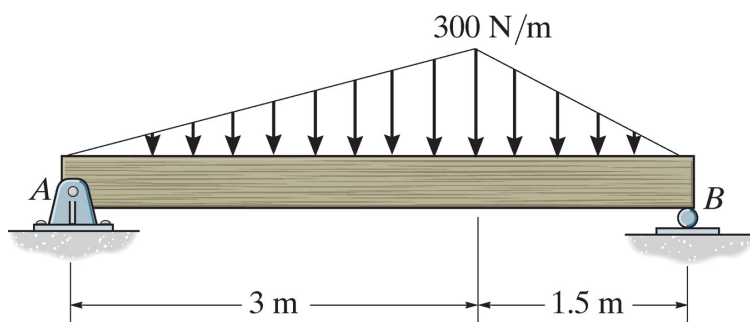


3. Members *ABC* and *BD* are rigidly connected at *B* while the smooth collar at *D* is allowed to move along the vertical post. Draw the shear-moment diagram for *ABC*.

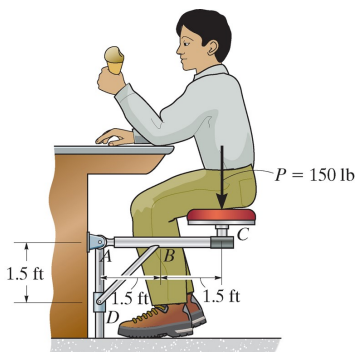


4. If the beam is subjected to a bending moment of $M = 10 \text{ kN} \cdot \text{m}$ find the bending stress in the beam at points A and B

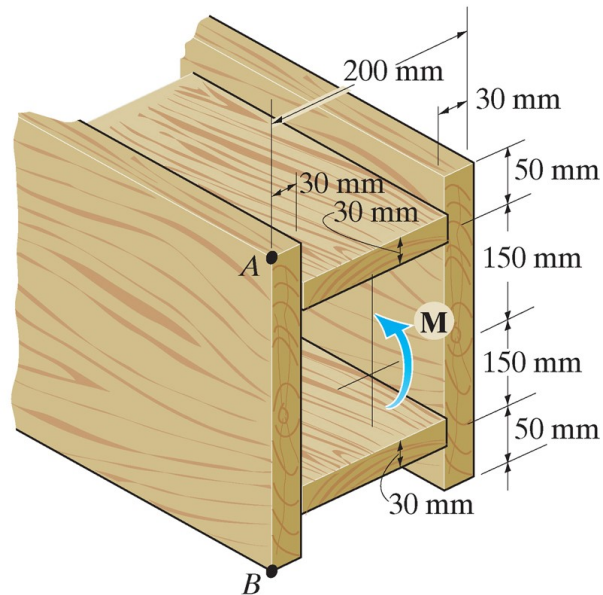

5. Find the absolute maximum bending stress in the beam assuming that the support at B exerts a uniformly distributed reaction on the beam. The cross section is rectangular with a base of 3 in and a height of 5 in

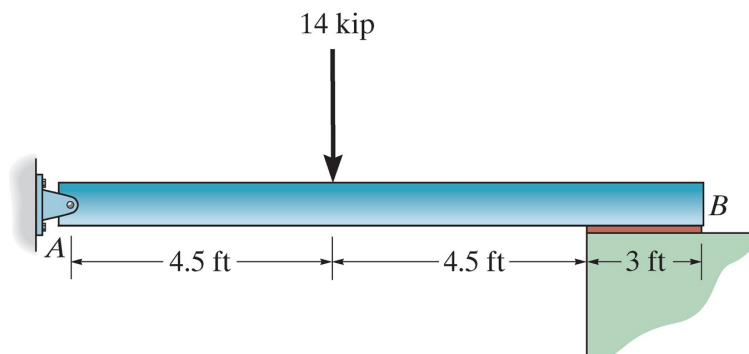

6. If the allowable bending stress is $\sigma_{allow} = 6 \text{ MPa}$, find the maximum dimension, d of the beams cross sectional area.

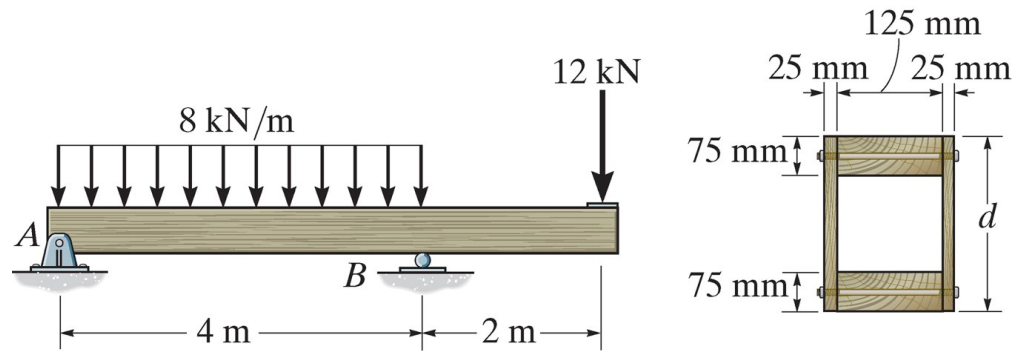

7. These garden shears were manufactured using an inferior material. Using a load of 50 lb and appropriate dimensions find the maximum bending stress and show why failure occurred at this location



