
Overview







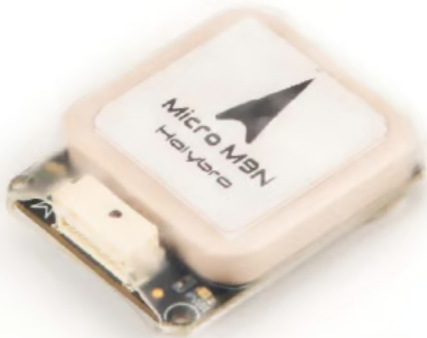

Overview

These Micro GPS uses multi-constellation GNSS powered by u-blox M10 or M9N, a concurrent GNSS receiver which can receive and track multiple GNSS systems. Owing to the multi-band RF front-end architecture all four major GNSS constellations, GPS,Galileo, GLONASS and BeiDou can be received concurrently. It also comes with the IST8310 compass.

The high-gain 25 × 25 mm2 patch antenna provides excellent performance and the omnidirectional antenna radiation pattern increases flexibility for device installation.

Firmware Support for M10 GPS: PX4 1.14, ArduPilot 4.3, INAV 5.0.0, Betaflight 4.3.0 or newer is required.

Specification

Search

	Holybro Micro M10 GPS	Holybro Micro M9N GPS
GNSS Receiver	Ublox M10	Ublox M9N
Number of Concurrent GNSS	Up to 4 GNSS - BeiDou - Galileo - GLONASS - GPS - QZSS	Up to 4 GNSS - BeiDou - Galileo - GLONASS - GPS - QZSS
Frequency Band	- GPS L1 - Galileo E1 - GLONASS L1 - BeiDou B1 - SBAS L1 - QZSS L1	- GPS L1 - Galileo E1 - GLONASS L1 - BeiDou B1 - SBAS L1 - QZSS L1
Compass	IST8310	IST8310
Output Protocol	- UBX (U-blox) - NMEA	- UBX (U-blox) - NMEA
Accuracy	2.0m CEP	1.5m CEP
Nav. Update Rate	Up to 25 Hz (single GNSS), Up to 10 Hz (4 concurrent GNSS)	Up to 25 Hz (4 concerrent GNSS)
GNSS Augmentation System	EGNOS, GAGAN, MSAS and WAAS QZSS: L1S	EGNOS, GAGAN, MSAS and WAAS QZSS: L1S
Default Baud Rate	115200	115200
Input Voltage	4.7-5.2V	4.7-5.2V
Port Type	JST-GH-6P	JST-GH-6P
Antenna	25 × 25 × 4 mm ceramic patch antenna	25 × 25 × 4 mm ceramic patch antenna
Power consumption	Less than 200mA @ 5V	Less than 200mA @ 5V
Operating Temperature	-40~80C	-40~80C
Dimension	- 32 × 26 × 9mm (w/o Case)	- 32 × 26 × 9mm (w/o Case)

	- 34 × 28 × 11mm (With Case)	- 34 × 28 × 11mm (With Case)
Weight	- 14g (w/o Case) - 16g (With Case)	- 14g (w/o Case) - 16g (With Case)
Other	- LNA MAX2659ELT+ RF Amplifier - Rechargeable Farah capacitance - Low noise 3.3V regulator	- LNA MAX2659ELT+ RF Amplifier - Rechargeable Farah capacitance - Low noise 3.3V regulator

- **M8N:** Concurrent reception of up to 3 GNSS (GPS, Galileo, GLONASS, BeiDou)

Previous
Micro M10/M9N GPS

Next
Pinout

Last updated 2 years ago

Was this helpful?

© 2024 Holybro. All rights reserved.