


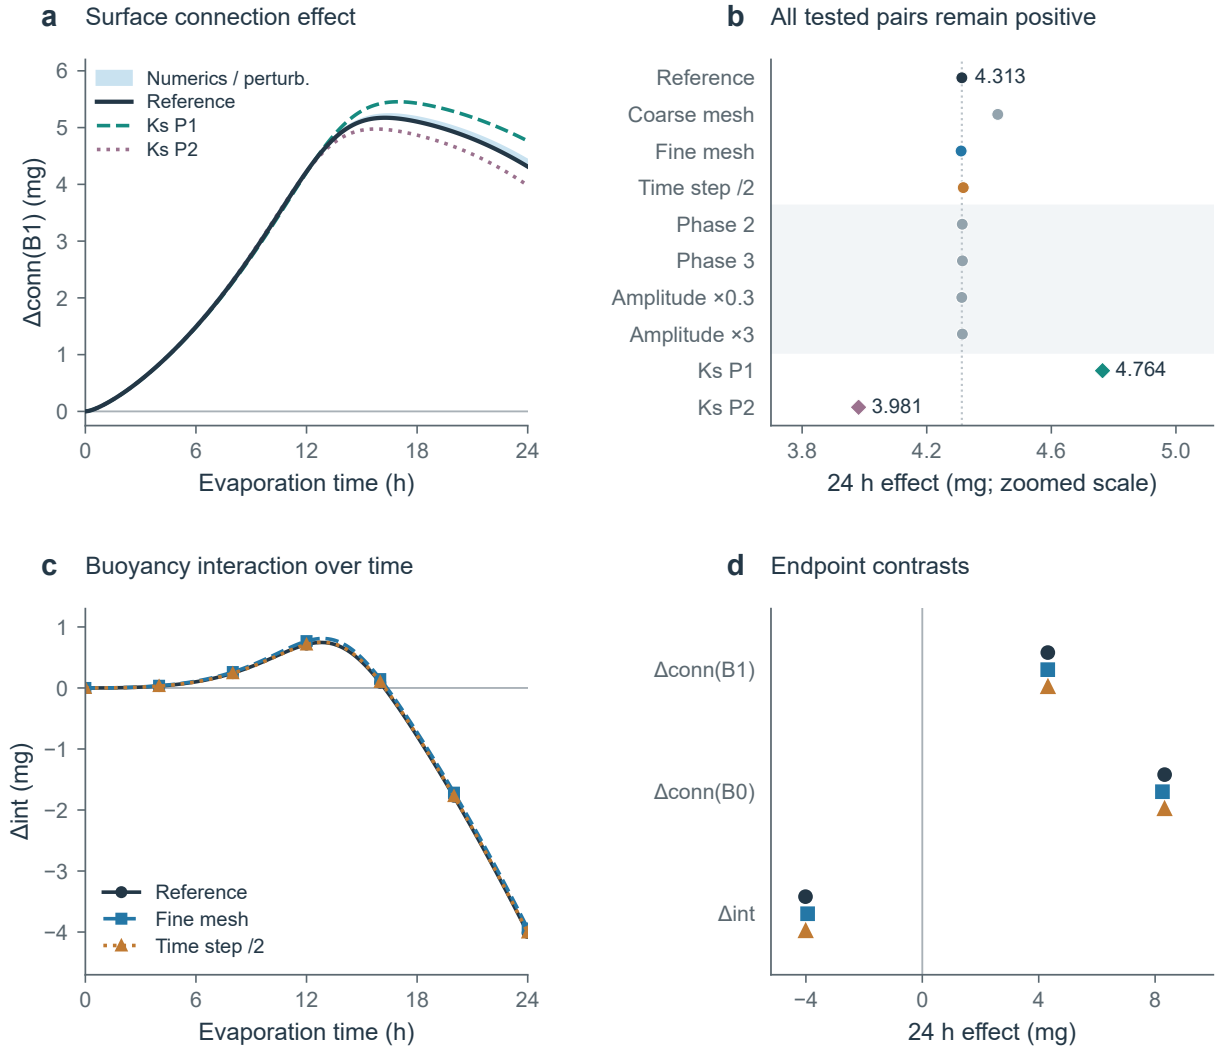
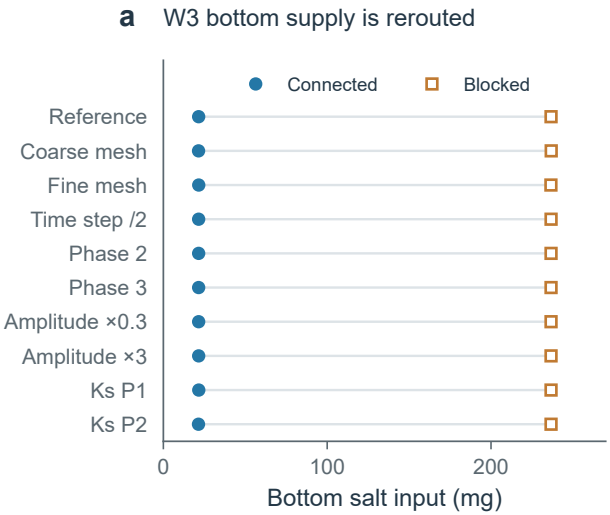



W3 upper 3 mm · RH = 0 · 24 h. Ranges span tested scenarios, not confidence intervals.
Δconn = connected − blocked; Δint = Δconn(B1) − Δconn(B0). B1/B0: buoyancy on/off.

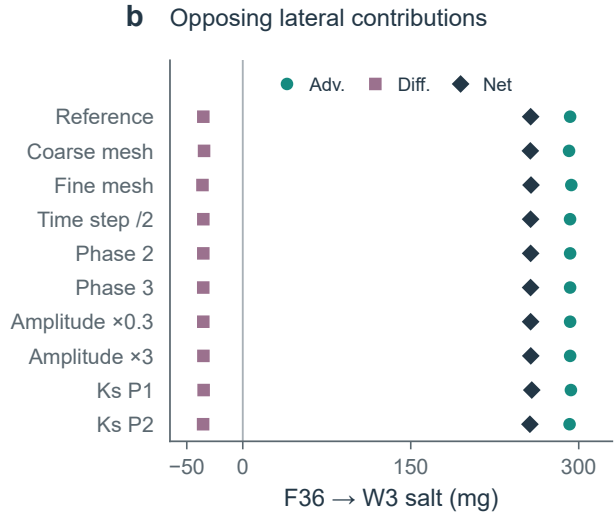


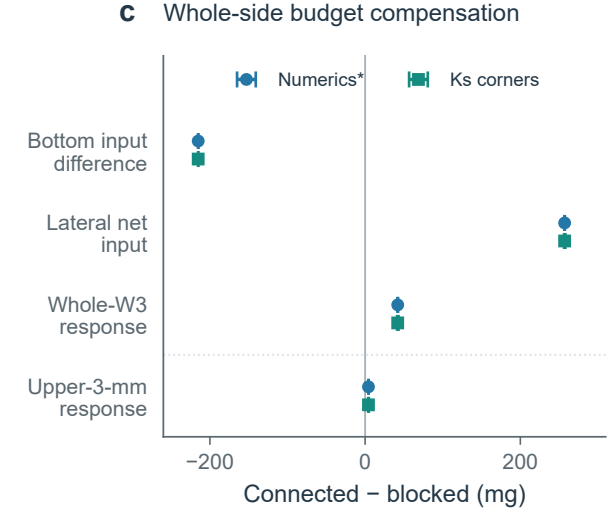


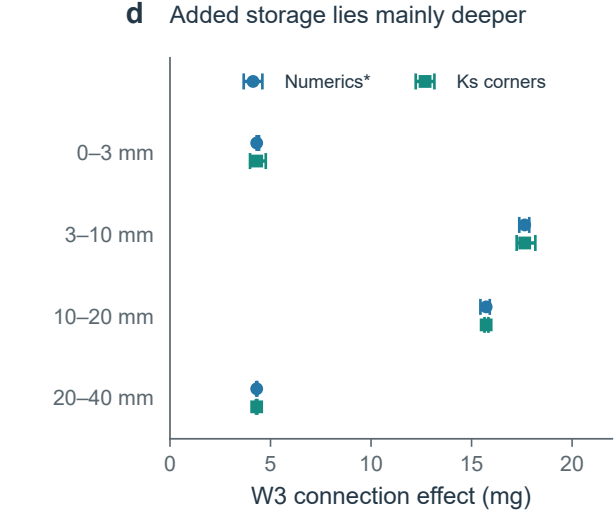

B1 · 24 h. All ten pairs (a,b); reference and finite ranges (c,d). *Includes mesh, time step and perturbations.
The upper-3-mm response is part of the whole-W3 response, not an additional budget term.

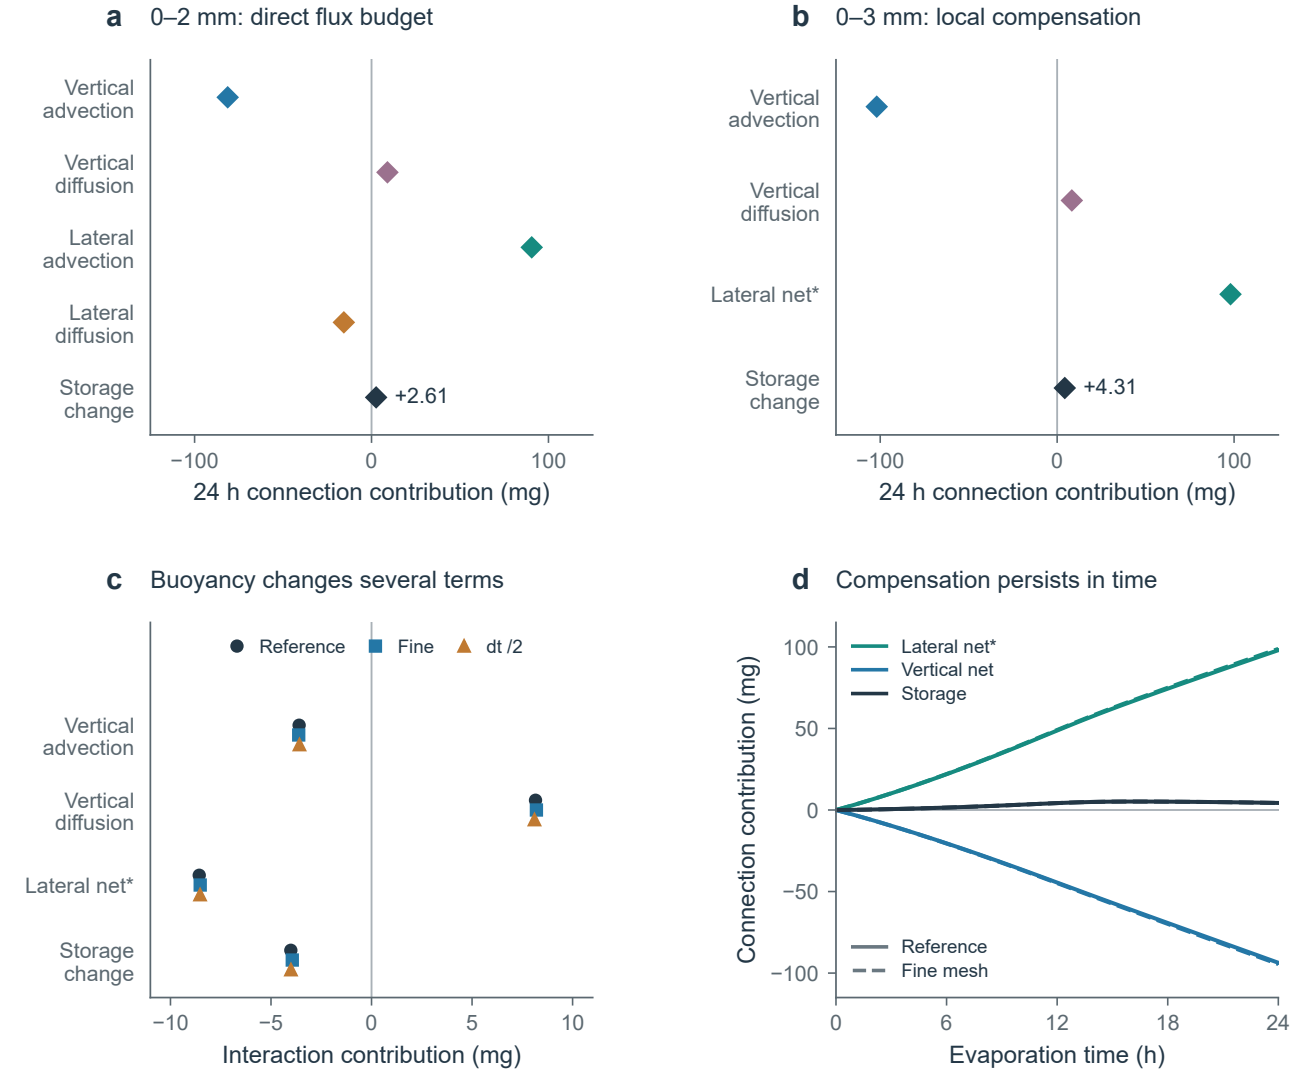


a,b: ten B1 pairs; diamonds mark the reference, grey spans mark the tested range.
*0–3 mm lateral net is inferred from storage minus vertical input; it is not an independent flux check.

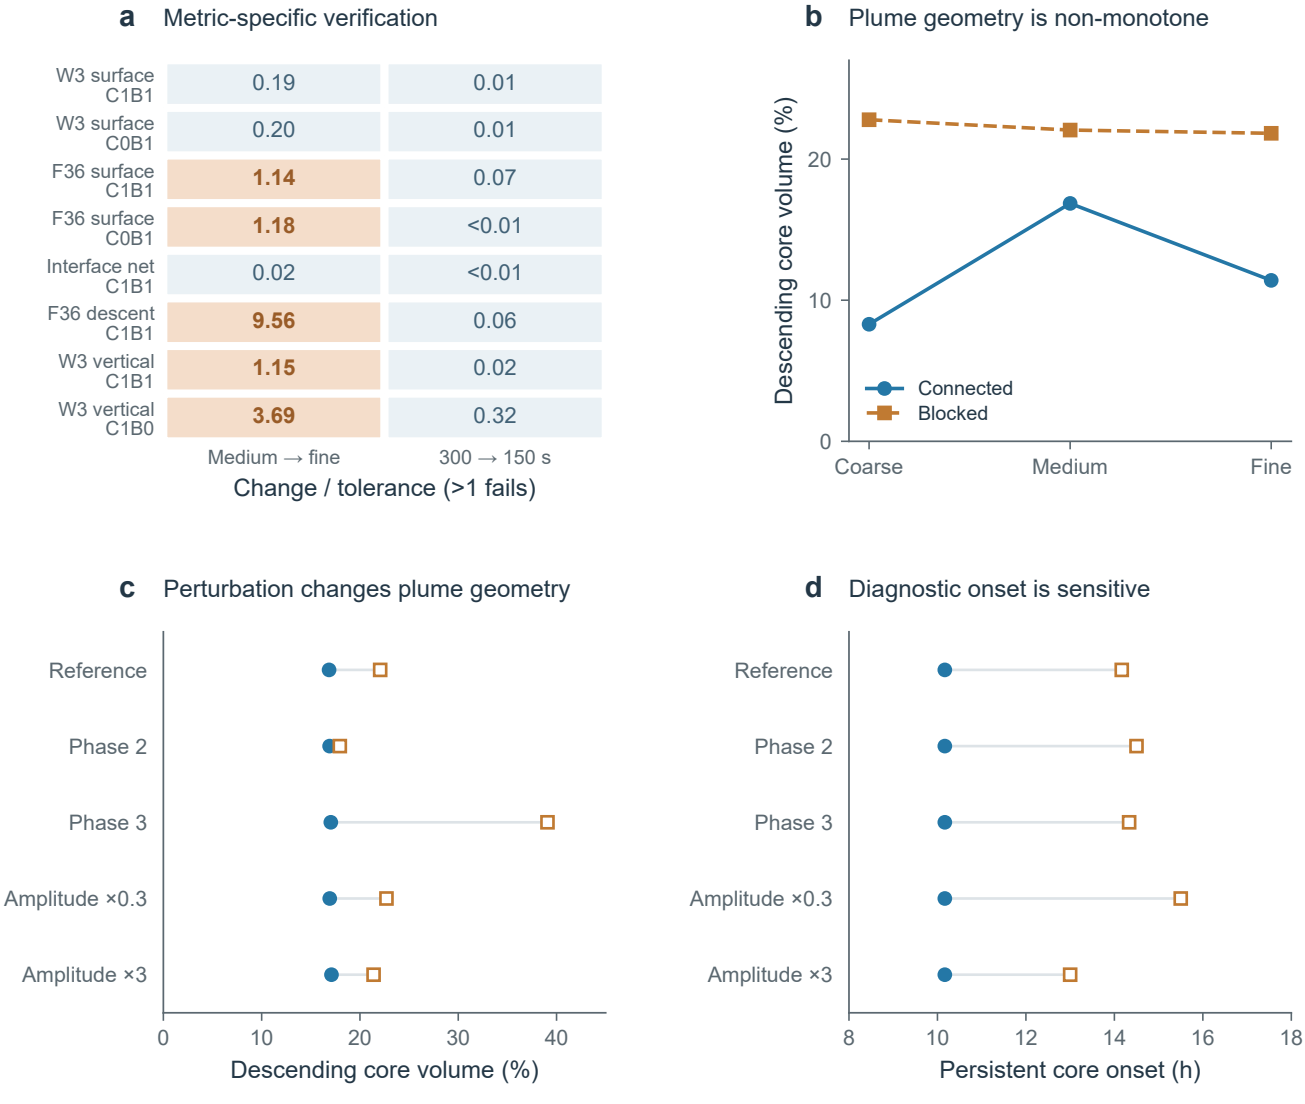


a: tolerance ratios, rounded; amber cells fail. b–d: B1, core-descent criterion (Darcy speed >1e-8 m/s).
Surface tolerance 2%; flux/volume tolerance 5%. Onset is a diagnostic, not an instability threshold.