

CYPHER

Training School on Scientific Machine Learning for Digital Twins

*System Identification and machine
learning for predicting reacting dynamics*

Anh Khoa Doan

Department of Aeronautics

n.doan@imperial.ac.uk



Acknowledgement




- Content heavily inspired by works/presentation of collaborators
 - Prof. Luca Magri (Imperial College):
 - Prediction of chaotic dynamics from data: An introduction
<https://arxiv.org/pdf/2604.11624>
 - <https://github.com/MagriLab/Tutorials>
 - Prof. Wolfgang Polifke (TU Munich):
 - Black-box system identification for reduced order model construction, *Annals of Nuclear Energy*, 67, 109-128 (2014).
<https://doi.org/10.1016/j.anucene.2013.10.037>
 - <https://gitlab.lrz.de/tfd/system-identification-tutorial>

Outline



- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI systems
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling

Turbulent (reacting) fluid flows are difficult to predict

- Turbulence: multiscale, unsteadiness, nonlinear
→ Unpredictable

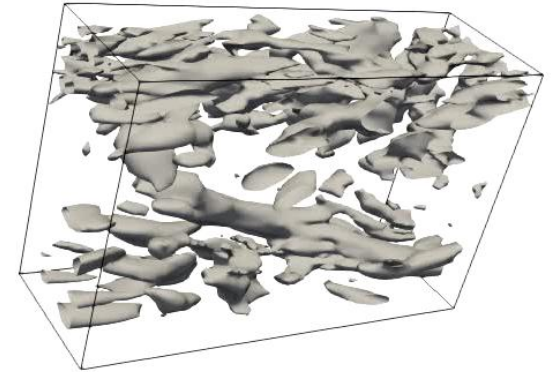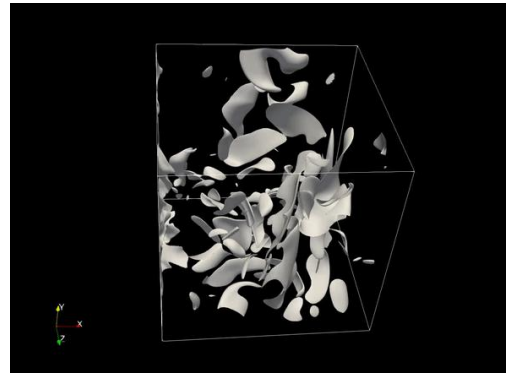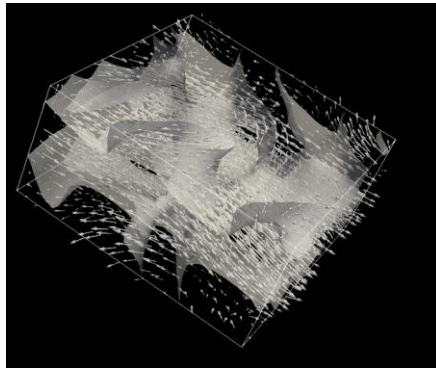

Added chemistry complexity
in reacting flows

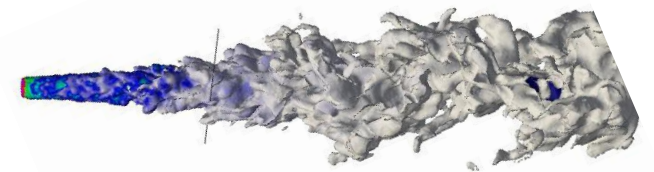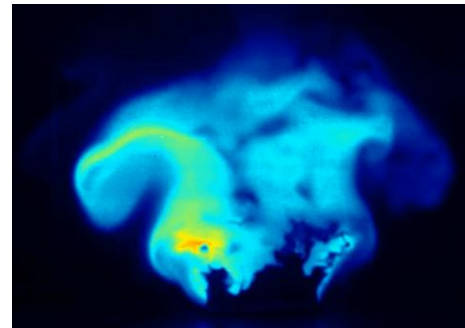

Dynamics of turbulent (reacting) flows

Nonlinear autonomous dynamical system:

$$\dot{\boldsymbol{\phi}} = \mathbf{N}(\boldsymbol{\phi}, \mathbf{p}, \mathbf{F})$$
$$\boldsymbol{\phi}(\mathbf{x}, 0) = \boldsymbol{\phi}_0$$

$\mathbf{N}$: smooth, deterministic and ergodic


$\mathbf{p}$: parameters of the systems

$\mathbf{F}$: forcing term

For fluids: $\mathbf{N}$: Navier-Stokes equations

Many systems of interest are *chaotic*


“Butterfly effect”



So what can/should we predict?

Statistics of chaotic signals

- Statistics of chaotic signals not affected by butterfly effect
→ Prediction of statistics becomes possible

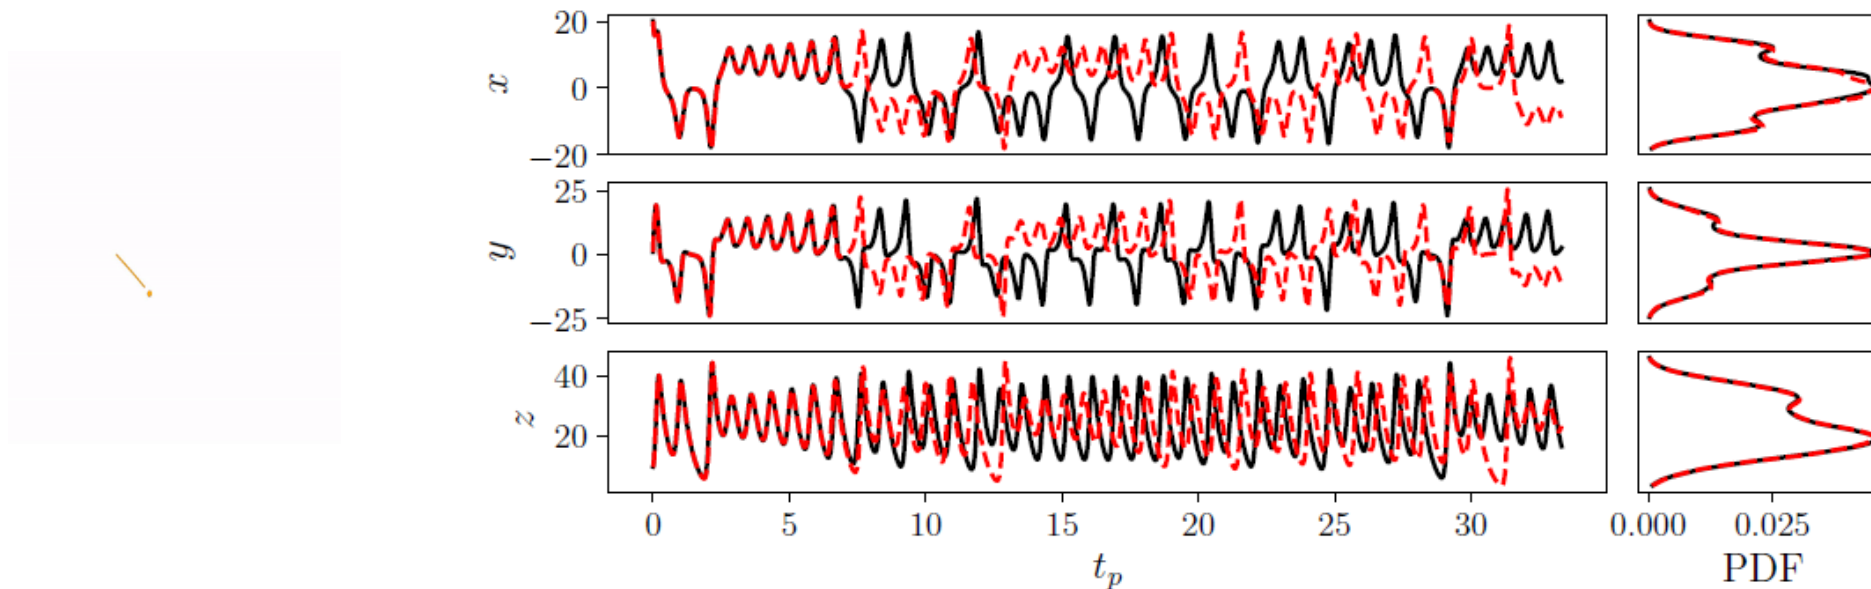


Attractor: set of values that q takes asymptotically

Nonlinear autonomous dynamical system:

$$\dot{\phi} = N(\phi, p, F)$$

$$\phi(x, 0) = \phi_0$$

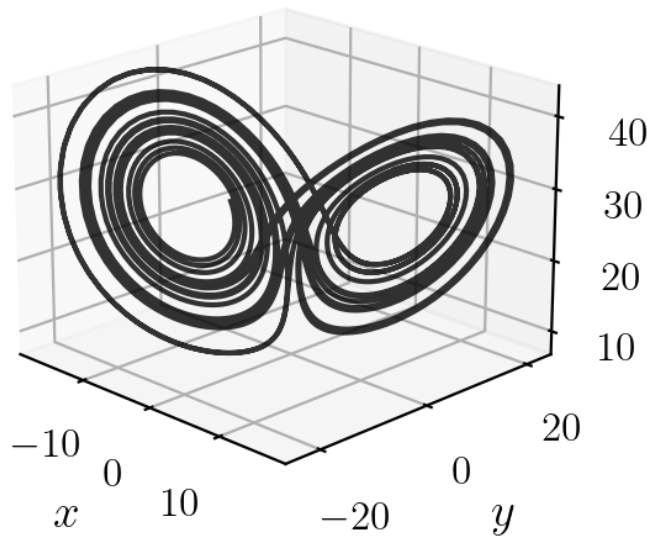


Attractor: once you are on the attractor, you remain on it

“Strange” attractor:

- Zero-measure in its embedding space
- Fractal dimension

Some indicator of chaos



Characteristics of attractor

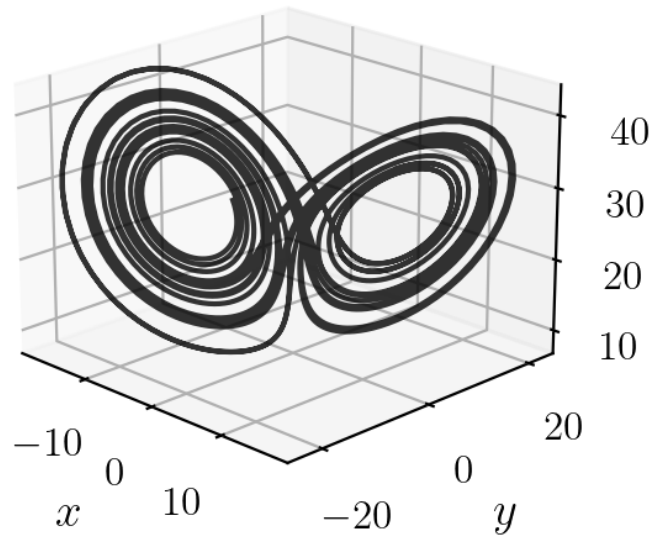

Estimate of the dimension of the attractor:

- Kaplan-Yorke dimension (can be estimated using the Lyapunov spectrum, not elaborated here)


Largest Lyapunov exponent

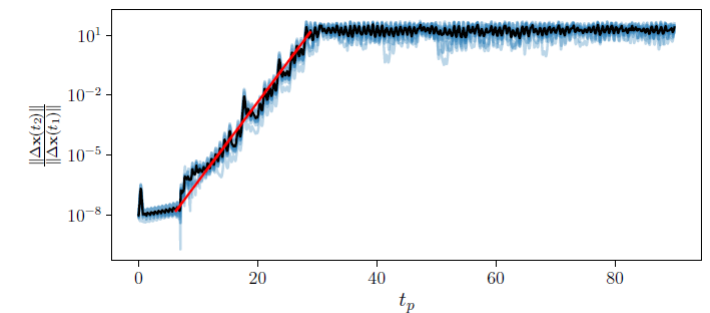

- λ_1 Lyapunov exponent: “Rate of divergence” of those two trajectories
- Lyapunov time: $t_p = 1/\lambda_1$
→ Indicator of “predictability of the chaotic system”


Typical dynamical modelling in turbulent (reacting) flows: Flow state prediction

- Flow state prediction:

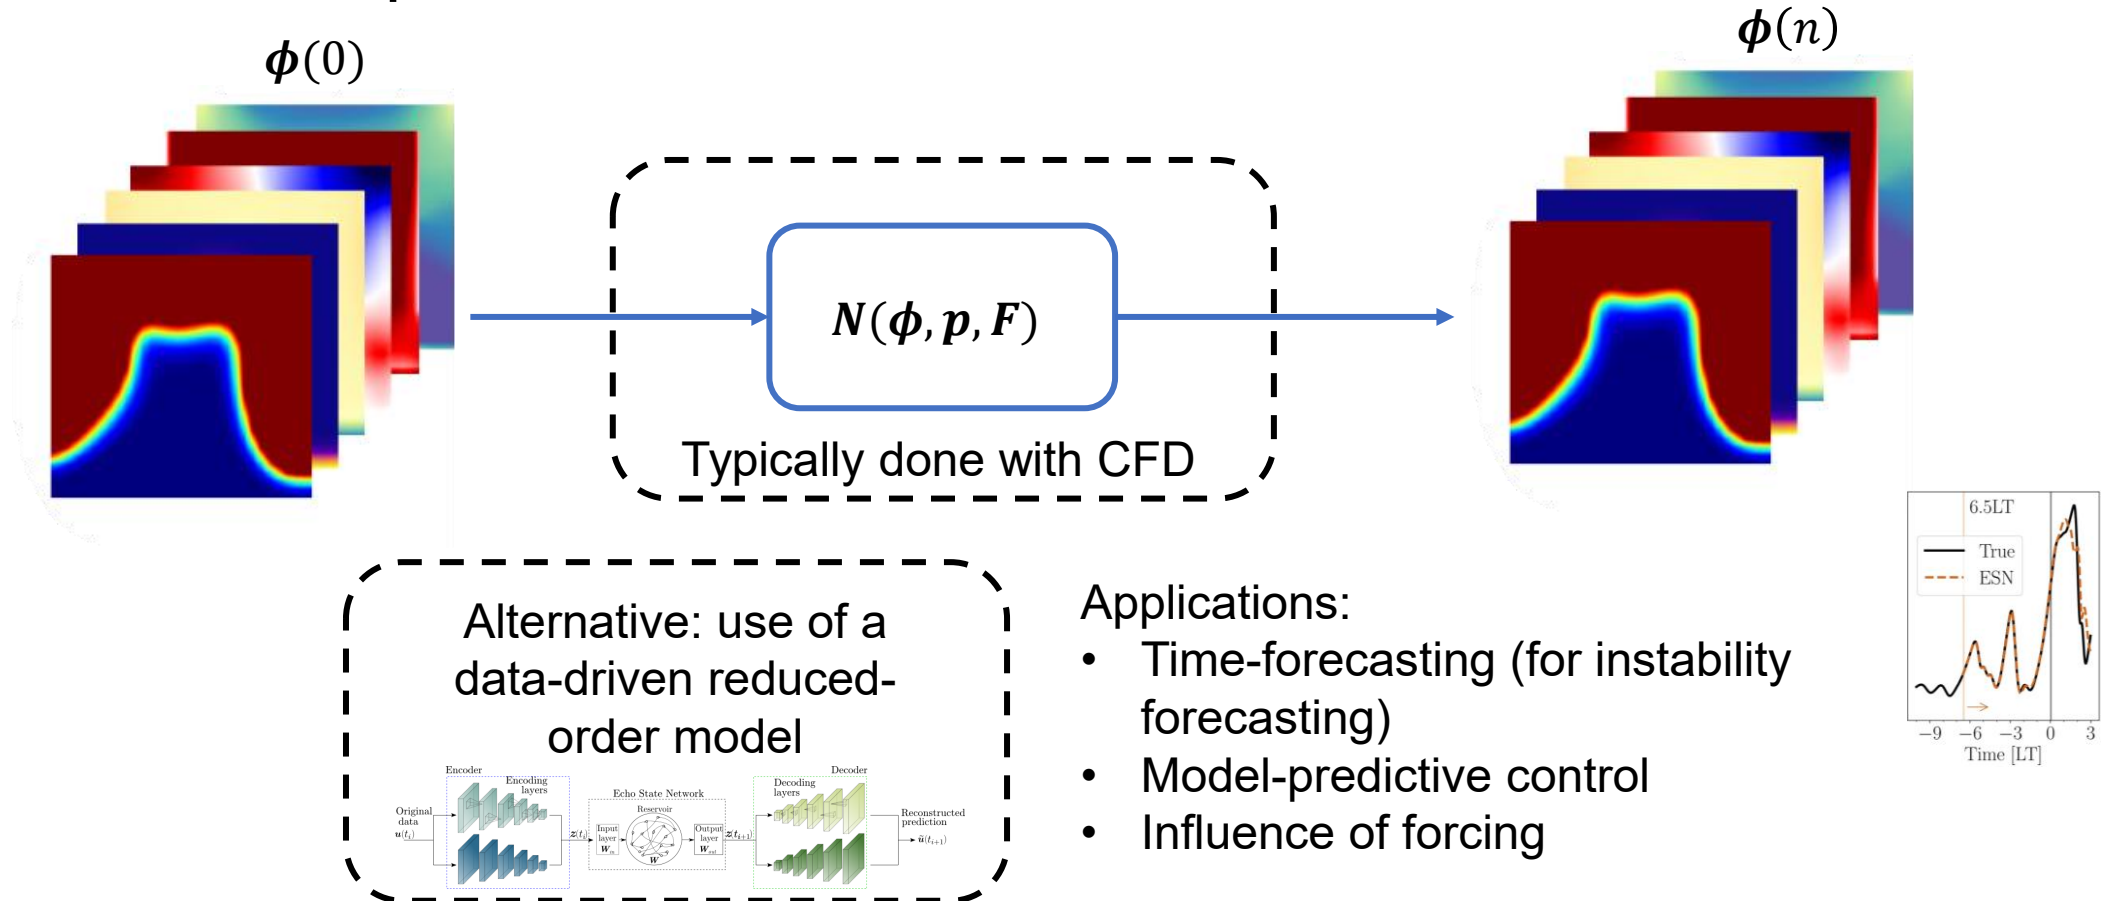


Typical dynamical modelling in turbulent (reacting) flows: Flow dynamics modelling


- Thermoacoustic instabilities: High amplitude pressure oscillations in premixed combustors

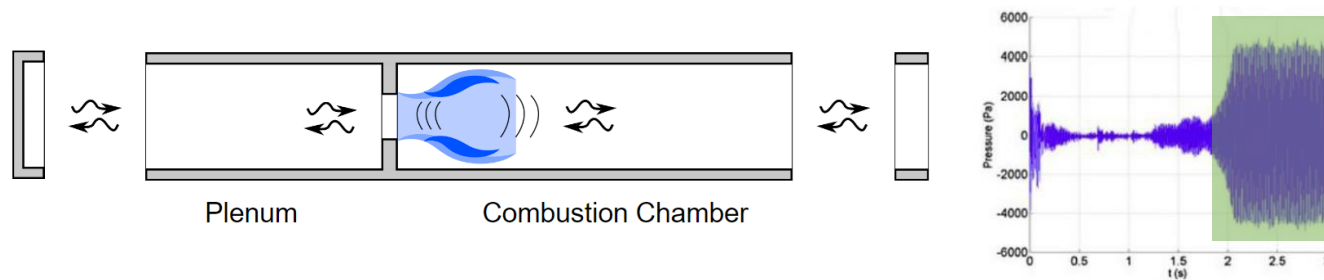

Thermoacoustic instabilities: result from coupling between HRR and acoustic fluctuations

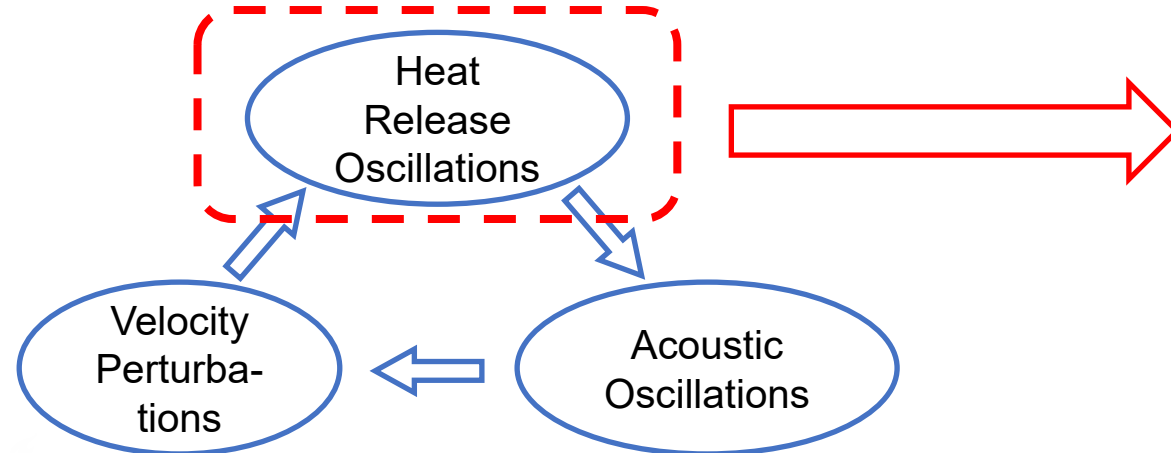

$$\dot{\phi} = N(\phi, p, F)$$



$$\rightarrow \dot{Q} = \mathcal{N}(\phi, F)$$

$$\rightarrow \dot{Q} = \mathcal{F}(F_u)$$

Outline


- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI system
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling

Dynamical systems produce sequential data

Nonlinear autonomous dynamical system:

$$\dot{\phi} = N(\phi, p, F)$$

$$\phi(x, 0) = \phi_0$$

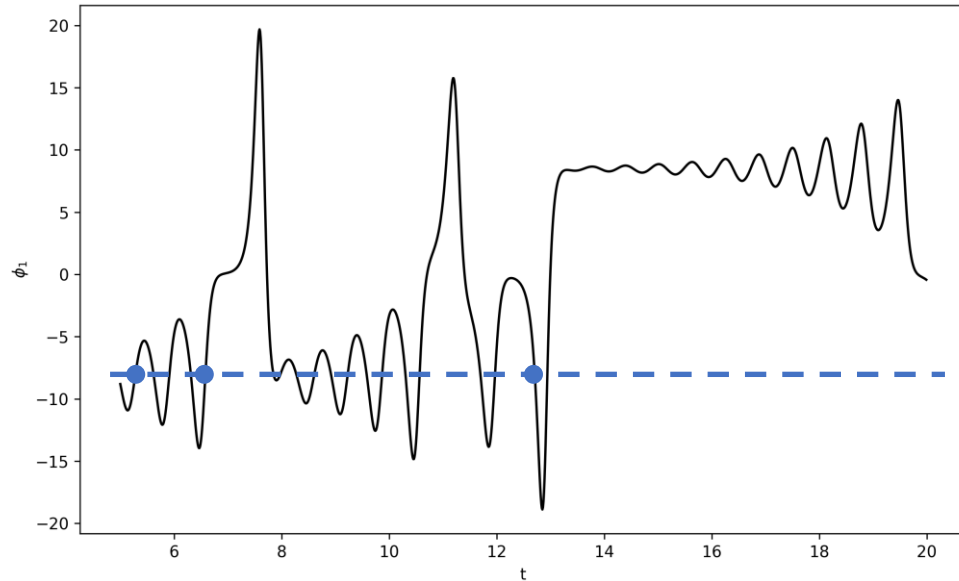


- System exhibit multiple time the same values

Dynamical systems produce sequential data

Nonlinear autonomous dynamical system:

$$\dot{\phi} = N(\phi, p, F)$$
$$\phi(x, 0) = \phi_0$$

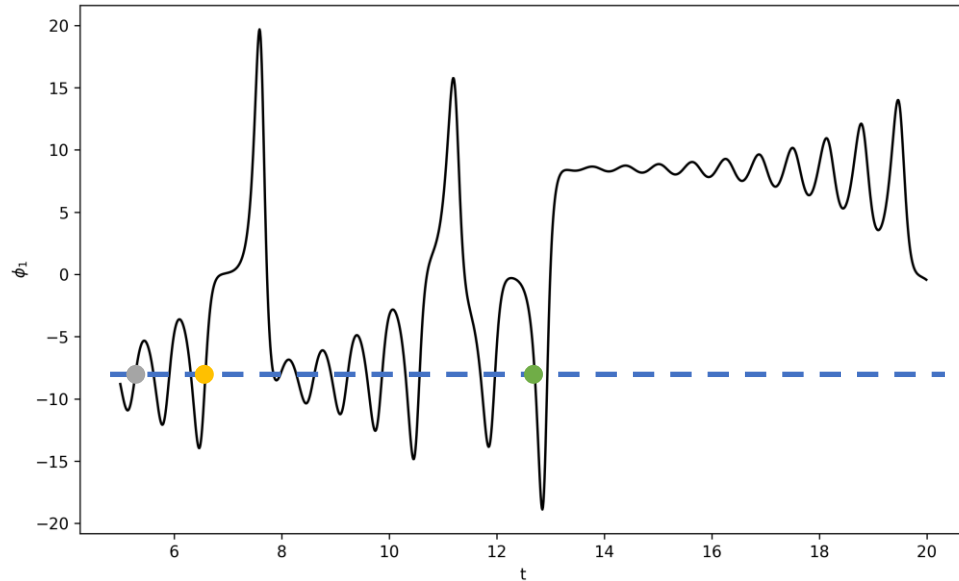


- System exhibit multiple time the same values
- But these are different data points

Dynamical systems produce sequential data

Nonlinear autonomous dynamical system:

$$\dot{\phi} = N(\phi, p, F)$$


$$\phi(x, 0) = \phi_0$$

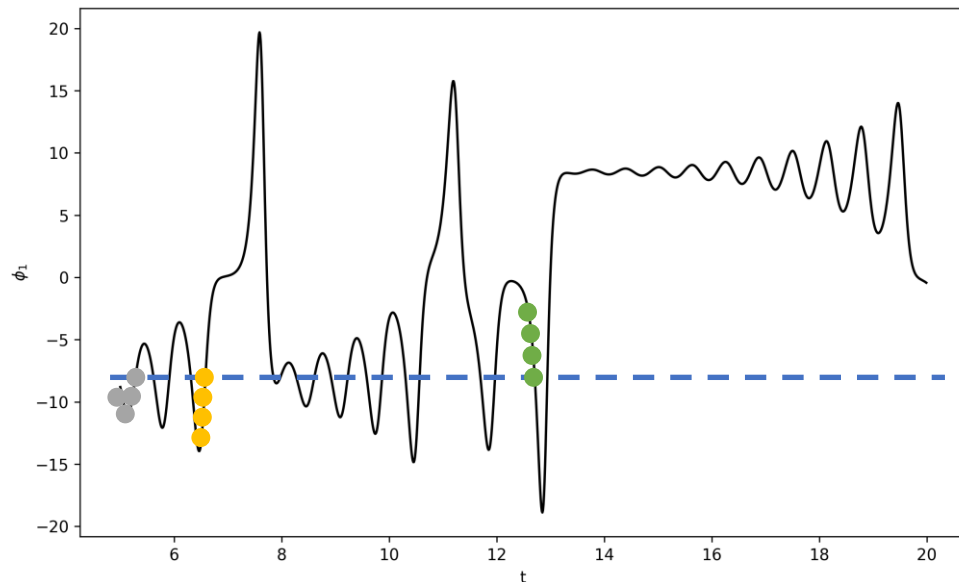

- System exhibit multiple time the same values
- But these are different data points
- The previous data provides the information
 - The *sequence* of data point is important

Slight change in notation

- Forcing considered as an “input” to the system

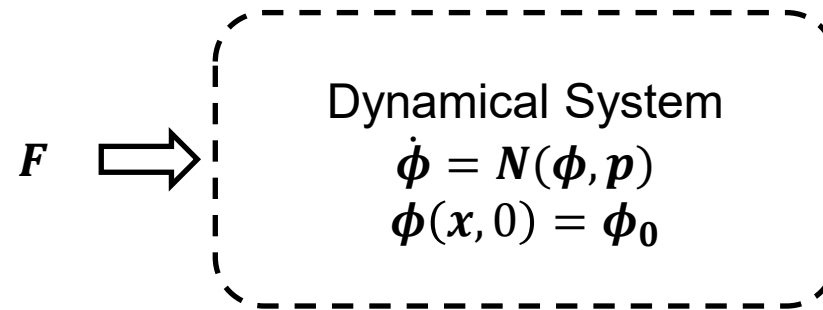

- Discrete-time notation:
 - $\phi(n)$ or ϕ_n : state sampled at time t_n
- Objective of data-driven dynamical system modelling:
 - Based on some data of the dynamical system...
 - ...Obtain a forecast $\tilde{\phi}(n)$ (or of a quantity of interest $\tilde{Q}(\tilde{\phi})$) which approximates the true evolution $\phi(n)$ (or of $Q(\phi)$)

Outline




- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI system
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling

Data-driven Modelling of Dynamical Systems

- Also called “system identification”
- Has a strong history (before “machine learning”)
- Finds its root in signal processing and control theory
 - Generally developed to model systems from measured data
 - Mostly applied to linear, time-invariant systems
 - See e.g. Rabiner and Gold (1975); Bellanger (2000); Ljung (1999)
- Extension to nonlinear dynamical systems
 - With recent neural networks-based approaches



Brief introduction to system identification

- Presentation based on: [1]
- Focus is on “system’s response to a signal”

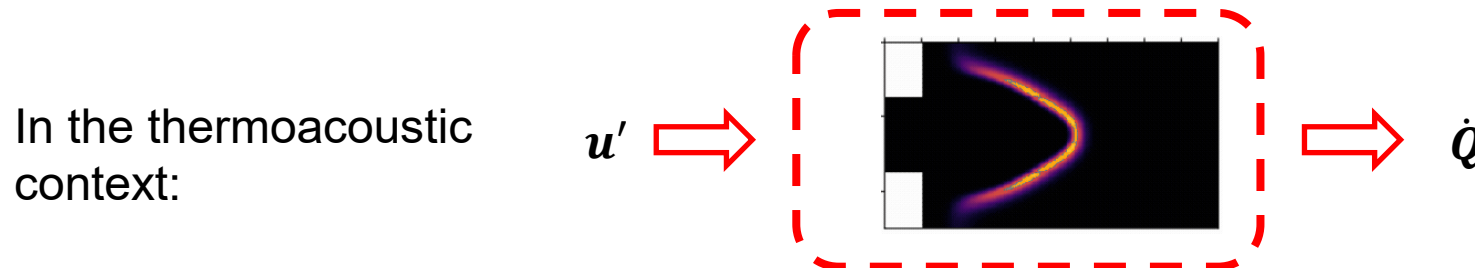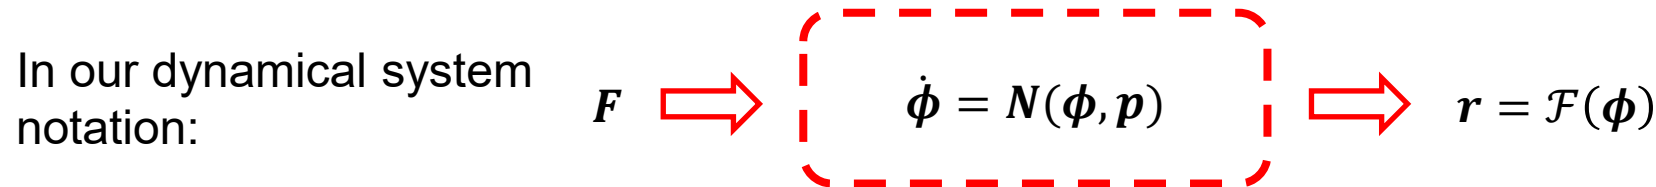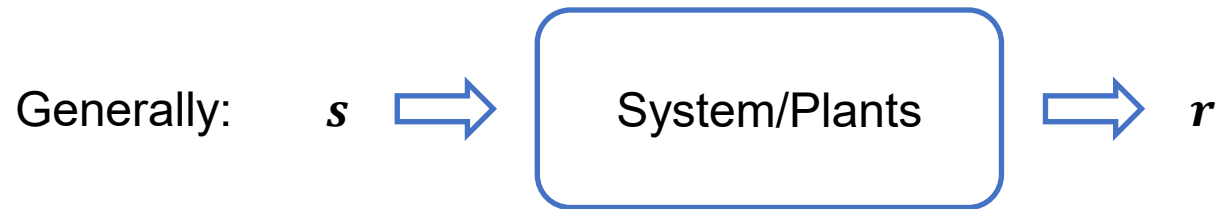

Brief introduction to system identification


- Assumption: causal linear time-invariant (LTI) system (and for single input/output)

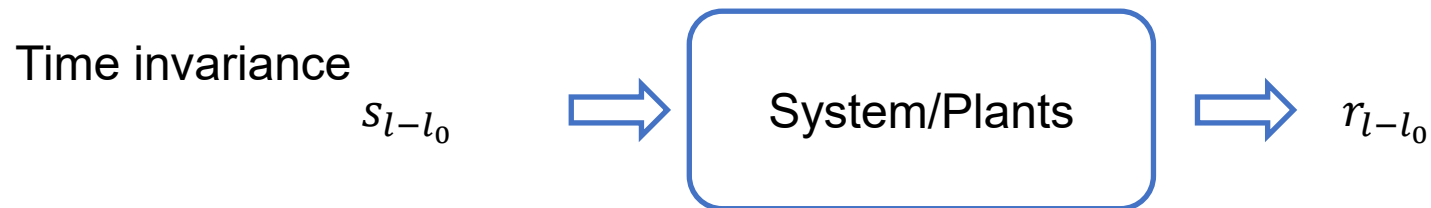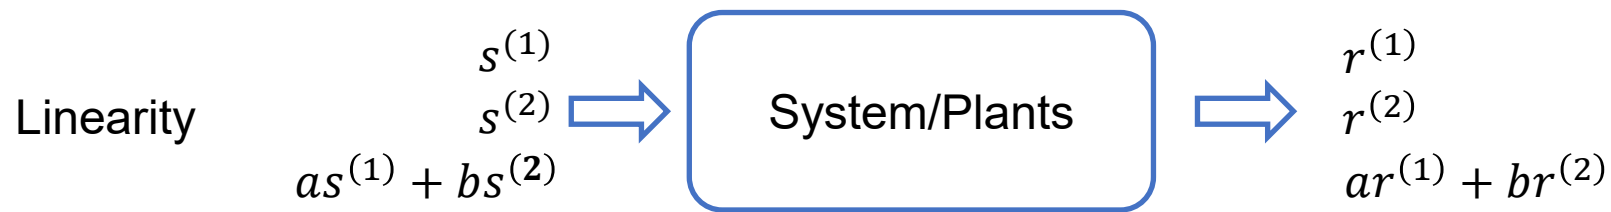

Causal: response r_l depends only on the present/past signal, i.e.:
 r_l does not depend on s_m for $m > l$

Brief introduction to system identification

- Impulse response: system's response to “impulse”

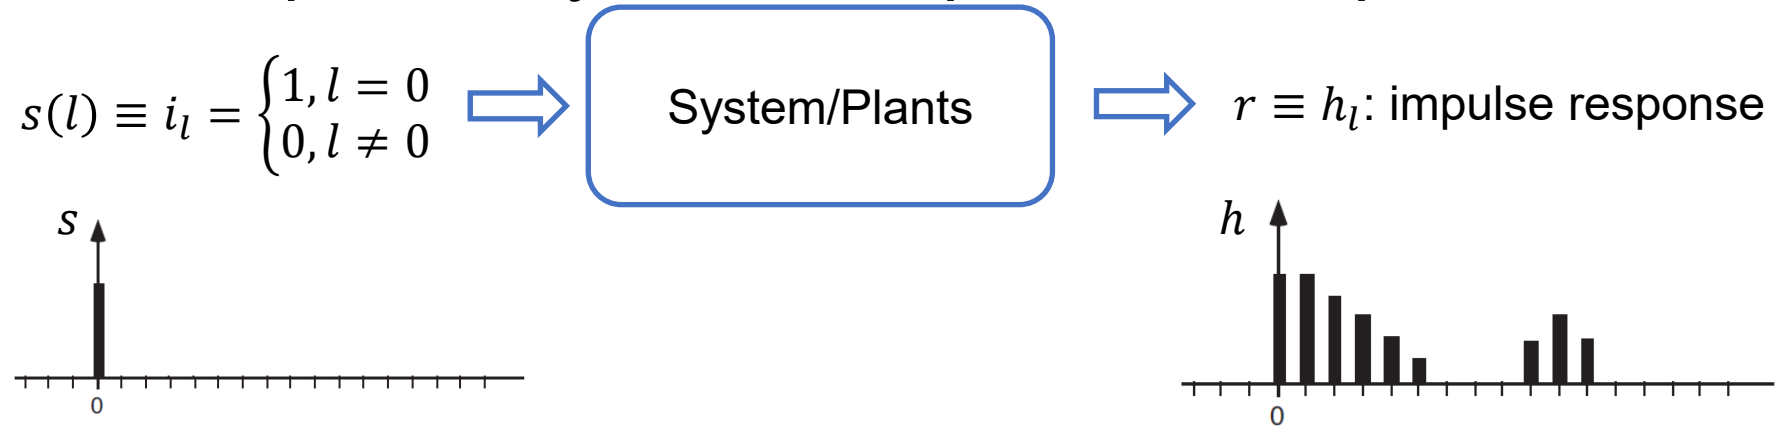

- Impulse response: characterizes the LTI system's response to *any* signal

$$r_l = \sum_{k=-\infty}^{\infty} h_k s_{l-k} \rightarrow r = h * s \quad (\text{convolution})$$

For causal system: $h_k = 0$ for $k < 0$

→ Fully characterizes the system's dynamics

$$r_l = \sum_{k=0}^{\infty} h_k s_{l-k}$$

Brief introduction to system identification

- How can we estimate the impulse response h_k ?
- First, consider the finite response ($k = 0, \dots, N$):

$$r_l \approx \sum_{k=0}^N h_k s_{l-k}$$

- Assume we have collected some signal/response of length L :
 s_l and r_l ($l = 0, \dots, L$)
- Correlation analysis can be used to estimate h_k

Brief introduction to system identification

- Consider the auto-correlation matrix $\mathbf{\Gamma}$ of s (estimated using L time lags)

$$\Gamma_{ij} \approx \frac{1}{L - N + 1} \sum_{k=N}^L s_{k-i} s_{k-j}, \quad i, j = 0, \dots, N$$

- And cross correlation vector $\mathbf{c}$

$$c_i \approx \frac{1}{L - N + 1} \sum_{k=N}^L s_{k-i} r_k, \quad i = 0, \dots, N$$

- One can show the following relation:

$$\begin{aligned} \mathbf{\Gamma} \mathbf{h} &= \mathbf{c} \text{ (Wiener-Hopf equation)} \\ &\rightarrow \mathbf{h} = \mathbf{\Gamma}^{-1} \mathbf{c} \end{aligned}$$

Brief introduction to system identification

- Direct inversion of $\mathbf{\Gamma}$ can result in “over-fitting” of the impulse response coefficients

$$\rightarrow \mathbf{h} = \mathbf{\Gamma}^{-1} \mathbf{c}$$

- Regularization generally used - $\mathbf{h}$ such that:

$$\min(\|\mathbf{\Gamma} \mathbf{h} - \mathbf{c}\|^2 + \alpha^2 \|\mathbf{R} \mathbf{\Gamma}\|^2)$$

$\mathbf{R}$: Regularization matrix (can be the identity matrix)

Exact solution:


$$\mathbf{h}_{\alpha} = (\mathbf{\Gamma}^T \mathbf{\Gamma} + \alpha^2 \mathbf{R} \mathbf{R}^T)^{-1} \mathbf{\Gamma}^T \mathbf{c}$$

Brief introduction to system identification


$$\rightarrow \mathbf{h} = \mathbf{\Gamma}^{-1} \mathbf{c} \text{ or } \mathbf{h}_{\alpha} = (\mathbf{\Gamma}^T \mathbf{\Gamma} + \alpha^2 \mathbf{R} \mathbf{R}^T)^{-1} \mathbf{\Gamma}^T \mathbf{c}$$

- If s is white noise, $\mathbf{\Gamma} = \mathbf{I}$ (identity matrix)

- Summary

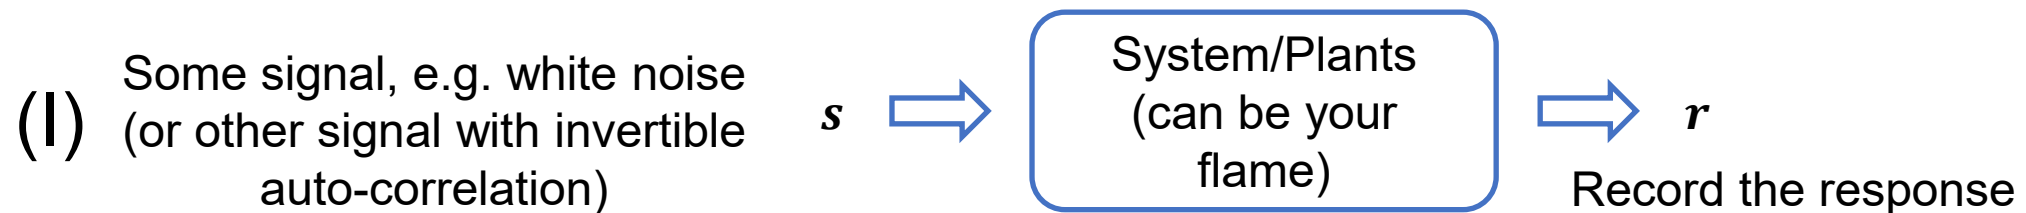

(II) Compute $\mathbf{\Gamma}, \mathbf{c}$

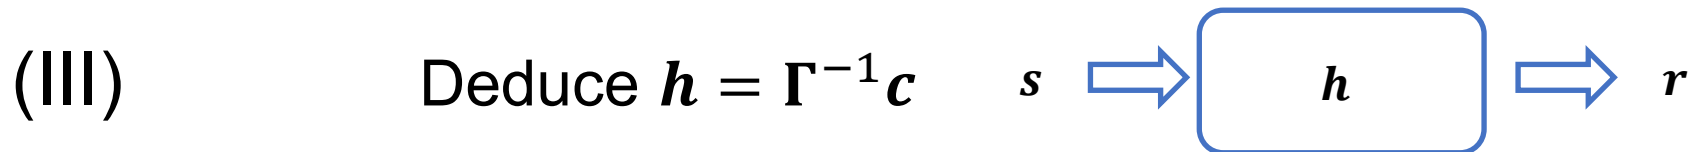

(IV) With $\mathbf{h}$, estimate $\mathbf{r}$ for any s

Brief introduction to system identification

- Approach can be extended to multi-input/multi-output systems
- In the specific case of thermo-acoustic, interest is in the frequency response:

If $s_l(\omega) = e^{1i\omega\Delta t l}$:

$$r_l = \sum_{k=-\infty}^{\infty} h_k e^{1i\omega\Delta t(l-k)} = e^{1i\omega\Delta t l} \sum_{k=-\infty}^{\infty} h_k e^{-1i\omega\Delta t k}$$

$$\rightarrow F(\omega) \equiv \sum_{k=-\infty}^{\infty} h_k e^{-1i\omega\Delta t k} \quad (\text{Laplace/z-transform of } \mathbf{h}, \text{ estimated at } z = e^{1i\omega\Delta t})$$

$$\rightarrow r_l(\omega) = s_l(\omega)F(\omega)$$

Brief introduction to system identification

- Practical considerations:
 - Turbulent fluctuations can mask “noise” the response signal, so masking/filtering of turbulent fluctuation may be necessary
 - “Optimal” excitation signal (for acoustic identification):
 - Excitation should be uncorrelated with itself
 - Signal should be broadband, low-pass filtered with constant amplitude in frequency range of interest
- ...

Outline

- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI system
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling


Outline for

Data-driven nonlinear dynamical system modelling

1. Motivation and General Concepts
2. Backpropagation through Time
3. Long Short-Term Memory Unit
4. Other RNNs/Advanced RNNs

Motivation

- So far: system identification for LTI system:

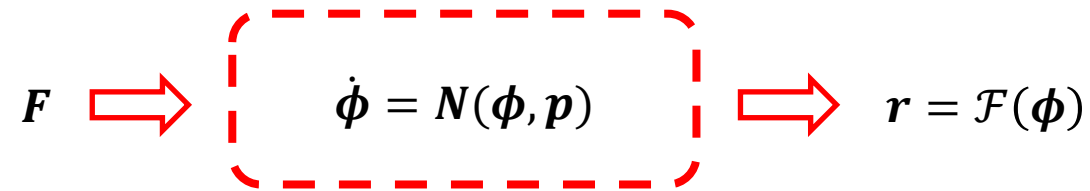


Strong assumptions remain:

→ Linear dynamical system

- What about when the system is nonlinear?
 - Various approaches possible (Volterra series, autoregressive models, ...)
 - Focus here on: neural network-based nonlinear modelling


Neural network can be used as a basis for “any model”

- Neural networks
 - Inspired to reproduce the biological process of learning (late 1940s/early 1950s)

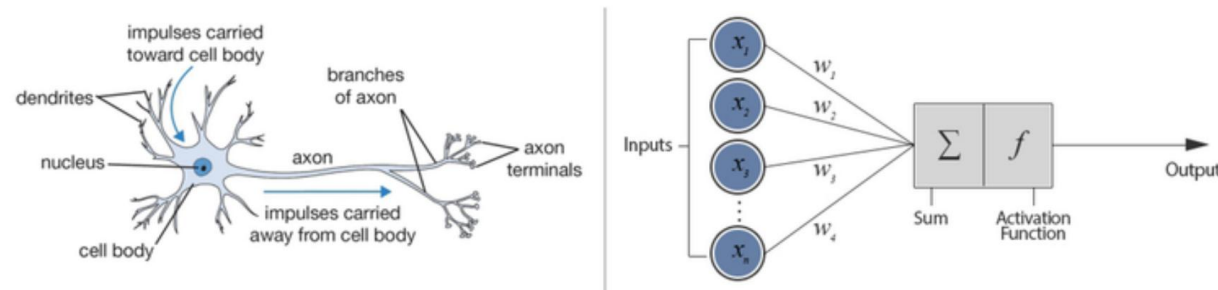

- Universal approximator
 - “Can approximate any kind of nonlinear function”*
- Very strong expressivity
 - “Can represent a large variety of functions”*

The neuron introduces nonlinearity through its activation function

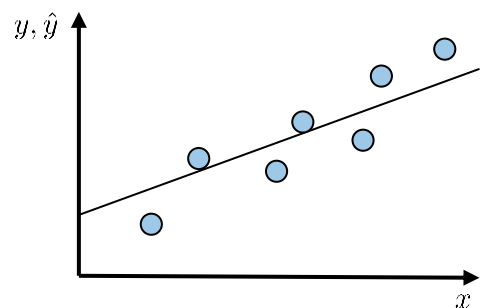


Standar linear regression:

$$\hat{y} = \sum_i^n w_i u_i + b_i = \mathbf{w} \cdot \mathbf{u} + \mathbf{b}$$


Nonlinearity introduced with activation function :

$$\hat{y} = f(\mathbf{w} \cdot \mathbf{u} + \mathbf{b})$$

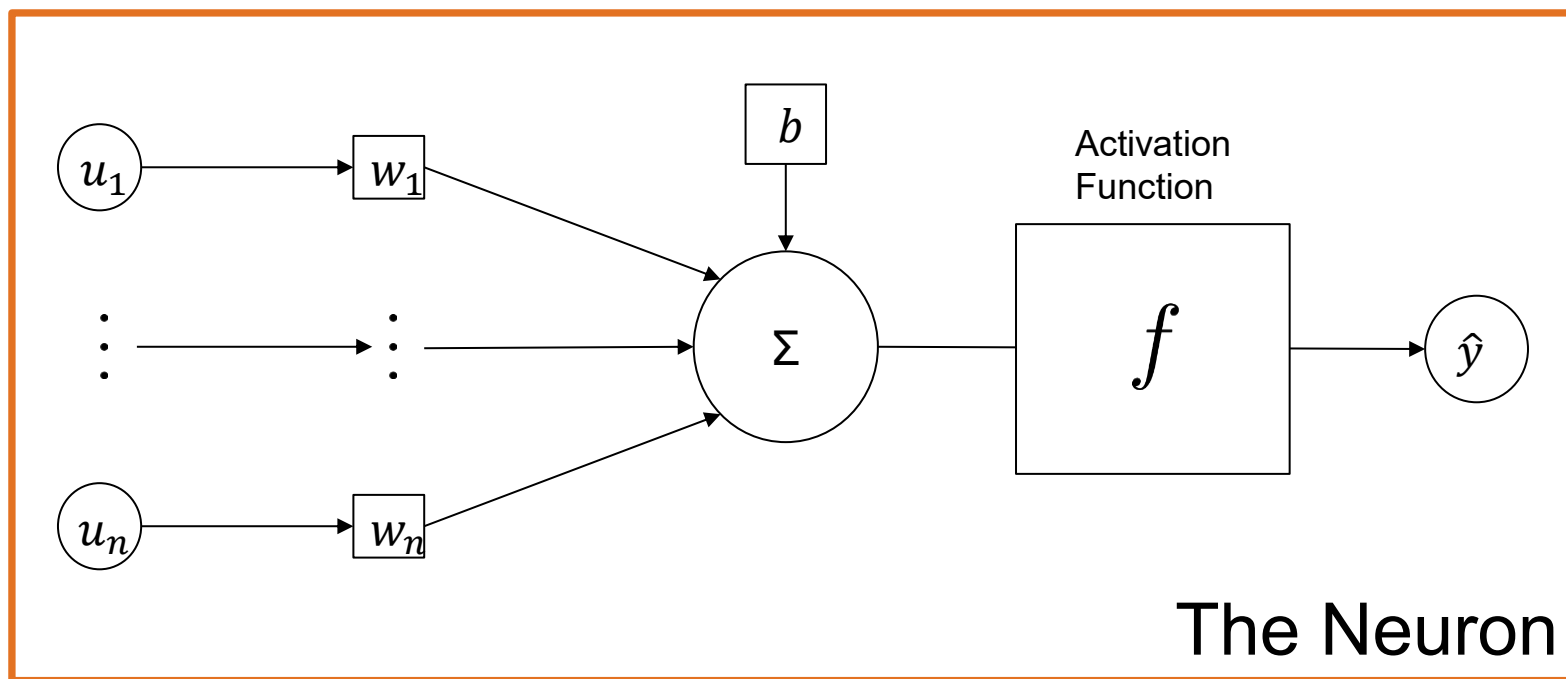


Feedforward neural network/Multilayer perceptron are obtained by chaining layers of neurons

- Dense deep neural network:
 - Fully connected neurons organised in layers
 - Enough neurons can approximate any function (universal approximator)

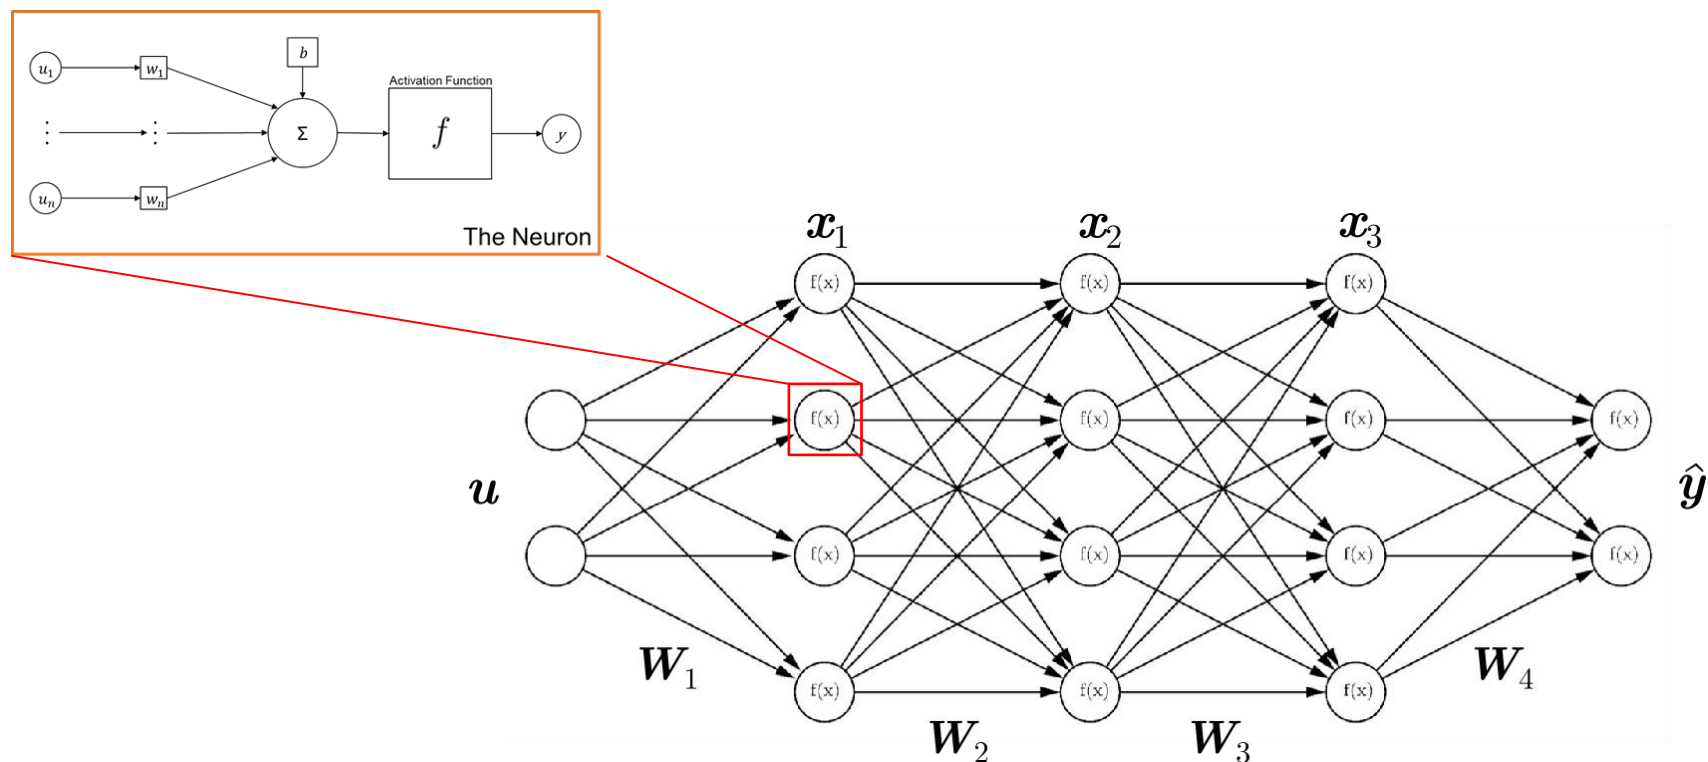

Learning/training is just optimizing the neurons' weights and biases

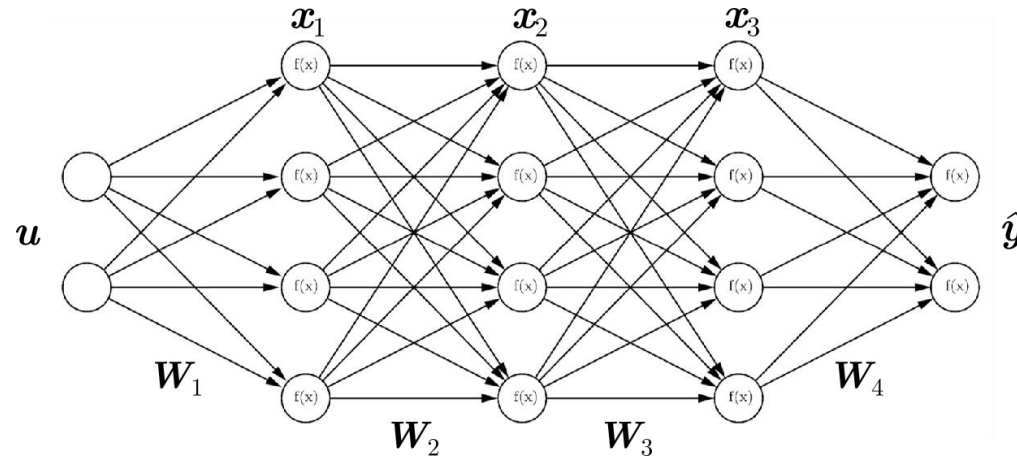



- Simplest type of task, data-regression: Minimization of the error:

$$\min_{W, b} \frac{1}{N} \sum_{i=1}^N ||y_i - \hat{y}_i||^2$$

→ Typically solved using gradient-based optimization where gradient obtained by automatic differentiation

Naive approach to sequence processing

- How to deal with sequence?
- Possible approach: time as input

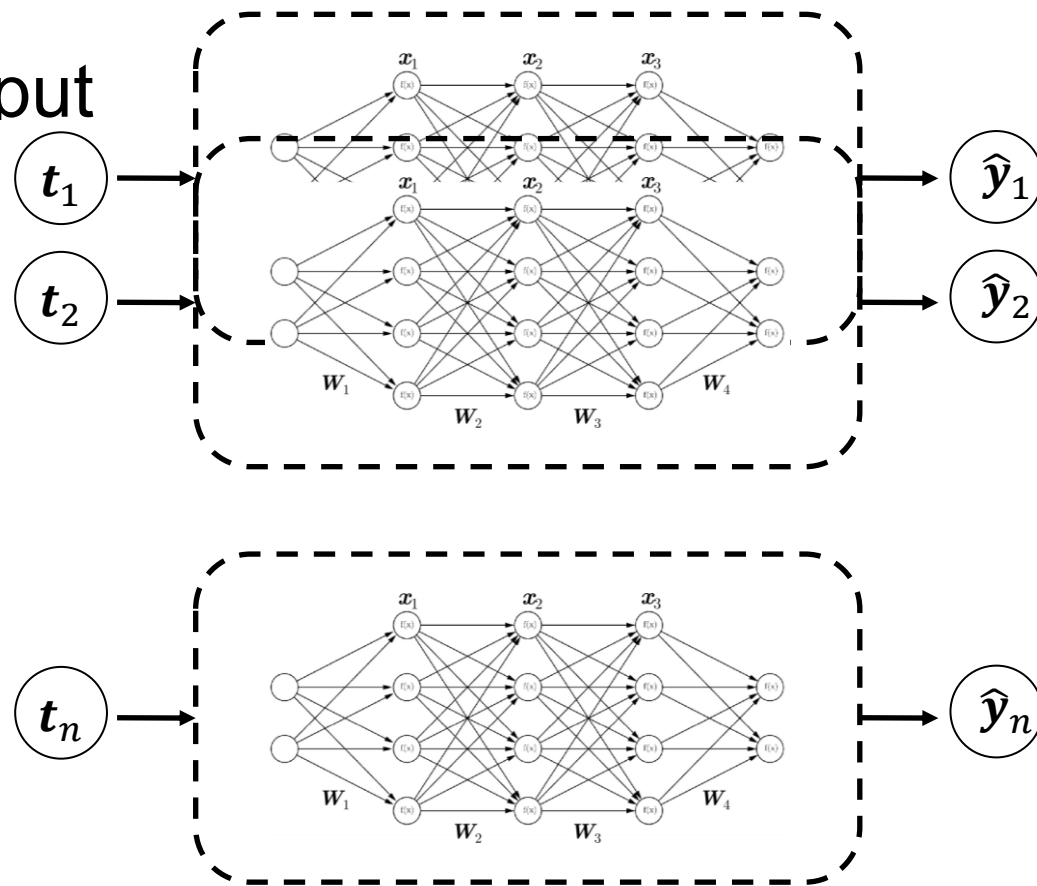
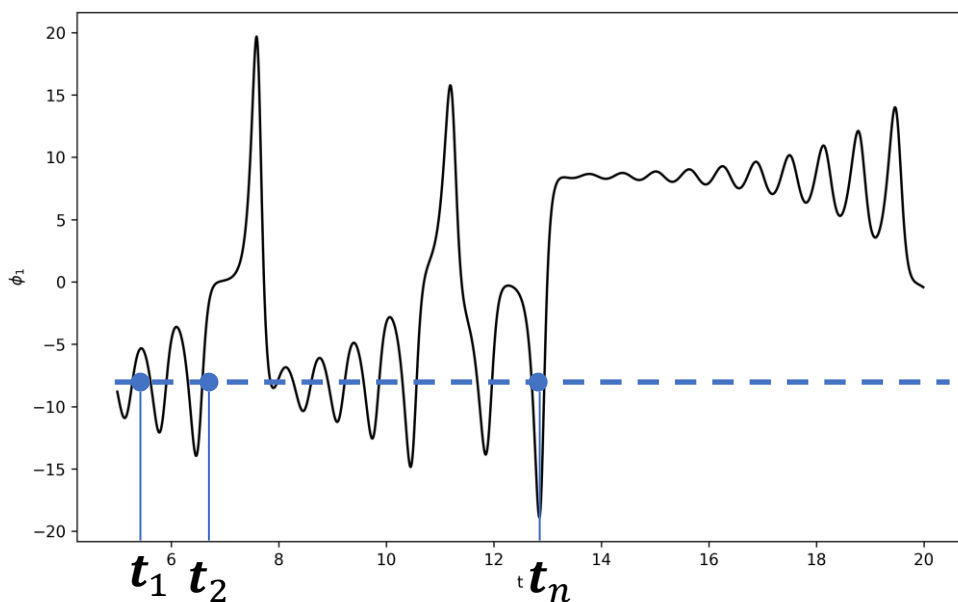


→ If input is time, no sense of “ordering”

→ Neural network: “value indexing”, no possibility to extrapolate

Another naive approach to sequence processing


- Possible approach:

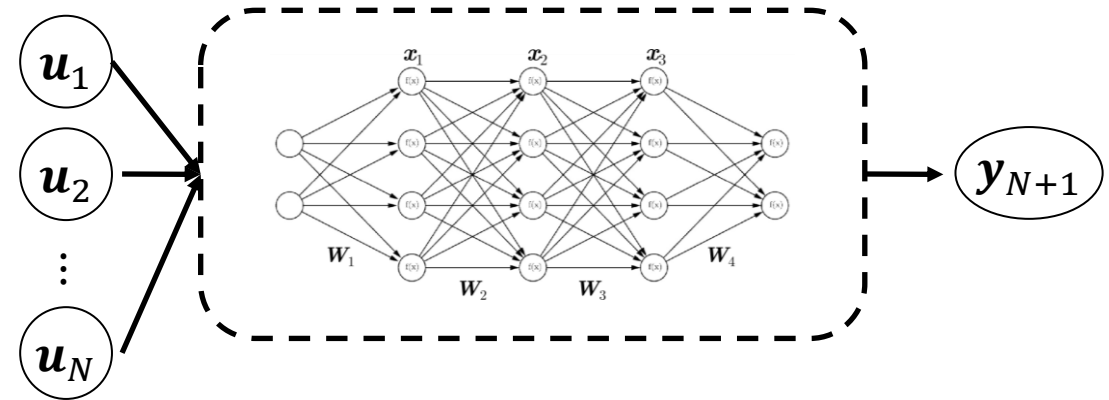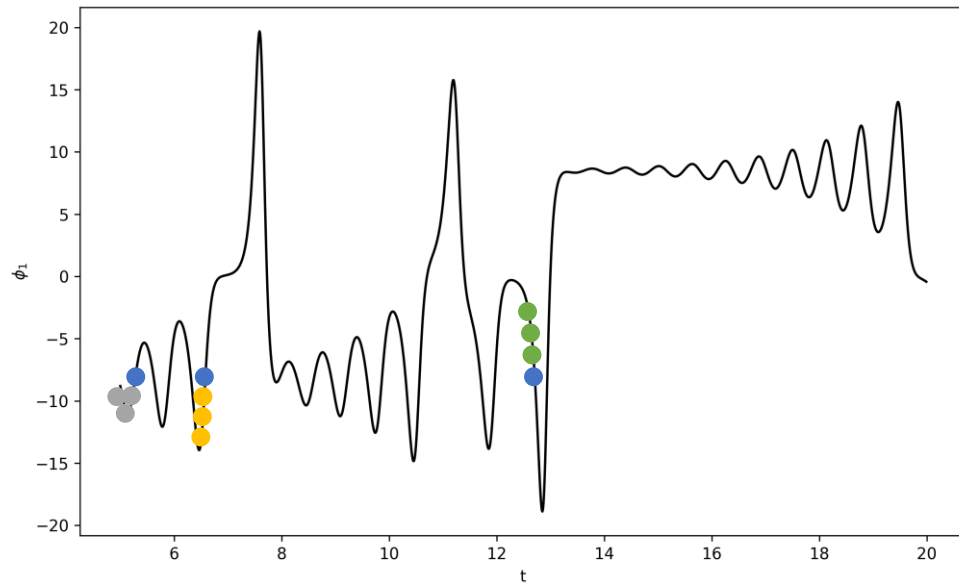



- Use sequence of N past values as input
- Requires initial guess of time-dependency
 - Can lead to large number of weights if long-term dependency required

How to include time-dependency

Standard neuron

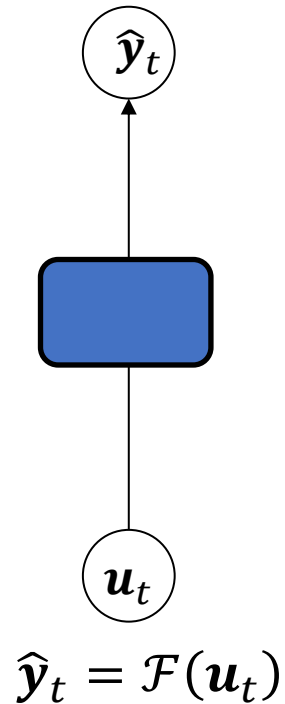

Time-handling neuron

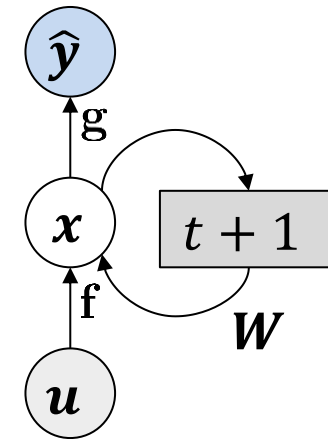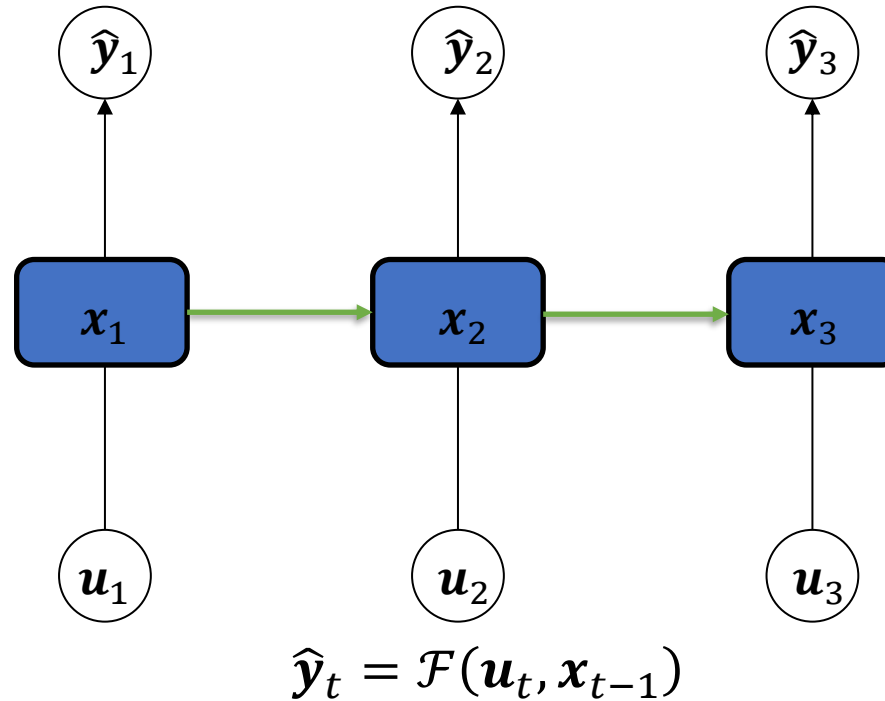

$$x_t = f(x_{t-1}, u_t)$$


$$\hat{y}_t = g(x_t)$$

x : internal/hidden state

u : input

$\hat{y}$: output

Recurrent neural network uses a “memory” to retain past information

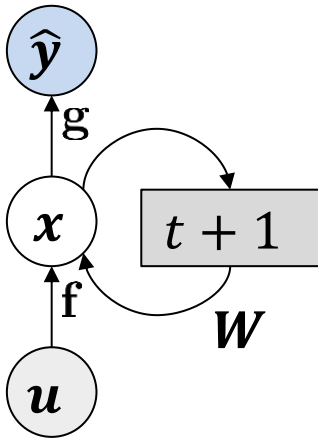

$$x_t = f(x_{t-1}, u_t; W)$$
$$\hat{y}_t = g(x_t; W_g)$$

x : internal/hidden state
 u : input
 $\hat{y}$: output

Recurrent neural network


- Have a “state/memory” which is retained and evolves
- Designed to deal with time series
- Wrap up: Is a state space system that can be time-advanced whose parameters have to be learned

Outline for


Data-driven nonlinear dynamical system modelling

1. Motivation and General Concepts
- 2. Backpropagation through Time**
3. Long Short-Term Memory Unit
4. Other RNNs/Advanced RNNs

Backpropagation in time: Unfolding the graph

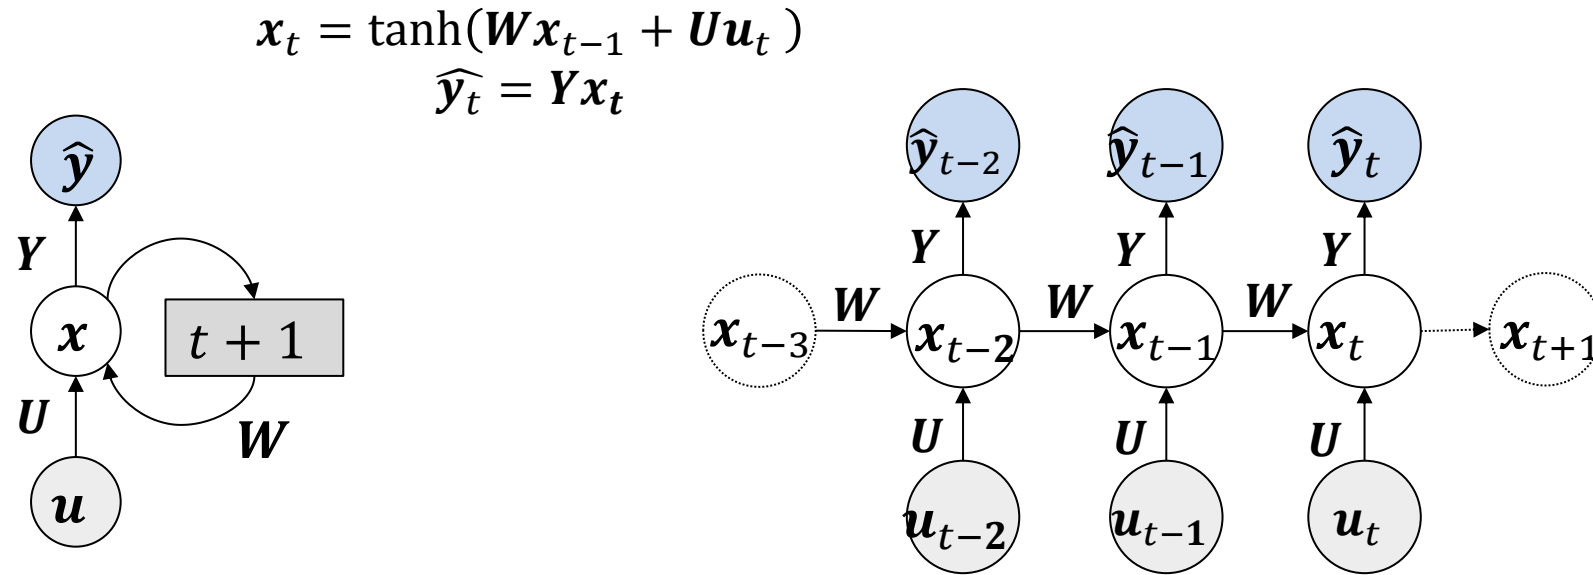

Backpropagation in time: Unfolding the graph

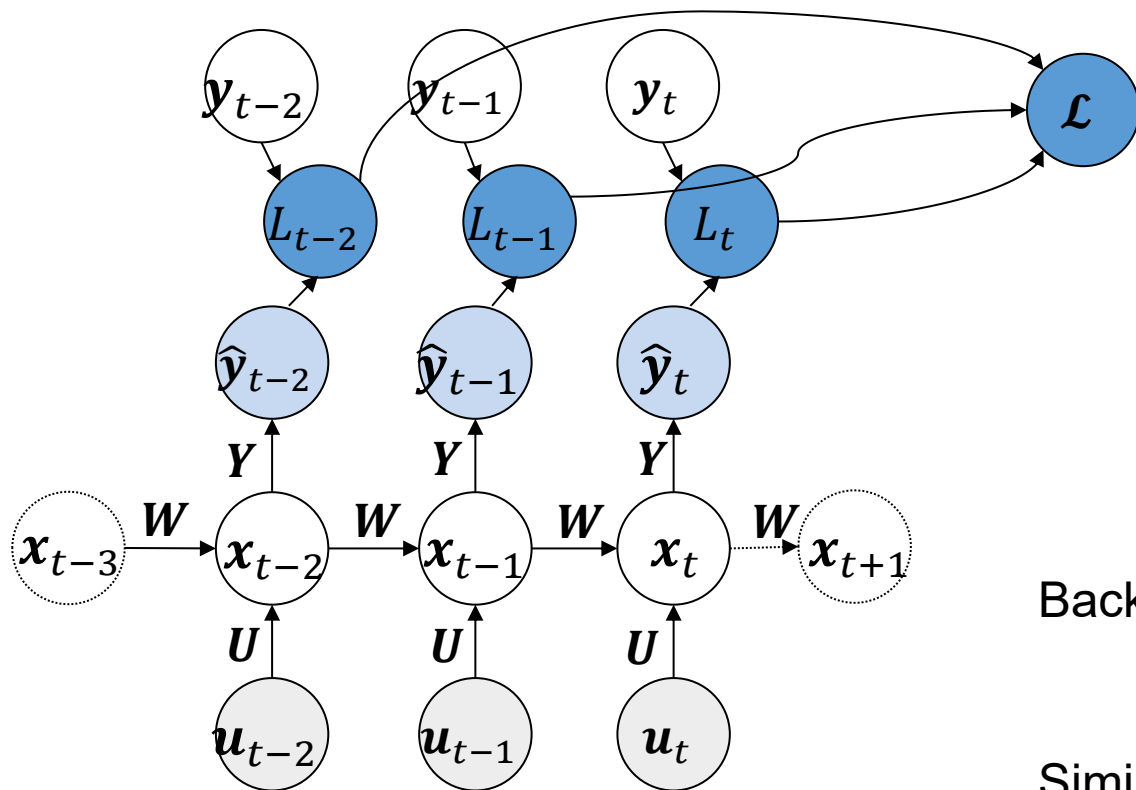

Loss over multiple timesteps:

$$\mathcal{L} = \sum_{t=\tau}^t L_k$$


Backpropagation:

$$\frac{\partial \mathcal{L}}{\partial W} = \frac{\partial \mathcal{L}}{\partial x_t} \frac{\partial x_t}{\partial W} + \dots + \frac{\partial \mathcal{L}}{\partial x_{t-\tau}} \frac{\partial x_{t-\tau}}{\partial W}$$

Similar to deep network:

#timesteps $\approx$ #layers

Long-term issues of backpropagation in time

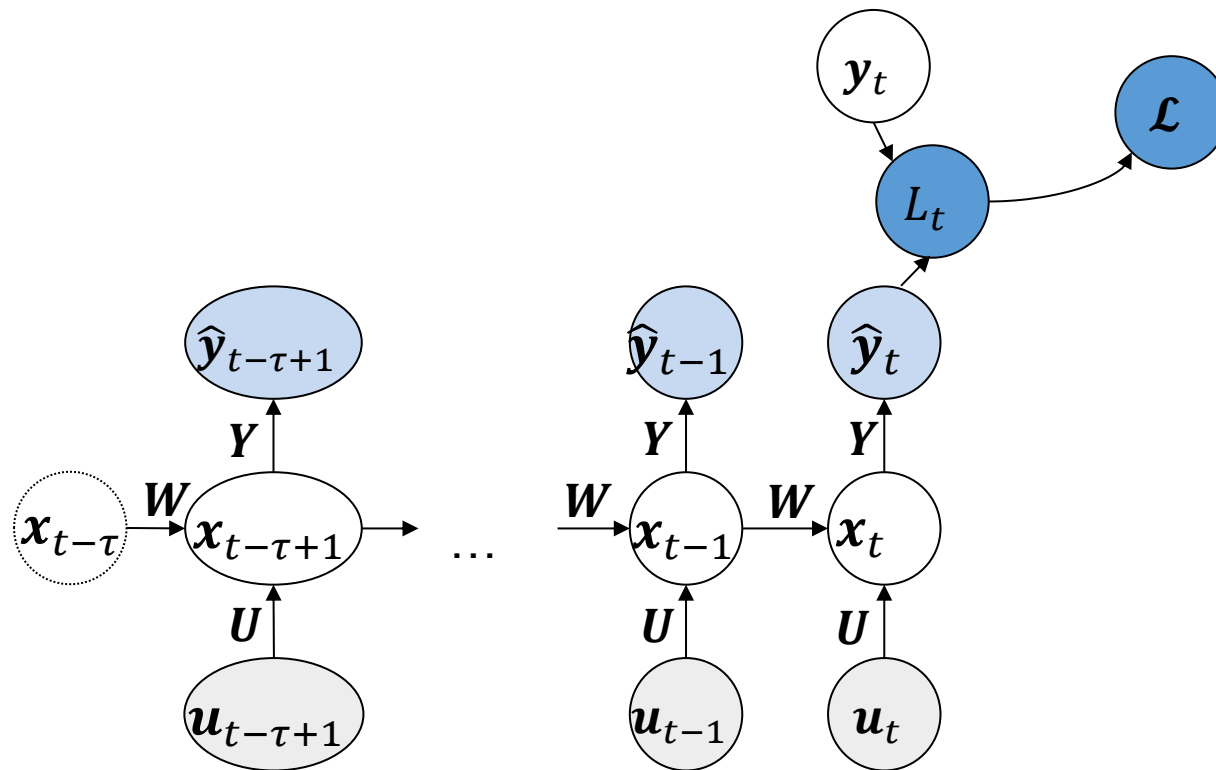

$$\frac{\partial \mathcal{L}}{\partial \mathbf{x}_{t-\tau}} = \frac{\partial \sum L_t}{\partial \mathbf{x}_{t-\tau}} \rightarrow \frac{\partial L_t}{\partial \mathbf{x}_{t-\tau}} = \frac{\partial L_t}{\partial \mathbf{x}_t} \frac{\partial \mathbf{x}_t}{\partial \mathbf{x}_{t-\tau}}$$

Difficulty:

The gradient with respect to past goes through many applications of W and activation function if long-term dependency.

So, stability of gradient calculation depends on:


- Activation function
- Spectral radius of W .

$\rho(W) > 1$: exploding gradient

$\rho(W) < 1$: vanishing gradient

How to overcome this long-term dependency issue?


1. Use activation function that don't decrease f' too much (ReLU)

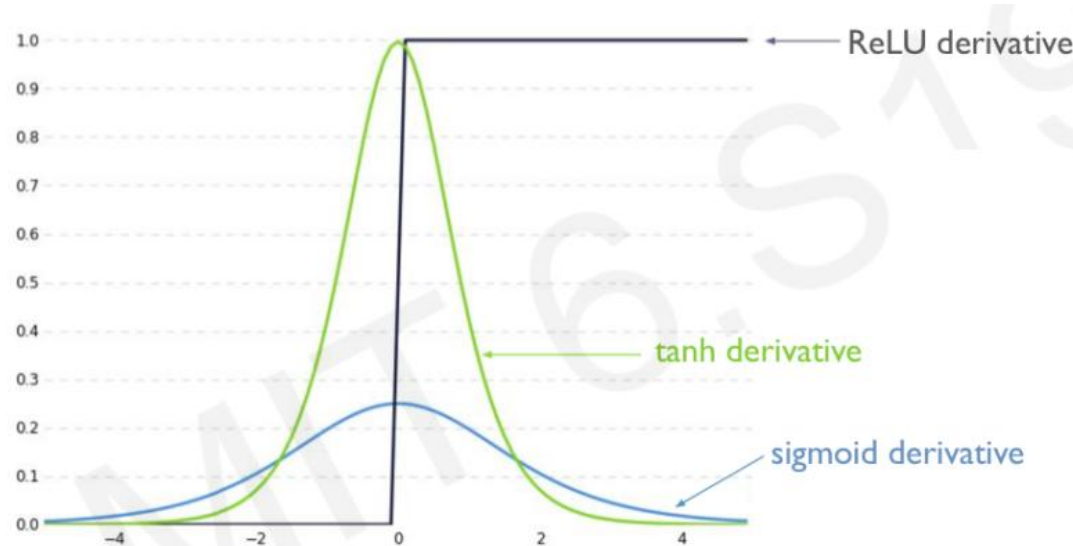

2. Initialize your Weight matrix $\mathbf{W}$ such that $\rho(\mathbf{W}) = 1$ (identity matrix)
3. Use more complex recurrent unit with gates to control the information flow (LSTM)

Teacher forcing can decouple the graph


- To facilitate training we can feed the next target output as input and split the graph

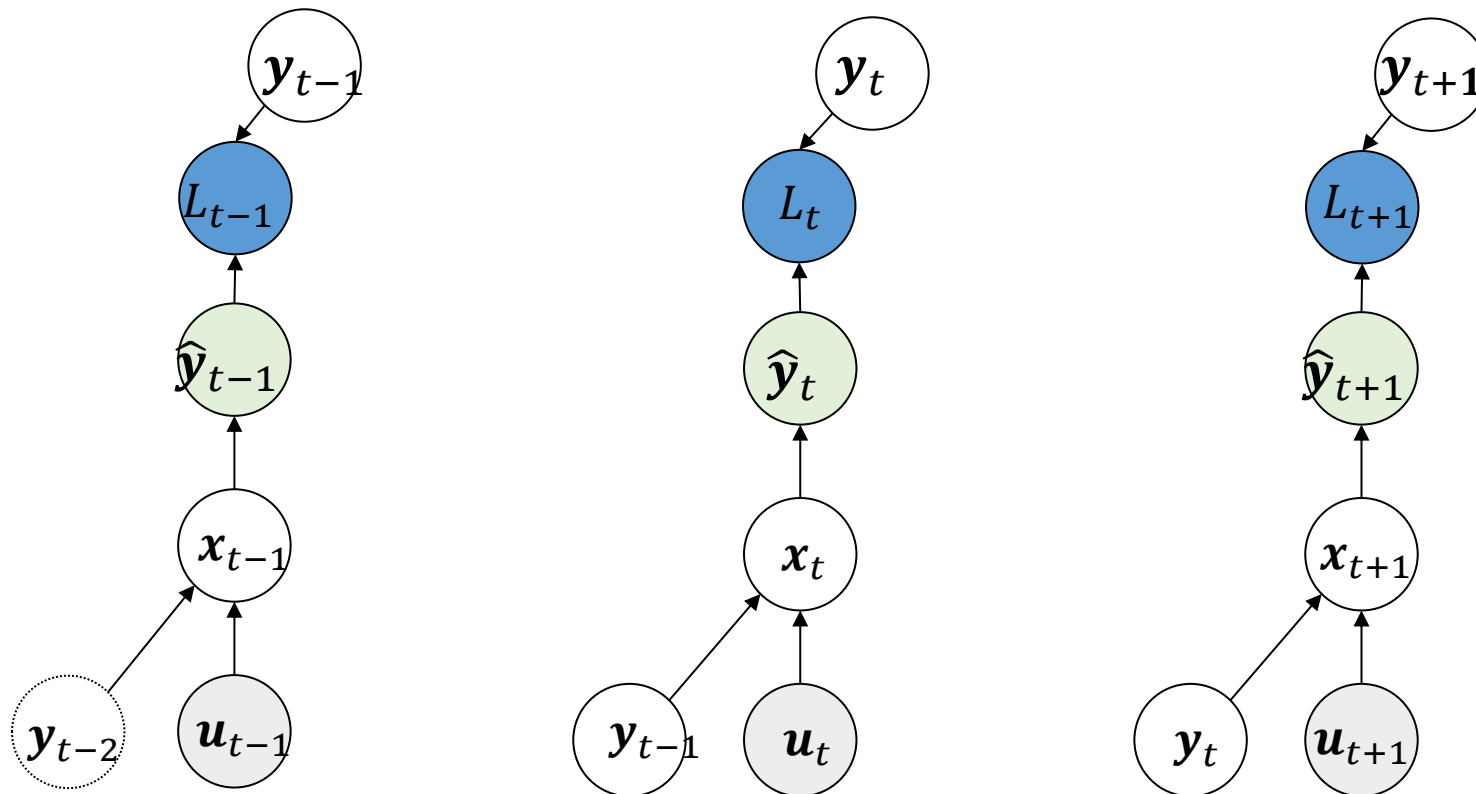

! But does not train for long-term prediction !

Auto-regressive training: Feedback of the prediction back as input

Auto-regressive training:

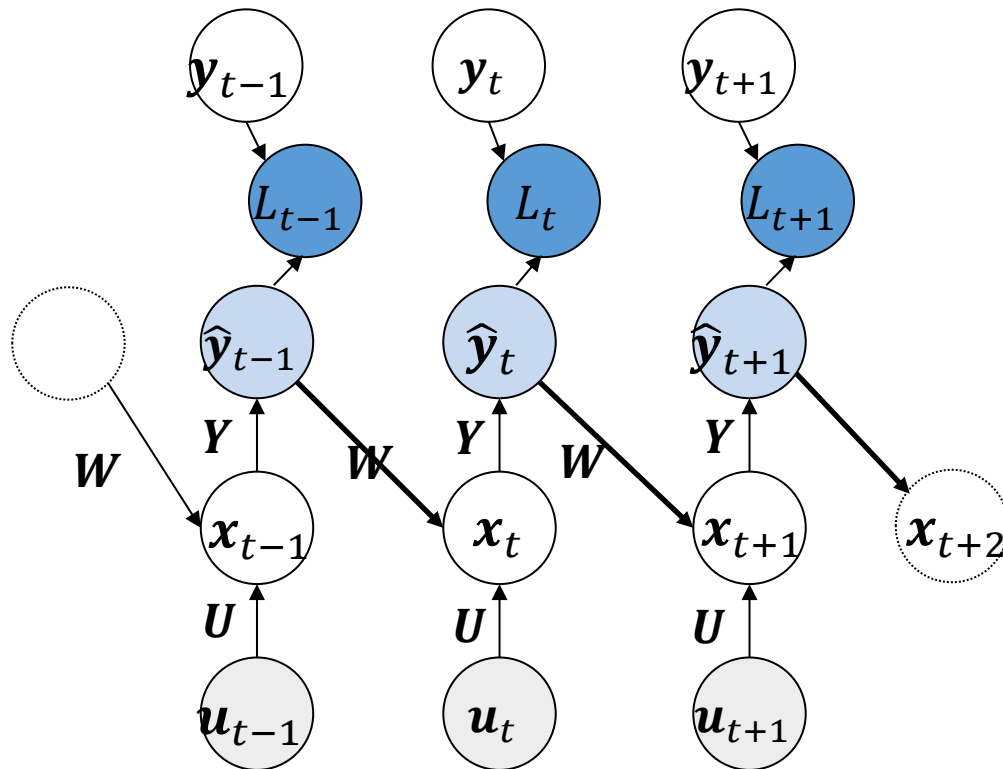

More expensive training but more robust

Recurrent Neural Network – Wrap up

- RNN: Dynamical system with free parameters
 - Similarly to feedforward neural networks, RNN are universal approximators of *dynamical systems*
- Can be trained using Backpropagation Through Time (as usual)
 - But depth of backpropagation depends on number of time-step dependency
 - Teacher-forcing can be used to decouple the graph


Schäfer A.M., Zimmermann H.G. (2006) Recurrent Neural Networks Are Universal Approximators. In: Kollias S.D., Stafylopatis A., Duch W., Oja E. (eds) Artificial Neural Networks – ICANN 2006. ICANN 2006. Lecture Notes in Computer Science, vol 4131. Springer, Berlin, Heidelberg. https://doi.org/10.1007/11840817_66

Outline for

Data-driven nonlinear dynamical system modelling

1. Motivation and General Concepts
2. Backpropagation through Time
- 3. Long Short-Term Memory Unit**
4. Other RNNs/Advanced RNNs

Simple RNN

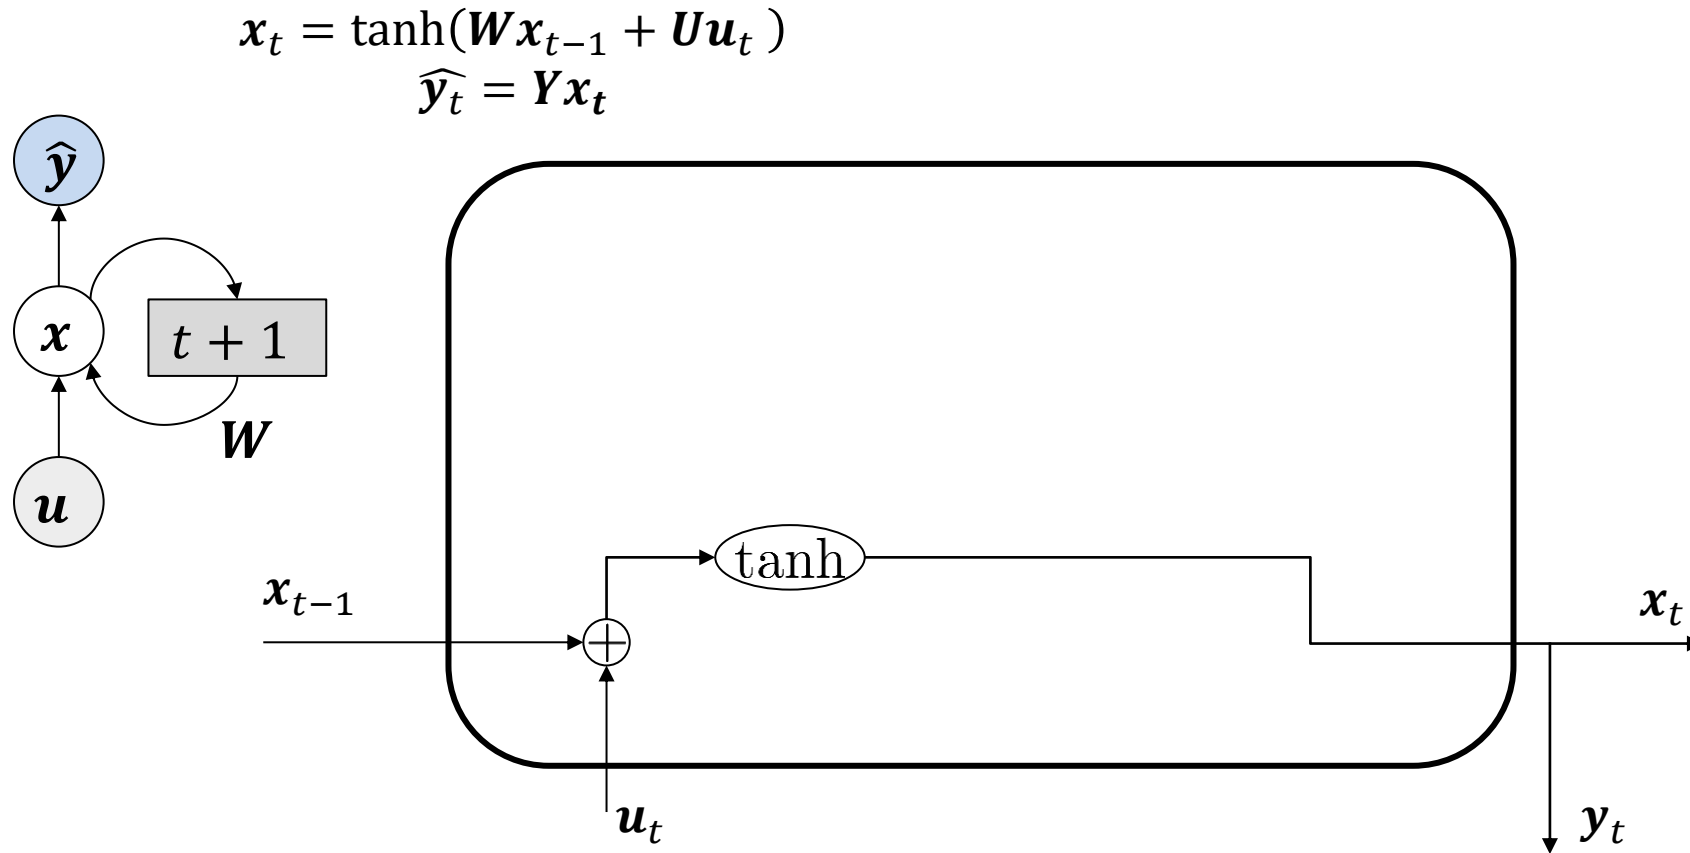

No long-term dependency!

Long-Short Term Memory


- Idea of not updating the whole hidden state each time
- Protect the state from being overwritten by useless information
- Be selective in
 - What to write (input gate) $\mathbf{i}_t = \sigma(\mathbf{W}_i \mathbf{x}_{t-1} + \mathbf{U}_i \mathbf{x}_t + \mathbf{b}_i)$
 - What to read (output gate) $\mathbf{o}_t = \sigma(\mathbf{W}_o \mathbf{x}_{t-1} + \mathbf{U}_o \mathbf{x}_t + \mathbf{b}_o)$
 - What to forget (forget gate) $\mathbf{f}_t = \sigma(\mathbf{W}_f \mathbf{x}_{t-1} + \mathbf{U}_f \mathbf{x}_t + \mathbf{b}_f)$

$$\mathbf{c}_t = \mathbf{f}_t \odot \mathbf{c}_{t-1} + \mathbf{i}_t \odot \tanh(\mathbf{W}_x \mathbf{x}_{t-1} + \mathbf{U}_x \mathbf{x}_t + \mathbf{b}_x)$$


$$\mathbf{x}_t = \mathbf{o}_t \odot \mathbf{c}_t$$

Long-Short Term Memory Unit

Gate: add/remove information with sigmoid




1. Forget
2. Store
3. Update
4. Output

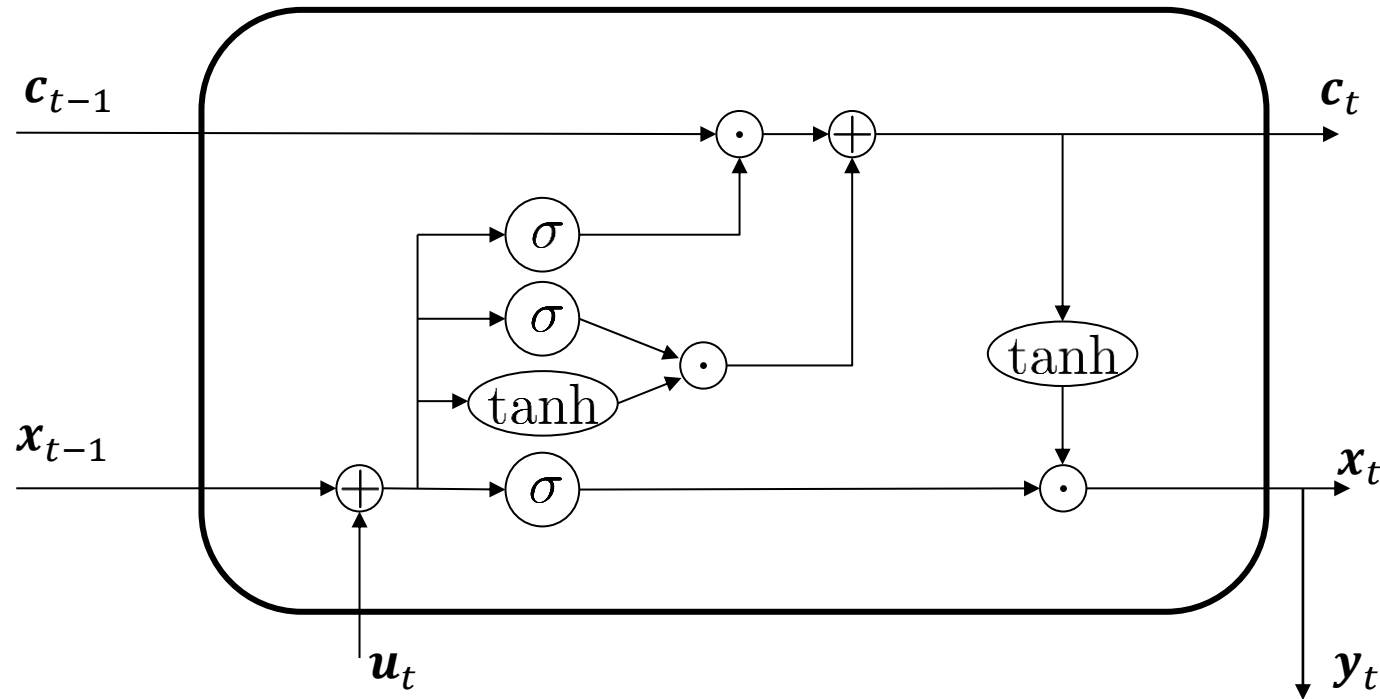


LSTM - Forget

1. **Forget**
2. Store
3. Update
4. Output

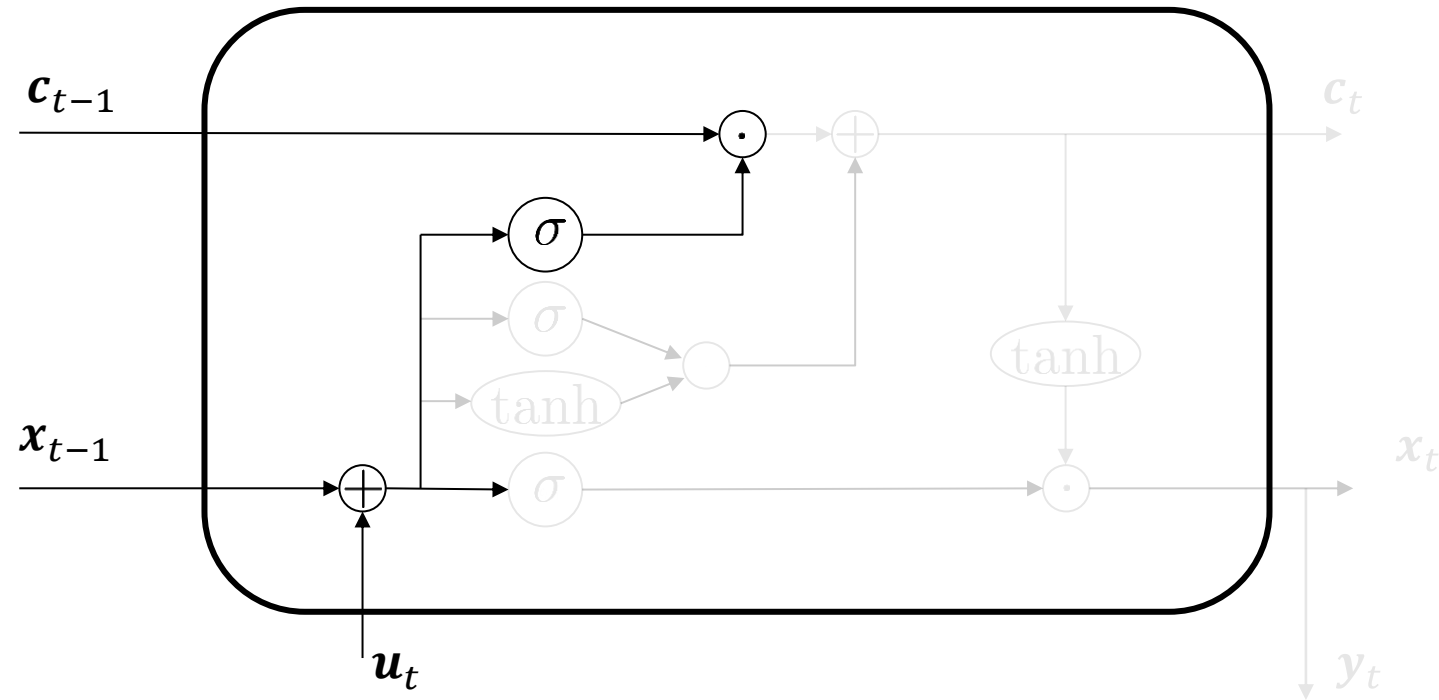


LSTM – Input (store)

1. Forget
2. **Store**
3. Update
4. Output

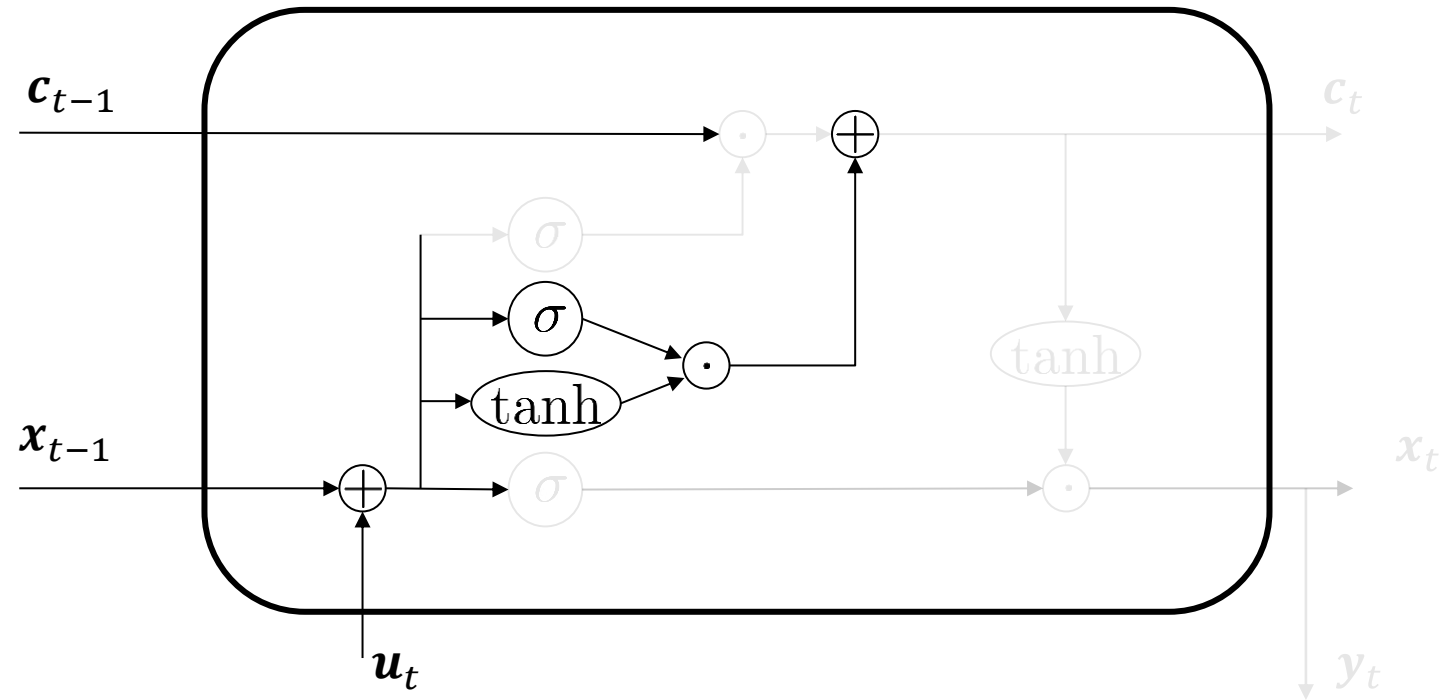


LSTM – Update

1. Forget
2. Store
3. **Update**
4. Output

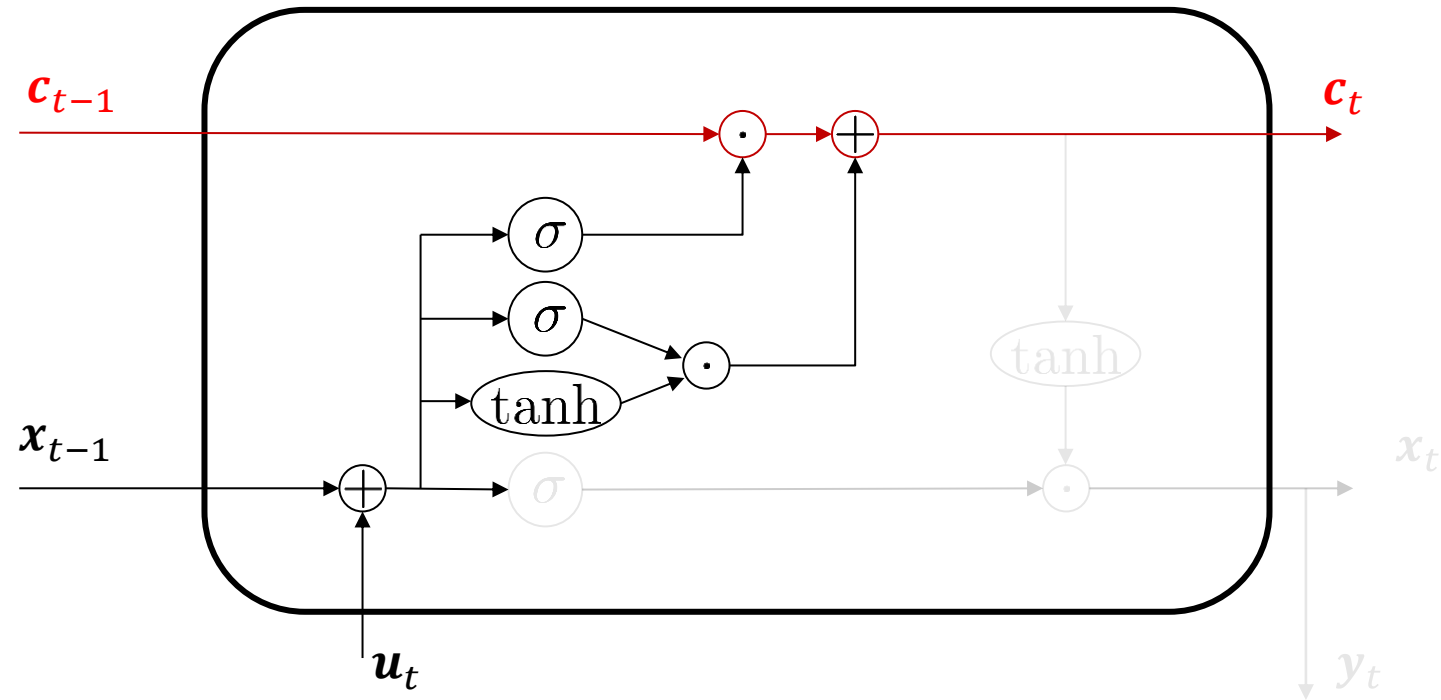


LSTM - Output

1. Forget
2. Store
3. Update
4. **Output**

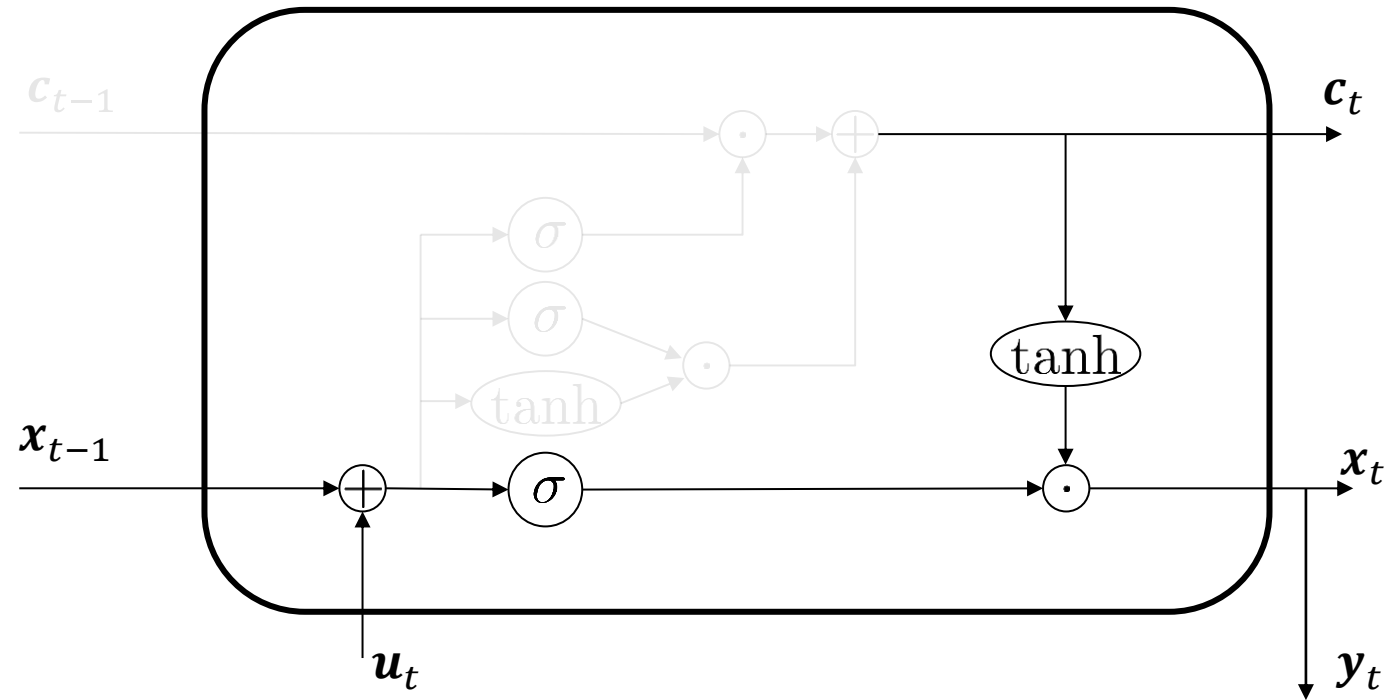

LSTM allows for the uninterrupted gradient calculation

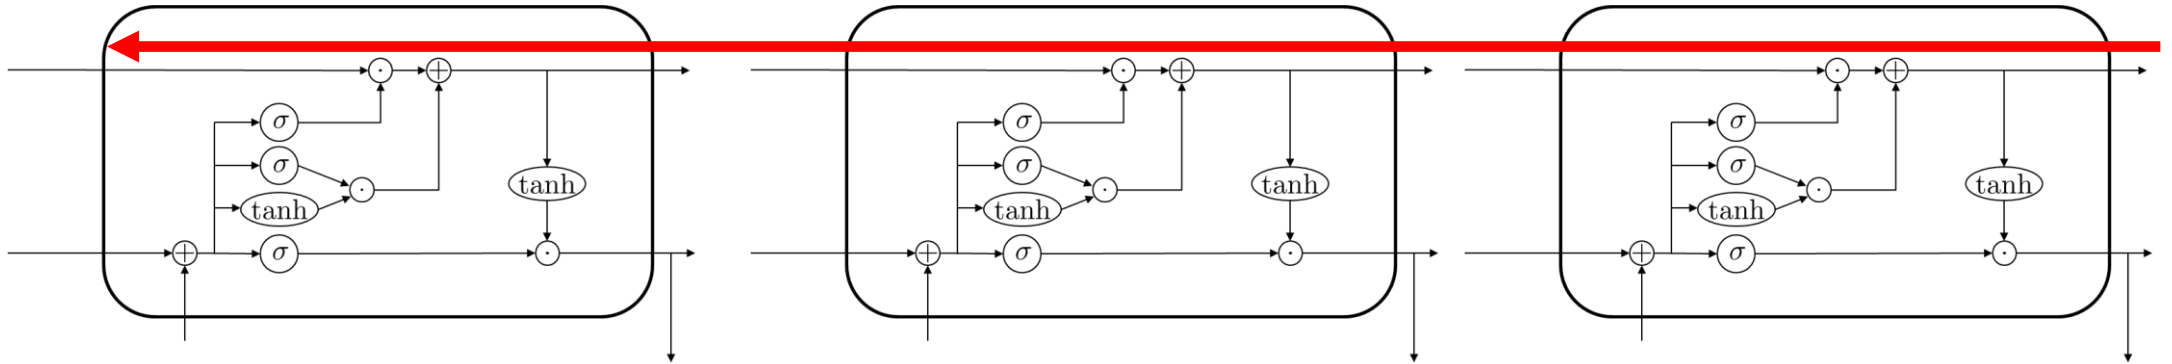


Structure of the Lecture

1. Motivation
 2. Backpropagation through Time
 3. Long Short-Term Memory Unit
 4. **Other RNNs/Advanced RNNs**
- Exercise:
 - Classify handwritten numbers
 - Predict the evolution of dynamical systems

Gated Recurrent Unit

- Alternative to LSTM: GRU (Gated Recurrent Unit)

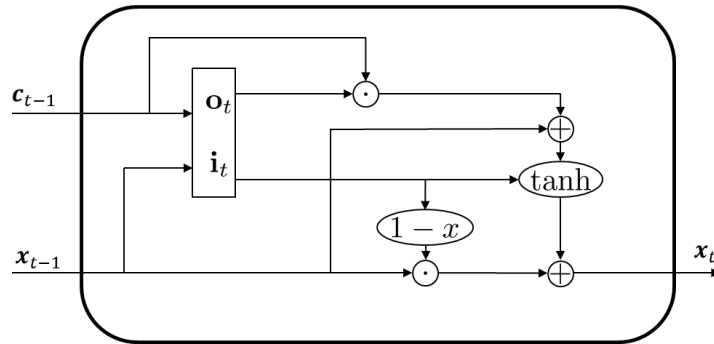

Input: $i_t = \sigma(W_i x_{t-1} + U_i x_t + b_i)$

Forget: $f_t = 1 - i_t$


Output/read: $o_t = \sigma(W_o x_{t-1} + U_o x_t + b_o)$

$$x_{t+1} = f_t \odot x_{t-1} + i_t \odot \tanh(W_x x_{t-1} + U_x (o_t \odot c_{t-1}) + b_x)$$


Similar to LSTM

Cho, Kyunghyun; van Merriënboer, Bart; Bahdanau, Dzmitry; Bengio, Yoshua (2014). "On the Properties of Neural Machine Translation: Encoder-Decoder Approaches". arXiv:1409.1259.



Reservoir computing is an alternative to LSTM

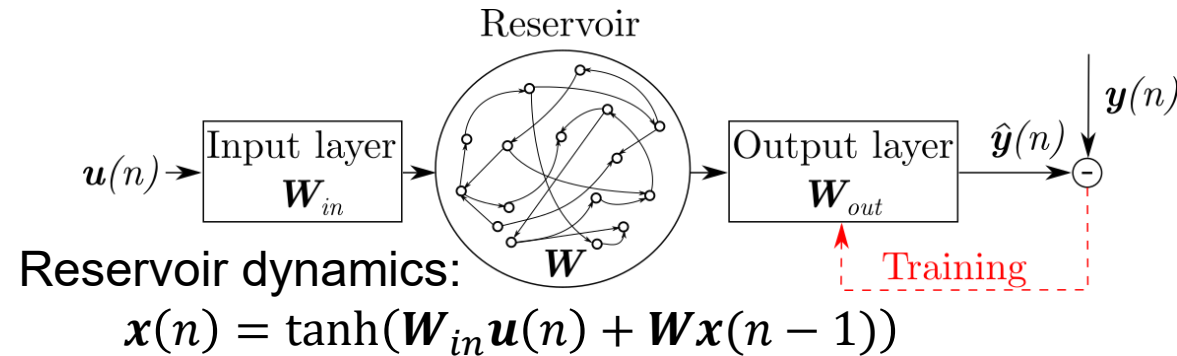

Project input to higher dimension

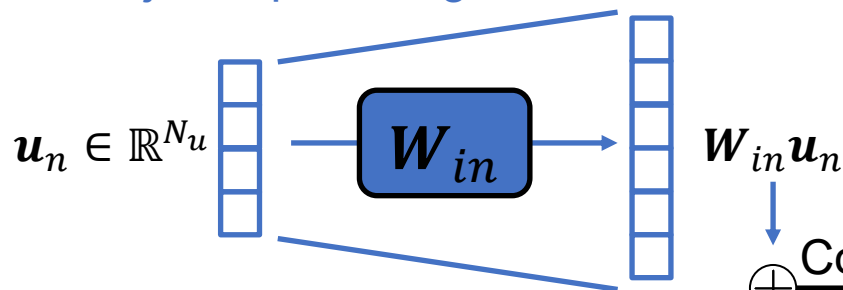


Dynamics in that higher dimension

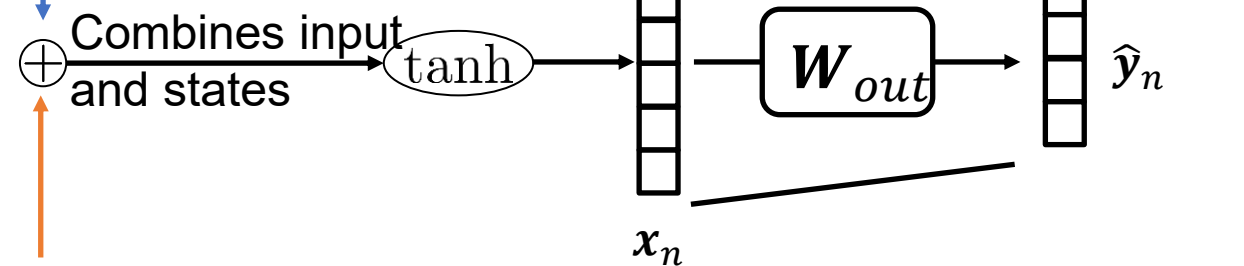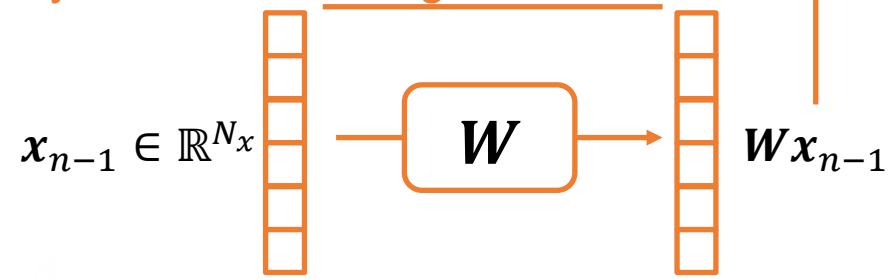

Reservoir computing is an alternative to LSTM

- Echo State Network:

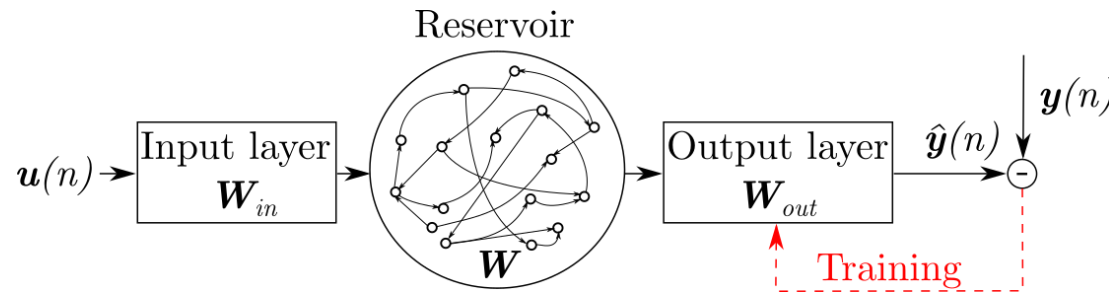


- Static reservoir: high-dimensional fixed random system excited by the input
 - Base for “nonlinear expansion” of the system
 - Memory of the inputs
 - Mapping of the system’s dynamics on the reservoir states via “trained” linear readout
 - No need for backpropagation

Echo State Network

W_{in} : Sparse/Dense matrix randomly initialised from uniform distribution $[-\sigma_{in}, \sigma_{in}]$

W : Sparse matrix randomly initialised from uniform distribution with set spectral radius $\Lambda \leq 1$ (echo state property)

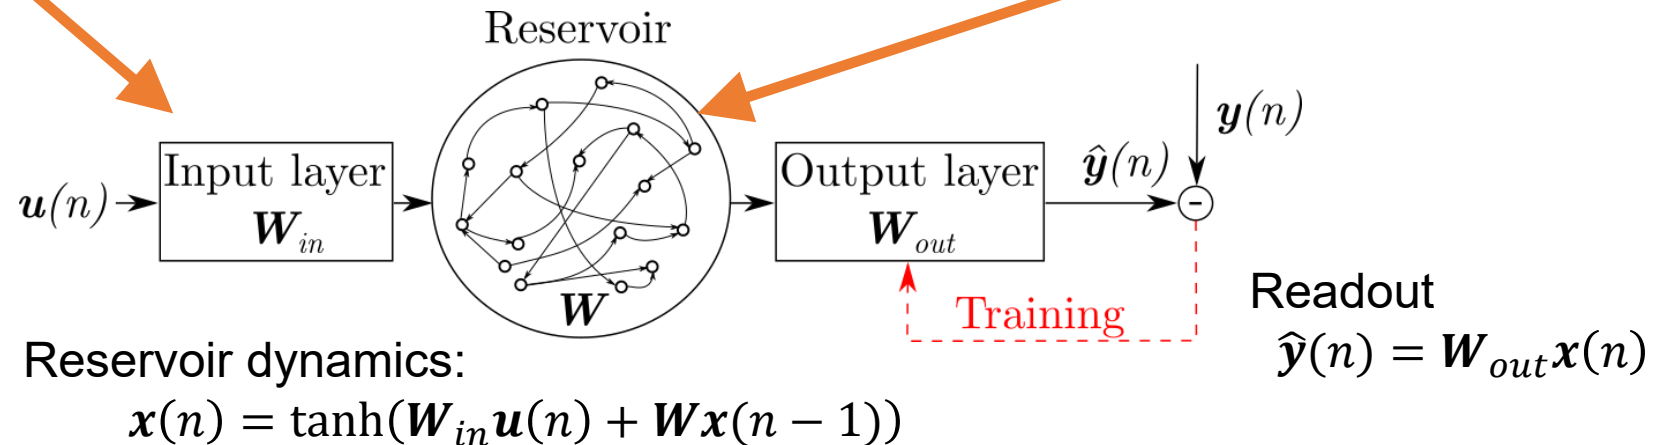

Training of W_{out} based on:

$$L = \underbrace{\frac{1}{N_y} \sum_{i=1}^{N_y} \frac{1}{N_t} \sum_{n=1}^{N_t} (\hat{y}_i(n) - y_i(n))^2}_{\text{Error on data}} + \underbrace{\gamma \frac{1}{N_y} \sum_{i=1}^{N_y} \|\mathbf{w}_{out,i}\|^2}_{\text{Regularity of } \mathbf{W}_{out}}$$

Training of the ESN is obtained by simple ridge regression

$$L = \frac{1}{N_y} \sum_{i=1}^{N_y} \frac{1}{N_t} \sum_{n=1}^{N_t} (\hat{y}_i(n) - y_i(n))^2 + \gamma \frac{1}{N_y} \sum_{i=1}^{N_y} \|\mathbf{w}_{out,i}\|^2$$


- $\mathbf{W}_{out}$ obtained from ridge regression with
- $\mathbf{W}_{out} = \mathbf{Y}\mathbf{X}^T (\mathbf{X}\mathbf{X}^T + \gamma \mathbf{I})^{-1}$
- Where
- $\mathbf{X}$: Concatenated reservoir state
- $\mathbf{Y}$: Concatenated target data
- $\mathbf{I}$: Identity matrix

Outline


- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI system
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling


Typical dynamical modelling in turbulent (reacting) flows: Flow dynamics modelling

- Thermoacoustic instabilities: High amplitude pressure oscillations in premixed combustors

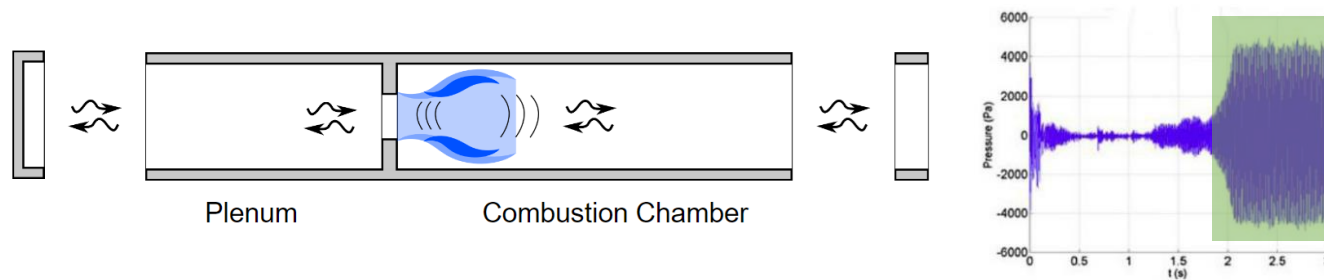


Thermoacoustic instabilities: result from coupling between HRR and acoustic fluctuations

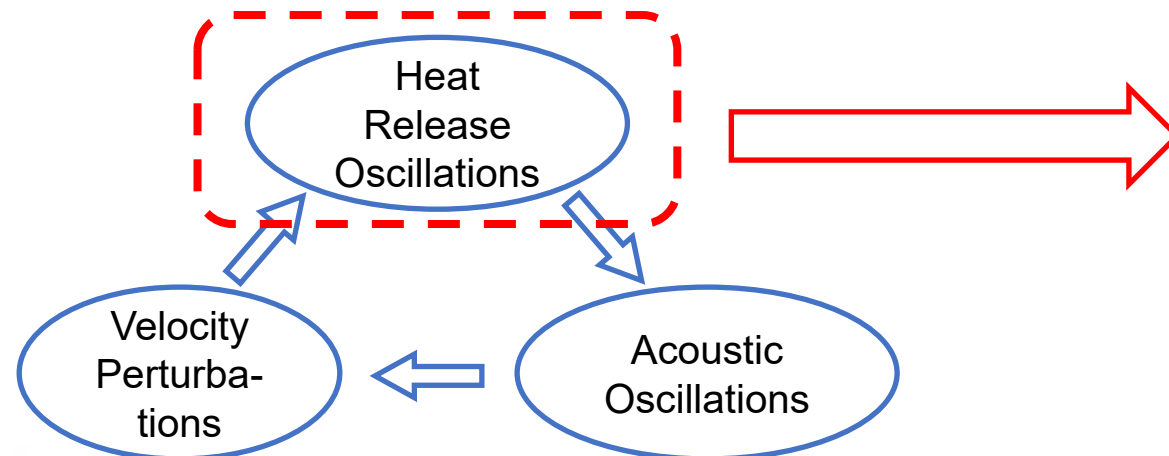

$$\dot{\phi} = N(\phi, p, F)$$


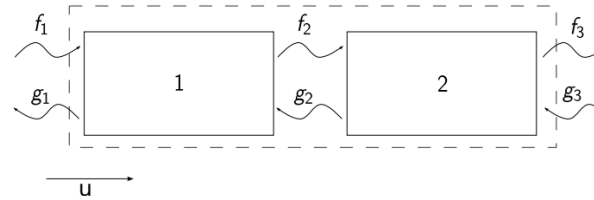
$$\rightarrow \dot{Q} = \mathcal{F}(\phi, F)$$

Divide and Conquer approach relies on interacting flame and acoustic models


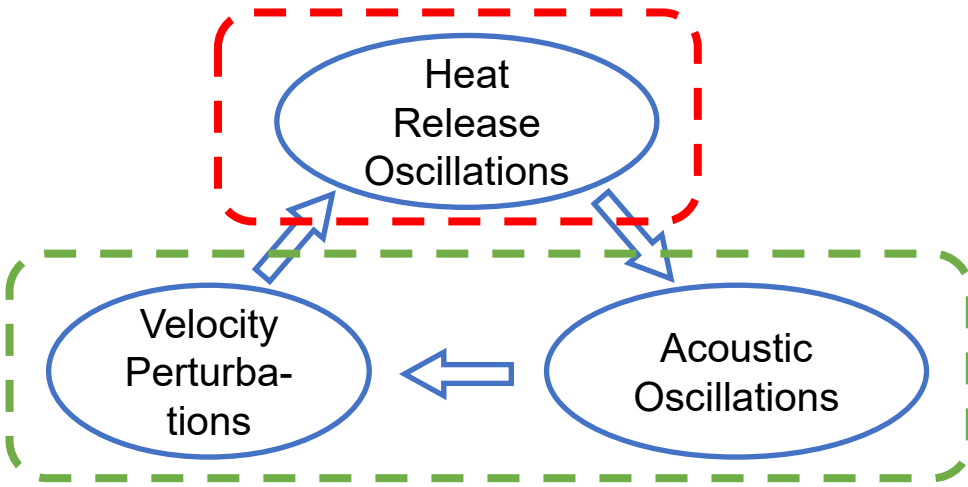


Flame model: $\dot{Q}' = \mathcal{F}(u')$

Acoustic network model



$$\begin{aligned} \dot{x}_1 &= A_1 x_1 + B_1 \begin{bmatrix} f_1 \\ g_2 \end{bmatrix} & y_1 &= \begin{bmatrix} g_1 \\ f_2 \end{bmatrix} \\ \dot{x}_2 &= A_2 x_2 + B_2 \begin{bmatrix} f_2 \\ g_3 \end{bmatrix} & y_2 &= \begin{bmatrix} g_2 \\ f_3 \end{bmatrix} \end{aligned}$$

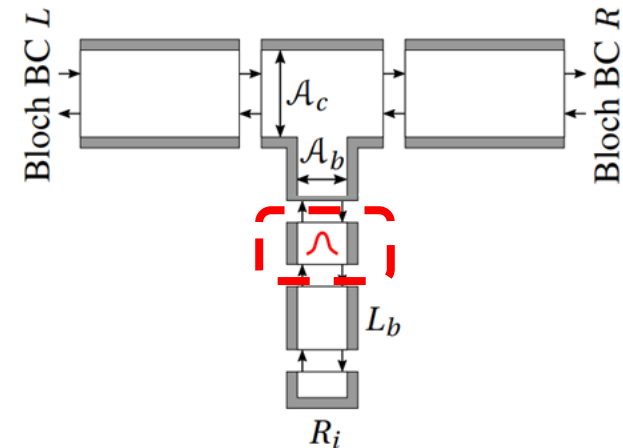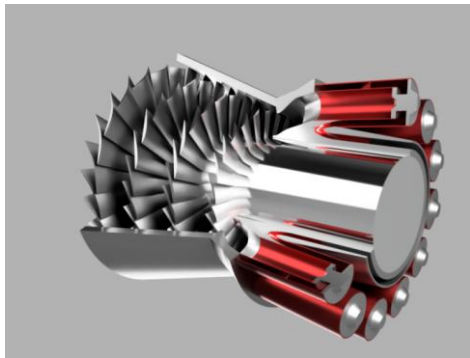


Essential of the flame dynamics can be obtained with single broadband forcing simulation

- What data do we need to model the flame dynamics?

$$\dot{Q}' = \mathcal{F}(u')$$



- From system identification:
 - Dataset with broadband forcing contains all the necessary information

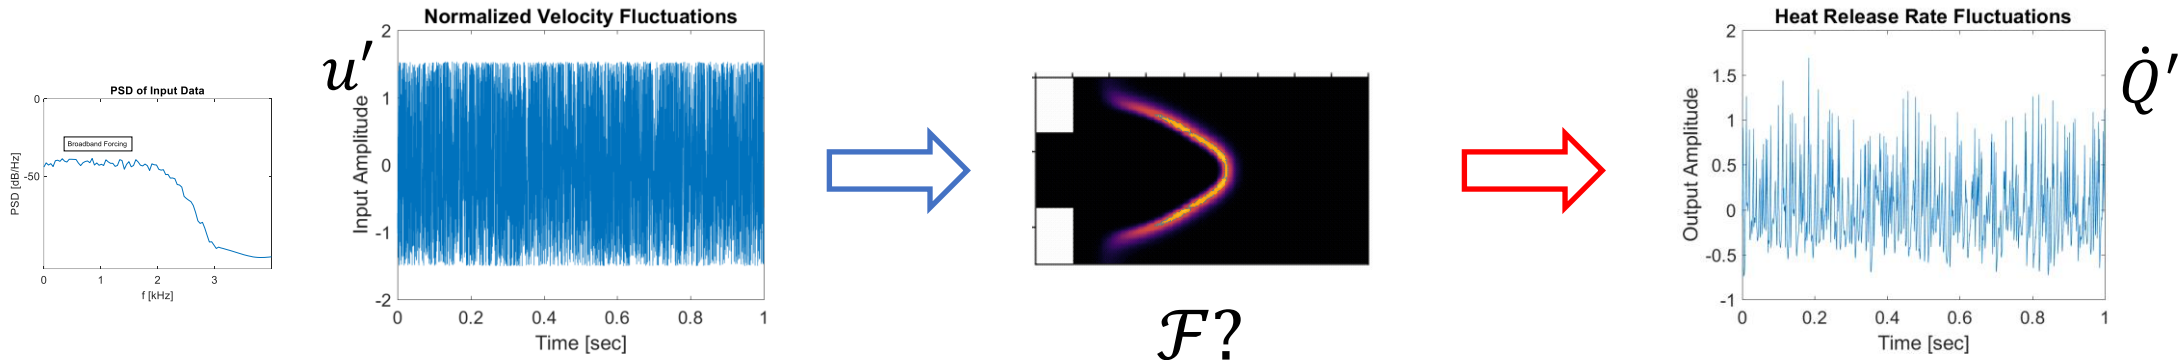



- How to model this?
 - Typical supervised learning problem applied to sequential data

Test case is a laminar premixed methane/air flame

- Fully resolved lean premixed methane-air slit burner at $\phi = 0.8$

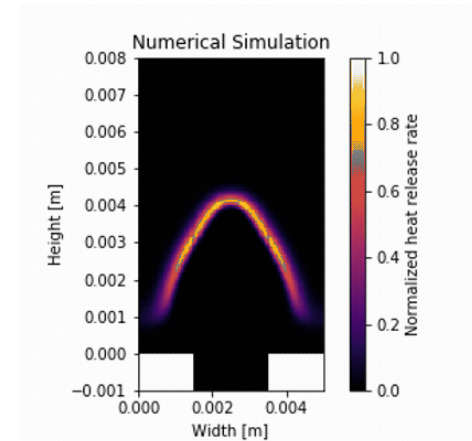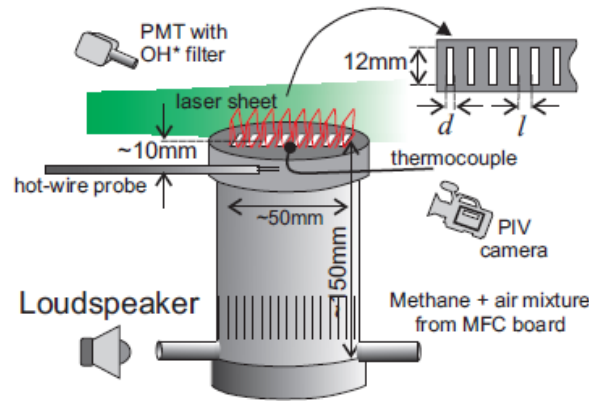


- Dataset: One simulation broadband excitation at high amplitude

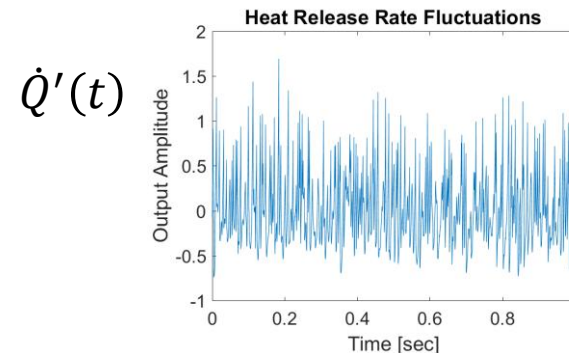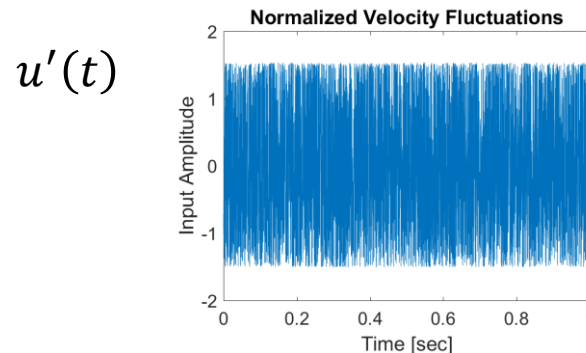


Neural networks can accurately learn nonlinear flame dynamics

NN trained with one broadband simulation at high amplitude

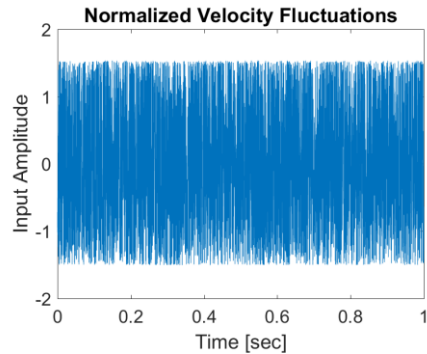




$$\begin{bmatrix} u'(t) \\ u'(t - \Delta t) \\ \vdots \\ u'(t - n\Delta t) \end{bmatrix}$$

Feedforward NN





$$[\dot{Q}'(t)]$$

Recurrent NN (LSTM)

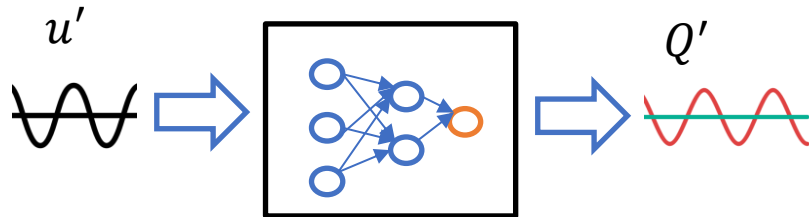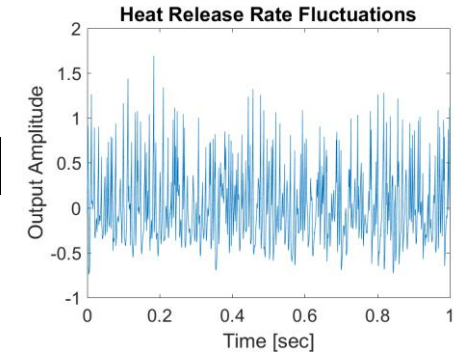

Frequency response of trained network

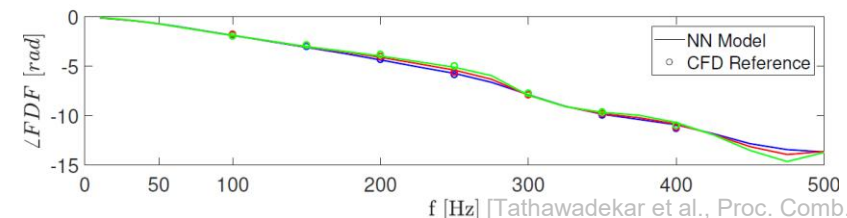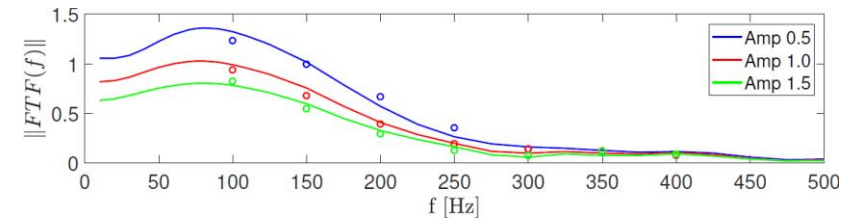


[Tathawadekar et al., Proc. Comb. Inst., 2021]




[Yadav et al., Proc. Comb. Inst., 2023] 69

Integrated NN and acoustic network predicts accurately the thermoacoustic instability

- Trained NN with acoustic model describes the multi-slit combustor



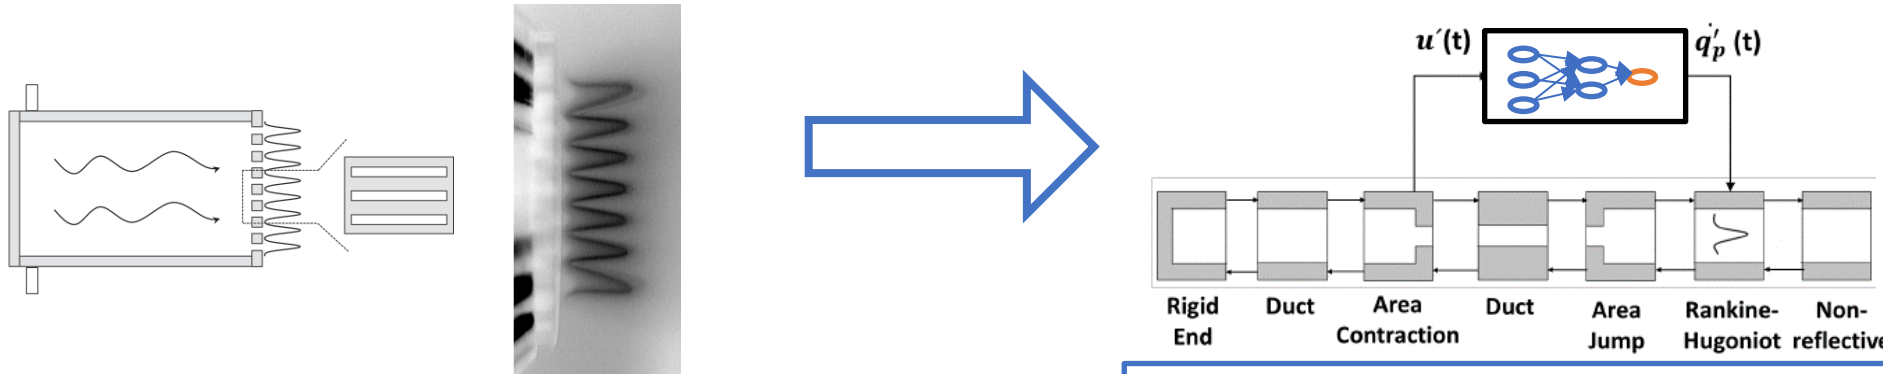


Design stability analysis

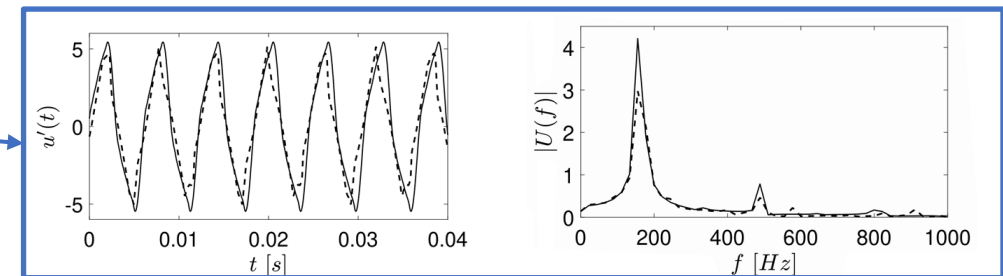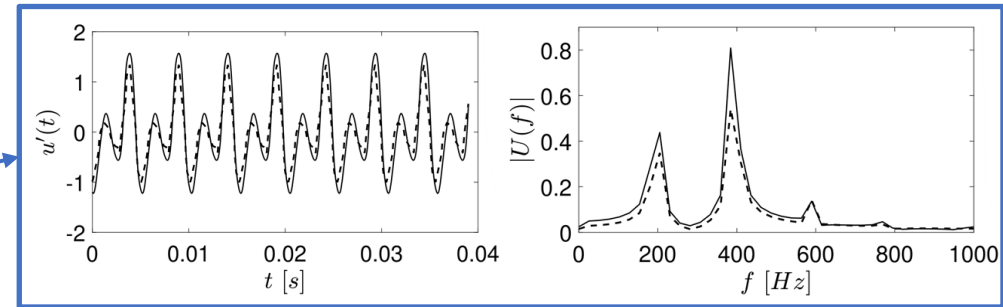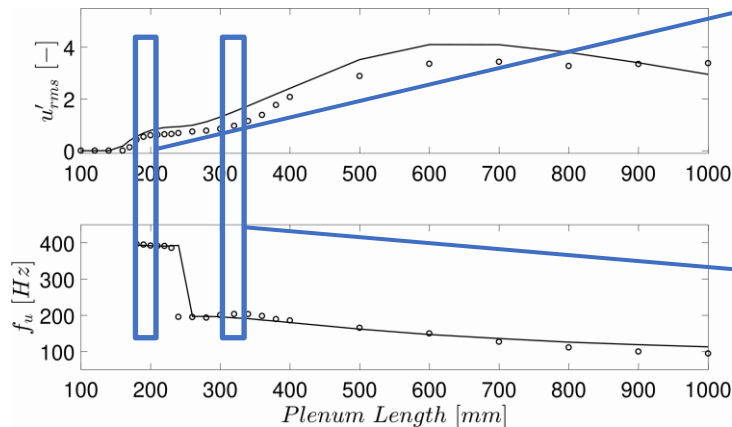

Extension to turbulent flames

- Previous methodology also applicable to turbulent flames

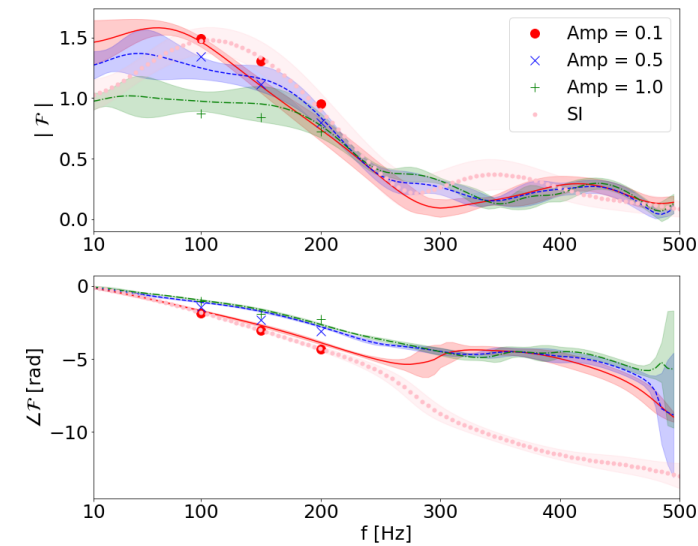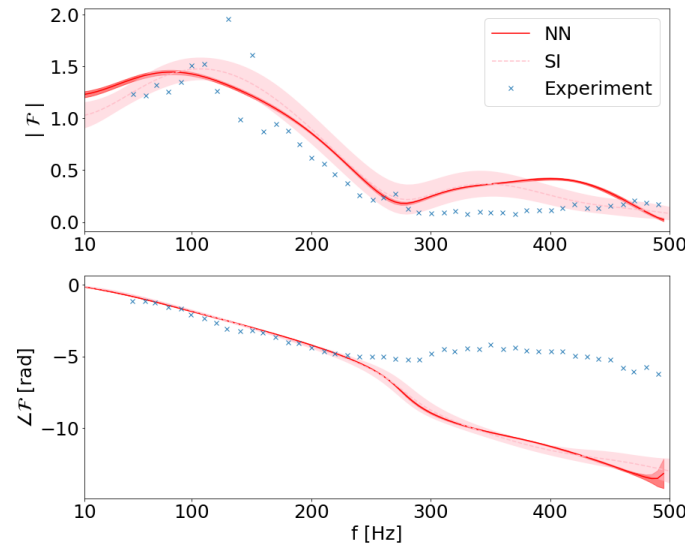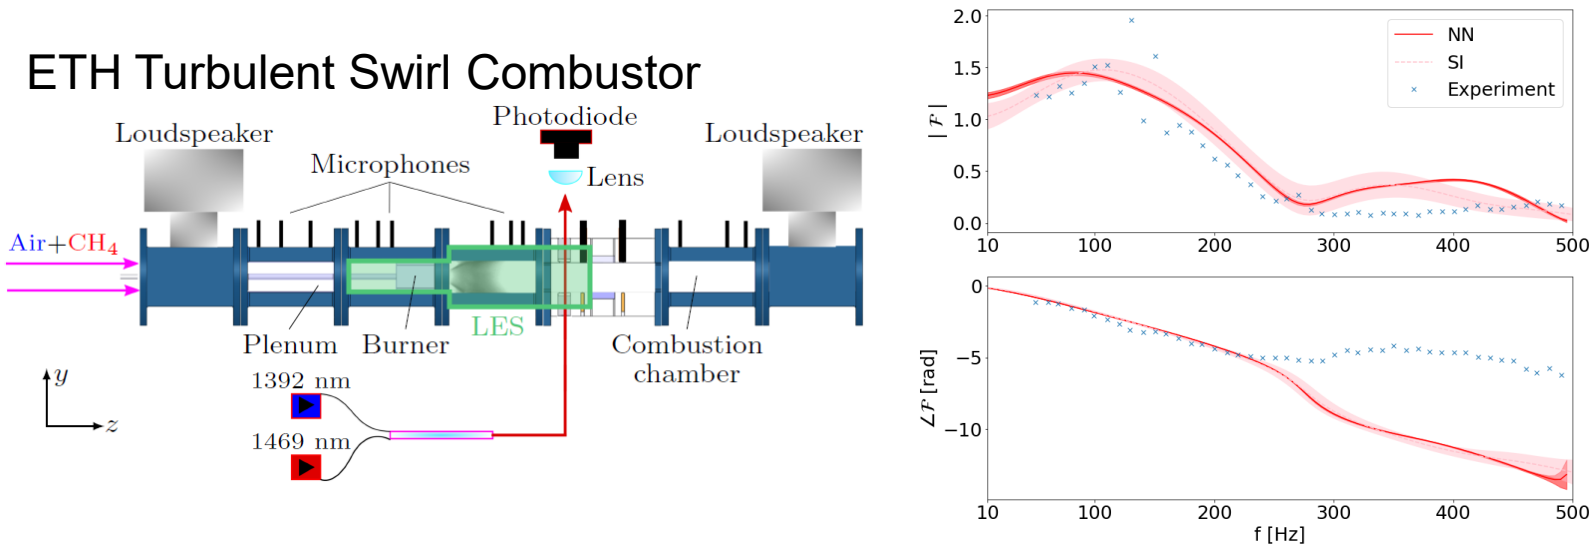


Increased challenge due to turbulent fluctuations

Outline

- Key concepts in Dynamical Systems and Chaos
- Machine Learning for Dynamical Systems
 - Sequential data and Dynamical Systems
 - System Identification for LTI system
 - Data-driven nonlinear dynamical system modelling
- Applications to reacting flows
 - Flame dynamics modelling
 - Reduced-order modelling

Learning turbulent dynamics of high-dimensional flows

- Most turbulent flows are highly dimensional

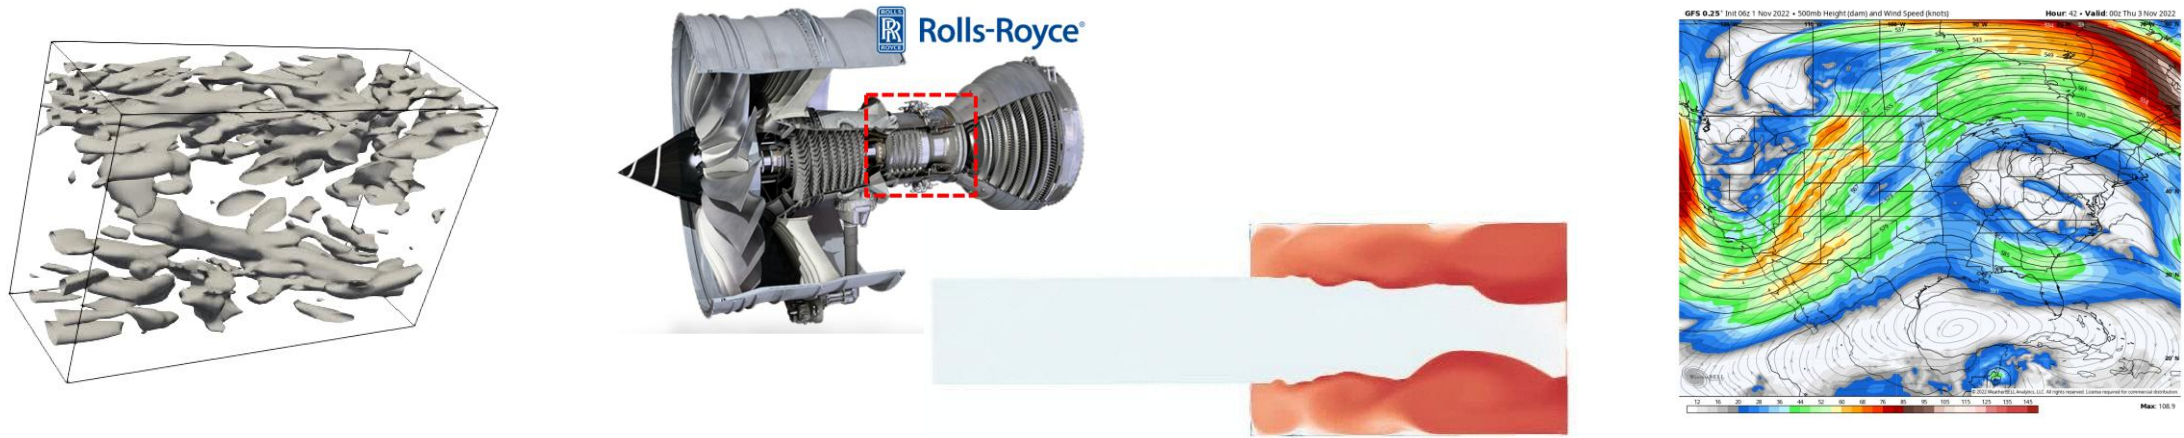

How can we handle those with all the methods seen so far?

→ Split the tasks

Spatial structures

→ Handled with CNN


(nonlinear form of modal decomposition)

Temporal chaotic dynamics

→ Handled with RNN


The spatial structures can be identified with CNN-based networks

- CNN-based autoencoder: discovers efficient latent space
 - Based on identifying “spatial structures”
 - Encoder: finds an efficient reduced order representation (latent space)
 - Decoder: reconstructs the full flow state from the latent space

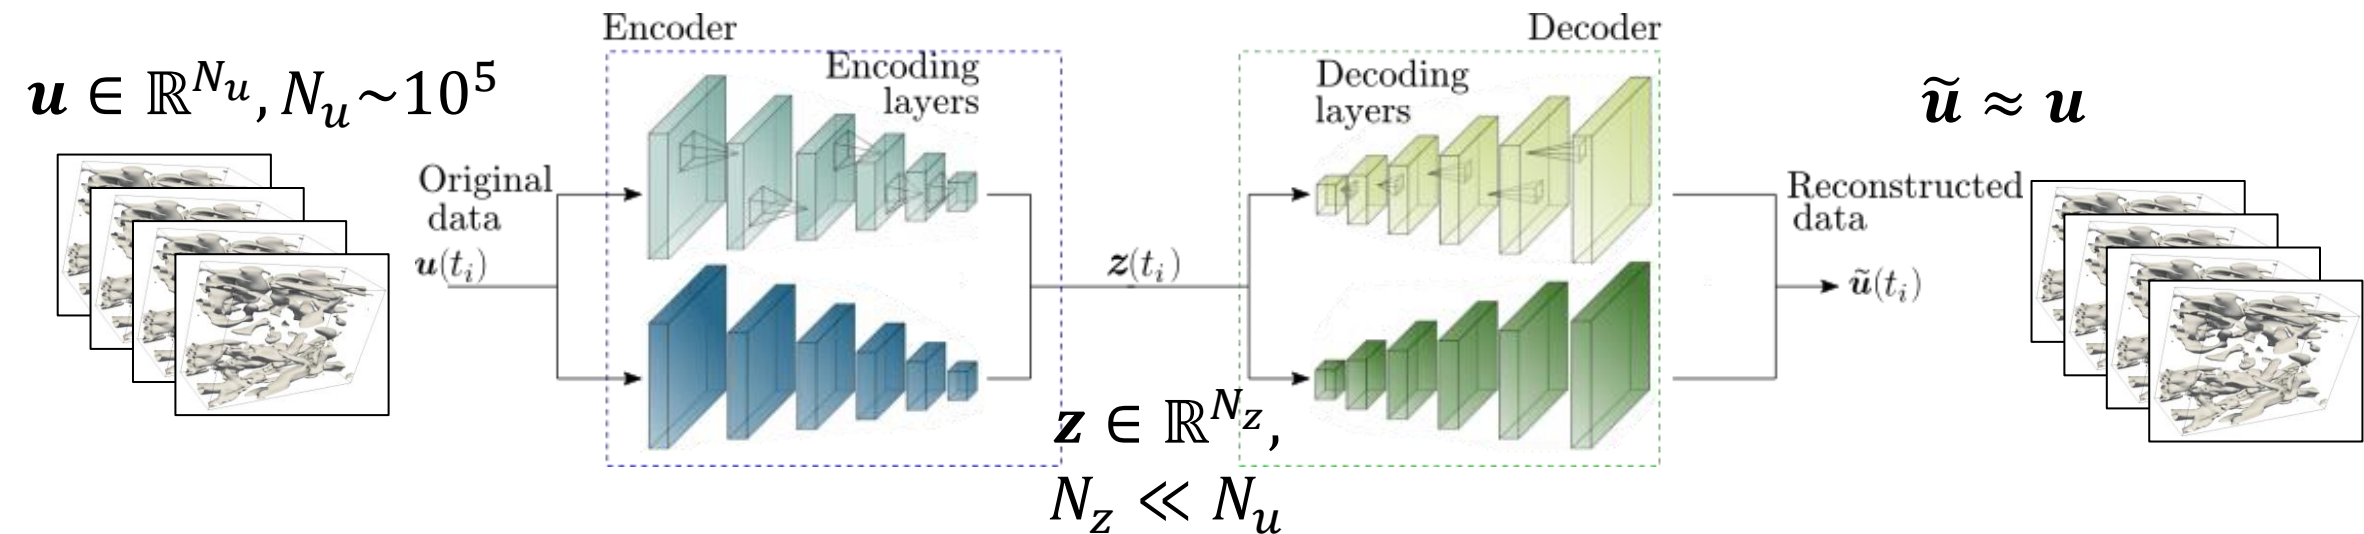


Trained by minimizing:
$$J = \frac{1}{N_t} \sum_i \|\mathbf{u}^{(i)} - \tilde{\mathbf{u}}^{(i)}\|^2$$

The encoder provides flow dynamics in the latent space

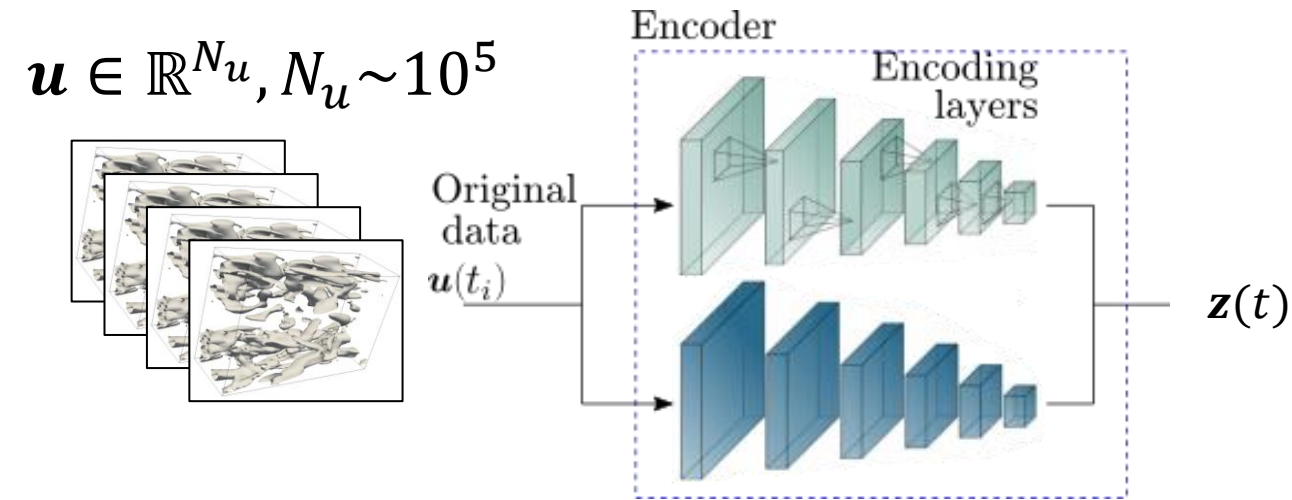


- “Encoded” version of original dataset
- Can be used to learn the dynamics
- Decoder can be used to recover the full physical state

We can learn that dynamics (in the latent space) with an RNN

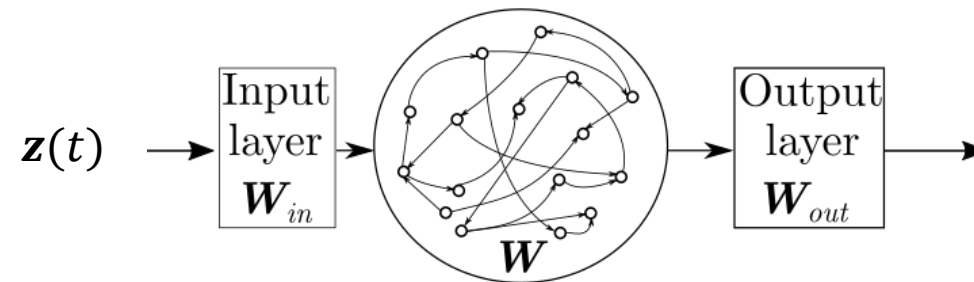


By combining CNN and RNN, we can handle high-dimensional flows

- Overall architecture:

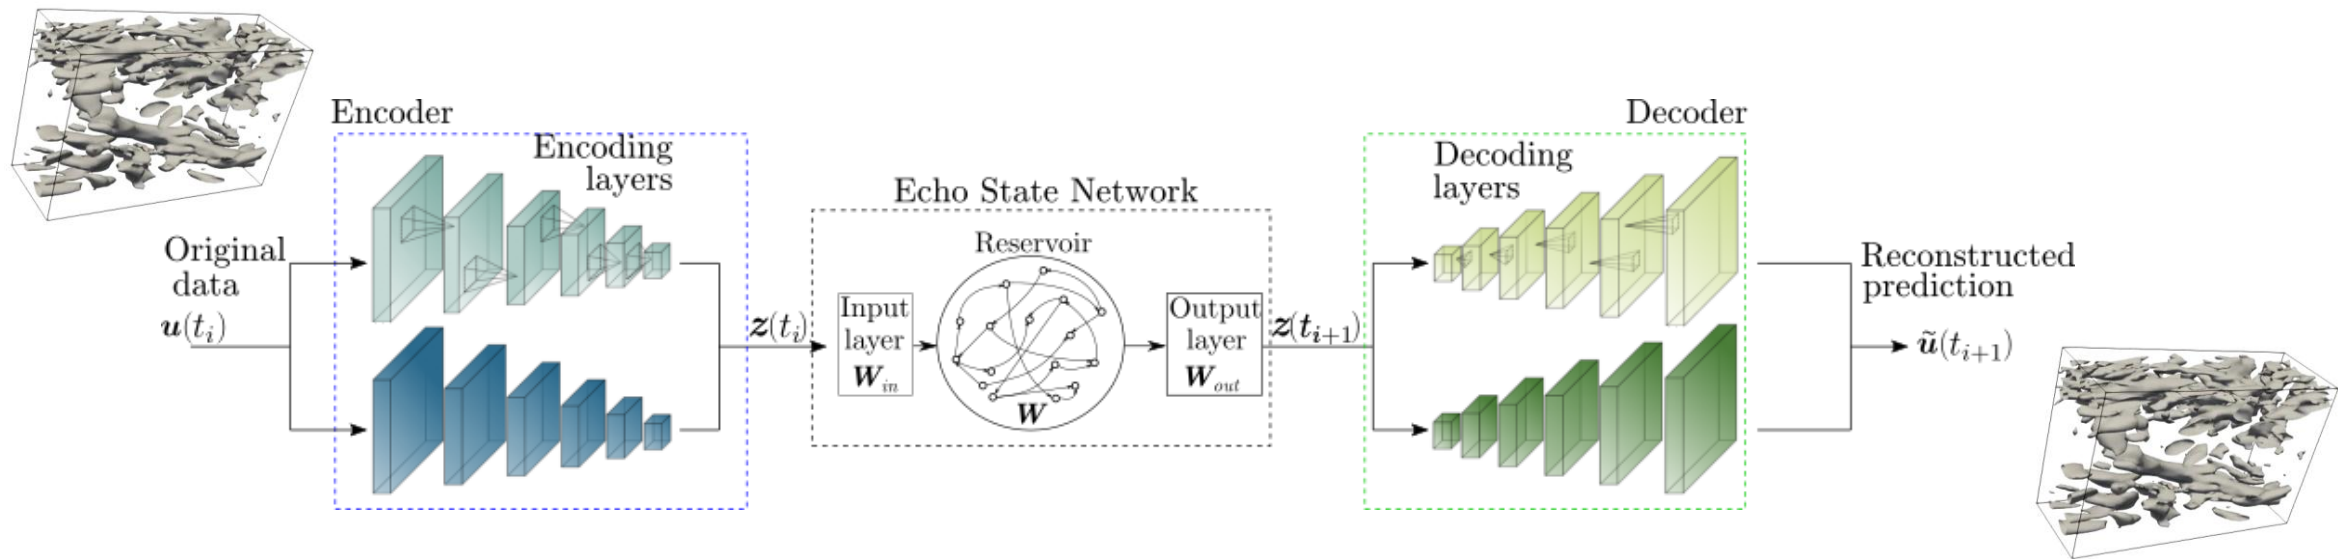


The hybrid model can accurately reproduce the flow dynamics


After training

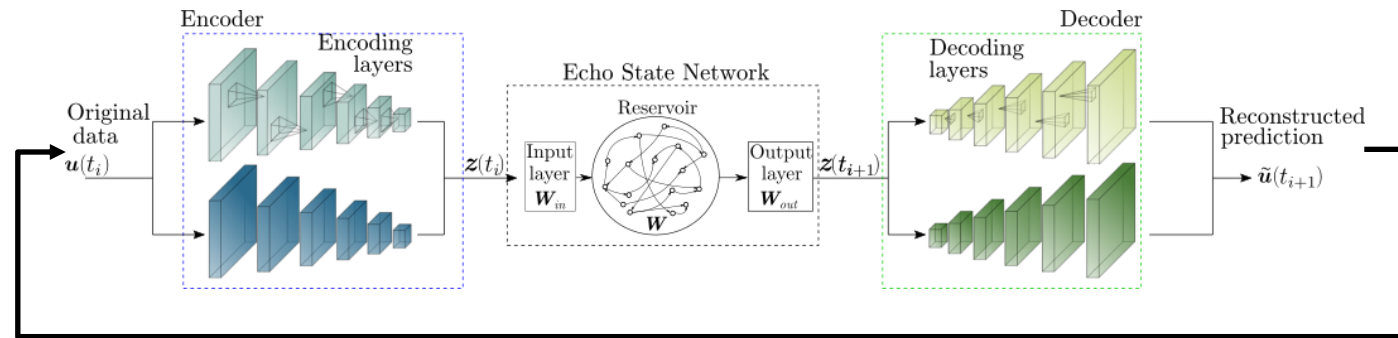

Actual

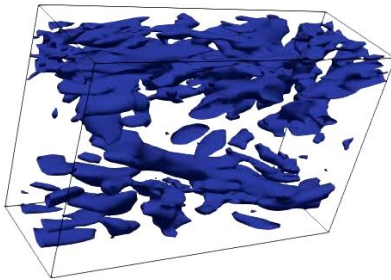

ML model

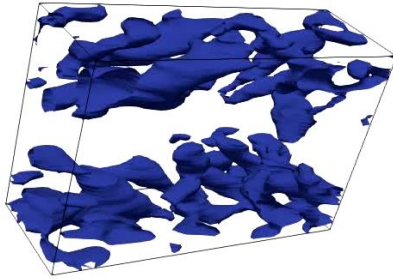

Extreme events statistics

