

Memory Switch Setting

You can set up the cutting position of which the paper is with blackmark.

1. Before you download the zipfile, please compare with the following things at the image <1-1>, so that you can put the values at the program we provide.

1.1. Please check the SW3 which is a range of between the point the paper starts, and the point the blackmark starts. The unit has to be mm (millimeter).

For example, if the range is 19mm, the SW3 is 152.

Please refer to the formulation of SW3 as belows.

$$SW3 \times 0.125 = 19\text{mm}$$

$$SW3 = 152 \quad (19 / 0.125)$$

1.2. Please check the SW2 which is a range of between the point the blackmark starts, and the point the paper cuts. The unit has to be mm (millimeter).

For example, if the range is 70mm, the SW2 is 560.

Please refer to the formulation of SW2 as belows.

$$SW2 \times 0.125 = 70\text{mm}$$

$$SW2 = 560 \quad (70 / 0.125)$$

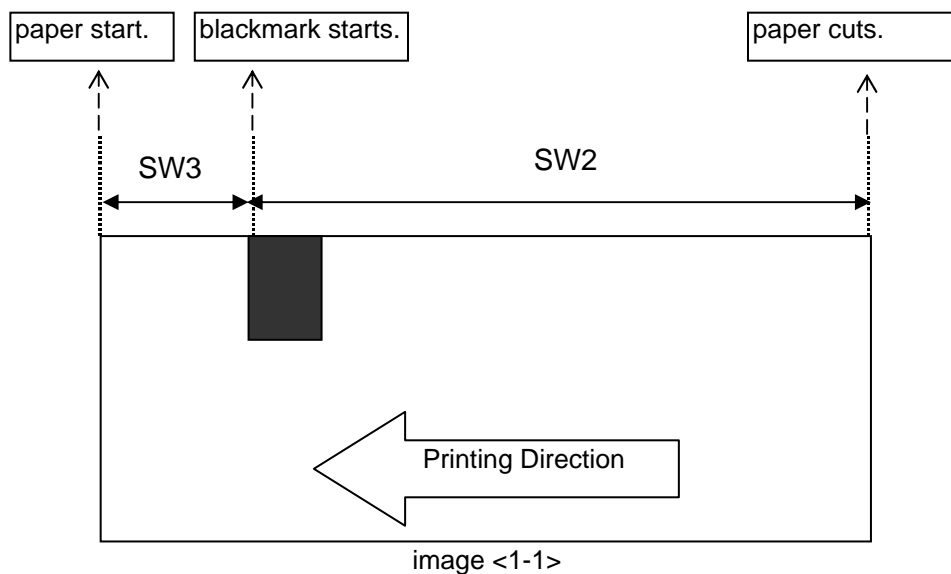



image <1-1>

1.3. This is an example of which the paper is with blackmark.

1.4. Unit: mm (millimeter)

2. Please connect the printer to the host you have. You don't need to power on yet.

Please check the dip switch 2 up as the image below.

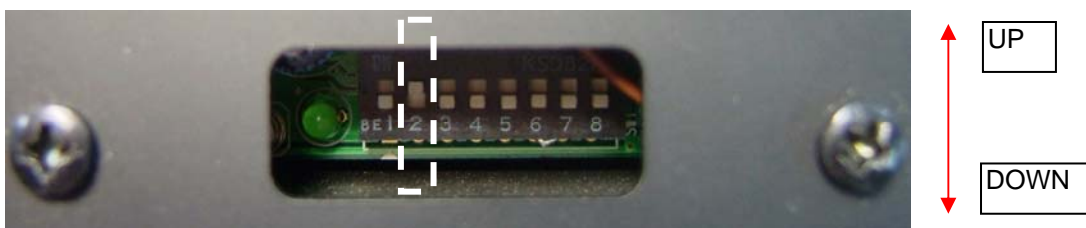


3. Please download the zip file.

The zip file has to be the one which we provide.

Please make sure the folder where you release the components of zipfile.


4. Please doubleclick the file(.exe).

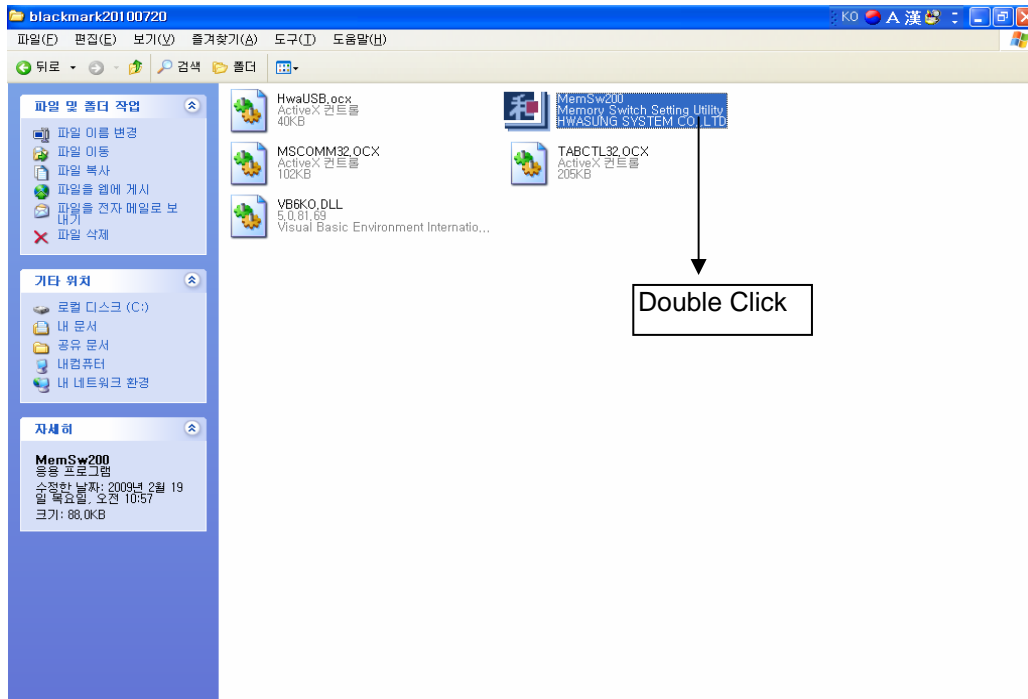

5. After you doubleclick the file(.exe), please set up the model / the port at the tab Interface.


For example, if you have HMK-060U usb, please set up the model 060series.

Also, please set up the port USB.

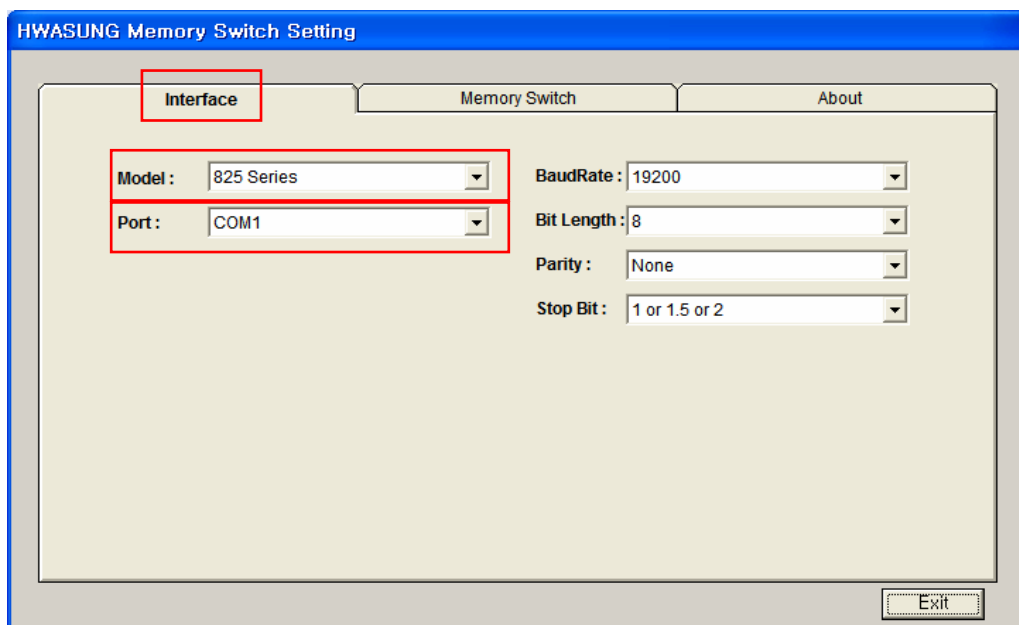


6. After you set up the model / the port at the tab interface, please go to the tab Memory Switch. Please put the value of SW2 / SW3 you have calculated. Then, please click the icon Start Setting.


Please take a note you have to power on, before you click the icon Start Setting.

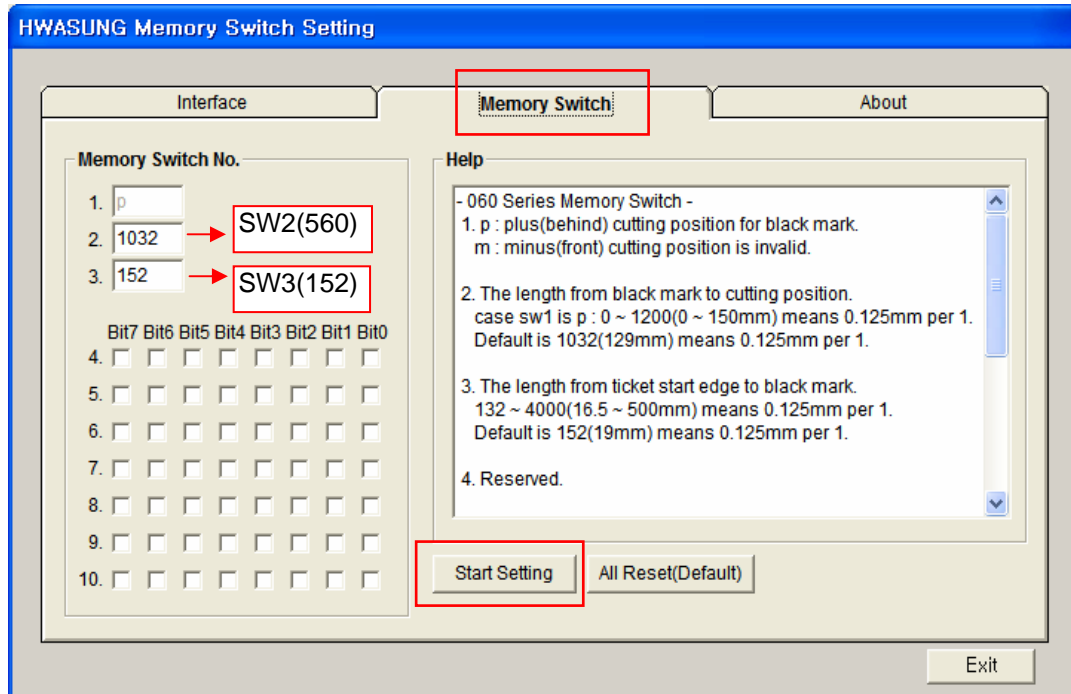

7. After you click the icon start setting, you can see the image as belows.

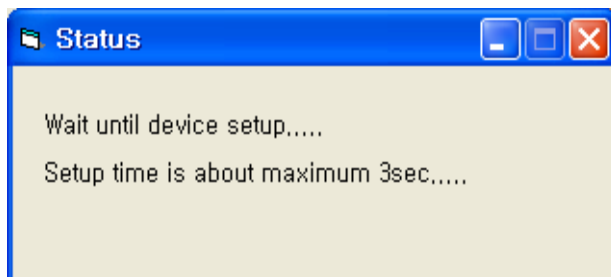

8. After setup times goes 3 secs, you can see the image as below. You just click.

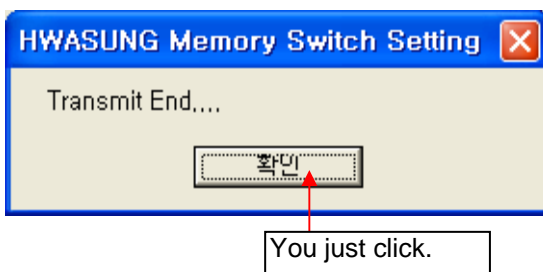

9. After you follow the step 8, please power off, and on.

Please take a note you have to mount the paper with blackmark, before you power off, and on.

10. Then it prints the paper you set up. You can see the paper cuts you want.