
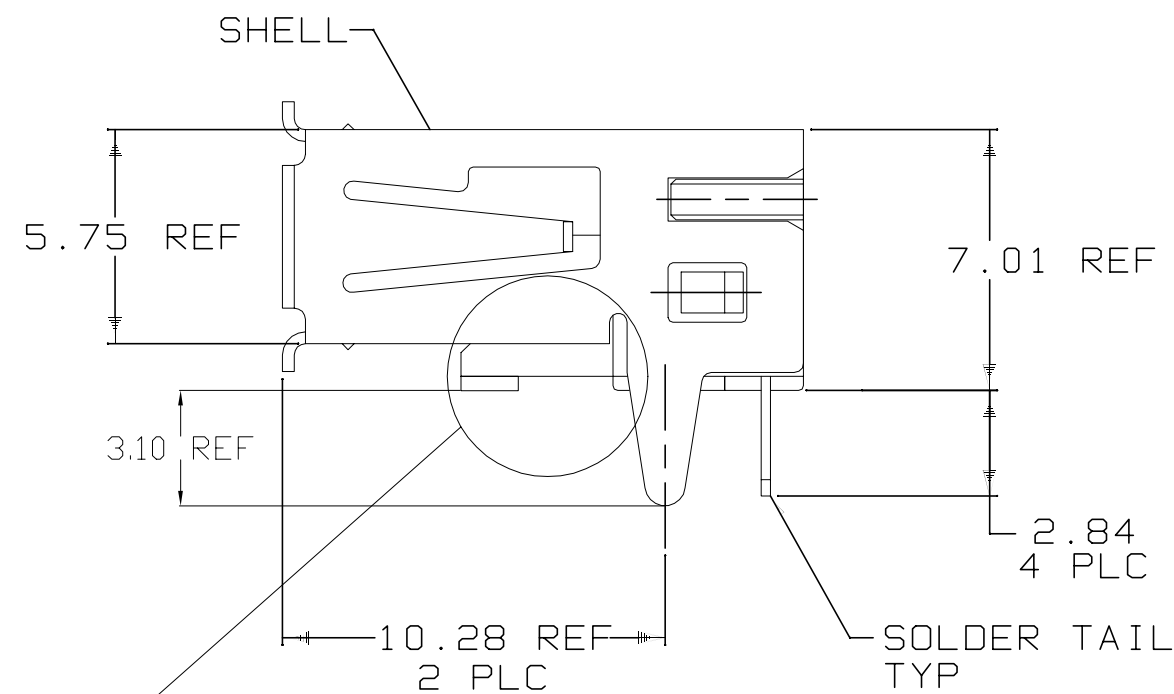


ANG	12APR2004	 TE Connectivity			
IAO	12APR04				
U	12APR04	NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 4POSITION, THRU-HOLE, USB			
CT SPEC					
08-60034					
CATION SPEC					
-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
T	-	A2	00779	C-6364372	-
TOMER DRAWING				SCALE	SHEET
				5:1	1 of 1
				REV	B







1 MATERIAL:
SHELL & CONTACTS- COPPER ALLOY.
HOUSING- UL 94V-0 RATED, THERMOPLASTIC, COLOR SEE TABLE.

2 PLATING:
CONTACTS- 0.076um MINIMUM GOLD OVER 0.76um MINIMUM
PALLADIUM-NICKEL ON MATING AREA.
3.8um MINIMUM MATTE TIN ON SOLDER TAILS.
BOTH OVER 1.27um MINIMUM NICKEL.
CONTACT ALTERNATE PLATING: 0.76um MIN GOLD ON MATING
AREA, 3.80um MIN MATTE TIN ON SOLDER TAILS, BOTH
OVER 1.27um MIN NICKEL.
SHELL: MINIMUM BRIGHT TIN OVER MIN NICKEL.

3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

TAPE&REEL	YES	BLACK	6364372-5
TAPE&REEL	YES	BLACK	6364372-4
TAPE&REEL	YES	NATURAL	6364372-3
TUBE	YES	NATURAL	6364372-2
TUBE	NO	BLACK	6364372-1
PACKAGING	HIGH TEMPERATURE COMPATIBLE	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.JIANG 12APR004		 TE Connectivity	
		CHK S.YAO 12APR04			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 4POSITION, THRU-HOLE, USB	
		APVD J.QU 12APR04 PRODUCT SPEC 108-60034			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC -			
MATERIAL		FINISH			
				SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C=6364372	
				RESTRICTED TO -	
				SCALE 5:1	
				SHEET 1 of 1	
				REV B	