


DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
-	ORIGINAL ISSUE	DGP	12/12/12
A	ECN05928; P/N 104740-10 REV A WAS REV -	DGP	01/10/13

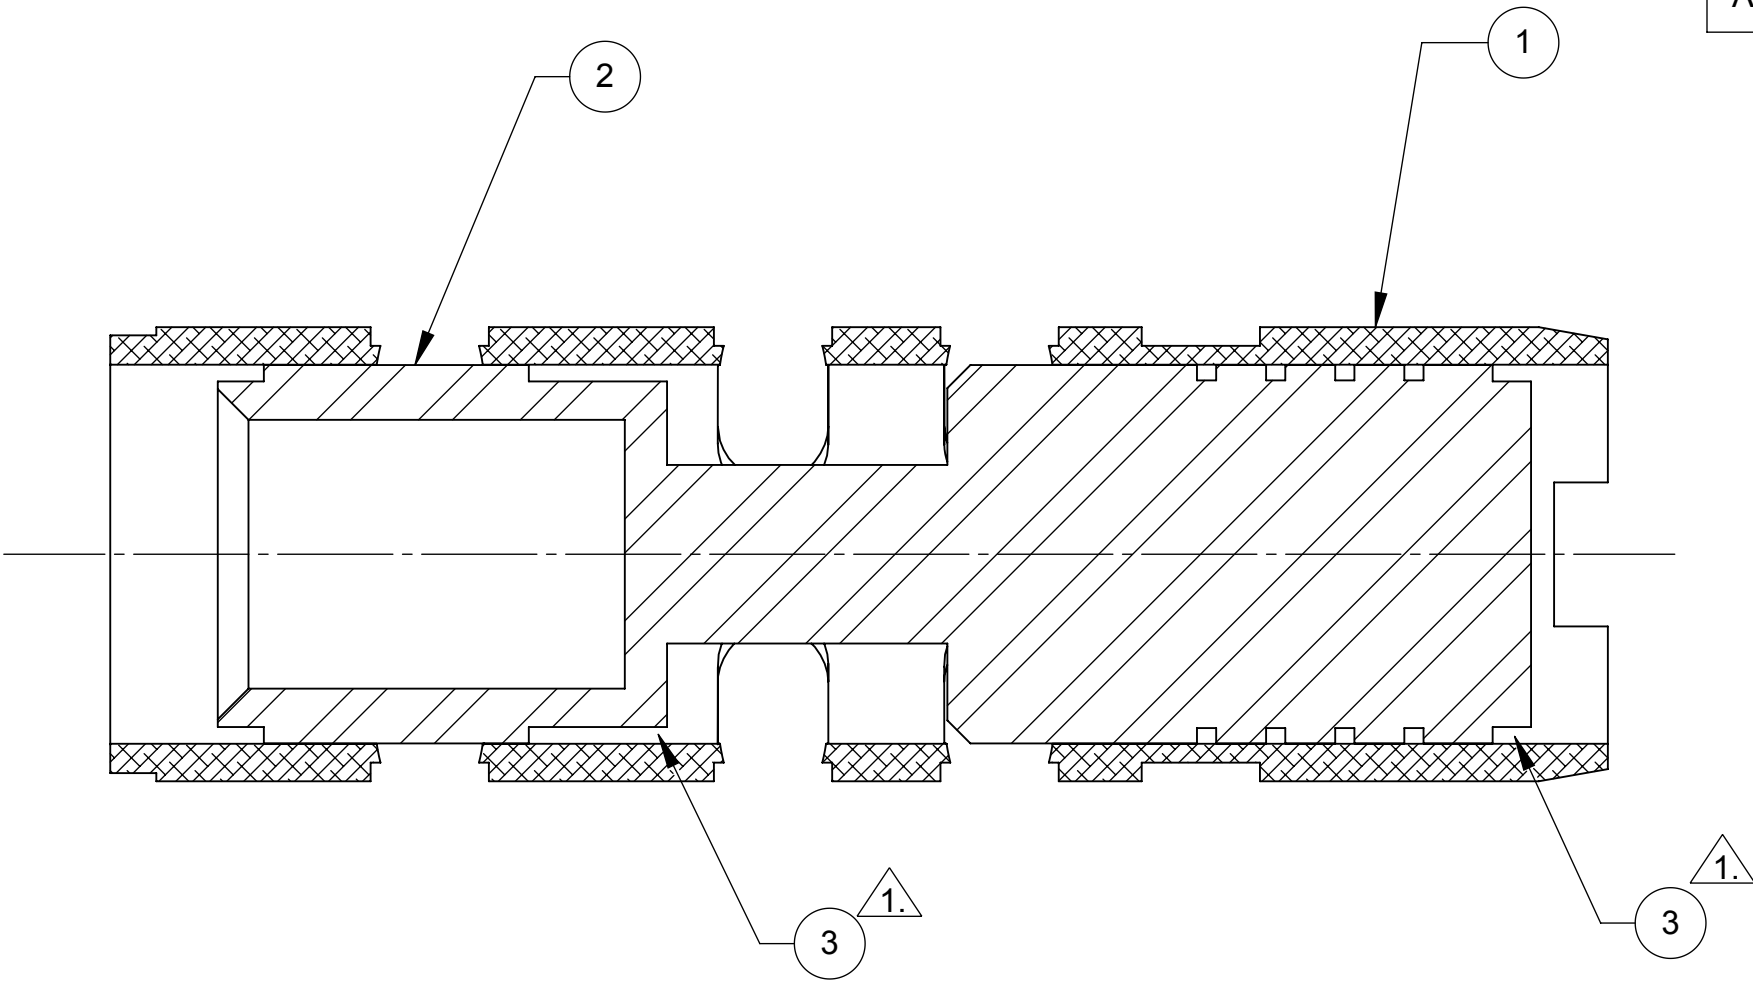

1. 用足夠的凝膠在valve與sleeve內徑，
以保證可以像示範的那樣撐住零件
2. valve與sleeve的中間必須要清空，
兩者之間的直徑必須是0.0004/0.0014 [0.010/0.036]

NOTES:

1. SUPPLY ENOUGH TRANSJEL IN AREAS SHOWN TO SECURELY HOLD PARTS TOGETHER AS ILLUSTRATED
2. THE CLEARANCE BETWEEN THE VALVE AND SLEEVE SPOOL DIAMETERS SHOULD BE .0004/.0014 [0.010/0.036]

A

3	1.	31295	-	TRANSJEL
2	1	104740-09	-	VALVE, COMPENSATOR FEED
1	1	104740-10	A	SLEEVE, COMPENSATOR FEED
ITEM	QTY	PART NUMBER	REV	DESCRIPTION (REF)
PARTS LIST				

CURRENT ISSUE		DATE		TITLE ASSEMBLY, VALVE/SLEEVE			
DRAWN DGP		09/07/12					
CHECKED TVM		09/13/12					
MFG ENG -		-					
APPROVED SCJ		01/10/13		SIZE B		DWG NO. 104740ASSY9	REV A
ISSUED PRJ		01/10/13		SCALE 4:1	EST. WT. 0.02 LBS	SHEET 1 OF 1	

		UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]	
		.XX [X.X] ± .015 [0.38] .XXX [X.XX] ± .005 [0.13] ANGLES ± 1° SURFACE FINISH 125 [3.2] ✓	
KEY CHARACTERISTIC SYMBOLS		THIRD ANGLE PROJECTION	
Cr CRITICAL	Ma MAJOR		

APPROVED