
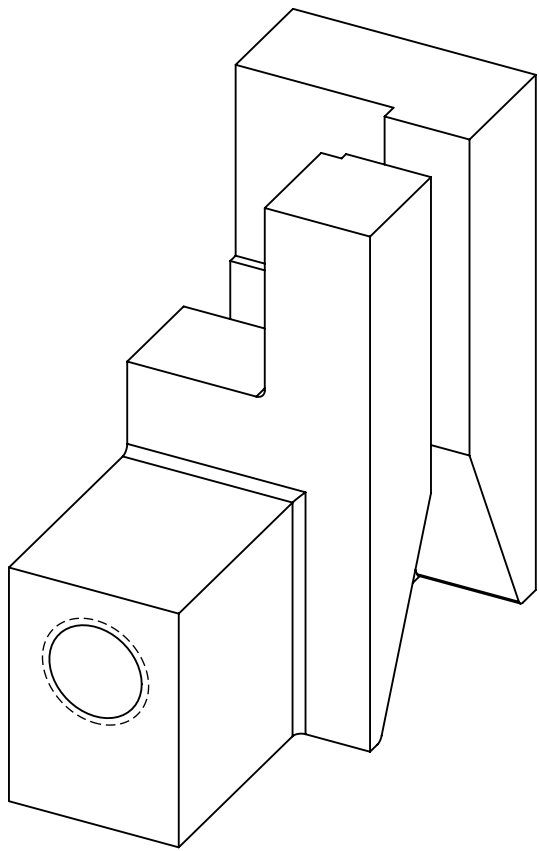
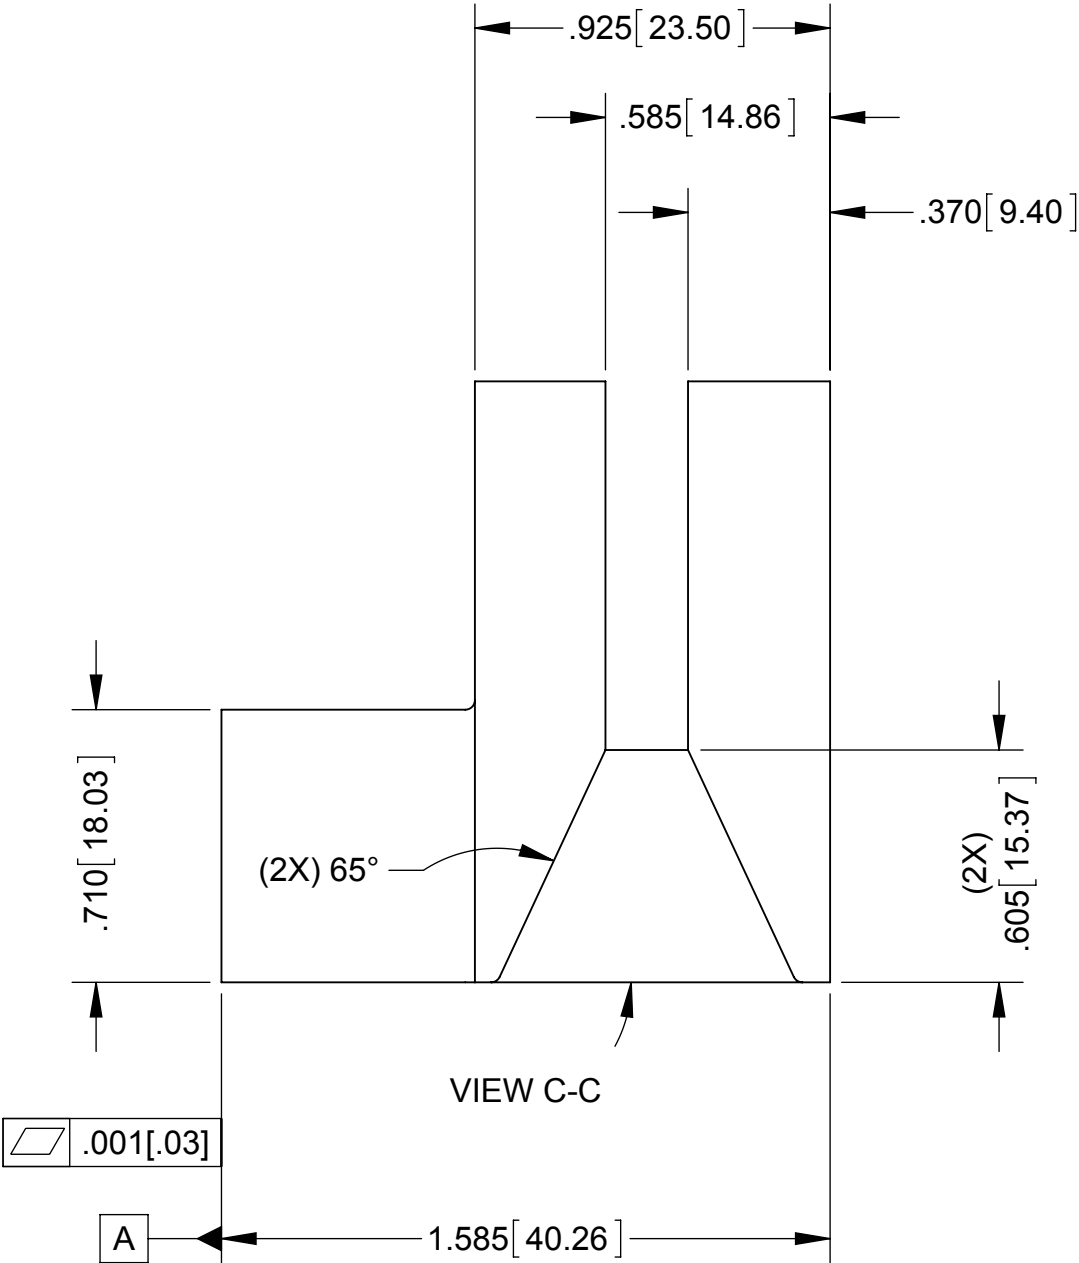
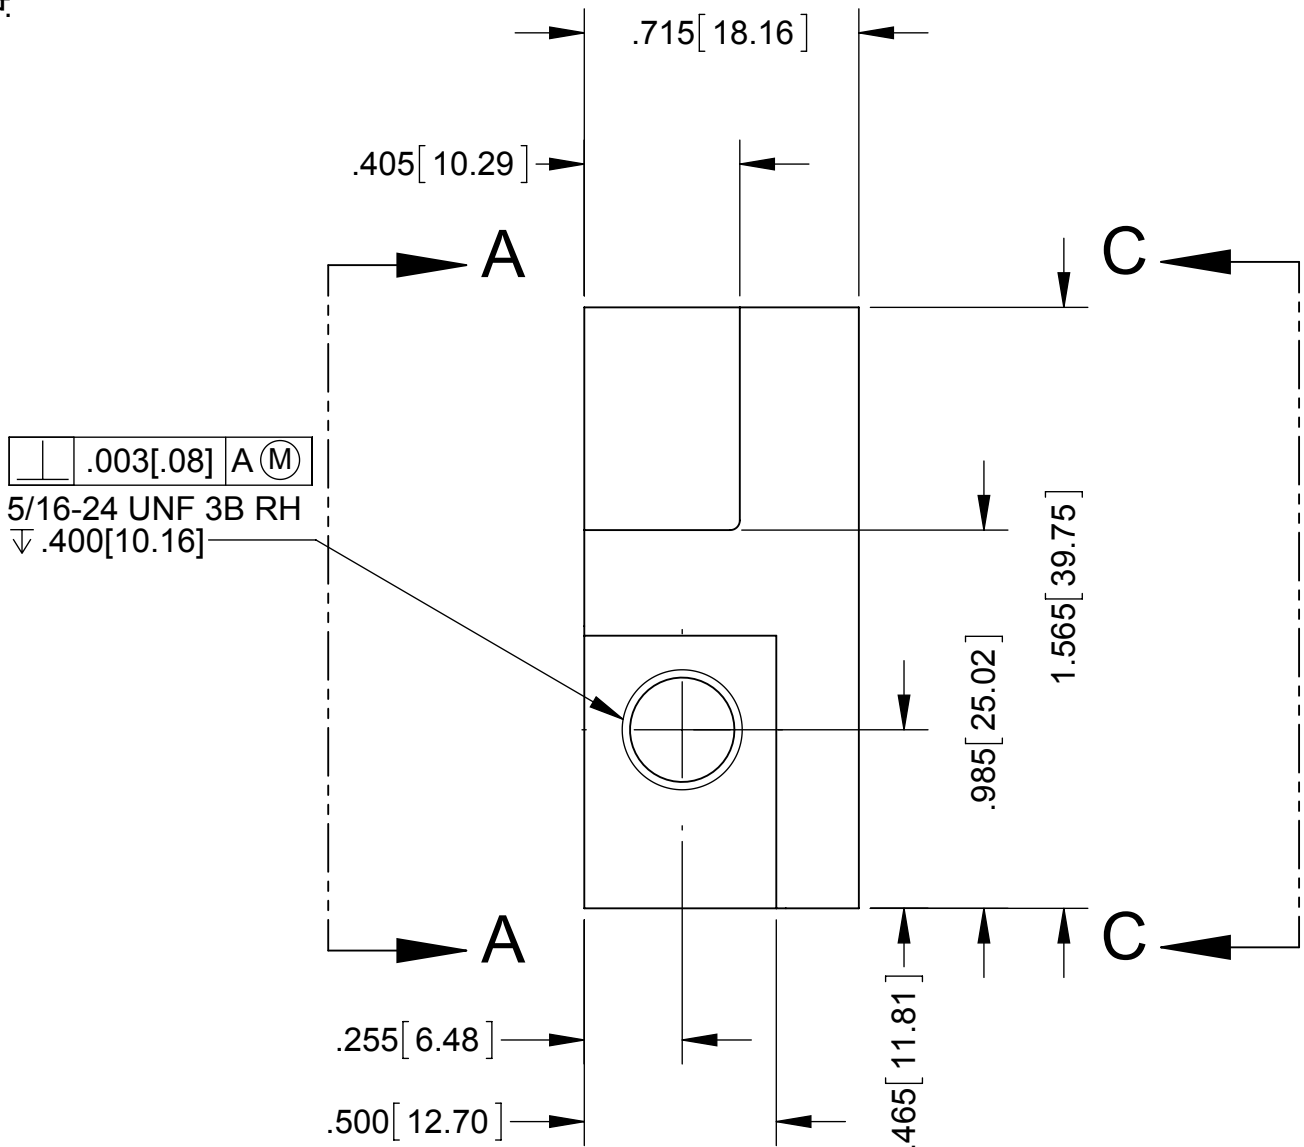


DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
1	PROTO/QUOTE	JLB	12/15/15

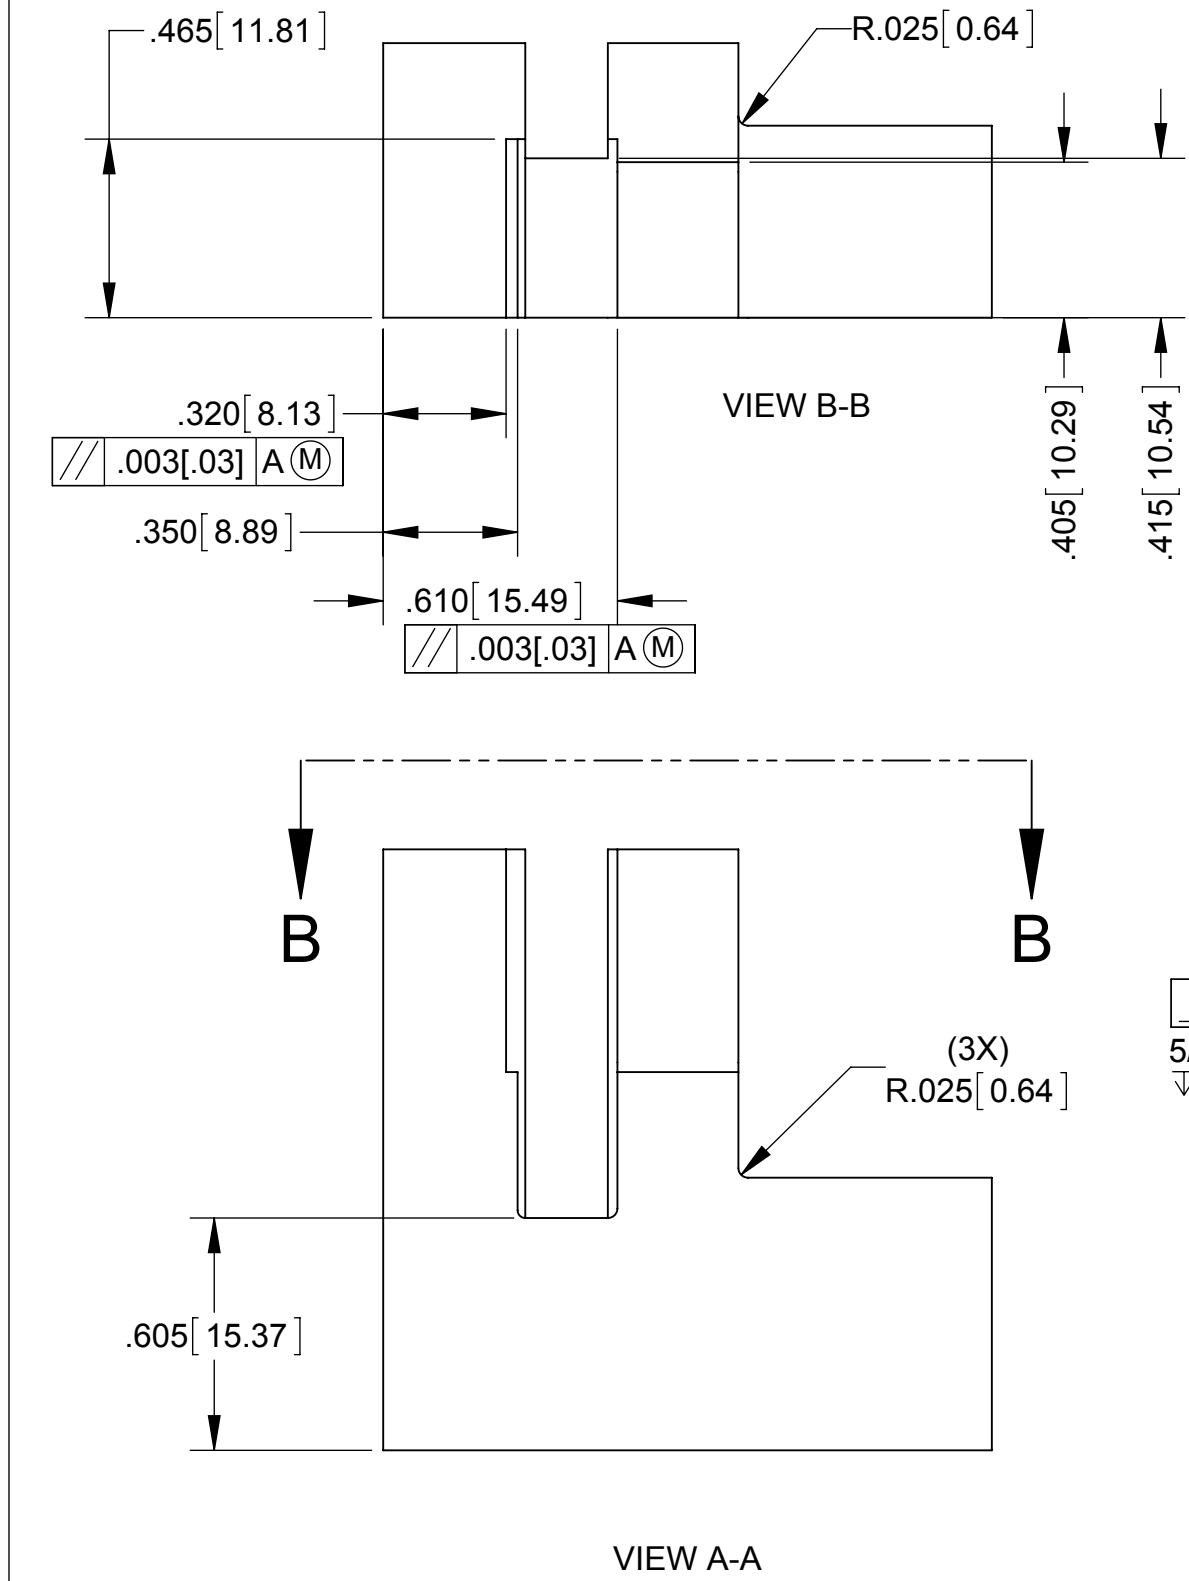

1. 材料：6061-T6 鋁
2. 硬陽，依照規範MIL-A-8625, TYPE III, CLASS 2，厚度.0008+/- .0004[0.02+/-0.01]，遮蓋/塞住5/16-24 牙
3. 所有尺寸都是陽極之後
4. 未指定R角 .02 [0.5] MAX
5. 允許在此表面有接觸點
6. 去毛邊

NOTES

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUM. MATERIAL
2. HARD ANODIZE TO YIELD .0008 +/- .0004 [0.02±0.01] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2. PLUG/MASK 5/16-24 THREAD.
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. BREAK/RADIUS UNSPECIFIED EDGES/CORNERS, .02 [0.5]MAX
5. CONTACT POINTS PERMITTED ON ANY SURFACE
6. REMOVE BURRS

UNLESS OTHERWISE SPECIFIED		CURRENT ISSUE	DATE	TITLE		
DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		DRAWN JLB	12/15/15	LINK, MANUAL VALVE		
.XX [X.X] ± .015 [0.38]		CHECKED ETD	12/16/15			
.XXX [X.XX] ± .005 [0.13]		MFG ENG -	-			
ANGLES ± 1°		APPROVED DGP	-			
SURFACE FINISH 125 [3.2] /		ISSUED PRJ	-	SIZE C	DWG NO. 104740-25	REV 1
THIRD ANGLE PROJECTION		SCALE 2:1		EST. WT. 0.03 LBS	SHEET 1 OF 1	

PROTO/QUOTE