



DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
-	ORIGINAL ISSUE	TVM	05/10/13

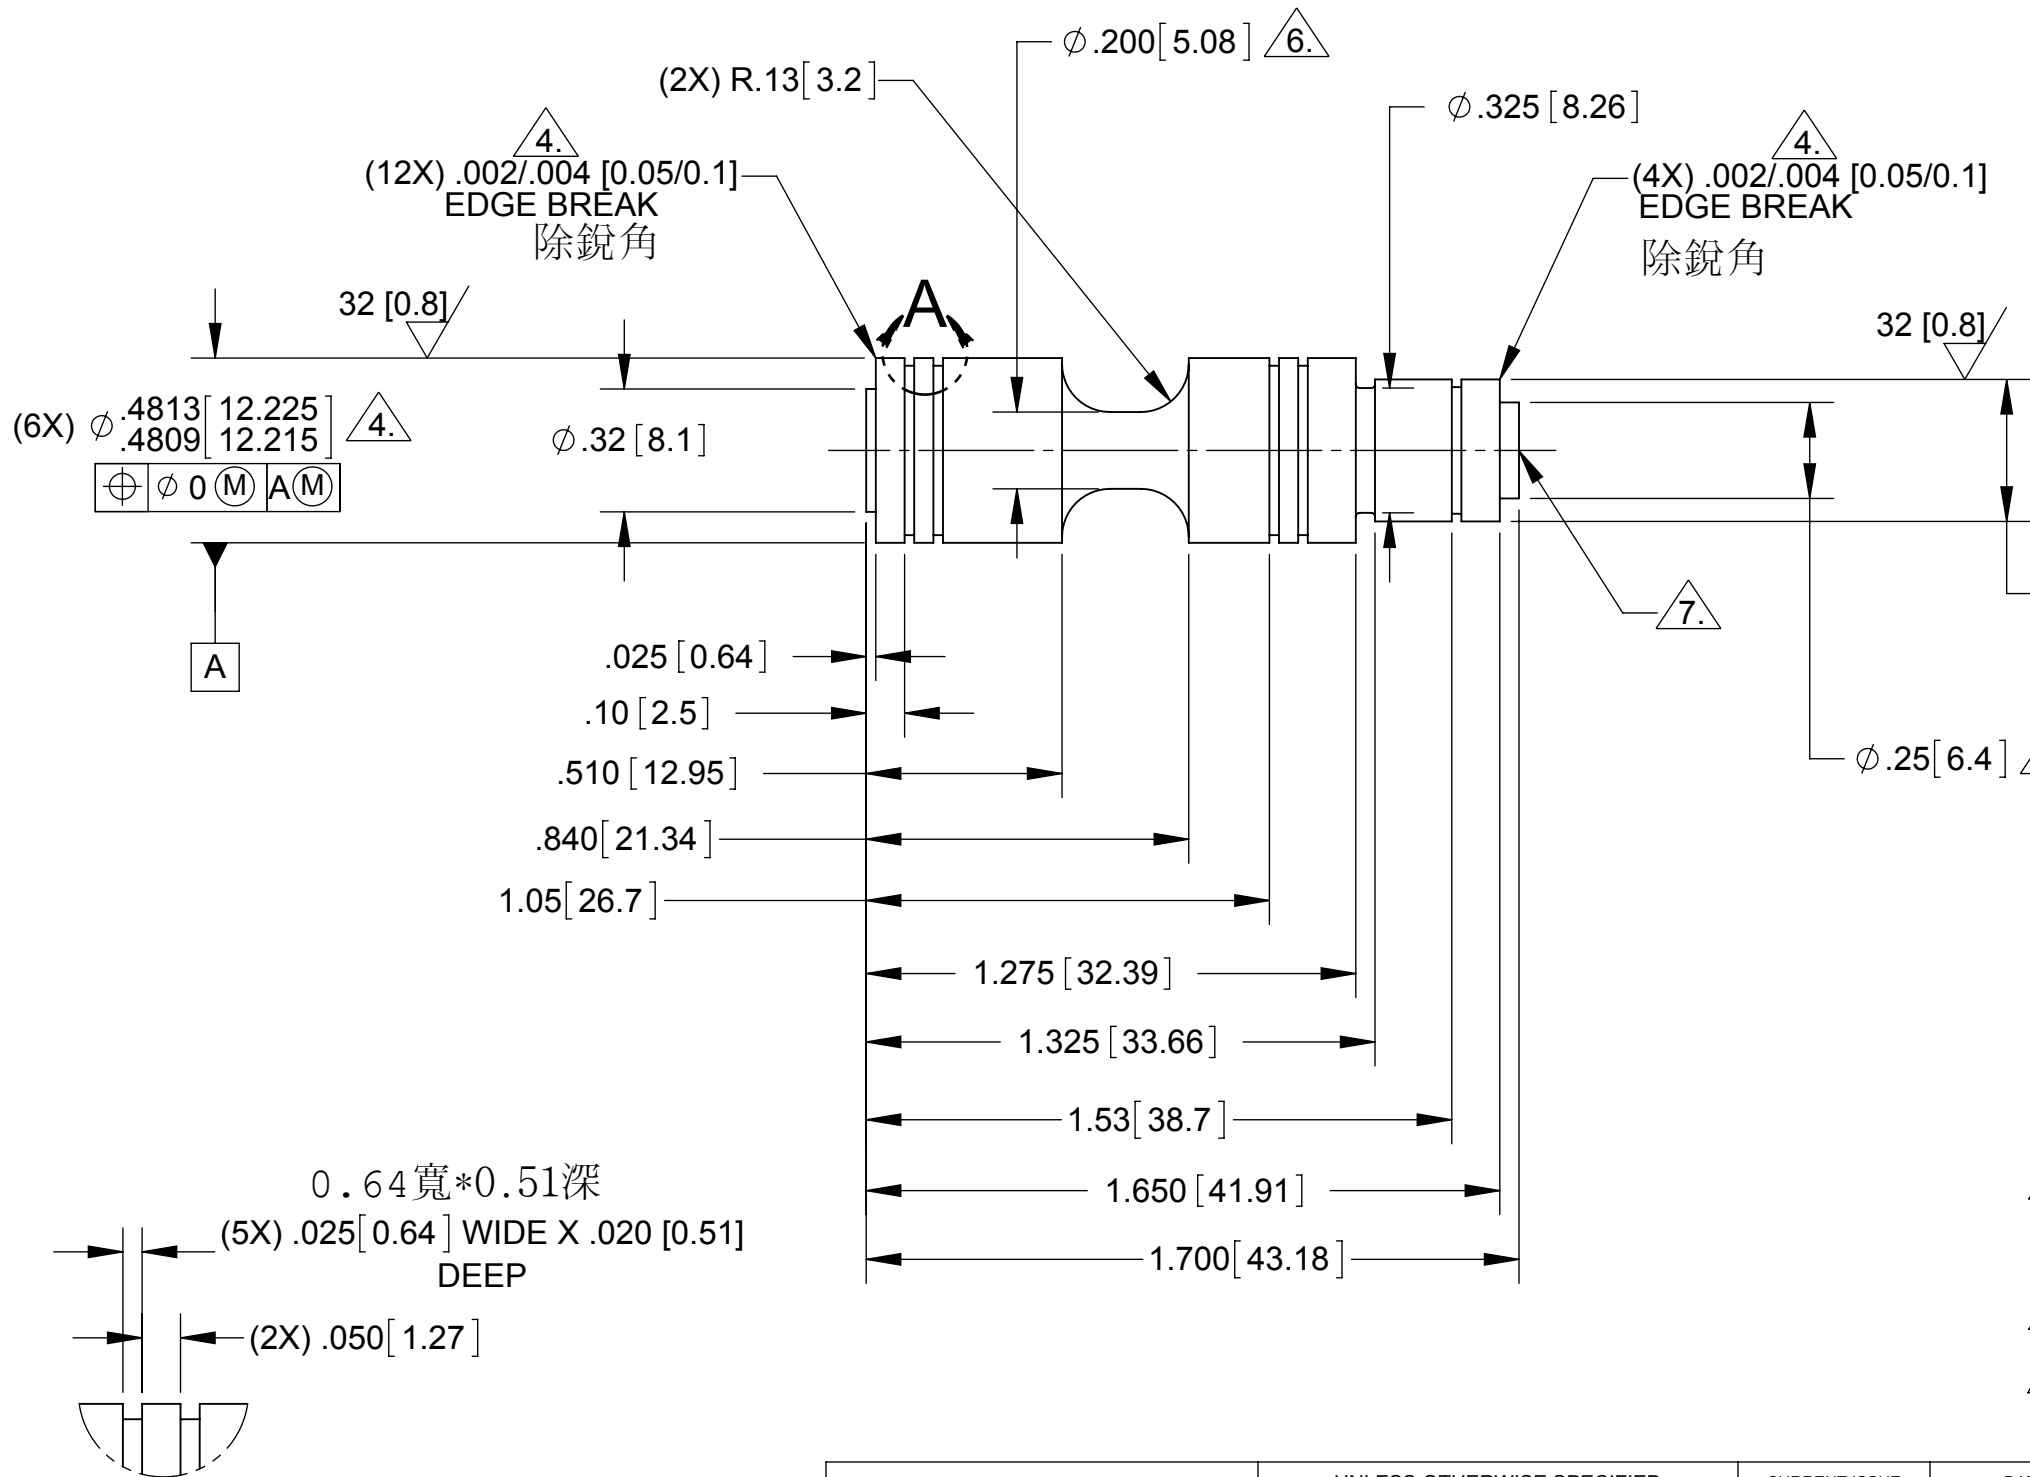

1. 材料：6262-T8/T9 或是 6061-T6 鋁
2. 硬陽：依照規範MIL-A-8625, TYPE 3, 厚度 0.0008 [0.020] +/- 0.0004 [0.010]
3. 所有尺寸都是陽極之後
4. 不允許有銳角
5. 未指定R角 0.005/0.015 [0.13/0.38]
6. 允許在此直徑或是表面有接觸點
7. 僅允許在此端有中心點 $\phi 0.06 [1.5]$ MAX



NOTES:

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZE TO YIELD $.0008 [0.020] \pm .0004 [0.010]$ BUILD UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. UNSPECIFIED FILLETS & RADII $.005/.015 [0.13/0.38]$
6. CONTACT POINTS PERMITTED ON DIAMETER
7. CENTER DRILL PERMISSIBLE, ONE SIDE ONLY, $\phi .06 [1.5]$ MAX

DETAIL A
SCALE 4 : 1

	UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		CURRENT ISSUE	DATE	TITLE VALVE			
	.XX [X.X] \pm .015 [0.38] .XXX [X.XX] \pm .005 [0.13] ANGLES \pm 1° SURFACE FINISH 125 [3.2] ✓		DRAWN TVM	04/17/13				
KEY CHARACTERISTIC SYMBOLS Cr Ma CRITICAL MAJOR	THIRD ANGLE PROJECTION		CHECKED DGP	04/30/13	SIZE B DWG NO. 95740-72 REV -			
			MFG ENG -	-				
			APPROVED SCJ	-	SCALE 2:1 EST. WT. 0.02 LBS SHEET 1 OF 1			
			ISSUED PRJ	-				

PRELIMINARY