




DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
-	ORIGINAL ISSUE	TVM	05/10/13


- 1.材料：6262-T8/T9 或是 6061-T6鋁
- 2.硬陽：依照規範MIL-A-8625, TYPE 3, 等級2, 厚度 0.0008 [0.020] +/-0.0004 [0.010]
- 3.所有尺寸都是陽極之後
- 4.不允許有銳角
- 5.未指定R角 0.005/0.015 [0.13/0.38]
- 6.允許在此直徑或是表面有接觸點

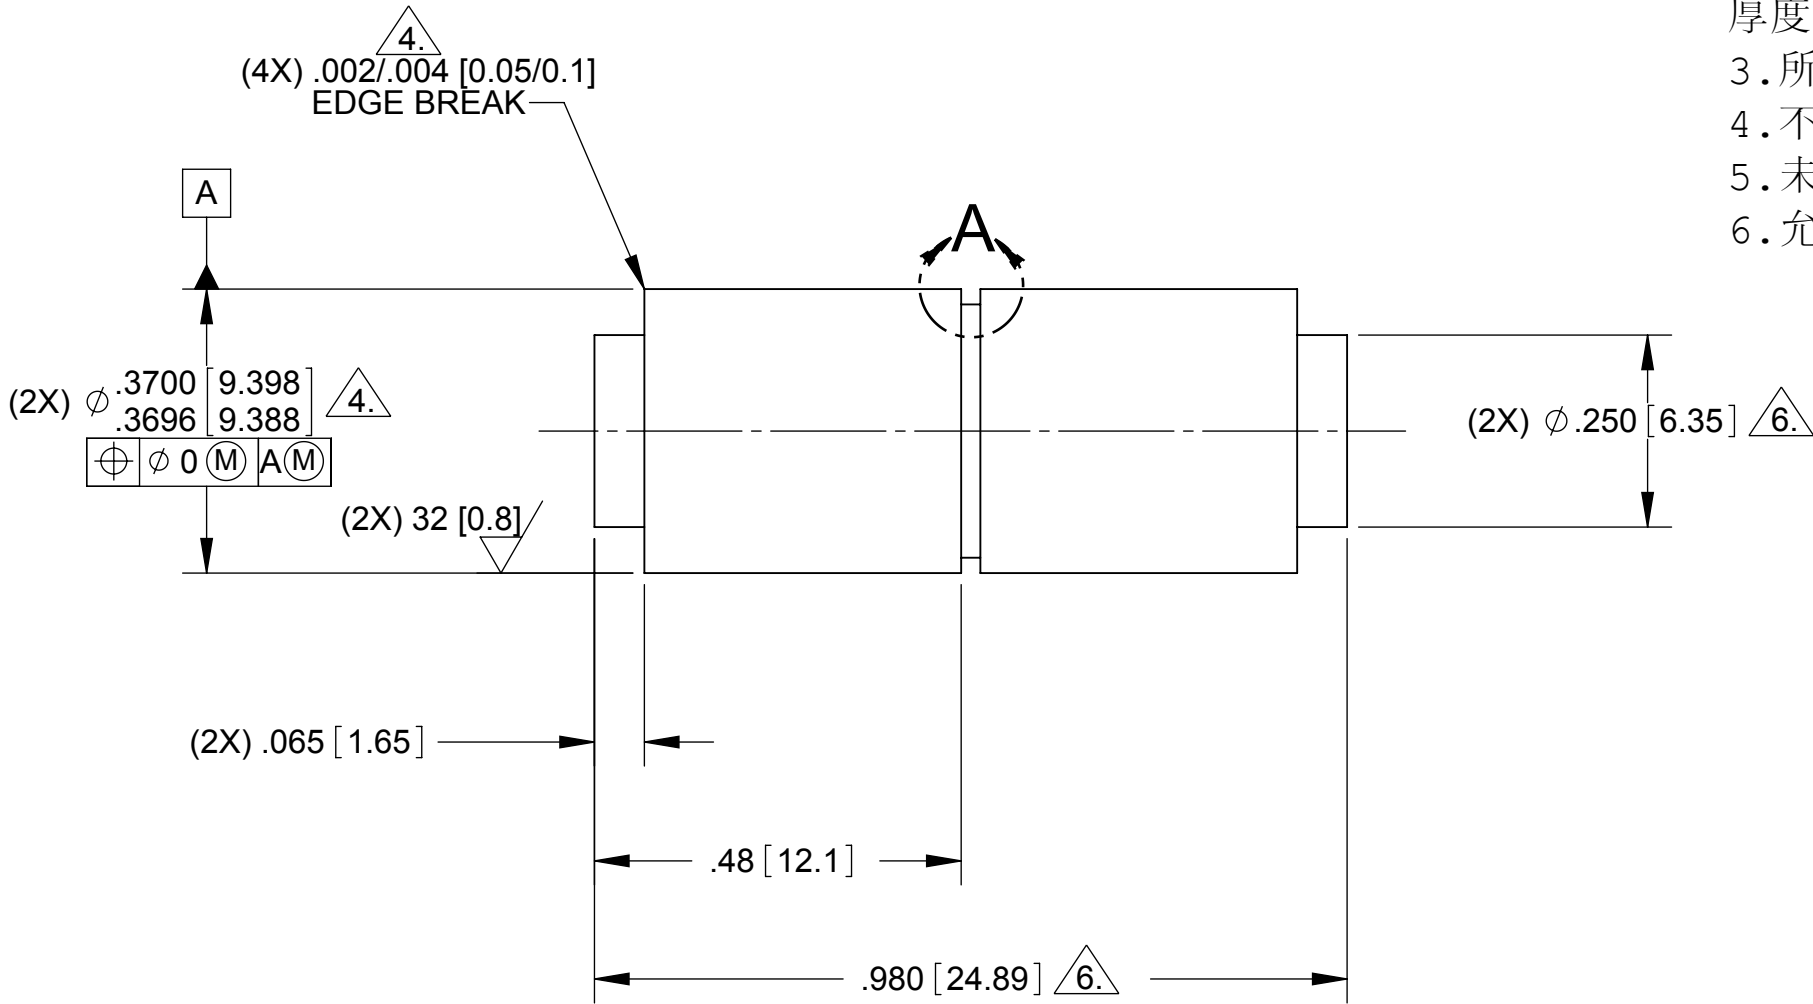

NOTES:

1. MATERIAL: 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZE TO YIELD .0008 [0.02] ±.0004 [0.01] BUILD UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]
6. CONTACT POINTS PERMITTED ON DIAMETER OR SURFACE

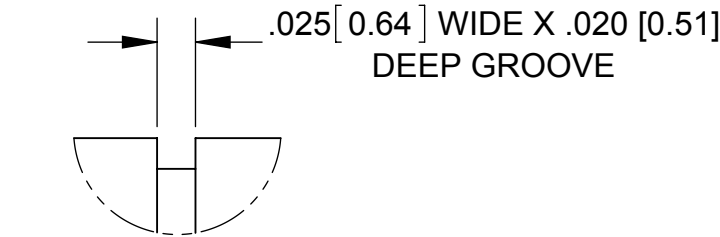

	UNLESS OTHERWISE SPECIFIED  DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]  XX [X.X] ± .015 [0.38] XXX [X.XX] ± .005 [0.13] ANGLES ± 5°  SURFACE FINISH 125 [3.2]✓	<div>THIRD ANGLE PROJECTION</div> <div></div>	CURRENT ISSUE	DATE	TITLE  VALVE, BOOST				
			DRAWN TVM	04/02/13					
			CHECKED MMC	04/09/13					
			MFG ENG -	-					
			APPROVED SCJ	-	SIZE B		DWG NO. 95740-67	REV -	
KEY CHARACTERISTIC SYMBOLS <div><div>Cr</div><div>CRITICAL</div><div>Ma</div><div>MAJOR</div></div>			ISSUED PRJ	-	SCALE 4:1	EST. WT. 0.01 LBS	SHEET 1 OF 1		

PRELIMINARY