
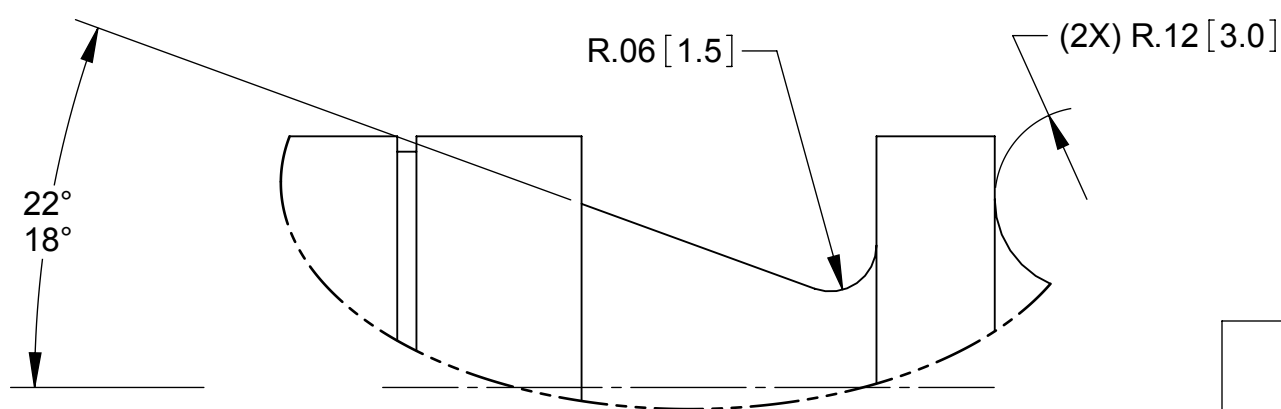
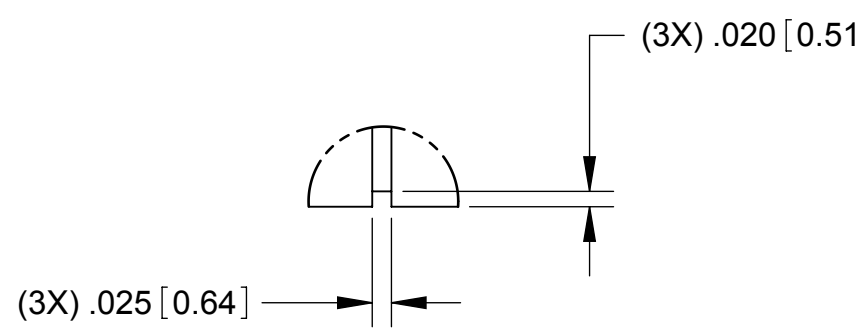
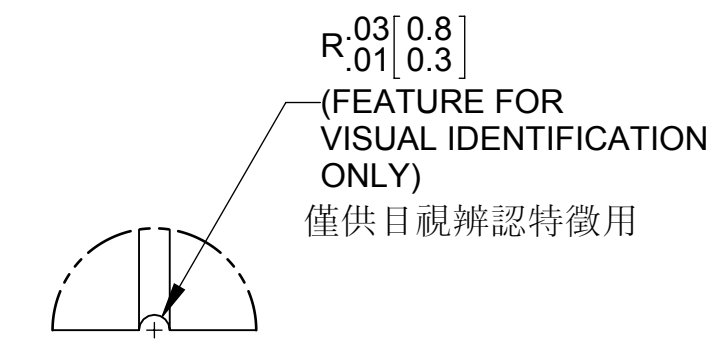


- 1.材料：6061-T6 鋁
2.硬陽，依照規範MIL-A-8625, TYPE III, CLASS 2，
厚度.0008+/- .0004 [0.02+/- 0.01]
3.允許在此尺寸有接觸點
4.所有尺寸都是陽極之後
5.不允許有銳角
6.未指定R角 .010/.020 [0.25/0.50]

DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
-	ORIGINAL ISSUE	DGP	05/30/13

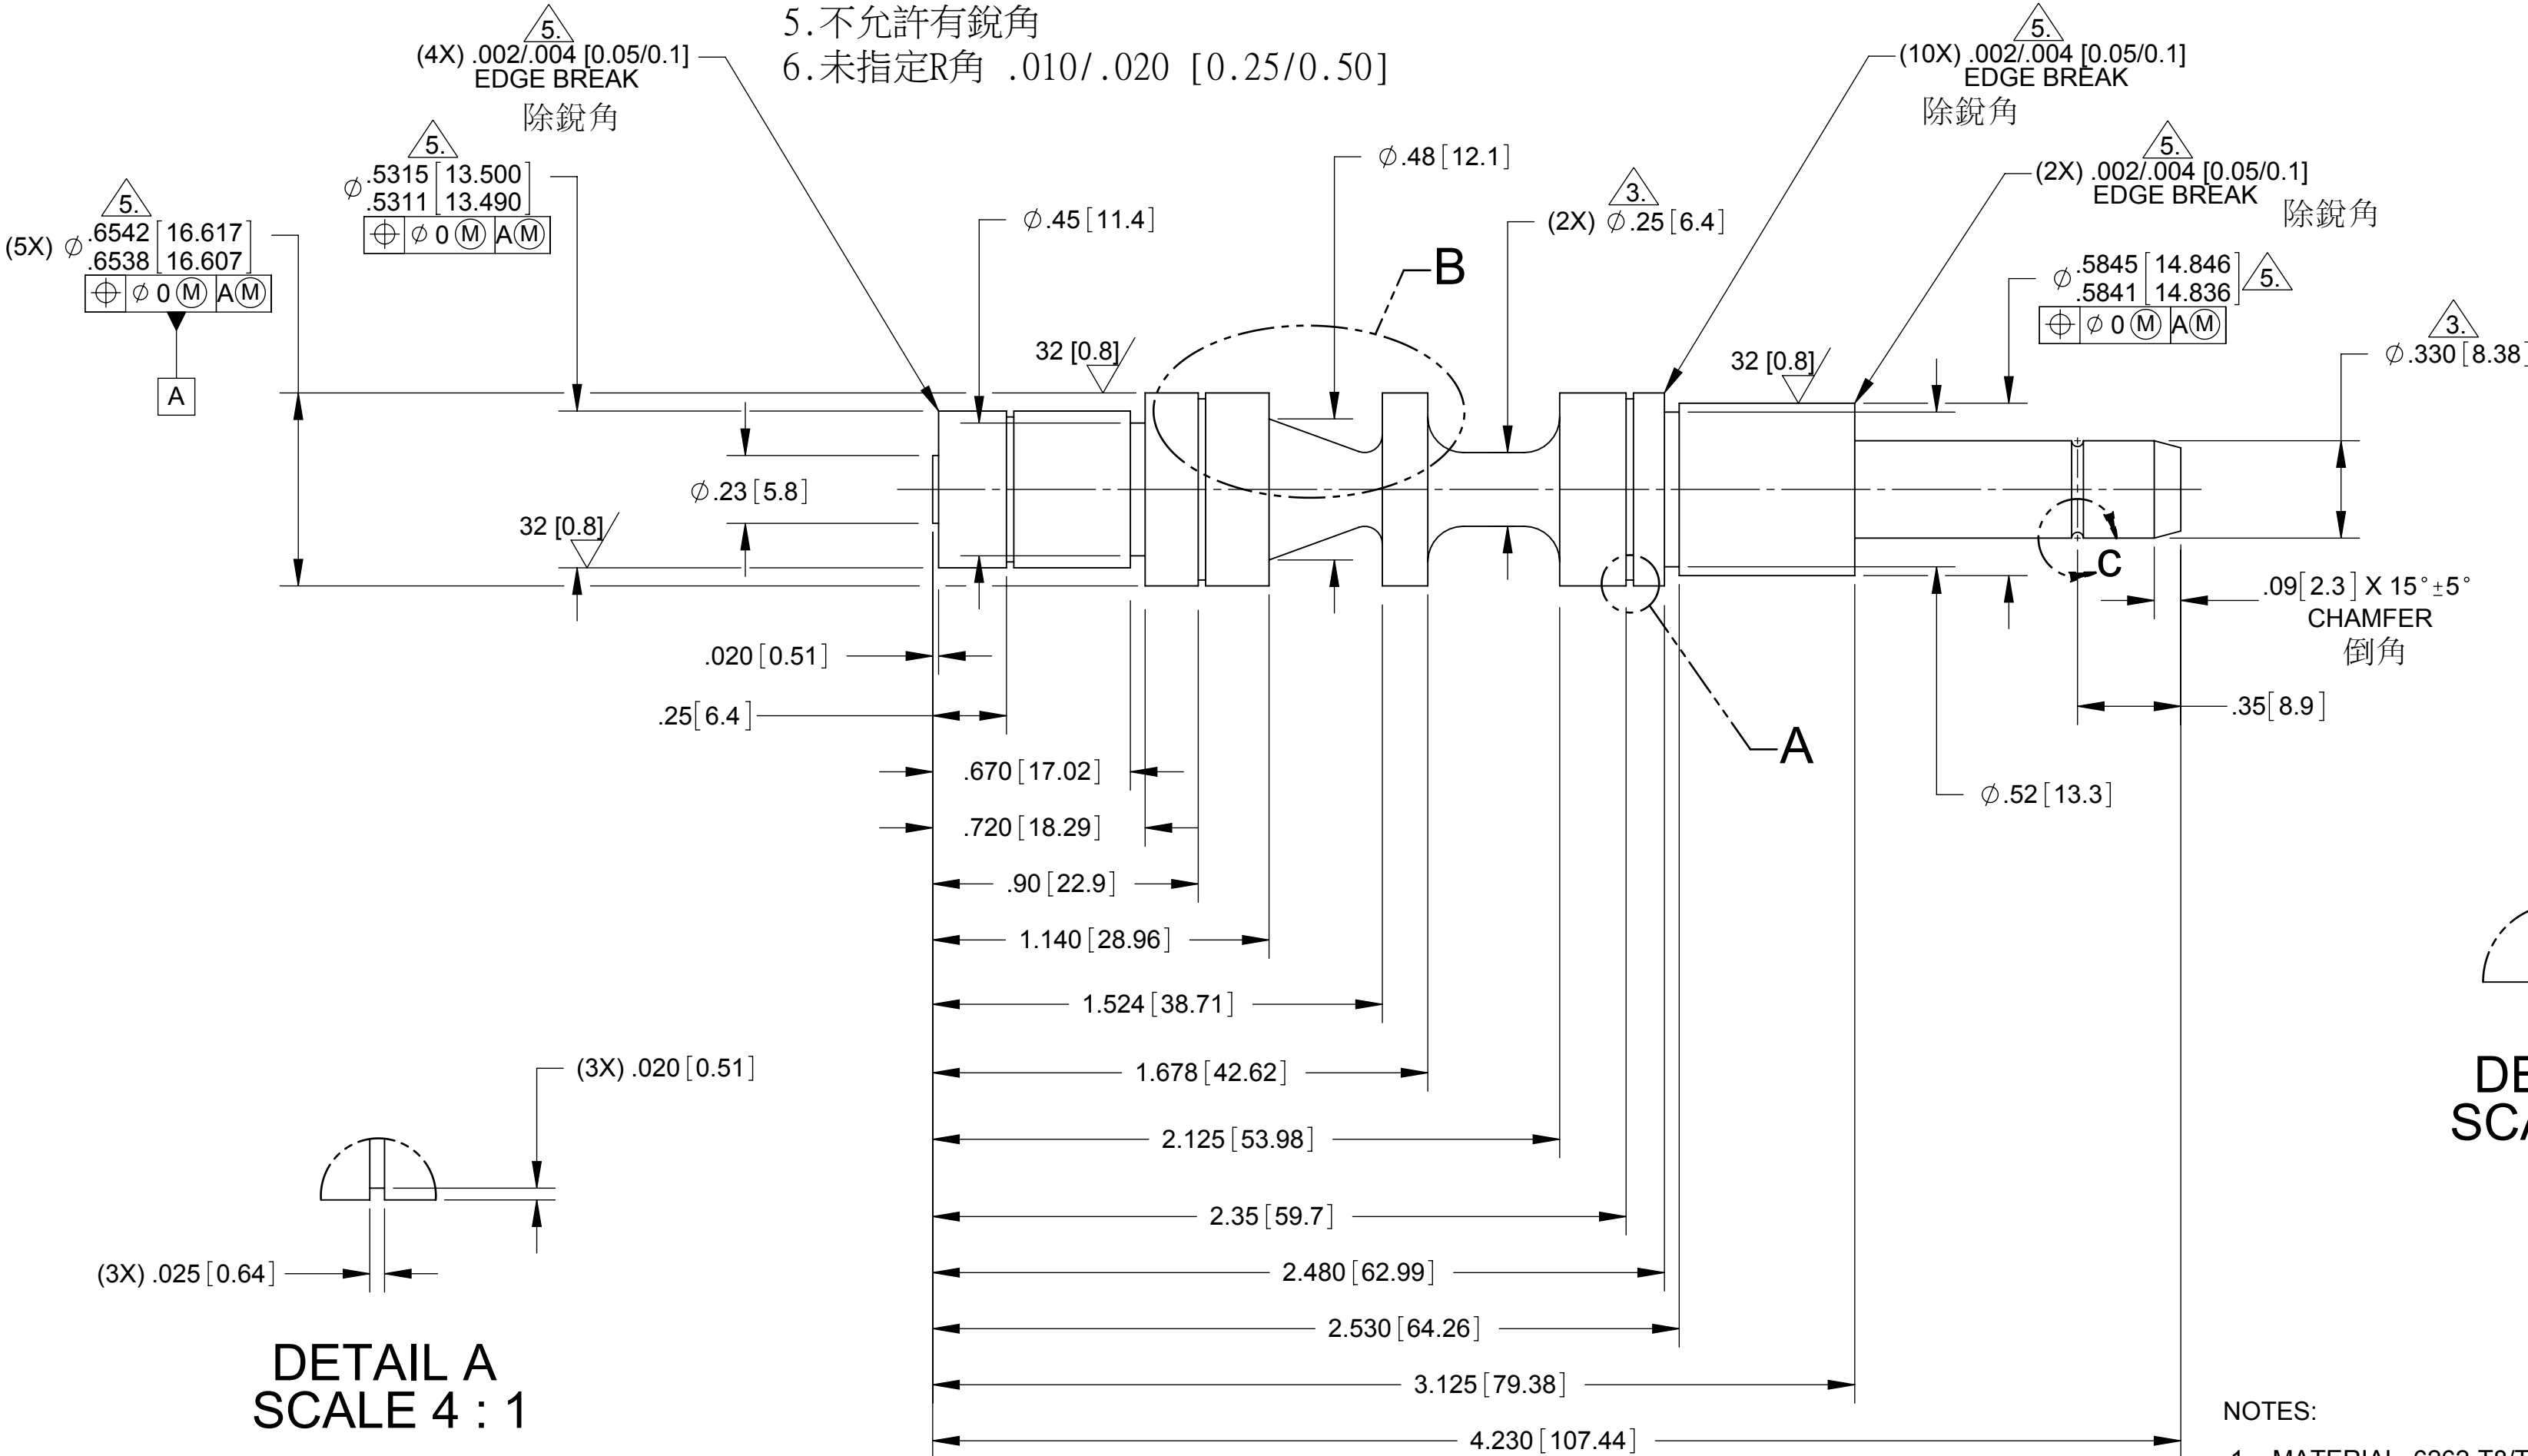

- NOTES:
- MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
 - HARD ANODIZE TO YIELD .0008[0.020] ± .0004[0.010] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
 - CONTACT POINTS PERMITTED ON THIS DIAMETER
 - ALL DIMENSIONS APPLY AFTER ANODIZING
 - SHARP EDGES WILL NOT BE TOLERATED.
 - UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]

UNLESS OTHERWISE SPECIFIED		CURRENT ISSUE	DATE	TITLE			
DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		DGP	03/29/13	VALVE, O/S PR, GEN II			
.XX [X.X] ± .010 [0.25] .XXX [X.XX] ± .005 [0.13] ANGLES ± 1° SURFACE FINISH 63 [1.6]		TVM	04/09/13				
KEY CHARACTERISTIC SYMBOLS		MFG ENG	-				
THIRD ANGLE PROJECTION		DGP	05/30/13	SIZE C	DWG NO. 95740-69	REV -	
		PRJ	05/30/13	SCALE 2:1	EST. WT. 0.08 LBS	SHEET 1 OF 1	

APPROVED