


- HARD ANODIZE TO YIELD .0008 ± .0004 [0.02 ±0.01] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
- All DIMENSIONS APPLY AFTER ANODIZING
- BREAK/RADIUS UNSPECIFIED EDGES/CORNERS, .005/.015 [0.13/0.38]
- REMOVE BURRS
- SHARP EDGES WILL NOT BE TOLERATED
- CENTERS PERMISSIBLE (BOTH ENDS) Ø.06 [1.5] MAX.
- CONTACT POINTS PERMITTED ON THESE DIAMETERS ONLY

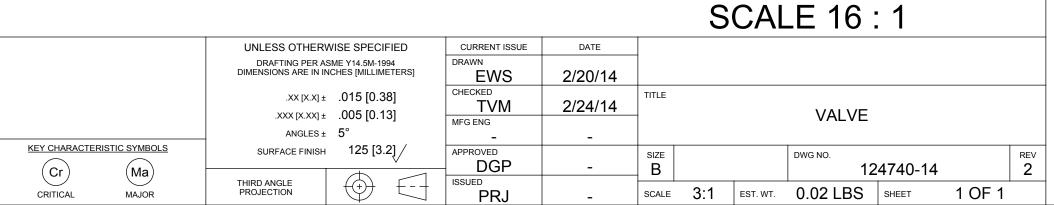

DETAIL C