1.材料：6262-T8/T9 或是 6061-T6 鋁
2.硬陽：厚度 0.0008[0.020]+/-0.0004[0.010]，依照規範 MIL-A-8625，TYPE 3，等級2
3.所有尺寸都是陽極之後
4.不允許有銳角
5.未指定R角 0.005/0.015[0.12/0.38]
6.允許在此尺寸上有接觸點

| DRAWING REVISION INFORMATION | | | |
|---|---|---|---|
| REV | DESCRIPTION | DRAWN BY | ISSUE DATE |
| - | PRELIMINARY | DGP | 05/07/13 |

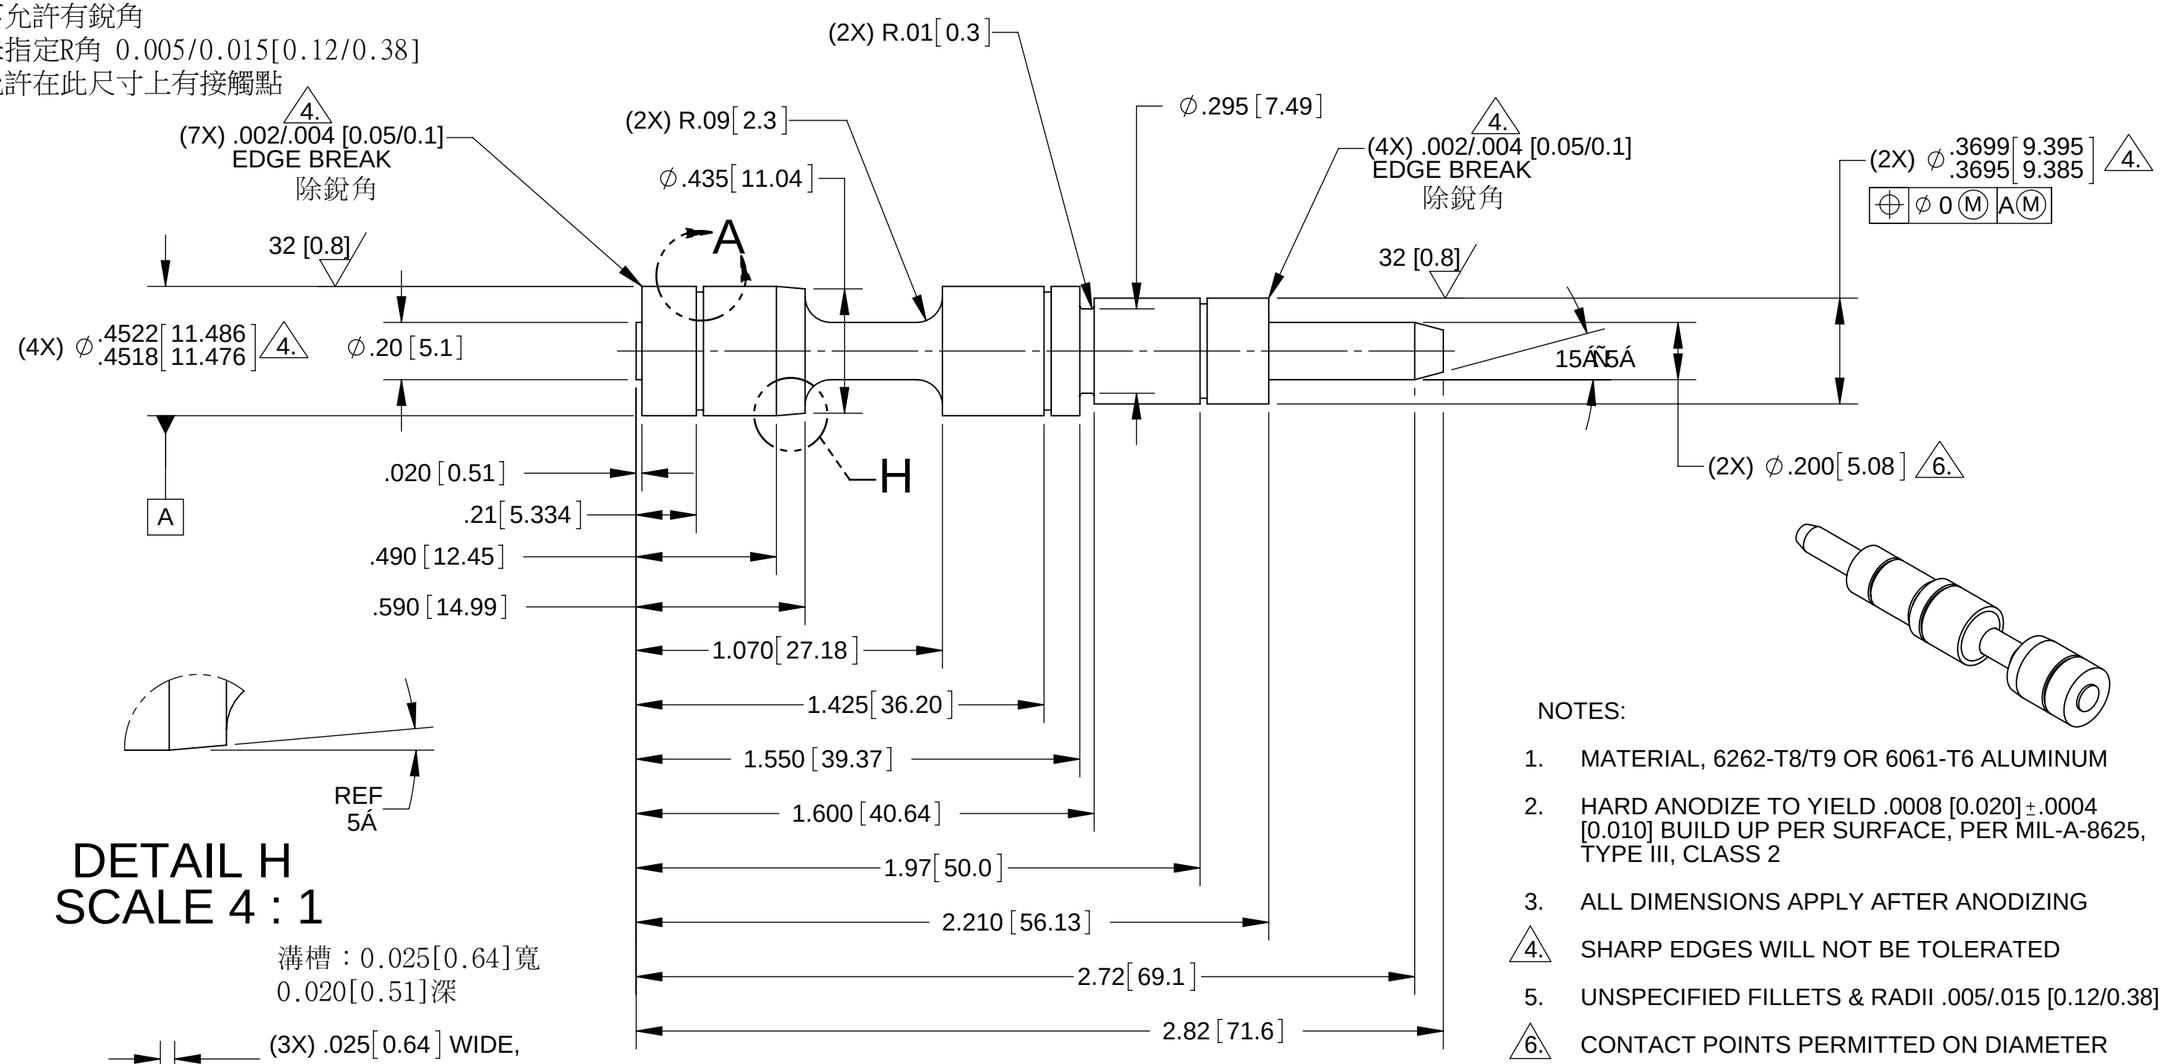


DETAIL H
SCALE 4 : 1

溝槽：0.025[0.64]寬
0.020[0.51]深

DETAIL A
SCALE 4 : 1

NOTES:

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZE TO YIELD .0008 [0.020]±.0004 [0.010] BUILD UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]
6. CONTACT POINTS PERMITTED ON DIAMETER

PRELIMINARY

KEY CHARACTERISTIC SYMBOLS
Cr CRITICAL
Ma MAJOR

UNLESS OTHERWISE SPECIFIED
DRAFTING PER ASME Y14.5M-1994
DIMENSIONS ARE IN INCHES [MILLIMETERS]
.XX [X.X] Ñ .015 [0.38]
.XXX [X.XX] Ñ .005 [0.13]
ANGLES Ñ 1Á
SURFACE FINISH 125 [3.2]
THIRD ANGLE PROJECTION

| CURRENT ISSUE | DATE |
|---|---|
| DRAWN DGP | 05/07/13 |
| CHECKED MMC | 05/15/13 |
| MFG ENG - | - |
| APPROVED SCJ | - |
| ISSUED PRJ | - |

TITLE: VALVE, O/S LUBE

| SIZE | DWG NO. | REV |
|---|---|---|
| B | 95740-71 | - |

SCALE 2:1 | EST. WT. 0.03 LBS | SHEET 1 OF 1