
DRAWING REVISION INFORMATION									
REV	DESCRIPTION	DRAWN BY	ISSUE DATE						
1	PROTO/QUOTE	JLB	12/15/15						

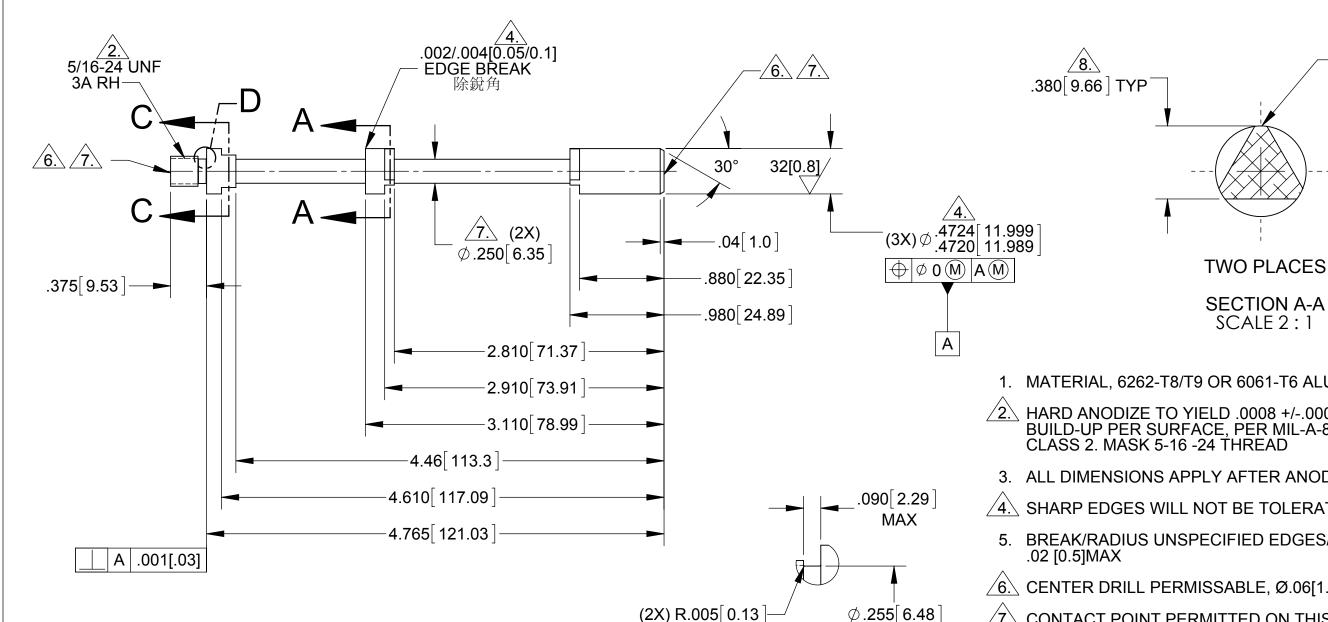

.169 4.29

SECTION C-C

(2X).002/.004[0.05/0.1] EDGE BREAK

除銳角

- 1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUM.
- HARD ANODIZE TO YIELD .0008 +/-.0004 [0.02±0.01] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2. MASK 5-16 -24 THREAD
- 3. ALL DIMENSIONS APPLY AFTER ANODIZING
- SHARP EDGES WILL NOT BE TOLERATED
- 5. BREAK/RADIUS UNSPECIFIED EDGES/CORNERS, .02 [0.5]MAX
- CENTER DRILL PERMISSABLE, Ø.06[1.5] MAX
- CONTACT POINT PERMITTED ON THIS DIAMETER/SURFACE
- ANGULAR ORIENTATION TO OTHER FEATURES IS NOT **CRITICAL**
- 0 DEMOVE BLIDDS

344[8.74] 332[8.43]		DETAIL D SCALE 2:1 ANGULAR ORIENTATION TO OTHER FEATURES IS NOT CRITICAL 9. REMOVE BURRS										
_		UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]	CURRENT ISSUE DRAWN JLB CHECKED	12/15/15		ţ						
		.xx[x.x]± .015 [0.38] .xxx[x.xx]± .005 [0.13] ANGLES± 1°	ETD MFG ENG -	12/16/15 -	TITLE		VALVE, MANUAL					
:-C	Cr Ma CRITICAL MAJOR	SURFACE FINISH 125 [3.2] / THIRD ANGLE PROJECTION	APPROVED DGP ISSUED PRJ	-	SIZE B SCALE	1:1	EST. WT.	DWG NO. 10	04740-24 SHEET	1 OF 1	REV 1	

(3X).002/.004[0.05/0.1] EDGE BREAK

除銳角