



DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
C	ECN05546; CREATE DRAWING IN SOLID WORKS	JAL	10/31/11

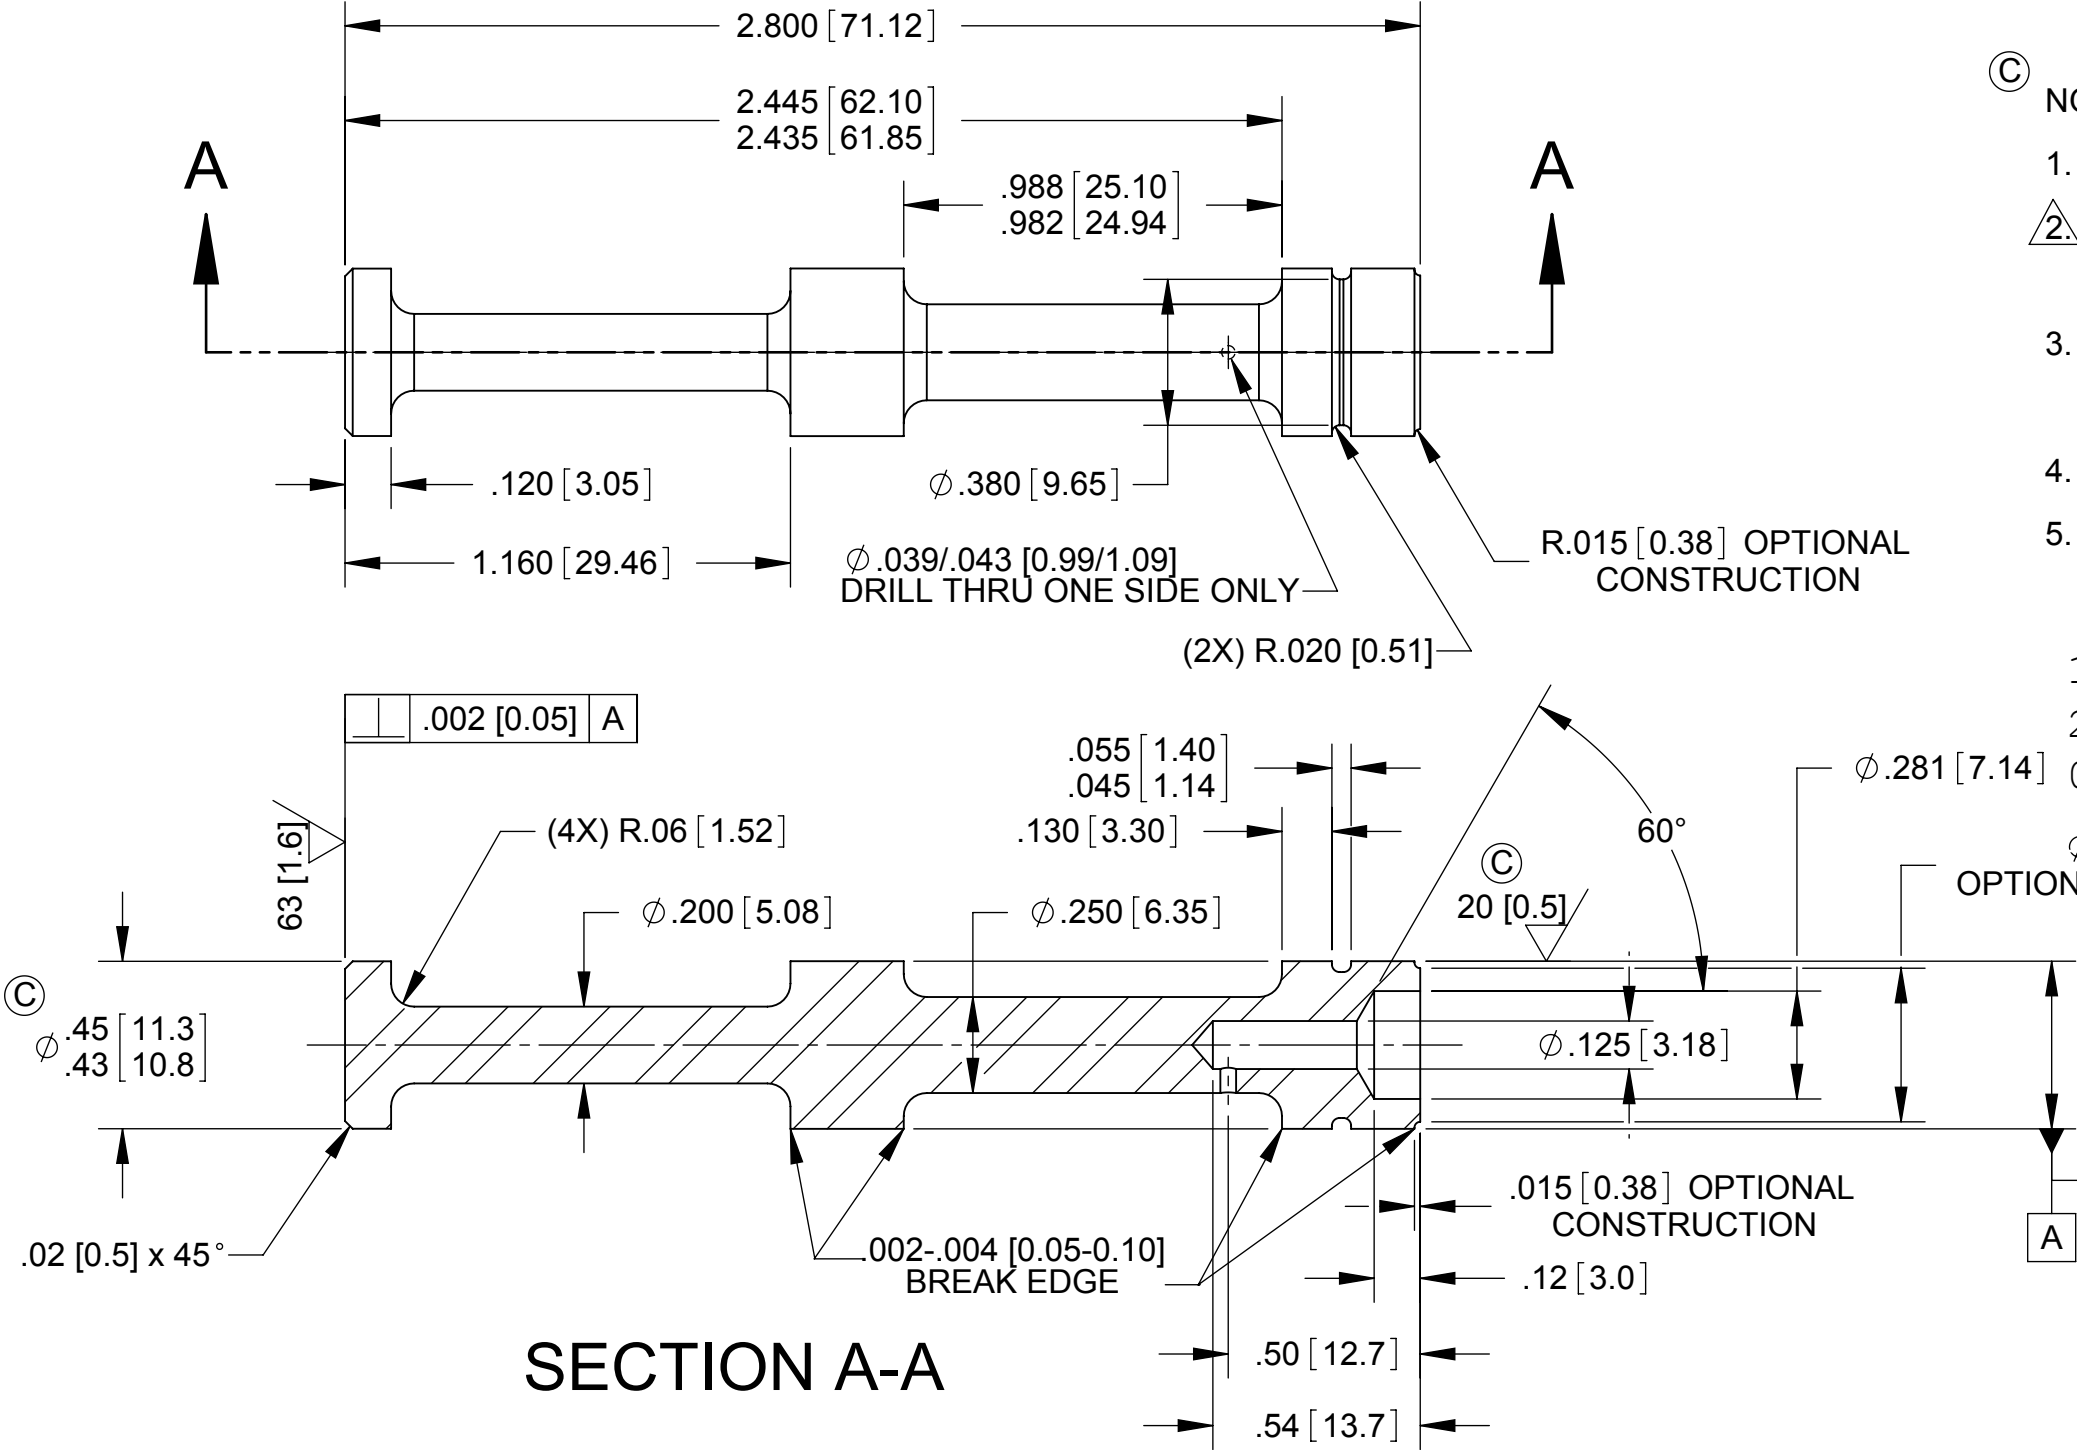

- NOTES:
- MATERIAL: LOW CARBON STEEL
 - CASE HDN, ROCKWELL 15N 89 MIN, .008-.050 [0.20-1.27] DEEP ON A
 - UNLESS OTHERWISE SPECIFIED, BREAK OUTSIDE CORNERS .02 [0.5] MAX, INSIDE CORNERS .02 [0.5] MAX
 - REMOVE BURRS
 - VALVES MUST BE PACKAGED AND STORED SEPERATED FROM EACH OTHER BY NON-ABRASIVE MATERIAL
1. 材料：低碳鋼
2. 硬度：羅克維爾 15N 89 MIN。在A厚度0.008-0.050 (0.2-1.27)
3. 除非特別指定，除外部銳角 0.02 (0.5) MAX, 內部R角0.02 (0.5) MAX
4. 除毛邊
5. VALVE必須個別被包裝與儲存在不可侵蝕的包裝當中

APPROVED

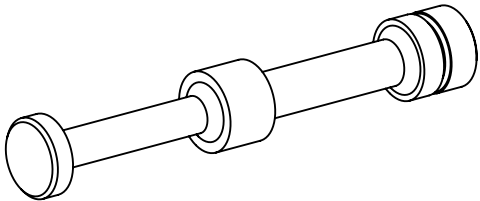

UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		CURRENT ISSUE	DATE	TITLE VALVE, AUTOMATIC GOVERNOR			
		DRAWN MSG	04/18/05				
KEY CHARACTERISTIC SYMBOLS Cr Ma CRITICAL MAJOR	.XX [X.X] ± .015 [0.38] .XXX [X.XX] ± .005 [0.13] ANGLES ± 1° SURFACE FINISH 125 [3.2]	CHECKED SCJ	05/03/05	SIZE B			
		MFG ENG -	-				
		APPROVED SFM	10/28/11	DWG NO. 350VALVE		REV C	
		ISSUED PRJ	10/31/11	SCALE 2:1	EST. WT. 0.05 LBS	SHEET 1 OF 1	