

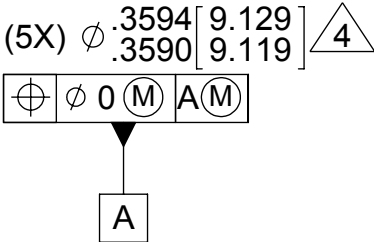



DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
1	PROTO/QUOTE	MMC	01/02/14

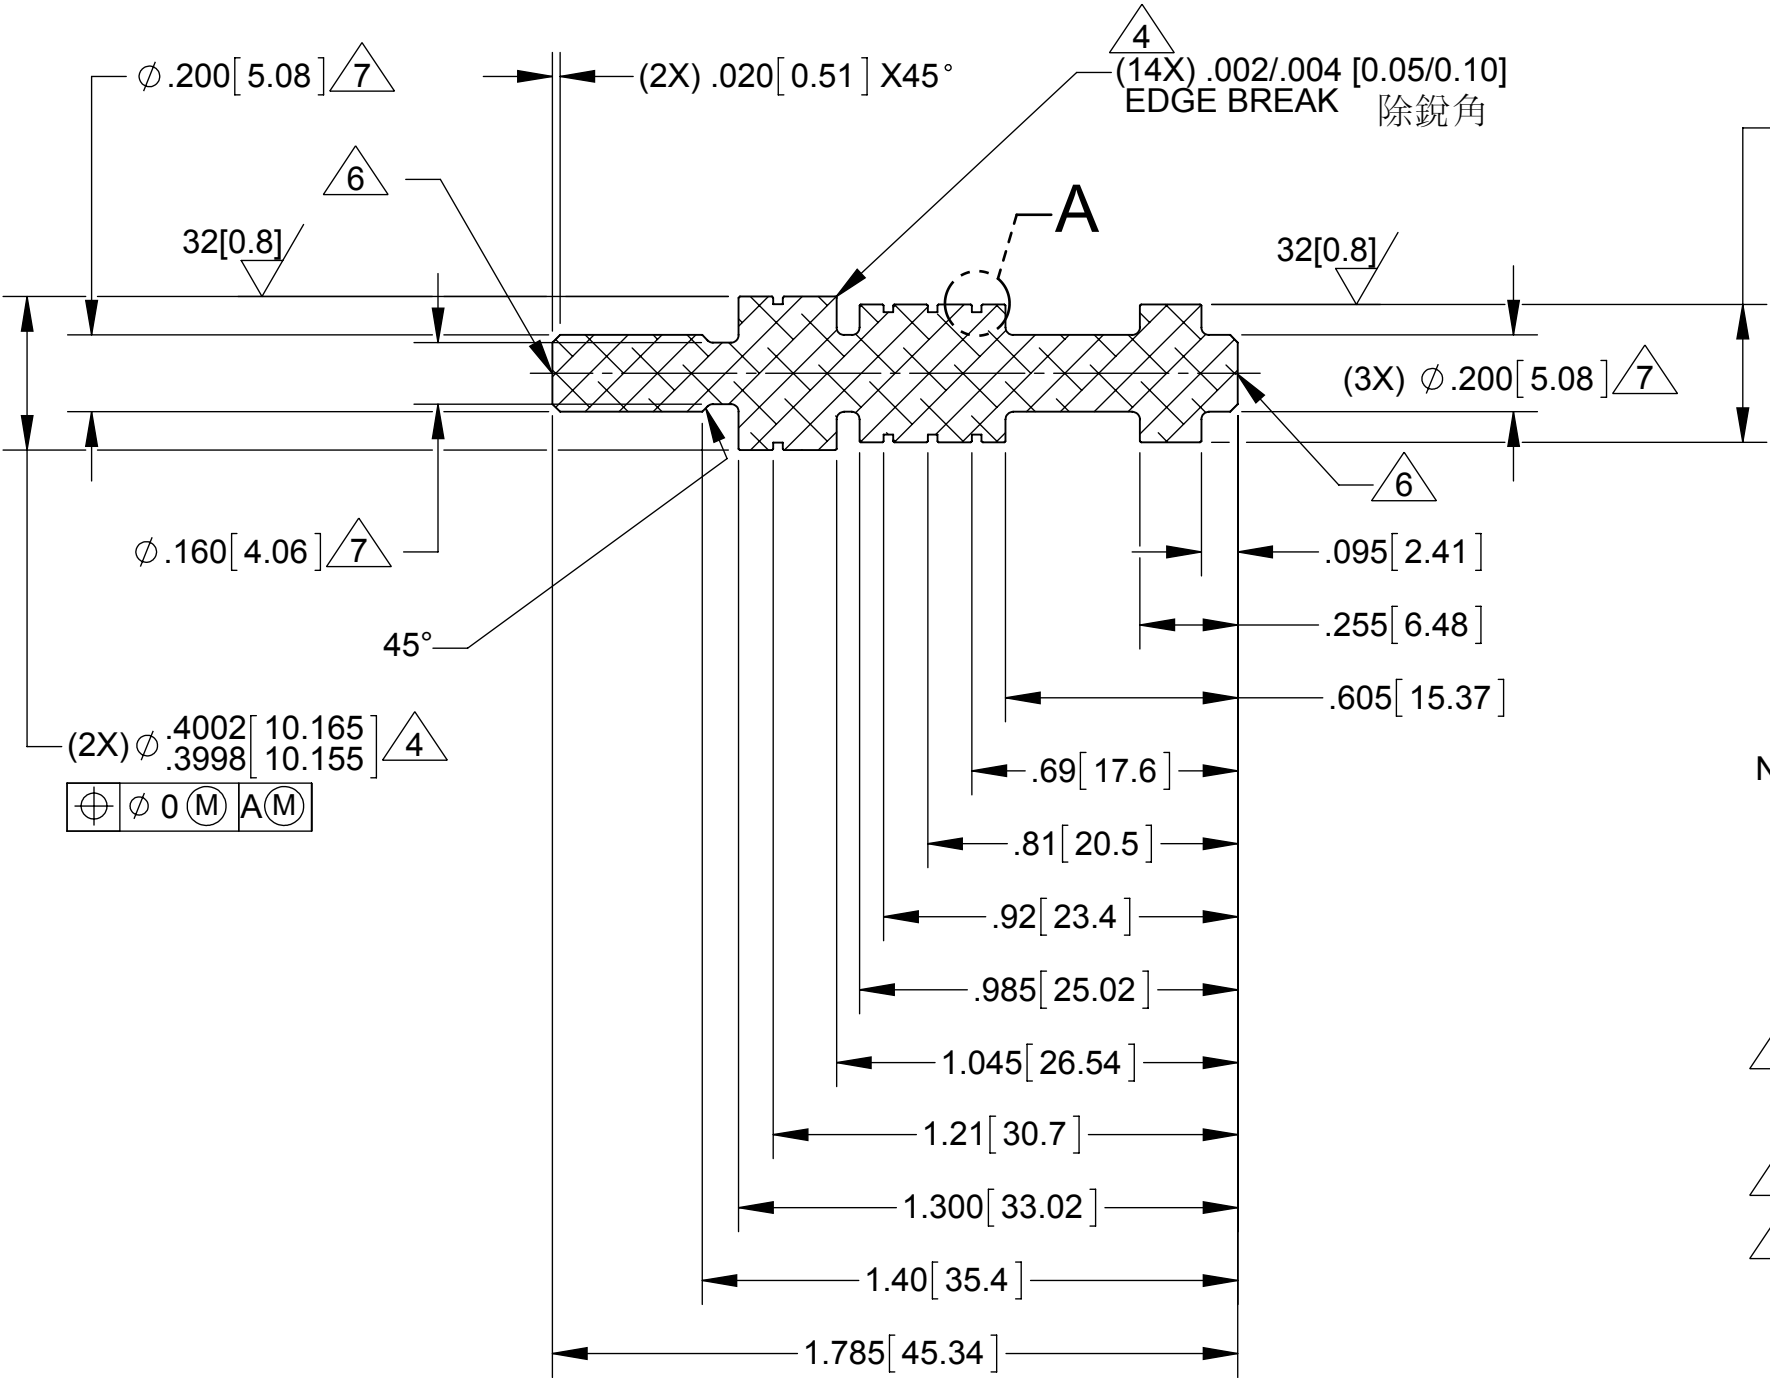


1. 材料：6262-T8/T9 或 6061-T6鋁
2. 硬陽：依照規範MIL-A-8625, TYPE 3, CLASS 2, 厚度.0008[0.02]+/- .0004[0.01]
3. 所有尺寸都是陽極之後
4. 不允許有銳角
5. 除銳角, 未指定R角, .02[0.5] MAX
6. 允許中心點, $\phi .060 [1.5]$ MAX
7. 允許在此尺寸上有接觸點
8. 除毛邊

NOTES:

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZED TO YIELD .0008 \pm .0004 [0.02 \pm 0.01] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. BREAK/RADIUS UNSPECIFIED EDGES/CORNERS .02 [0.5] MAX
6. CENTER DRILL PERMISSABLE, $\phi .06 [1.5]$ MAX
7. CONTACT POINTS PERMITTED ON THIS DIAMETER
8. REMOVE BURRS

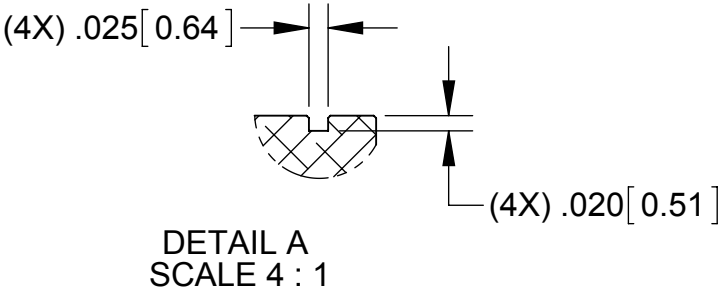

SON-ENG-GL-02	UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		CURRENT ISSUE	DATE	TITLE VALVE				
			DRAWN MMC	12/16/13					
			CHECKED DGP	12/26/13					
			MFG ENG -	-					
KEY CHARACTERISTIC SYMBOLS <div><div>Cr</div><div>CRITICAL</div><div>Ma</div><div>MAJOR</div></div>	ANGLES ± 5° SURFACE FINISH 125 [3.2]✓		APPROVED DGP	/ /	SIZE B		DWG NO. 144740-23X	REV 1	
	THIRD ANGLE PROJECTION		ISSUED PRJ	/ /	SCALE 2:1	EST. WT. 0.011 LBS	SHEET 1 OF 1		

PROTO/QUOTE