


DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
1	PROTO/QUOTE	TVM	06/26/14


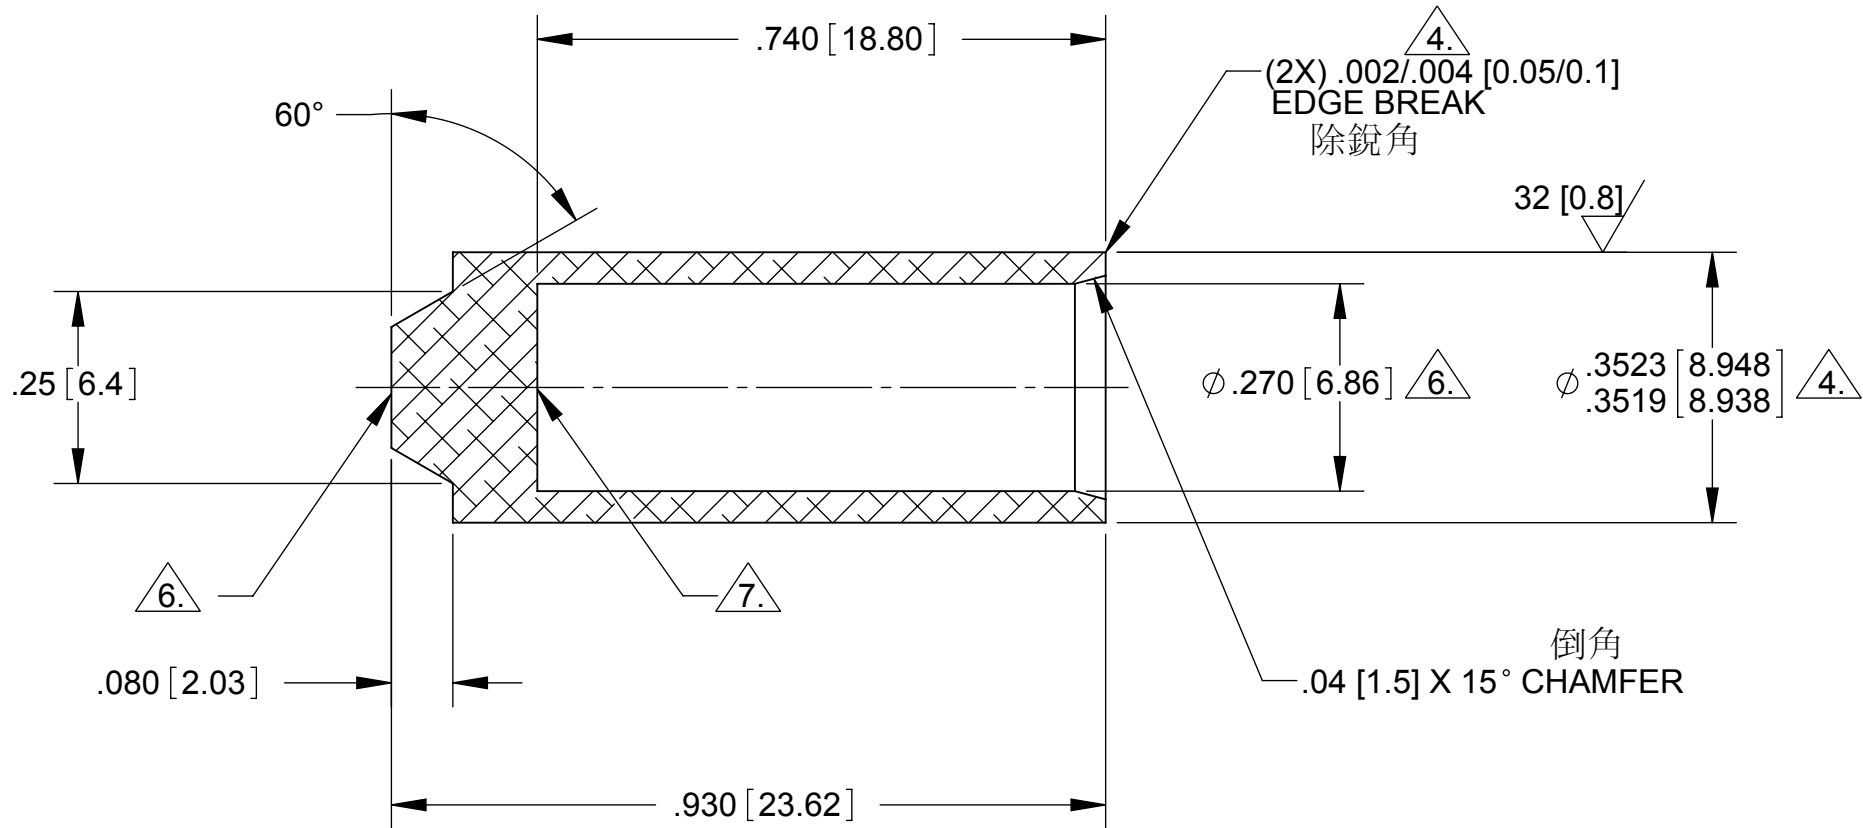


SECTION A-A

1. 材料：6262-T8/T9或是6061-T6鋁
2. 硬陽，依照規範MIL-A-8625，TYPE III，CLASS 2
厚度.0008[0.020]+/- .0004[0.010]
3. 所有尺寸都是陽極之後
4. 不允許有銳角
5. 未指定R角 .005/ .015[0.12/0.38]
6. 允許在此尺寸或是表面有接觸點
7. 僅允許此面有中心點Ø.06[1.5] MAX

NOTES:

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZE TO YIELD .0008 [0.020] ±.0004 [0.010] BUILD UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]
6. CONTACT POINTS PERMITTED ON DIAMETER OR SURFACE
7. CENTER PERMISSIBLE THIS SIDE ONLY, Ø.06 [1.5] MAX

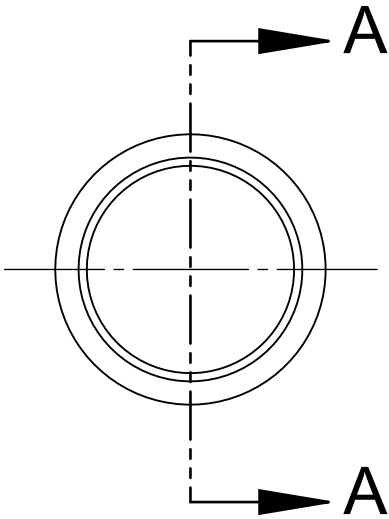

SCALE 2 : 1

UNLESS OTHERWISE SPECIFIED DRAFTING PER ASME Y14.5M-1994 DIMENSIONS ARE IN INCHES [MILLIMETERS]		CURRENT ISSUE	DATE	TITLE VALVE			
		DRAWN TVM	06/18/14				
.XX [X.X] ± .015 [0.38] .XXX [X.XX] ± .005 [0.13] ANGLES ± 5° SURFACE FINISH 125 [3.2] ✓		CHECKED MMC	06/25/14	SIZE B			
		MFG ENG -	-				
KEY CHARACTERISTIC SYMBOLS Cr CRITICAL Ma MAJOR		APPROVED DGP	-	DWG NO. 98892-29		REV 1	
		ISSUED BTC	-	SCALE 4:1	EST. WT. 0.004 LBS	SHEET 1 OF 1	

PROTO/QUOTE