





Househol
type specimen

INTRODUCTION


Househol is a typeface inspired by household items, we vectorized ordinary objects around us into abstract letters. The project aims to create a font that is instantly recognizable by its silhouette of the object that each letter is taken from.

“ You’re calling the XXXXXX household.”

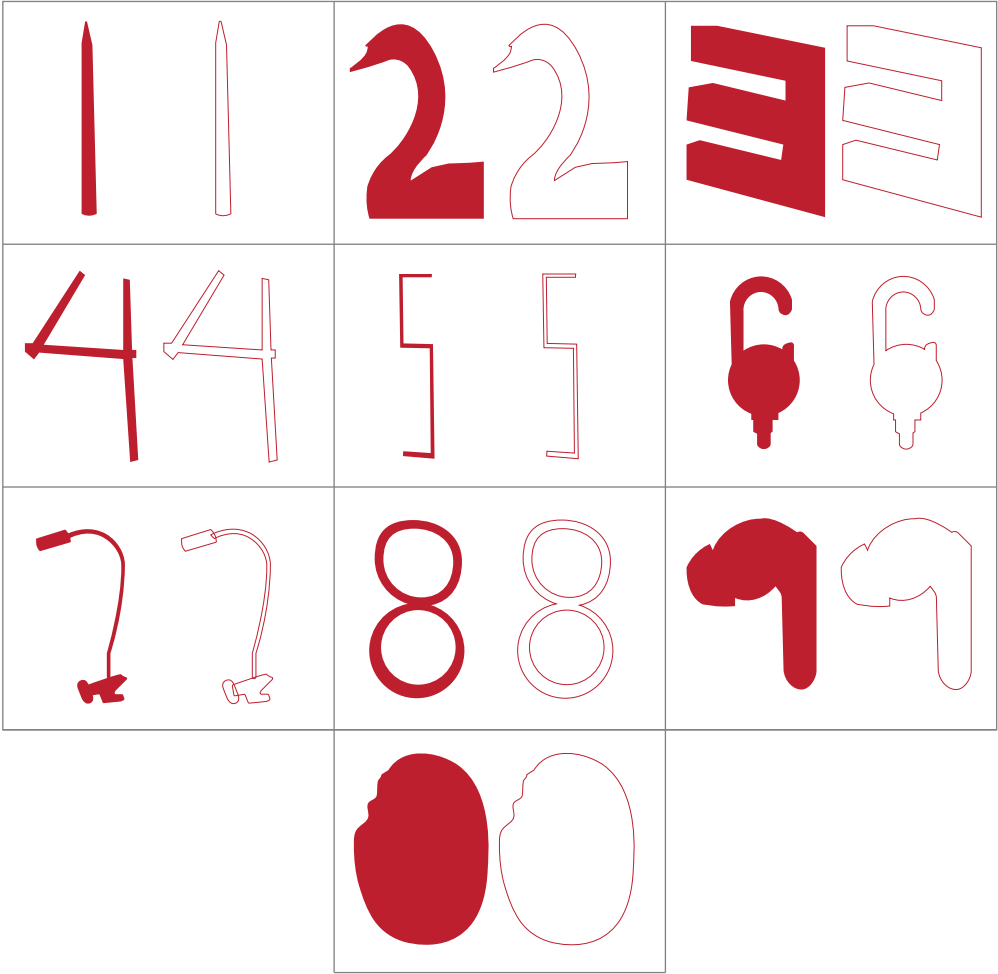


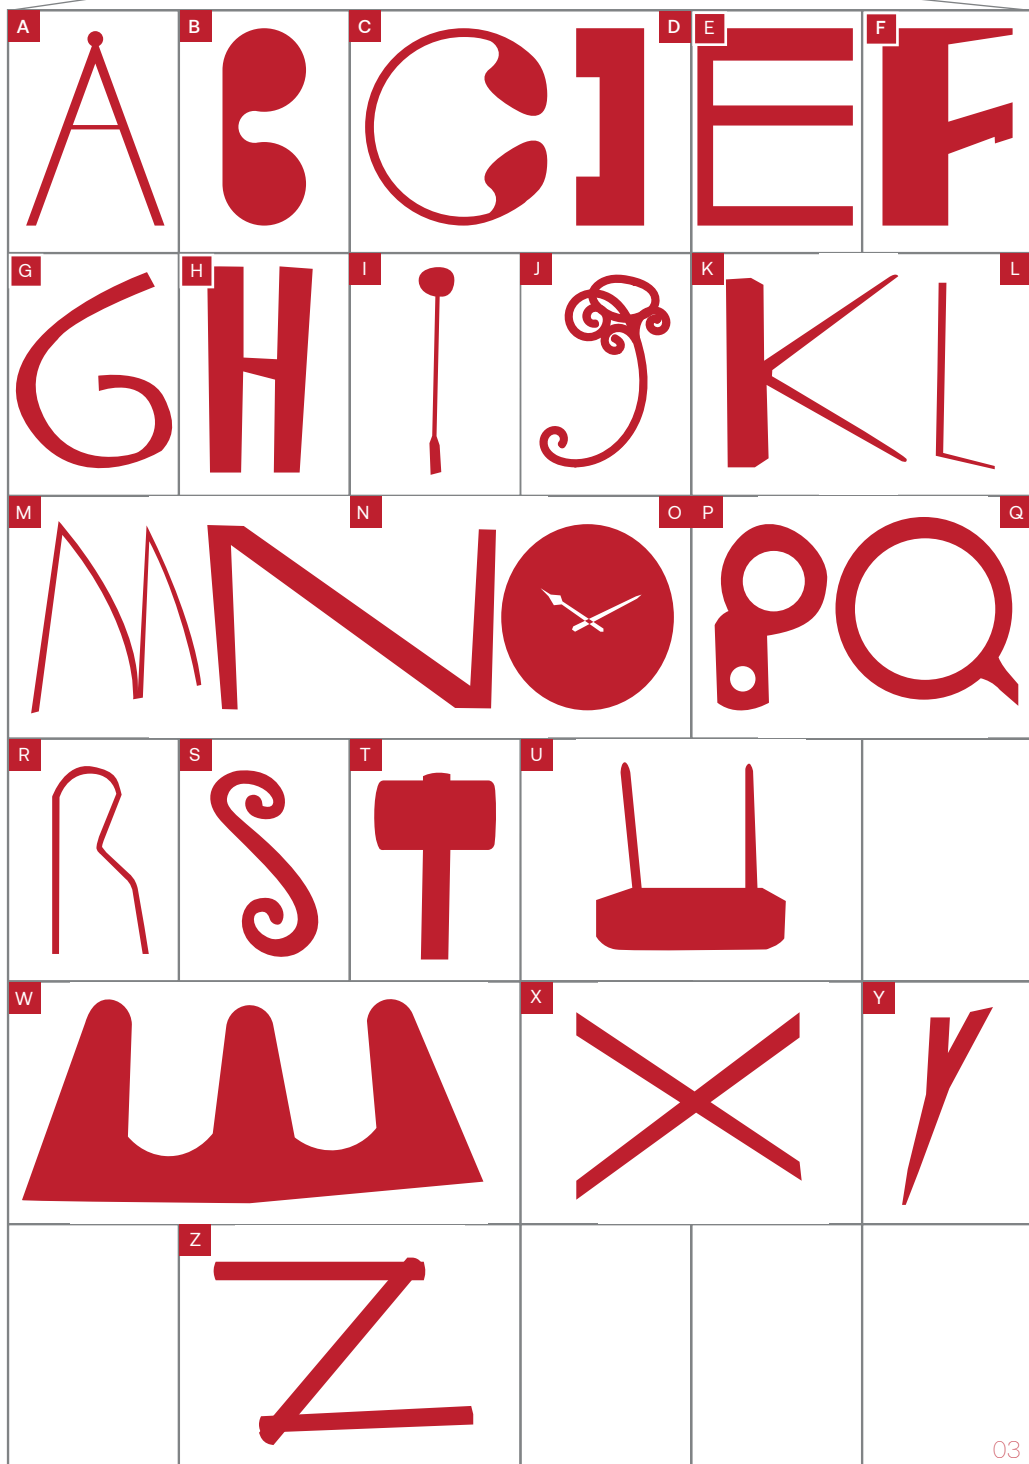

72pt

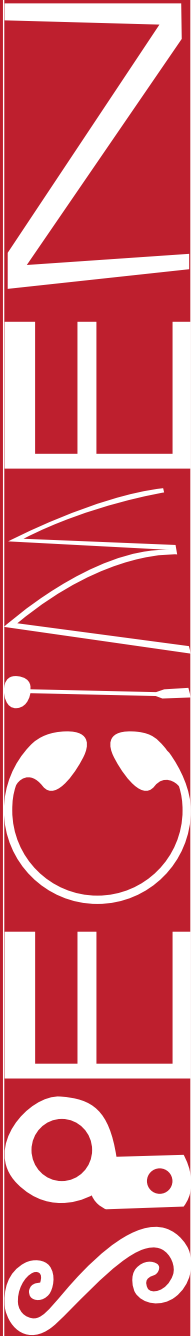

60pt

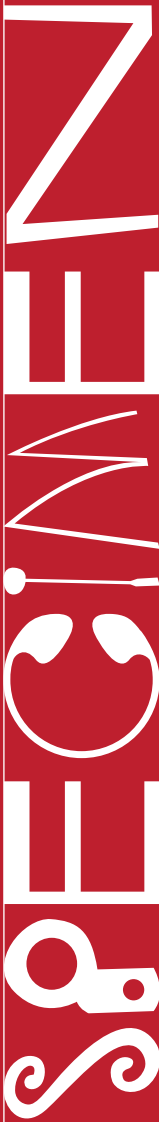

48pt



32pt

SPECIMEN

24pt

SPECIMEN

18pt

SPECIMEN

12pt

SPECIMEN

points

THE OLD
JULY 30
40K ICE
KHONG
2 PHO TAI
02 09 1975
HSJ

QUARTER

TH 1945 ★


COFFEE

GO G...


CHIN

★★

≡.8.2026

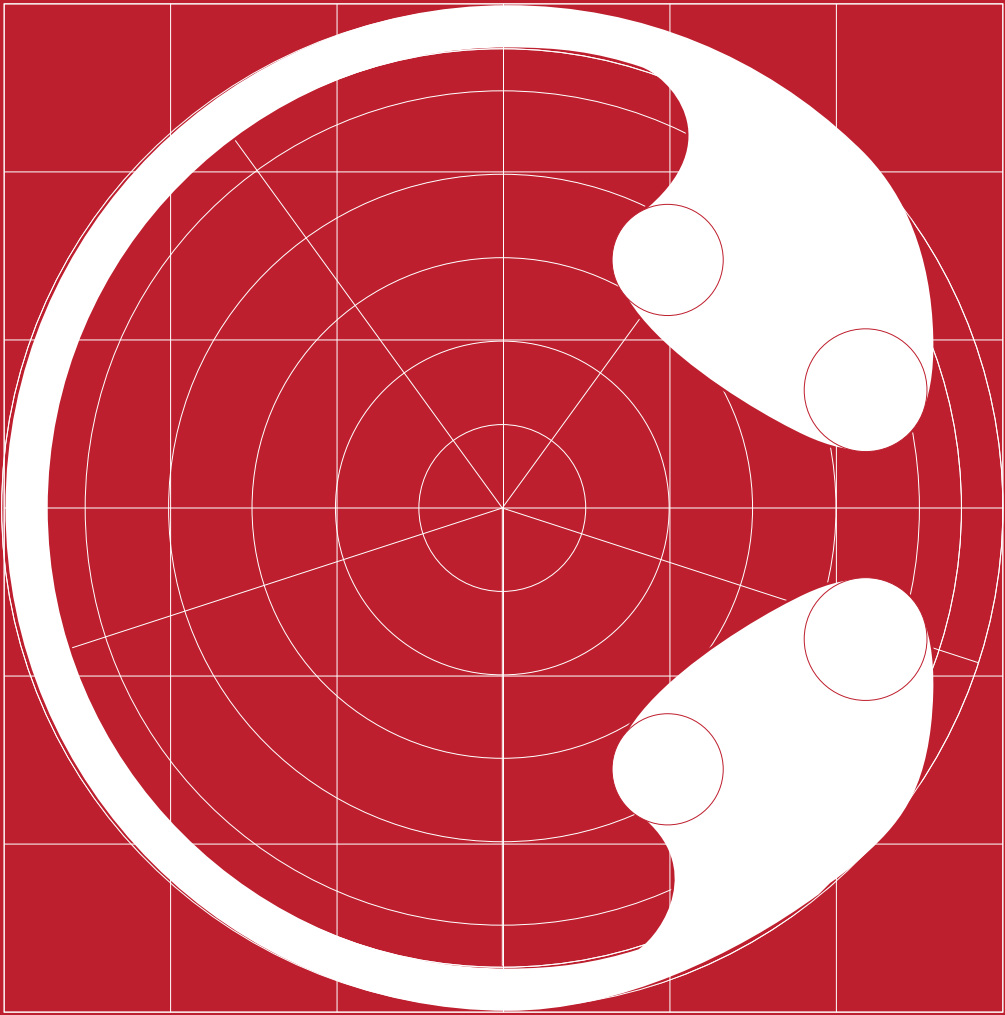



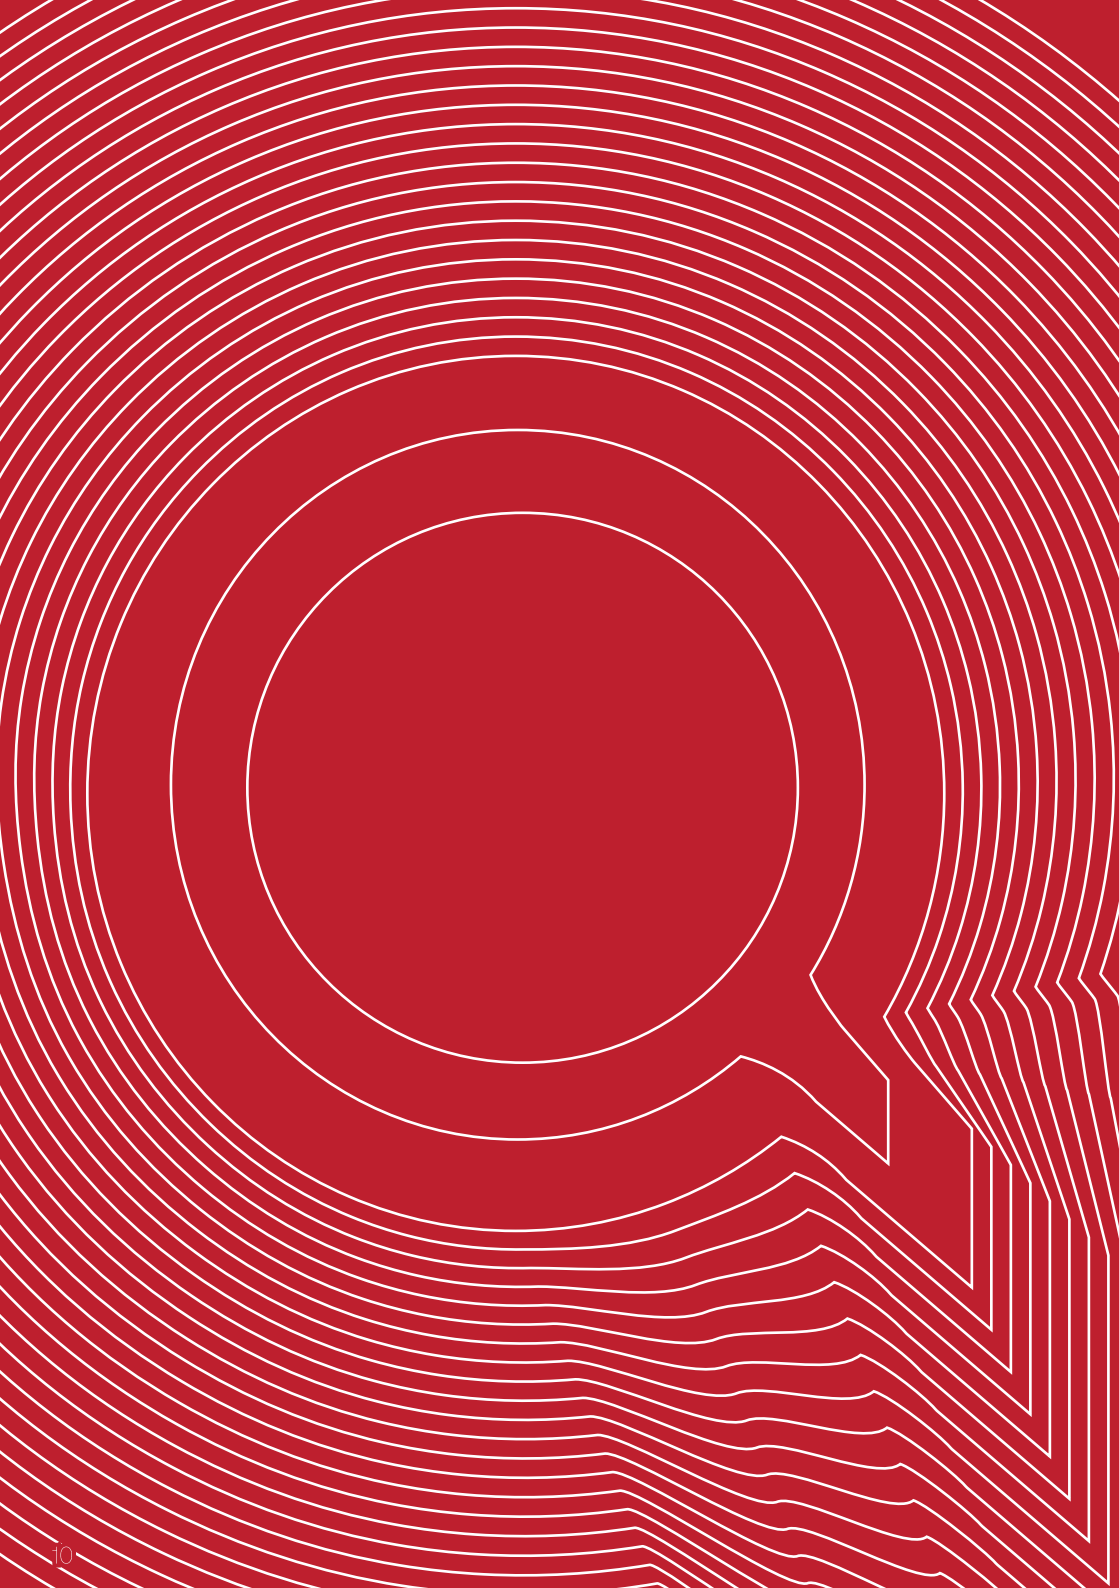



The pen, the cup of coffee,
the clothe hanger, the
bended ruler, the
hammer, those are
the fews object
‘Househol’ has taken
its letters from. A
highly experimental
typeface that is sur-
prisingly recogniz-
able from the
object commonly
found in a house,
hence the name
‘Househol’.





CAT TOC

25K

LONG

BIEN

PHO GA

11A THE





the $\mathcal{H}_\infty$ norm of the closed-loop system is bounded by a constant that depends only on the system parameters and the desired γ .

It is worth noting that the $\mathcal{H}_\infty$ norm of the closed-loop system is bounded by a constant that depends only on the system parameters and the desired γ . This is a key result in the design of robust controllers.

The next step in the design is to determine the controller $K(s)$ that achieves the desired γ . This is done by solving the $\mathcal{H}_\infty$ optimization problem.

The $\mathcal{H}_\infty$ optimization problem is a convex optimization problem that can be solved using standard optimization techniques.

The solution to the $\mathcal{H}_\infty$ optimization problem is the controller $K(s)$ that achieves the desired γ .

The controller $K(s)$ is then used to control the system, and the resulting closed-loop system is analyzed to ensure that it meets the desired performance requirements.

The $\mathcal{H}_\infty$ norm of the closed-loop system is bounded by a constant that depends only on the system parameters and the desired γ .

This is a key result in the design of robust controllers, and it ensures that the closed-loop system is robust to uncertainties in the system parameters.

The next step in the design is to determine the controller $K(s)$ that achieves the desired γ . This is done by solving the $\mathcal{H}_\infty$ optimization problem.

The $\mathcal{H}_\infty$ optimization problem is a convex optimization problem that can be solved using standard optimization techniques.

The solution to the $\mathcal{H}_\infty$ optimization problem is the controller $K(s)$ that achieves the desired γ .

The controller $K(s)$ is then used to control the system, and the resulting closed-loop system is analyzed to ensure that it meets the desired performance requirements.

The $\mathcal{H}_\infty$ norm of the closed-loop system is bounded by a constant that depends only on the system parameters and the desired γ .

This is a key result in the design of robust controllers, and it ensures that the closed-loop system is robust to uncertainties in the system parameters.

The next step in the design is to determine the controller $K(s)$ that achieves the desired γ . This is done by solving the $\mathcal{H}_\infty$ optimization problem.

The $\mathcal{H}_\infty$ optimization problem is a convex optimization problem that can be solved using standard optimization techniques.

The solution to the $\mathcal{H}_\infty$ optimization problem is the controller $K(s)$ that achieves the desired γ .