


Per-site ..RMSE from adding disturbance ... ETmax (mm d...¹)

Below 0 = D reduces per-site RMSE | panel label = % of sites improved and the mean % change | bars coloured by Relative Disturbance tier (blue=Low, grey=Mid, red=High) | LOSO CV | 112 sites

..RMSE (%) = 100 × [RMSE(with D) ... RMSE(without D)] / RMSE(without D)

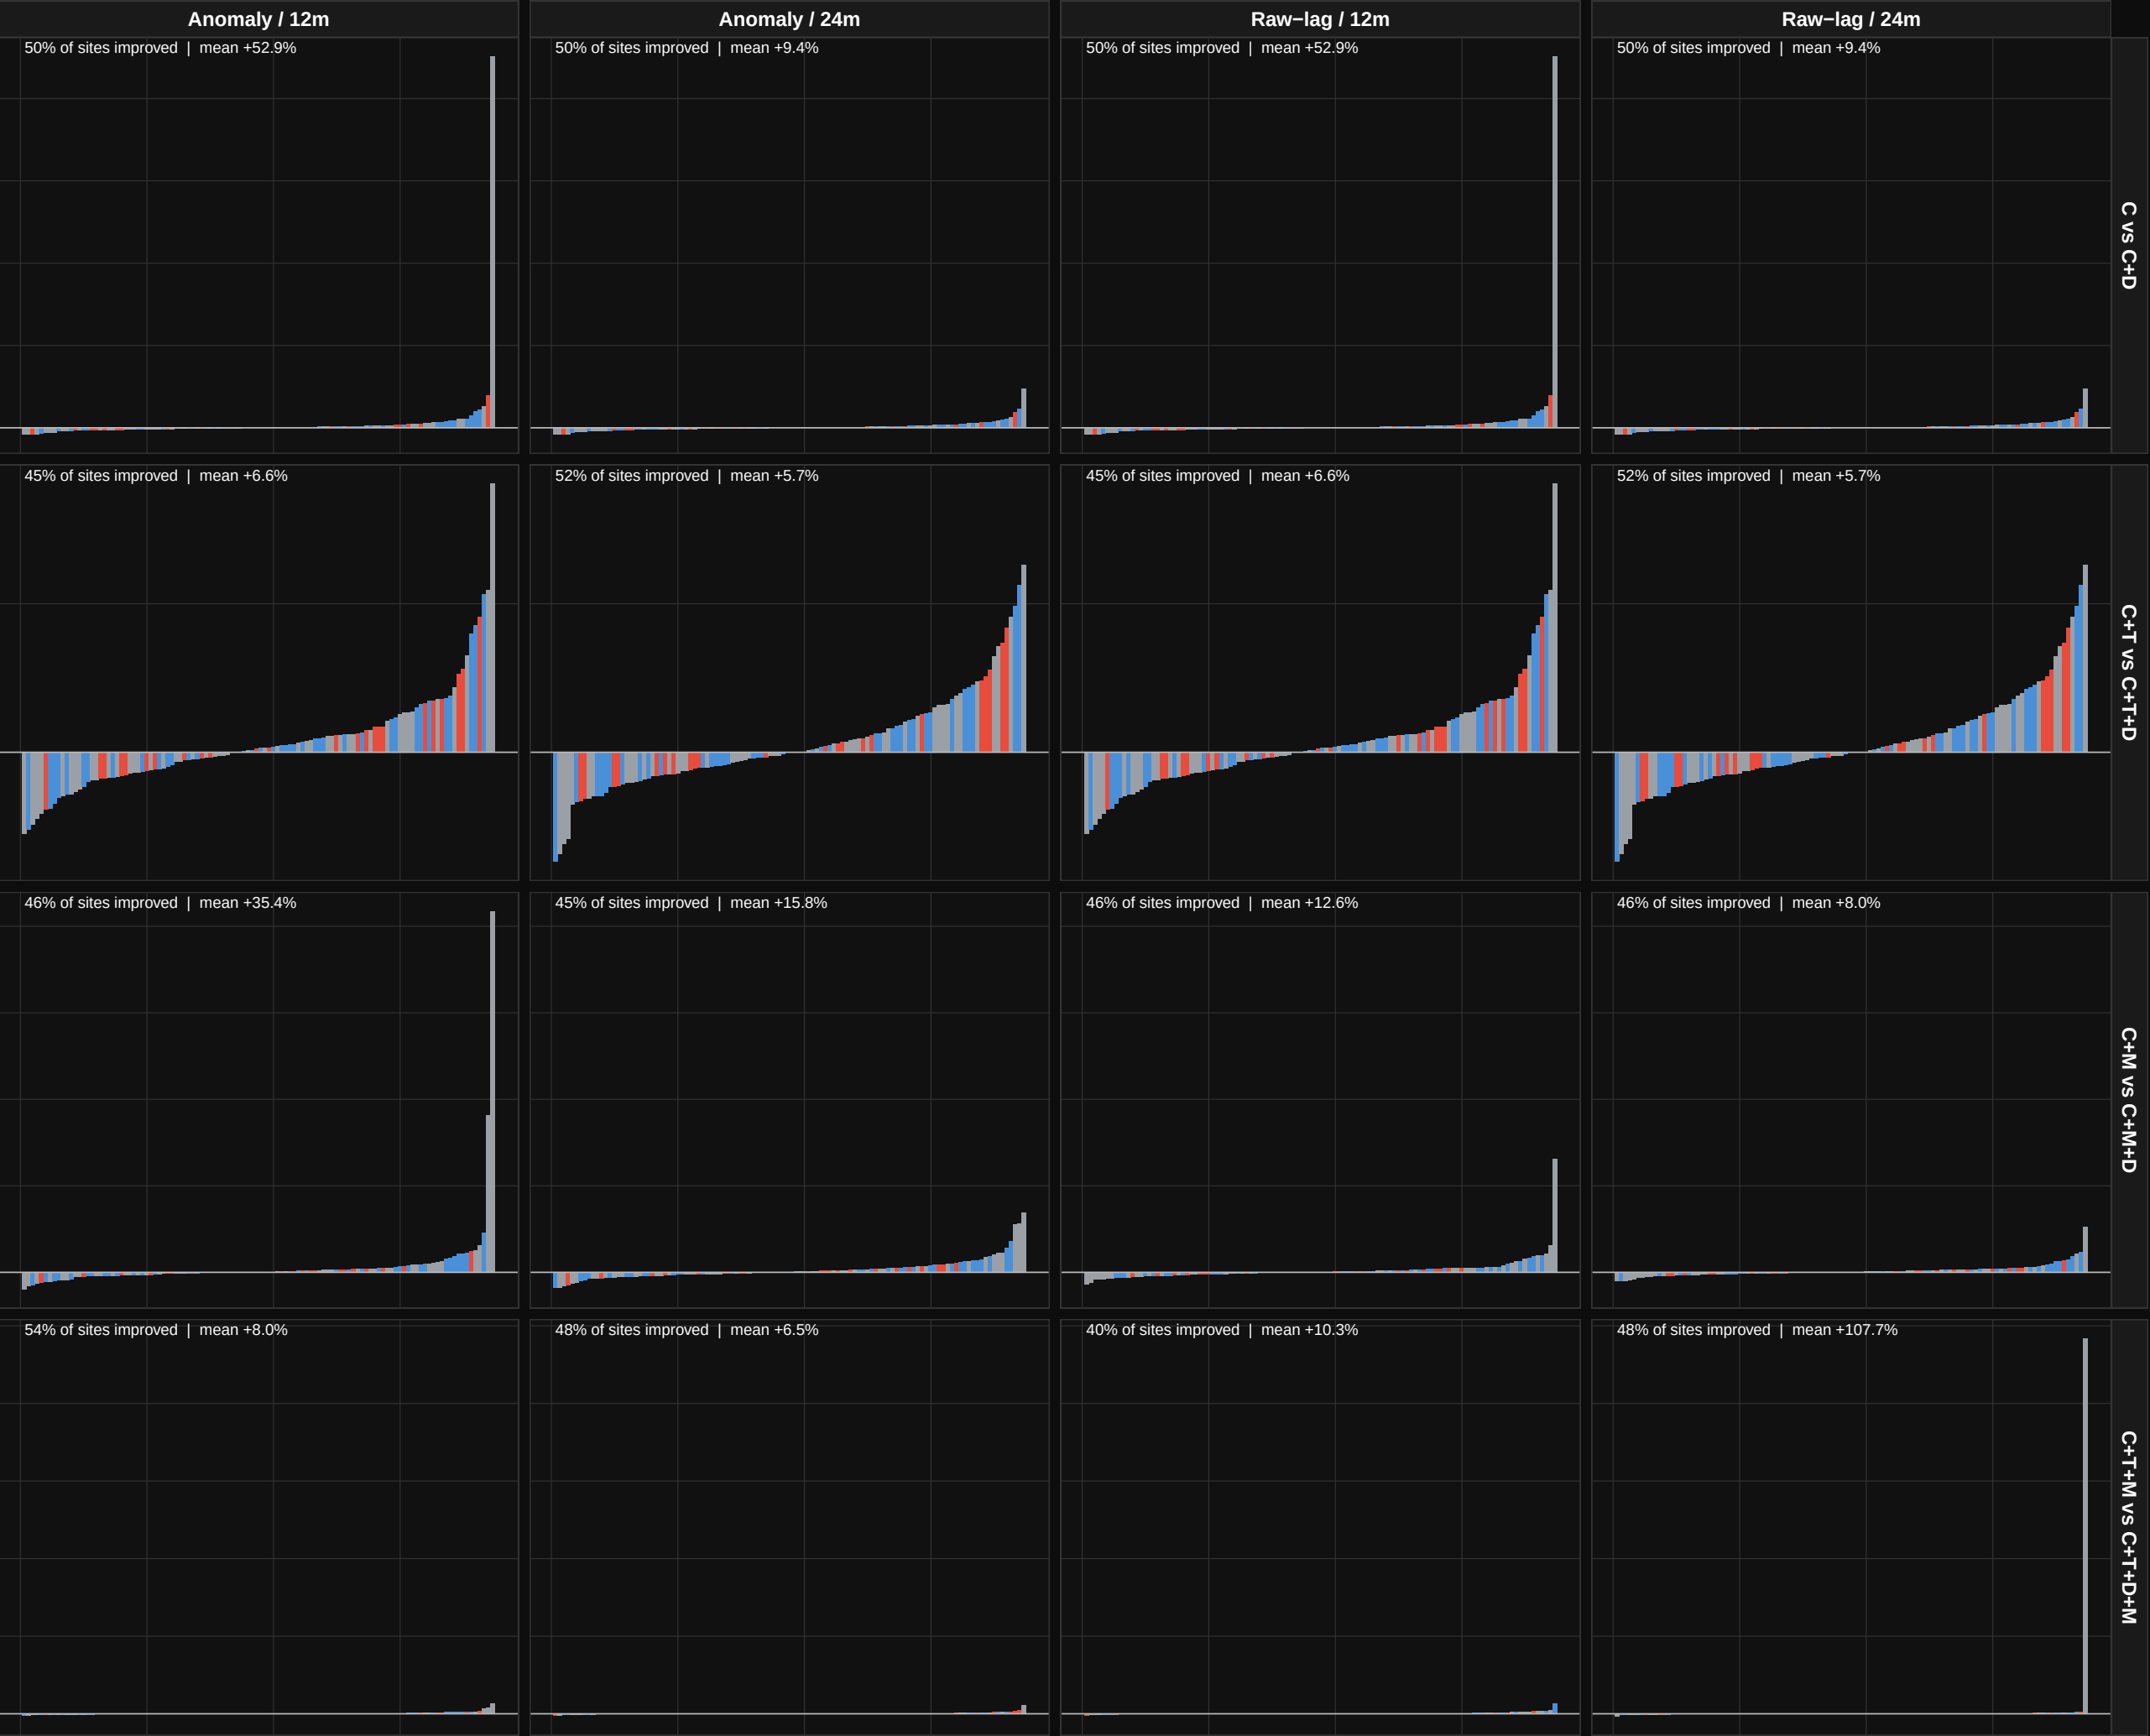

High Mid Low