

A re-examination of filter-based stabilization for spectral-element methods

P. S. Negi, P. Schlatter and D. S. Henningson

Department of Mechanics, Linné FLOW Centre and Swedish e-Science Research Centre (SeRC), KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

Technical Report

We revisit the “filter-based stabilization” approach proposed by Fischer & Mullen (2001) and find that the loss of divergence-free condition due to commutation errors can be particularly severe in the cases of marginally resolved flows. In light of this, an alternative approach based on “relaxation-term-based stabilization” is proposed which is closely related to the explicit filter operation. The method retains the advantages of simplicity and efficiency of an explicit filter while also remedying some of its drawbacks. The effect of this relaxation-term is analyzed and it found to be an effective method of stabilization within the practical parameter range. Parameter limits of the stabilization procedure are also presented.

1. Introduction

Stability of numerical methods is a well-known challenge. This is particularly true in the case of high Reynolds number (Re) flows where low physical dissipation allows small numerical errors to grow in time. Especially if the solution method provides very low numerical dissipation as is the case with high-order methods. A particular type of numerical oscillation arises due to the violation of the *inf-sup* or Ladyzenskaya-Brezzi-Babuška (LBB) condition. These occur due to inconsistent approximation spaces for the velocity and pressure and are found in both high and low Reynolds number flows. Instabilities specific to high Reynolds number flows have often been associated with the non-linear advection term. These instabilities have been known since Phillips (1959), who showed an instability arising due to non-linear interactions within a finite difference scheme. Philips was able to remove the instability by periodically removing energy from half the wavelengths in the simulation. Orszag (1971) noted that only the highest third of the scales are necessary to be filtered out. The effects of aliasing due to non-linear interactions on the flow quality are discussed in Krist & Zang (1987); Chow & Moin (2003) and Canuto *et al.* (1988). For non-uniform grids, Kirby & Karniadakis (2003) showed improved stability and accuracy of the incompressible Navier–Stokes solutions for spectral-element methods when using consistent integration (over-integration) of the non-linear

term. This involves the evaluation of the non-linear term on a higher number of grid points, which provides a complete integration of the term. Malm *et al.* (2013) showed that the non-linear advection term is skew-symmetric and an incomplete integration of this term leads to a loss of skew-symmetry. This loss of skew-symmetry causes some of the eigenvalues of the operator to have a positive real part, in turn leading to numerical instability. These works on aliasing, over-integration and skew-symmetry provide valuable insight into the numerical instability associated with the advection term. However the current knowledge of the sources of numerical instability does not appear to be exhaustive. Indeed Malm *et al.* (2013) show that one of their test cases suffered from numerical instability despite the use of over-integration. The authors conjecture that even small amounts of errors in divergence would lead to instability. The same test cases were used by Fischer & Mullen (2001) where the authors say that they were unable to stabilize the simulation with only over-integration within a reasonable resolution. In light of these issues other methods are necessary to suppress numerical oscillations. One of the earliest methods employed simple addition of a second order dissipative operator by Von Neumann & Richtmyer (1950). Tadmor (1989) first proposed the spectral vanishing viscosity (SVV) method for the stabilization of a 1D Burgers' equation. Maday *et al.* (1993) used SVV in the context of legendre pseudospectral methods. The method was used for a large-eddy simulation (LES) by Karamanos & Karniadakis (2000) and further shown as a useful stabilization method for spectral element methods (Kirby & Sherwin 2006). An alternate method that has been proposed in the context of spectral element methods has been that of filter-based stabilization by Fischer & Mullen (2001). Instead of adding a dissipative term to the Navier–Stokes, the method involves a simple two-step procedure of “*evolve one time-step and filter*”. This particular stabilization strategy has been analyzed in some detail by Ervin *et al.* (2012). The filter function is a low-pass filter, built in modal space. The loss of C_0 continuity which occurs when applying the low-pass filter can be averted by using a simple basis transformation which preserves the physical values at the element boundaries after the application of the filter (Boyd 1998). This completely negates the need for inter-element information transfer and thus makes the filtering operation local to each spectral-element. The method has been shown to be effective at stabilizing flows even at high Reynolds numbers and the simplicity of the method is highly attractive. However, it suffers from a few potential drawbacks. For one, the “*evolve and filter*” operation is time-step dependent with more energy being filtered out of the system for a smaller time-step since that requires more time-steps to solution and hence more filter applications. Secondly the simple transform procedure introduced by Boyd (1998) creates a filter operation which is not strictly dissipative and may in some situations be a source of energy in the flow. This was pointed out by Pasquetti & Xu (2002) and also mentioned in the original paper by Fischer & Mullen (2001). However Pasquetti & Xu (2002) note that to their knowledge such a redistribution of energy has not led to anomalies in the results. A third drawback involves the violation of the divergence-free condition of the

incompressible Navier–Stokes. The “evolution” part of the method solves for a divergence-free field at each time-step. Since the filter operation is applied after this evolution and the filter operation does not commute with the derivative operation, the divergence-free property of the solution is lost. Typically, for well-resolved flow cases less than 1% of energy of the highest spectral mode is filtered out at each time-step. For well-resolved flows, the energy in the highest mode is expected to be negligibly small and thus this operation is not expected to create large errors. However, in the case of marginally resolved flows, this could potentially lead to sizable errors in the divergence. In the light of these potential drawbacks, the filter-based stabilization technique is re-examined. We start by looking at the filter formulation proposed by Boyd (1998). For the sake of completeness we include some of theory that may already be found in Boyd (1998); Fischer & Mullen (2001) and Pasquetti & Xu (2002).

2. Filter-based stabilization

In spectral methods, a convenient strategy for the reduction of numerical noise is to replace the finite order spectral representation of a solution u_N with a filtered solution \bar{u}_N such that

$$u_N(x) = \sum_{i=0}^N a_i P_i(x) \rightarrow \bar{u}_N(x) = \sum_{i=0}^N \sigma_i a_i P_i(x). \quad (1)$$

In the context of spectral-element methods $P_i(x)$ may be Legendre or Chebyshev polynomials. a_i are the spectral coefficients for the finite series expansion of the solution and σ_i is a defined filter transfer function. While the procedure is simple, it violates the boundary conditions of the solution such that $u_N(\pm 1) \neq \bar{u}_N(\pm 1)$. The solution to the problem as proposed by Boyd (1998) was to apply the filter function on a transformed basis $\phi_i(x)$ defined as

$$\phi_i(x) = P_{i+2}(x) - P_i(x). \quad (2)$$

The filtering operation may now be represented as

$$u_N(x) = \sum_{i=0}^N b_i \phi_i(x) \rightarrow \bar{u}_N(x) = \sum_{i=0}^N \sigma_i b_i \phi_i(x), \quad (3)$$

where b_i are the coefficients in this new transformed basis. This meant that in practical flow cases where one may wish to remove energy from highest mode P_N , only mode P_{N-2} needs to be modified in order to preserve the boundary points of the solution. This is a convenient operation since it only affects the high wavenumber modes while leaving the low wavenumber spectrum untouched. However this creates a filtering procedure which is not purely dissipative, as pointed out by Pasquetti & Xu (2002); Fischer & Mullen (2001). To take an example where one filters out a fraction “ α ” of the last mode such that

$$\sigma_i = \begin{cases} 1, & i < N \\ 1 - \alpha, & i = N. \end{cases} \quad (4)$$

After applying the filter in the transformed basis, the filtered solution in the original basis is

$$\bar{u}_N = \sum_{i=0}^{N-3} a_i P_i + (a_{N-2} + \alpha a_N) P_{N-2} + a_{N-1} P_{N-1} + (1 - \alpha) a_N P_N \quad (5)$$

In terms of difference in energy between the unfiltered and filtered solution, one can easily obtain the expressions:

$$\Delta E = \|u_N\|_w^2 - \|\bar{u}_N\|_w^2 \quad (6)$$

$$\begin{aligned} \Delta E &= (a_{N-2}^2 + (a_{N-2} + \alpha a_N)^2) P_{N-2}^2 + (1 - (1 - \alpha)^2) a_N^2 P_N^2 \\ \Delta E &= a_N^2 \underbrace{[(r^2 - (r + \alpha)^2) P_{N-2}^2 + (1 - (1 - \alpha)^2) P_N^2]}_{\gamma}. \end{aligned} \quad (7)$$

Here r is the ratio of a_{N-2} and a_N , *i.e.* the ratio of the modal coefficients of the two modes affected by the filter operation. To understand the dissipative character of the filter one can look at the sign of the term denoted as γ in equation 7 parametrically with r and α for certain polynomial approximation order N . Figure 1 demarcates the regions of positive and negative γ for a polynomial order $N = 10$. Interestingly the filter acts as an energy source in a fairly large region in this r - α plane. This qualitative picture does not change substantially with changing polynomial orders. While slightly surprising, this may not necessarily be a negative characteristic of the filter. Fischer & Mullen (2001) and Malm *et al.* (2013) show the filter to be effective in stabilizing flows without any apparent adverse effects.

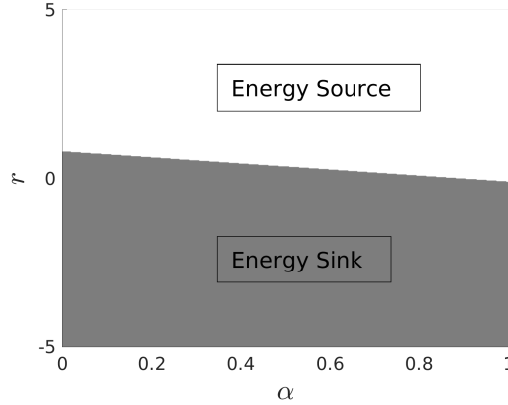


Figure 1: Dissipative character of filtering for polynomial order $N = 10$. Grey regions indicate the filter is dissipative while the white region indicates energy is being introduced into the flow by the filter.

The other aspect of the filtering operation which was not discussed by Fischer & Mullen (2001) is its effect on the divergence-free condition. Since the


filtering operation is performed after the divergence-free condition is enforced, the filtered solution loses this quality. This error arises because the filter and derivative operators do not commute. Such commutation errors have previously been discussed in the context of large-eddy simulations by several authors (van der Bos & Geurts 2005; Geurts & Holm 2006; Geurts *et al.* 1997; Domaradzki & Adams 2002; Vasilyev *et al.* 1998). In order to assess the effects on divergence we revisit the double shear layer case studied in Fischer & Mullen (2001) and Malm *et al.* (2013).

The flow case is setup in a two-dimensional domain $\Omega = [0, 1]^2$ with doubly-periodic boundary conditions. The initial conditions are introduced as:

$$u_0 = \begin{cases} \tanh(\rho(y - 0.25)), & y \leq 0.5 \\ \tanh(\rho(0.75 - y)), & y > 0.5 \end{cases} \quad (8)$$

$$v_0 = 0.05 \sin(2\pi x), \quad \forall x, y$$

The domain is discretized with 16×16 spectral-element grid and each element uses $N = 16$ Legendre polynomial modes, corresponding to 256 points per element. The non-linear term is calculated using over-integration so as to preserve skew-symmetry of the advection term. The filtering stabilization procedure is also used to assess the effect of filtering on the divergence. 1% of the last mode is filtered out at the end of each time-step. The tolerance of the solver for the divergence free condition is set to 10^{-10} . Figure 2a shows the initial condition at time $T = 0$ and Figure 2b shows the flow state at time $T = 2$.

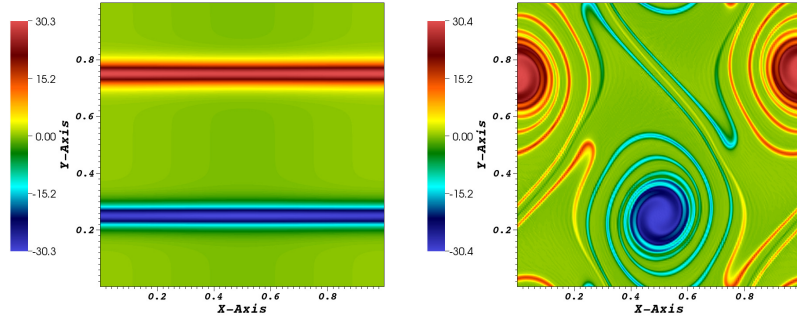

(a) Initial vorticity at $T = 0$

(b) Vorticity at $T = 2.0$

Figure 2: Vorticity evolution for the double shear layer test case.

Figure 3 shows the divergence of the flow field calculated before and after the application of the filter. At the start of the simulation, when negligible energy is present in the last mode, the filter has very little impact on the divergence of the flow-field. However as the flow evolves and the energy in the smaller scales increase, violation of the divergence-free condition due to

the action of the filter increases. This violation is significant once the flow is fully developed, with the flow dropping nearly 6 orders of magnitude in accuracy between the pressure-correction and the filtering step. This impact is surprisingly large. The case may be considered to be a stringent test with thin shear layers, which demand high resolution and thus even the small scales may contain dynamically significant energy. The situation however is representative of marginally resolved simulations where the smallest scales may still contain dynamically relevant energy, and thus filtering may have an unexpectedly large impact on the divergence-free condition of the flow-field.

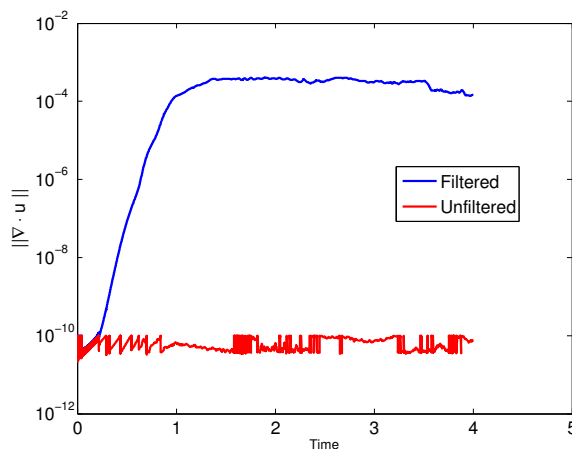


Figure 3: The norm of the divergence after pressure correction and after filter application.

A puzzling aspect of the test as reported in the results of Fischer & Mullen (2001) and Malm *et al.* (2013) is that the case always needed some filter based stabilization. Malm *et al.* (2013) study the case with and without the use of over-integration for the non-linear term. They report that an order of magnitude lower filtering strength was needed when over-integration was used. However only over-integration did not ensure complete stabilization and the simulation experienced numerical instability at $T \sim 6.7$ without filtering. Malm *et al.* (2013) attribute the destabilization to the finite accuracy of the divergence-free constraint, stating that even small errors would lead to numerical instability in the absence of dissipative terms (viscous or numerical) or stabilizing procedures (filtering). Although the authors do not report the tolerance to which the divergence-free condition was satisfied. To check this again we run our test case with over-integration and without any filtering for a long duration. However contrary to the results obtained in Malm *et al.* (2013), the simulation was stable (at least up to $T = 20$). An explanation might be found when looking at the original test case reported in Fischer & Mullen (2001). The authors there report using time steps such that the CFL number is between 1 and 5. The standard

BDF3-K3 time-stepper would be unstable for these CFL numbers. This suggests that a characteristic time-stepping scheme may have been employed. We test the case by employing a the characteristic time-stepping scheme with over-integration but no filtering and indeed the simulation experienced numerical instabilities. This would implicate the characteristics time-stepper as the source of numerical instability.

In retrospect, the results are to be expected. The use of consistent spaces for velocity and pressure avoids the spurious pressure oscillations. The absence of boundary conditions due to a doubly-periodic domain negates errors due to boundary terms, the use of over-integration dismisses aliasing errors as the source of instabilities and the spectral-element grid is perfectly Cartesian. Then as per the conclusion derived in Malm *et al.* (2013), small divergence errors remain the obvious (known) source of numerical instability. However, these errors should be of the order of the specified solver tolerance for divergence. The (instantaneous) advection operator being real and skew-symmetric is a normal matrix (if evaluated completely using over-integration). Any violation of divergence-free condition of $O(\epsilon)$ can be regarded as a small perturbation to a normal matrix and one would expect a change in the eigenvalues to be of the same order ϵ . Since in the ideal case the eigenvalues must lie on the imaginary axis with exactly zero real part, any perturbation due to numerical errors of order $O(\epsilon)$ would introduce new eigenvalues with a real part of $O(\epsilon)$. Thus a practical value for the solver tolerance of 10^{-8} would result in a advection matrix which would have eigenvalues with real parts of the order 10^{-8} . Such a scenario creates an ever present numerical instability. However it should be an extremely weak instability, at least in such idealized test cases where other sources of instabilities are absent.

One can easily check the change of eigenvalues with varying degree of error in the advecting field. To do so we created a simple advection operator in Matlab following the spectral-element framework. A square domain with $\Omega = [0, 1]^2$ is built and discretized using 3×3 spectral-elements which are further discretized using 10^{th} order Legendre polynomials. The advection operator is built on an over-integration grid with 19×19 grid points. The grid point spacing and weights for numerical integration correspond to the Gauss-Lobatto-Legendre points (GLL) for a polynomial of order $N_d = 18$ resulting in the desired 18 grid points for a complete integration of the convection term. Individual matrices are built independently for each spectral element and then a larger matrix for the whole system is built using direct stiffness summation. A simple sinusoidal divergence-free field can be used for building the $C \cdot \nabla$ matrix:

$$\begin{aligned} C_x &= 1.0 + 0.1 \sin(2\pi x + 2\pi y) & + \epsilon \sin(2\pi x) \sin(2\pi y) \\ C_y &= 1.0 - 0.1 \sin(2\pi x + 2\pi y) & + \epsilon \sin(2\pi x) \sin(2\pi y) \end{aligned} \quad (9)$$

When $\epsilon = 0$ the field is analytically divergence free. Within the current numerical approximation the normalized divergence field defined as $||\nabla \cdot C|| = (\nabla \cdot C, \nabla \cdot C) / Volume$ is of the order 10^{-11} . The parameter ϵ can thus be

used to add a controlled perturbation to the advecting field and study the resulting change in eigenvalues. Figure 4a and 4b show the spectra of advection operator using $\epsilon = 0$ and $\epsilon = 10^{-4}$, resulting in divergence norms of the order $O(10^{-11})$ and $O(10^{-4})$ respectively. Tracking λ_{max} , defined as the eigenvalue with the largest real part, one can obtain how the instability of the advection operator changes with the variation of the divergence field. Figure 5 shows the change in λ_{max} with $\|\nabla \cdot C\|$. As expected the trend is linear in a log-log scale with a slope of 1 across a variation of 8 orders of magnitude for $\|\nabla \cdot C\|$. This would suggest that relatively large divergence errors would be required for numerical instabilities to be caused by the advection term, as long as the term is evaluated completely. Of course as shown by Malm *et al.* (2013) and by Kirby & Karniadakis (2003), the evaluation of this term without over-integration leads to instabilities in the absence of stabilization. These instabilities are much stronger than just divergence errors. Figure 6 shows the eigenvalue spectra for the advection operator (with $\epsilon = 0$) evaluated on 11×11 GLL points in each element. The largest unstable eigenvalue is of the order 10^{-1} , making the instability due to aliasing much stronger than the instabilities arising from the violation of the divergence-free condition. Malm *et al.* (2013)

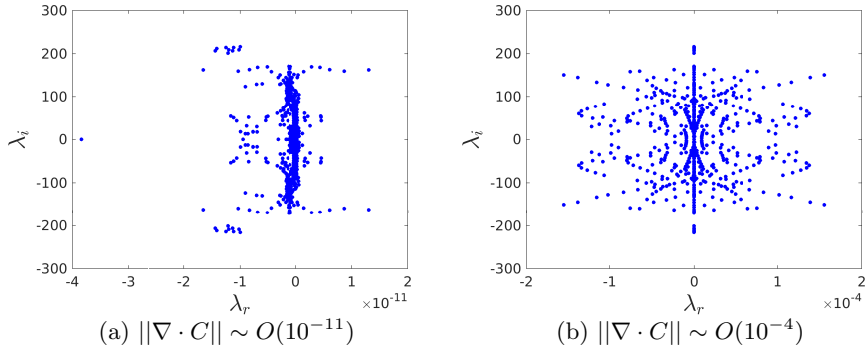


Figure 4: Eigenvalue spectra for the advection operator with different divergence norms for a perturbed advecting field.

found that for the double shear layer case, the numerical instabilities first manifested in the thinnest part of the shear layers, thus concluding high shear regions necessarily need numerical stabilization. Since we do not experience any numerical instabilities using the BDF-EXT-k time stepping scheme, we further test this conclusion by reducing the resolution for the test case. We run the simulation with the same 16×16 spectral-elements but with polynomial orders of $N = 11, 7$ and 5 . These would lead to under-resolved shear layers. The under-resolution is strongly visible in the flow-field for the lowest polynomial order case of $N = 5$. Figure 7 shows the vorticity in the flow field at time $t = 1.0$ for $N = 5$. However in all cases we find that the simulation does not

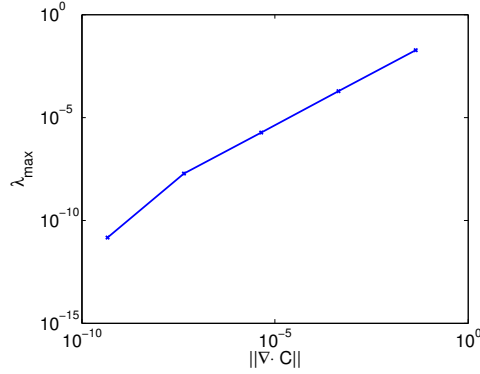


Figure 5: Variation of maximum real part of the eigenvalue spectrum with the norm of the divergence of the advection operator

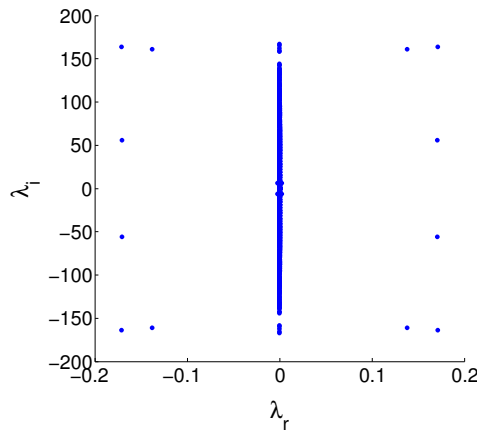


Figure 6: Eigenvalues for the advection term evaluated without over-integration

experience any numerical instabilities (at least up till $T = 20$) and additional stabilization was not required. The results indicate that in the absence of boundary terms and other sources of errors, under-resolution alone may not lead to numerical instabilities as long as the flow-field divergence remains small and the non-linear term is evaluated using complete over-integration. These results are consistent with those presented by Kirby & Karniadakis (2003) who found that they were able to simulate transition and turbulence in triangular ducts as well as turbulent channel flow simulations after employing over-integration but without additional flow stabilization.

3. Relaxation-term based stabilization

In practical simulations aliasing errors may not be the only source of numerical instability and often it is found that simulations, especially those involving

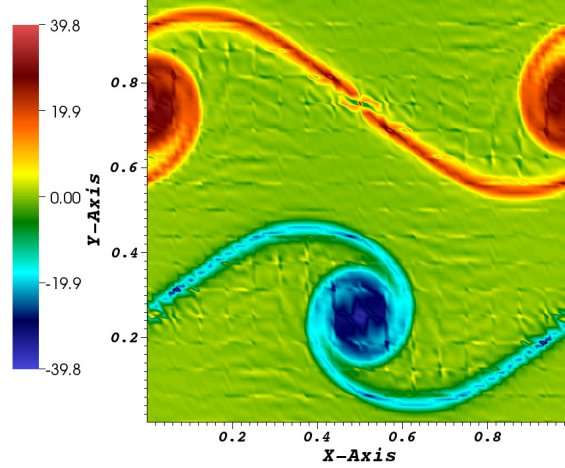


Figure 7: Vorticity at $T = 1.0$ for the double shear layer case using polynomial order $N = 5$

complex geometries or truncated domains require some amount of stabilization despite the use of over-integration. Filter-based stabilization has been an effective and efficient method to suppress such numerical instabilities. However the results of the previous section highlight some of the drawbacks of such a procedure. The loss of divergence free condition may be particularly severe for marginally resolved cases. In such a scenario, one may wish to look for an alternative method which preserves the advantages of explicit filtering, namely, efficiency and simplicity, while doing away with the potential drawbacks. One possible alternative in the context of the pressure-correction method is to perform the filtering procedure before the pressure-correction step. In the standard algorithm, the pressure-correction would follow a three-step procedure as follows:

- Velocity prediction \rightarrow Pressure correction \rightarrow Filtering.

A modified procedure would then follow:

- Velocity prediction \rightarrow Filtering \rightarrow Pressure Correction.

This allows the filtering of the highest scales but leaves the solution unchanged after the divergence-free condition has been enforced. Such a procedure would remedy perhaps the most striking drawback of explicit filtering, which is the loss of divergence, while still retaining the simplicity and efficiency of explicit filtering operation. However the other drawbacks mentioned earlier, *i.e.* time-step dependence of filtered energy and the statistical nature of filter dissipation, still remain.

As it would turn out, there is an equally simple method that can resolve all the above mentioned deficiencies and is analogous to performing an explicit filtering procedure. As has been pointed out in Stolz *et al.* (2001); Mathew *et al.* (2003) and Schlatter *et al.* (2004), performing an explicit filtering operation is equivalent to an implicit time-relaxation. Formally, the two may be shown to be equivalent using a simple evolution equation

$$\frac{\partial u}{\partial t} + \mathcal{F}(u) = 0, \quad (10)$$

where $\mathcal{F}(u)$ is a (possibly non-linear) evolution operator. The explicit filtering procedure may then be shown using a semi-discretized form of the evolution equation

$$\begin{aligned} u^* &= u^n - \mathcal{F}(u^n)\Delta t + O(\Delta t^2) \\ u^{n+1} &= \mathcal{G}(u^*), \end{aligned} \quad (11)$$

where \mathcal{G} is a defined low-pass filter. As an alternate method, one may consider the same evolution equation supplemented by a relaxation-term

$$\frac{\partial u}{\partial t} + \mathcal{F}(u) = -\chi \mathcal{H}(u), \quad (12)$$

which may be evolved using a time-splitting scheme

$$\begin{aligned} u^* &= u^n - \mathcal{F}(u)\Delta t + O(\Delta t^2) \\ u^{n+1} &= u^* - \chi \mathcal{H}(u^*)\Delta t + O(\Delta t^2) \end{aligned} \quad (13)$$

Taking the the parameter $\chi = 1/\Delta t$ and $\mathcal{H} = (\mathcal{I} - \mathcal{G})$ to be the corresponding high-pass filter of \mathcal{G} , and substituting in equation 13 one obtains:

$$u^{n+1} = \mathcal{G}(u^*) + O(\Delta t^2) \quad (14)$$

which is equivalent to the expression obtained in equation 11 to leading order of time discretization. The relaxation-term may be interpreted as the equivalent to a low-pass filter operation \mathcal{G} every $1/(\chi\Delta t)$ time-steps (Stolz *et al.* 2001; Mathew *et al.* 2003; Schlatter *et al.* 2004) or the application of the filter \mathcal{G} with the strength $\chi\Delta t$ every time-step Mathew *et al.* (2003).

Thus the “filter-based stabilization” operation proposed by Fischer & Mullen (2001) may be reformulated as an equivalent “relaxation-term-based stabilization”, which we refer to as “RT stabilization”. It can be easily incorporated into the Navier-Stokes by a simple addition of a relaxation-term on the right hand side. Thus the equivalent RT stabilized equation may be written as (Schlatter *et al.* 2004)

$$\frac{\partial u}{\partial t} + u \cdot \nabla u = -\frac{\nabla p}{\rho} + \nu \nabla^2 u - \chi \mathcal{H}(u), \quad (15)$$

$$\nabla \cdot u = 0. \quad (16)$$

Here $\mathcal{H}(u)$ is a high-pass-filtered velocity field. The parameter χ may be used as a weighting parameter similar to the filter weight ‘ α ’ used in Fischer & Mullen (2001) and Malm *et al.* (2013). Such a formulation immediately provides us with

two advantages over the explicit filtering operation. Firstly, since there are no more explicit filtering operations after the pressure-correction step, the velocity field remains divergence free. Secondly, with the RT now part of the evolution equations, for a fixed χ and \mathcal{H} the physical energy drain provided by the RT should be independent of the chosen time-step (as long as numerical stability is ensured). The final aspect of the stabilization concerning the dissipative character of the RT requires more constraints. For scalar transport equations \mathcal{H} may be chosen to be positive semi-definite, and χ a positive constant. In such a scenario the RT is purely dissipative in nature. However with spatially varying χ and \mathcal{H} the relaxation-term may be non-dissipative (Stolz & Adams 2003).

3.1. RT parameters

In the context of spectral-elements Malm *et al.* (2013) describe a simple transfer function \mathcal{G} defined for a variable in a one-dimensional domain $\Omega = [-1, 1]$ such that the filtering operation takes the simple form

$$\bar{u}_N(x) = \mathcal{G}(u_N(x)) = \sum_{k=0}^N \sigma_k a_k \phi_k(x), \quad (17)$$

where ϕ_k is the basis function and the definition of σ_k describes the low-pass filter function \mathcal{G} which takes the form

$$\sigma_k = \begin{cases} 1 - \alpha \left(\frac{k-k_c}{N-k_c} \right)^2, & k > k_c \\ 1, & k \leq k_c. \end{cases} \quad (18)$$

Where N is the number of modes in the spectral-element discretization and k_c is the cut-off mode in spectral space used for building the filter. Amplitudes for modes $k \leq k_c$ are unaffected by the filter operation. α is the filter weight such that $0 \leq \alpha \leq 1$. In keeping with our analysis earlier, we may define the corresponding high-pass filter \mathcal{H} for the RT as:

$$\mathcal{H}(u_N(x)) = \sum_{k=0}^N \gamma_k a_k \phi_k(x) \quad (19)$$

$$\gamma_k = \begin{cases} \left(\frac{k-k_c}{N-k_c} \right)^2, & k > k_c, \\ 0, & k \leq k_c \end{cases} \quad (20)$$

where the parameter α is absorbed into χ which acts as an RT strength term. To formally have the same operation as the explicit filter, the value of χ can be set to $\chi = (\alpha/\Delta t)$. This is in agreement with the interpretation that the RT procedure is equivalent to performing a low-pass filter operation every time-step with a strength of $(\chi\Delta t)$. Using this value we get $\chi\Delta t = \alpha$ and thus we recover the correct weighting for the equivalent explicit filter operation.

The basis functions ϕ used for the definition of \mathcal{H} however is different from the one used by Malm *et al.* (2013) who use the transformed basis functions described by Boyd (1998) which are described in equation 2. Using this basis

function however, the form of \mathcal{H} is not semi-positive definite and thus the relaxation term is not purely dissipative. This is rather expected from our earlier results which show that the explicit filter operation using such a transformed basis has a substantial parameter range where it acts as an energy source. The equivalent RT formulation then can not be purely dissipative. We use the Legendre polynomials as the basis functions (for a Legendre-spectral-element method) for building the RT which makes \mathcal{H} semi-positive definite. Thus for $\chi > 0$ the relaxation term $-\chi\mathcal{H}(u)$ is purely dissipative in a scalar transport equation.

3.2. Stability and parameter range

The action of the RT can be inferred from the change in eigenvalues of the system due to the added stabilization. As an illustration we build the system matrices using the simple 3×3 spectral-element grid in Matlab for a linear advection operator stabilized by a relaxation-term. The advection operator is built using the parameters in equation 9. We set $\epsilon = 10^{-2}$ so that the operator now models a numerically unstable system with positive eigenvalues. The eigenvalues of the unstable system without the addition of a relaxation term are shown in figure 8a. As expected, there are unstable eigenvalues with positive real part of order $O(10^{-2})$. With the addition of an RT as defined earlier, with $k_c = 10$ and $\chi = 0.4$ causes the eigenvalues to shift towards the negative real plane (figure 8b). In the example shown here, the instability appears to be completely suppressed and the largest real part of the eigenvalues of the resulting system is zero. The overall system is more dissipative as evidenced by the general negative shift of the real part of the eigenvalues. A stabilization of eigenvalues has also been shown by Ohlsson *et al.* (2011) for the explicit filtering operation in the Burgers' equation.

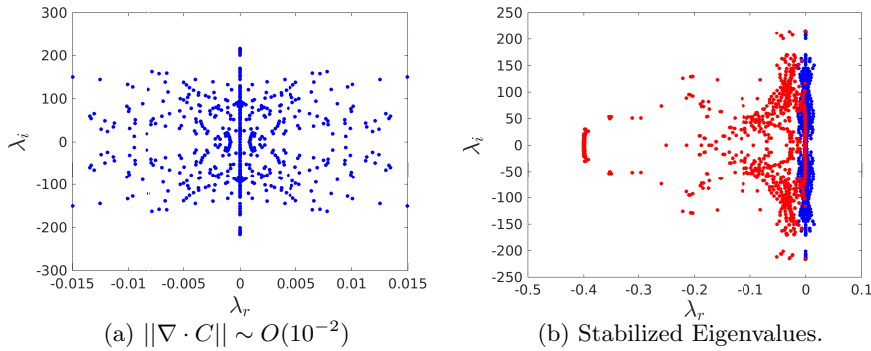


Figure 8: Comparison of eigenvalues for an unstable system (a) with $\|\nabla \cdot C\| \sim O(10^{-2})$ and a system stabilized using a relaxation-term (b)

While the RT clearly has a stabilizing effect on the system, it can also be destabilizing for a certain range of parameters. From figure 8b one can notice some eigenvalues of the stabilized system have a large negative shift with the smallest real part being $\lambda_r^{min} = -0.4$. As it turns out this particular eigenvalue sets the stability limits of the RT stabilization approach. For a particular temporal discretization such as the BDF-EXT-3, the region of stability may cover a finite region of the negative plane. For a system with eigenvalues such that $\lambda\Delta t$ falls outside the stability region of the time-stepping scheme, the system becomes numerically unstable. The scaled eigenvalues with varying values of the parameter $\chi\Delta t$ (and $k_c = 10$) are shown in figure 9 with a black line enveloping the region of stability for a BDF-EXT-3 temporal discretization scheme. As the strength of the RT stabilization is increased by varying χ , the eigenvalues become more negative and the dissipative character of the stabilization procedure becomes stronger. Eventually as $\chi\Delta \approx 1$ the stabilization procedure itself becomes numerically unstable and the time-step needs to be reduced in order to render the simulation numerically stable again. The analysis is exemplified using the BDF-EXT-3 scheme but the concept generalizes to other schemes and the limit of stability will be governed by the stability region of the respective schemes. The same conclusion may also be drawn by analyzing a scalar transport equation with a time-splitting scheme and applying the numerical stability arguments to the relaxation step. Schlatter (2005) mentions a similar numerical stability criterion for $0 < \chi < 1/\Delta t$. This condition limits the parameter range for which a relaxation-term type stabilization can be used. Practical values of the χ parameter should not reach such a limit. To compare with an explicit filtering case, practical values of the filter strength vary between $0 \leq \alpha \leq 0.3$ which correspond to $0 \leq \chi\Delta t \leq 0.3$. Fischer & Mullen (2001) apply the filtering procedure with $\alpha = 1.0$ and note that lower values of α are preferable. Should one find that the dissipation provided at low values of χ is not enough, the alternative would be to change the cut-off wavenumber k_c . This increases the added dissipation by the relaxation-term but does not substantially change the stability limits. Figure 10 shows the change in eigenvalues with different $\chi\Delta t$ using the cut-off mode number as $k_c = 8$. The system is clearly more dissipative with many more eigenvalues with large negative real parts. However the approach to numerical instability remains approximately the same at $\chi\Delta t \approx 1.0$.

It is important to note that such a formulation is very similar to the RT-3D approach used by Schlatter *et al.* (2004) in the context of large-eddy simulations of transitional flows. In the study the authors compare different variants of the ADM-RT (approximate deconvolution model with relaxation term) for transitional and turbulent regimes. In the RT-3D variant the non-linear terms are computed without the deconvolution procedure and hence only the relaxation-term is used for modeling the sub-grid stresses. A comparison of the LES performance between the explicit filtering technique and relaxation-term is also performed in Schlatter *et al.* (2006a). In the current study we are

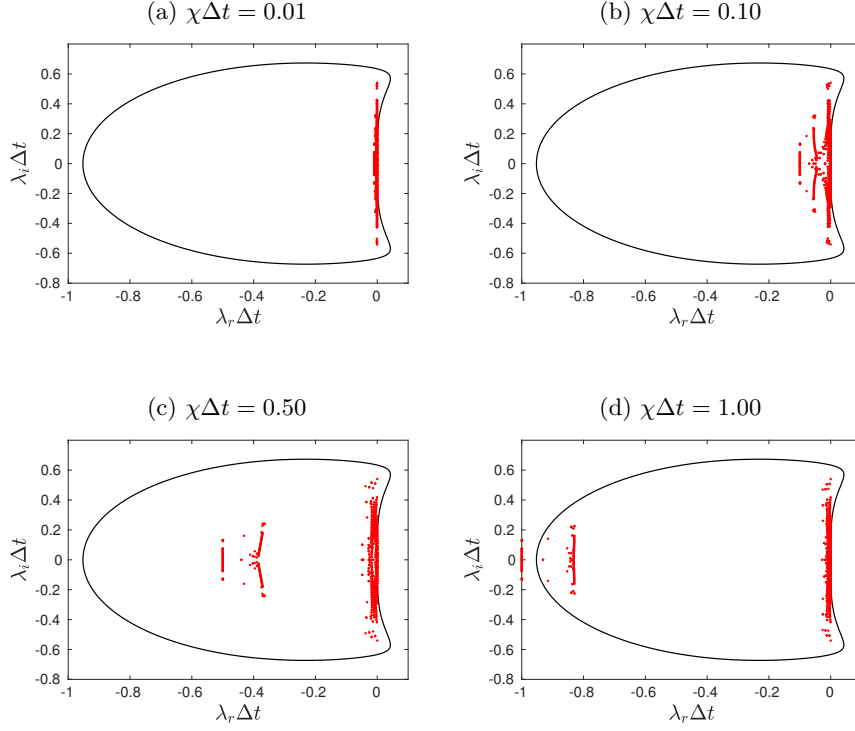


Figure 9: Changes in eigenvalues with varying filter strength $\chi\Delta t$ with $k_c = 10$.

only concerned with the relaxation-term procedure in the context of numerical stabilization.

3.3. Double shear layer

We test the RT stabilization in the 2D model test case of double shear layer as done by Fischer & Mullen (2001) and Malm *et al.* (2013) for a several different parameters. Quite expectedly the procedure successfully stabilizes the simulations. We show the results of only one test case when no over-integration is employed, which would be the most stringent test case for stabilization. We ran the test using a 16×16 spectral-element grid with $N = 16$ Legendre modes in each spectral-element. The RT parameters of $\chi = 1.5 \times 10^3$ (corresponding to $\chi\Delta t = 0.3$) and $k_c = 15$ were used. Figure 11 shows the vorticity in the field at $T = 2.0$ where the thin shear layers are clearly visible. The simulation ran without numerical instabilities up to $T = 20$.

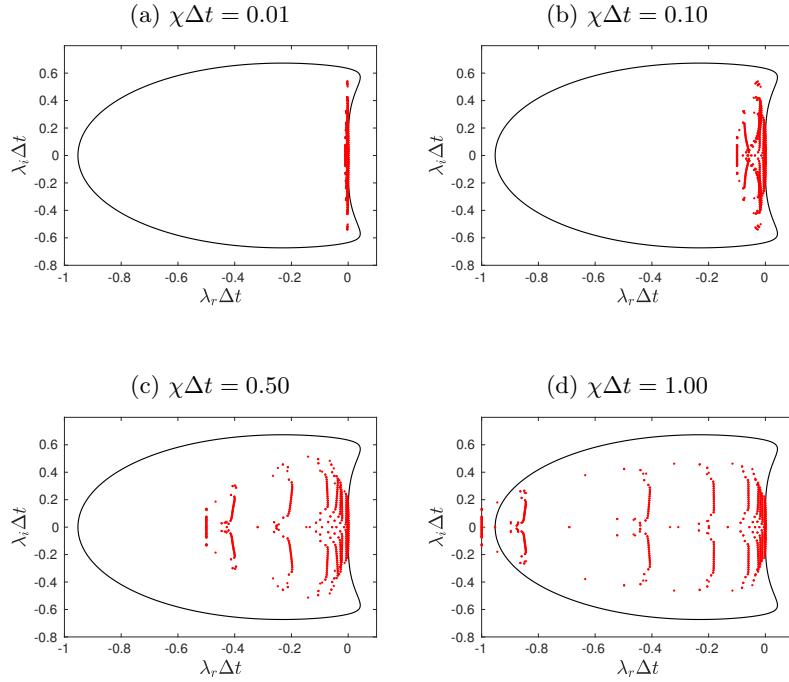


Figure 10: Changes in eigenvalues with varying filter strength $\chi\Delta t$ with $k_c = 8$.

4. Conclusion

We reassess the filter-based stabilization proposed by Fischer & Mullen (2001) and find that despite its appealing simplicity and efficiency, it suffers from a few drawbacks, the most striking of which is the loss of the divergence-free quality of the flow field due to commutation errors. In marginally resolved simulations, this loss may be severe as in our model test case where 6 orders of accuracy was lost for the divergence-free condition. Two other drawbacks are the time-step dependence of the filtered energy and the statistical character of the filter dissipation. A closely related alternate formulation for the explicit filtering involves a relaxation regularization referred to as “relaxation-term-based stabilization” or RT stabilization. With appropriate parameters it can be shown to be equivalent to an explicit filter operation to leading order of time discretization. The procedure stabilizes the numerical method without destroying the divergence-free property. Moreover, the stabilization is now part of the evolution equations, and thus the energy drain due to relaxation-term is independent of the chosen time-step. Limits of the stabilization are also shown and under certain parameters the stabilization itself becomes numerically

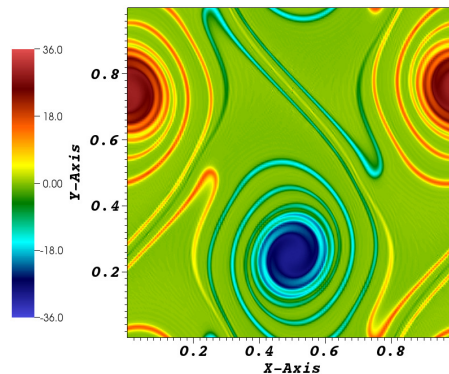


Figure 11: Vorticity at $t = 2.0$ for the double shear layer case using polynomial order $N = 16$ without over-integration and using a relaxation-term stabilization.

unstable. However the procedure is stable under the standard parameter ranges which may be expected for numerical stabilization. Test cases with the double shear layer shows the relaxation-term is able to stabilize the numerical simulation even in the absence of over-integration, which corresponds to a fairly stringent case of numerical stability in the presence of negligible viscosity.

REFERENCES

- BOYD, J. P. 1998 Two comments on filtering (artificial viscosity) for chebyshev and legendre spectral and spectral element methods: Preserving boundary conditions and interpretation of the filter as a diffusion. *Journal of Computational Physics* **143** (1), 283 – 288.
- CANUTO, C., QUARTERONI, A., HUSSAINI, M. Y. & ZANG, T. A. 1988 *Spectral Methods in Fluid Dynamics*. Springer.
- CHOW, F. K. & MOIN, P. 2003 A further study of numerical errors in large-eddy simulations. *Journal of Computational Physics* **184** (2), 366 – 380.
- DOMARADZKI, J. A. & ADAMS, N. A. 2002 Direct modelling of subgrid scales of turbulence in large eddy simulations. *Journal of Turbulence* **3**, N24.
- ERVIN, V. J., LAYTON, W. J. & NEDA, M. 2012 Numerical analysis of filter-based stabilization for evolution equations. *SIAM Journal on Numerical Analysis* **50** (5), 2307–2335.
- FISCHER, P. & MULLEN, J. 2001 Filter-based stabilization of spectral element methods. *Comptes Rendus de l'Académie des Sciences - Series I - Mathematics* **332** (3), 265 – 270.
- GEURTS, B., VREMAN, B., KUERTEN, H. & VAN BUUREN, R. 1997 *Noncommuting Filters and Dynamic Modelling for Les of Turbulent Compressible Flow in 3D Shear Layers*, pp. 47–56. Dordrecht: Springer Netherlands.
- GEURTS, B. J. & HOLM, D. D. 2006 Commutator errors in large-eddy simulation. *Journal of Physics A: Mathematical and General* **39** (9), 2213.

- KARAMANOS, G.-S. & KARNIADAKIS, G. 2000 A spectral vanishing viscosity method for large-eddy simulations. *Journal of Computational Physics* **163** (1), 22 – 50.
- KIRBY, R. M. & KARNIADAKIS, G. E. 2003 De-aliasing on non-uniform grids: algorithms and applications. *Journal of Computational Physics* **191** (1), 249 – 264.
- KIRBY, R. M. & SHERWIN, S. J. 2006 Stabilisation of spectral/hp element methods through spectral vanishing viscosity: Application to fluid mechanics modelling. *Computer Methods in Applied Mechanics and Engineering* **195** (23), 3128 – 3144, incompressible CFD.
- KRIST, S. E. & ZANG, T. A. 1987 Numerical simulation of channel flow transition, resolution requirements and structure of the hairpin vortex. *Tech. Rep.* NASA Langley Research Center; Hampton, VA, United States.
- MADAY, Y., KABER, S. M. O. & TADMOR, E. 1993 Legendre pseudospectral viscosity method for nonlinear conservation laws. *SIAM J. Numer. Anal.* **30**, 321–342.
- MALM, J., SCHLATTER, P., FISCHER, P. F. & HENNINGSON, D. S. 2013 Stabilization of the spectral element method in convection dominated flows by recovery of skew-symmetry. *Journal of Scientific Computing* **57** (2), 254–277.
- MATHEW, J., LECHNER, R., FOYSI, H., SESTERHENN, J. & FRIEDRICH, R. 2003 An explicit filtering method for large eddy simulation of compressible flows. *Physics of Fluids* **15** (8), 2279–2289.
- OHLSSON, J., SCHLATTER, P., FISCHER, P. F. & HENNINGSON, D. S. 2011 *Stabilization of the Spectral-Element Method in Turbulent Flow Simulations*, pp. 449–458. Berlin, Heidelberg: Springer Berlin Heidelberg.
- ORSZAG, S. A. 1971 On the Elimination of Aliasing in Finite-Difference Schemes by Filtering High-Wavenumber Components. *Journal of the Atmospheric Sciences* **28** (6), 1074–1074.
- PASQUETTI, R. & XU, C. 2002 Comments on filter-based stabilization of spectral element methods. *Journal of Computational Physics* **182** (2), 646 – 650.
- PHILLIPS, N. A. 1959 An example of non-linear computational instability. *The Atmosphere and the Sea in motion* **501**.
- SCHLATTER, P., STOLZ, S. & KLEISER, L. 2004 LES of transitional flows using the approximate deconvolution model. *International Journal of Heat and Fluid Flow* **25** (3), 549 – 558, turbulence and Shear Flow Phenomena (TSFP-3).
- SCHLATTER, P., STOLZ, S. & KLEISER, L. 2006 *Analysis of the SGS energy budget for deconvolution- and relaxation-based models in channel flow*, pp. 135–142. Dordrecht: Springer Netherlands.
- SCHLATTER, P. C. 2005 Large-eddy simulation of transition and turbulence in wall-bounded shear flow. Doctoral thesis, Swiss Federal Institute of Technology Zürich.
- STOLZ, S. & ADAMS, N. A. 2003 Large-eddy simulation of high-reynolds-number supersonic boundary layers using the approximate deconvolution model and a rescaling and recycling technique. *Physics of Fluids* **15** (8), 2398–2412.
- STOLZ, S., ADAMS, N. A. & KLEISER, L. 2001 An approximate deconvolution model for large-eddy simulation with application to incompressible wall-bounded flows. *Physics of Fluids* **13** (4), 997–1015.
- TADMOR, E. 1989 Convergence of spectral methods for nonlinear conservation laws. *SIAM Journal on Numerical Analysis* **26** (1), 30–44.

- VAN DER BOS, F. & GEURTS, B. J. 2005 Commutator errors in the filtering approach to large-eddy simulation. *Physics of Fluids* **17** (3), 035108.
- VASILYEV, O. V., LUND, T. S. & MOIN, P. 1998 A General Class of Commutative Filters for LES in Complex Geometries. *Journal of Computational Physics* **146** (1), 82 – 104.
- VON NEUMANN, J. & RICHTMYER, R. D. 1950 A method for the numerical calculation of hydrodynamic shocks. *Journal of Applied Physics* **21** (3), 232–237.