

ABOUT THIS BOOK

This book introduces matrices through high school coordinate geometry. This approach makes it easier for beginners to learn Python for scientific computing. All problems in the book are from NCERT mathematics textbooks from Class 9-12. Exercises are from CBSE board exam papers.

The content is sufficient for industry jobs and covers nearly all matrix prerequisites for machine learning. There is no copyright, so readers are free to print and share.

License: <https://creativecommons.org/licenses/by-sa/3.0/>
and

<https://www.gnu.org/licenses/fdl-1.3.en.html>

First manual appeared in January 2018

First edition published on July 10, 2024

In this edition, some incorrect solutions were removed. All figures redrawn. More problems added.

CONTENTS

1	GATE CE-2 2025	3
1.1	Formulae	3
1.2	Problems	7

1. GATE CE-2 2025

A. Formulae

1.1.1 Energy Consumption

- Power-Time-Energy Relation: The total energy consumption E is given by the product of power P , operating time t per day, and the number of days N :

$$E = P \times t \times N \quad (1.1.1.1)$$

where P is in kilowatts (kW), t is in hours per day, and N is the number of days, yielding energy in kilowatt-hours (kWh).

1.1.2 Alligation Formula

- Mixture Pricing and Proportion: When two varieties of materials or commodities with unit costs C_P and C_Q (where $C_P < CP < C_Q$, with CP being the cost price of the mixture) are mixed in weights W_P and W_Q , the proportion is given by:

$$\frac{W_P}{W_Q} = \frac{C_Q - CP}{CP - C_P} \quad (1.1.2.1)$$

1.1.3 Heron's Formula and Triangle Area

- Semi-Perimeter: For a triangle with side lengths a , b , and c , the semi-perimeter s is defined as:

$$s = \frac{a + b + c}{2} \quad (1.1.3.1)$$

- Area via Heron's Formula: The area Δ of the triangle is given by:

$$\Delta = \sqrt{s(s-a)(s-b)(s-c)} \quad (1.1.3.2)$$

- Area via Base and Altitude: Alternatively, given a base b and corresponding altitude h , the area is:

$$\Delta = \frac{1}{2} \times b \times h \quad (1.1.3.3)$$

1.1.4 Integration by Parts

- Indefinite Integral Formula: For differentiable functions $u(x)$ and $v(x)$, the integration by parts formula is:

$$\int u \, dv = uv - \int v \, du \quad (1.1.4.1)$$

Expressed explicitly in terms of x :

$$\int u(x) v'(x) \, dx = u(x) v(x) - \int v(x) u'(x) \, dx \quad (1.1.4.2)$$

1.1.5 Vector Calculus: Curl and Divergence of Velocity Vector

- Two-Dimensional Velocity Field: For a 2D velocity vector $\mathbf{V} = u\hat{i} + v\hat{j}$, where u and v are scalar components along x and y :

a) z -Component of Curl:

$$(\nabla \times \mathbf{V})_z = \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \quad (1.1.5.1)$$

b) Divergence of Velocity Vector:

$$\nabla \cdot \mathbf{V} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \quad (1.1.5.2)$$

1.1.6 Laplace Transform

- Unilateral Definition: For causal signals starting at $t = 0$:

$$G(s) = \mathcal{L}\{g(t)\} = \int_0^\infty g(t) e^{-st} dt \quad (1.1.6.1)$$

- Derivative Properties:

$$y'(t) \xleftrightarrow{\mathcal{L}} sY(s) - y(0) \quad (1.1.6.2)$$

$$y''(t) \xleftrightarrow{\mathcal{L}} s^2Y(s) - sy(0) - y'(0) \quad (1.1.6.3)$$

- Standard Transform Pairs:

$$u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{s}, \quad \text{Re}(s) > 0 \quad (1.1.6.4)$$

$$e^{at}u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{s-a}, \quad \text{Re}(s) > a \quad (1.1.6.5)$$

1.1.7 Higher-Order Derivative Test and Local Extrema

- Critical Points: Points where the first derivative vanishes: $f'(x_0) = 0$.
- Second Derivative Test: Let x_0 be a critical point of $f(x)$:
 - a) If $f''(x_0) < 0$, then $f(x)$ has a ****local maximum**** at x_0 .
 - b) If $f''(x_0) > 0$, then $f(x)$ has a ****local minimum**** at x_0 .
 - c) If $f''(x_0) = 0$, the test is inconclusive, and higher-order derivatives must be evaluated.

1.1.8 Standard Deflection Formulae and Propped Cantilever Analysis

- Deflection due to UDL: The maximum deflection δ_{UDL} at the free end of a cantilever of length L and flexural rigidity EI subjected to a uniformly distributed load of intensity w over the entire span is:

$$\delta_{UDL} = -\frac{wL^4}{8EI} \quad (1.1.8.1)$$

- Deflection due to End Moment: The maximum deflection δ_M at the free end of a cantilever of length L and flexural rigidity EI subjected to an end moment M is:

$$\delta_M = -\frac{ML^2}{2EI} \quad (1.1.8.2)$$

- Deflection due to End Load: The deflection δ_R at the free end due to a point load

(or redundant reaction R_B) at the tip is:

$$\delta_R = \frac{R_B L^3}{3EI} \quad (1.1.8.3)$$

- Propped Cantilever Compatibility: For a propped cantilever with a support settlement Δ at the prop (taking upward as positive):

$$\delta_M + \delta_R = -\Delta \implies R_B = \frac{3M}{2L} - \frac{3EI\Delta}{L^3} \quad (1.1.8.4)$$

1.1.9 Eigenvalues and Eigenvectors of a Matrix

- Characteristic Equation: For a square matrix $\mathbf{A}$, the eigenvalues λ are the roots of the characteristic polynomial:


$$P(\lambda) = |\lambda \mathbf{I} - \mathbf{A}| = 0 \quad (1.1.9.1)$$

- Trace and Eigenvalue Sum: The sum of the eigenvalues equals the trace of the matrix:

$$\sum_{i=1}^n \lambda_i = \text{tr}(\mathbf{A}) = \sum_{i=1}^n a_{ii} \quad (1.1.9.2)$$

1.1.10 Chemistry and Environmental Engineering Formulae (TOC, TKN, COD)

- Stoichiometric Oxidation Reaction: For an organic compound $C_a H_b O_c N_d$, the complete stoichiometric oxygen demand reaction is:



- Definitions:

- a) **TOC (Total Organic Carbon):** Measures the total carbon content in the compound ($12a$ per mole).
- b) **TKN (Total Kjeldahl Nitrogen):** Measures organic and ammonia nitrogen content ($14d$ per mole).
- c) **COD (Chemical Oxygen Demand):** Measures the oxygen equivalent required for chemical oxidation of the organic matter based on the moles of O_2 consumed ($32 \times$ moles of O_2 per mole of compound).

1.1.11 Hydrostatic Force and Moment about Hinge

- Hydrostatic Force: The total hydrostatic force F on a submerged plane surface of area A with centroidal depth $\bar{y}$ below the free surface is:

$$F = \rho g A \bar{y} \quad (1.1.11.1)$$

- Moment about Hinge: For a gate or plate pivoted about a hinge, the resultant moment M_P due to linear hydrostatic pressure distribution $p(s) = \rho g \bar{y}(s)$

integrated over the surface length L is:

$$M_P = \int_0^L s \, dF = \rho g b \int_0^L s \left(h - \frac{y(s)}{s} s \right) ds \quad (1.1.11.2)$$

1.1.12 Highway Engineering Widening Formulae

- Total Extra Widening (W_e): On horizontal curves, extra widening is the sum of mechanical widening (W_m) and psychological widening (W_p):

$$W_e = W_m + W_p \quad (1.1.12.1)$$

where:

$$W_m = \frac{nl^2}{2R} \quad (\text{Mechanical Widening}) \quad (1.1.12.2)$$

$$W_p = \frac{V}{9.5\sqrt{R}} \quad (\text{Psychological Widening}) \quad (1.1.12.3)$$

with n as the number of lanes, l as the wheelbase of the longest vehicle, R as the curve radius, and V as design speed in km/h.

1.1.13 System of Linear Equations and Rouché–Capelli Theorem

- Matrix Form: $\mathbf{Ax} = \mathbf{b}$.
- Solvability via Ranks:
 - a) No Solution (Inconsistent): $\text{rank}(\mathbf{A}) < \text{rank}([\mathbf{A} \mid \mathbf{b}])$
 - b) Unique Solution: $\text{rank}(\mathbf{A}) = \text{rank}([\mathbf{A} \mid \mathbf{b}]) = n$ (number of variables)
 - c) Infinitely Many Solutions: $\text{rank}(\mathbf{A}) = \text{rank}([\mathbf{A} \mid \mathbf{b}]) < n$

1.1.14 Probability and Random Variables

- Mutually Exclusive Events: $\Pr(A \cap B) = 0$ and $\Pr(A \cup B) = \Pr(A) + \Pr(B)$.
- Conditional Probability: $\Pr(A \mid B) = \frac{\Pr(A \cap B)}{\Pr(B)}$ (with $\Pr(B) > 0$). If $B \subset A$, $\Pr(A \mid B) = 1$.
- Mean and Variance of Discrete Random Variables:

$$\mu = E[X] = \sum x_i p_i \quad (1.1.14.1)$$

$$\sigma^2 = E[X^2] - (E[X])^2 = \sum x_i^2 p_i - \mu^2 \quad (1.1.14.2)$$

B. Problems

- 1.2.1 An electricity utility company charges ₹7 per kWh (kilo watt-hour). If a 40-watt desk light is left on for 10 hours each night for 180 days, what would be the cost of energy consumption? If the desk light is on for 2 more hours each night for the 180 days, what would be the percentage-increase in the cost of energy consumption?

(GATE CE2 2025)

- a) ₹604.8; 10%
- b) ₹504; 20%
- c) ₹604.8; 12%
- d) ₹720; 15%

Solution: The initial energy consumption is

$$E_1 = P \times t_1 \times N \quad (1.2.1.1)$$

$$= 0.04 \text{ kW} \times 10 \text{ hours/night} \times 180 \text{ days} \quad (1.2.1.2)$$

$$= 72 \text{ kWh} \quad (1.2.1.3)$$

The initial cost at ₹7 per kWh is

$$\text{Initial Cost} = 72 \text{ kWh} \times ₹7/\text{kWh} \quad (1.2.1.4)$$

$$= ₹504 \quad (1.2.1.5)$$

With $t_2 = 12$ hours/night, the new energy consumption and cost are

$$E_2 = 0.04 \text{ kW} \times 12 \text{ hours/night} \times 180 \text{ days} \quad (1.2.1.6)$$

$$= 86.4 \text{ kWh}, \quad (1.2.1.7)$$

$$\text{New Cost} = 86.4 \text{ kWh} \times ₹7/\text{kWh} \quad (1.2.1.8)$$

$$= ₹604.8 \quad (1.2.1.9)$$

Therefore, the percentage increase is

$$\text{Percentage Increase} = \frac{604.8 - 504}{504} \times 100 \quad (1.2.1.10)$$

$$= 20\%. \quad (1.2.1.11)$$

Thus, option (B) is correct.

codes/ce2q3/ce2q3.py

- 1.2.2 A bag contains Violet (V), Yellow (Y), Red (R), and Green (G) balls. On counting them, the following results are obtained:

- (i) The sum of Yellow balls and twice the number of Violet balls is 50.
- (ii) The sum of Violet and Green balls is 50.
- (iii) The sum of Yellow and Red balls is 50.
- (iv) The sum of Violet and twice the number of Red balls is 50.

Which one of the following correctly represents the balls in the bag?

(GATE CE2 2025)

- a) $V = 10\%$, $R = 20\%$, $Y = 30\%$, $G = 40\%$
 b) $V = 40\%$, $R = 10\%$, $Y = 20\%$, $G = 30\%$
 c) $V = 30\%$, $R = 40\%$, $Y = 10\%$, $G = 10\%$
 d) $V = 20\%$, $R = 30\%$, $Y = 40\%$, $G = 10\%$

Solution: Let the numbers of Violet, Yellow, Red, and Green balls be collected in the vector

$$\mathbf{x} = \begin{pmatrix} V \\ Y \\ R \\ G \end{pmatrix}.$$

The four given conditions can be written as the linear system

$$\mathbf{A}\mathbf{x} = \mathbf{b},$$

where

$$\mathbf{A} = \begin{pmatrix} 2 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 0 \\ 1 & 0 & 2 & 0 \end{pmatrix}, \quad \mathbf{b} = \begin{pmatrix} 50 \\ 50 \\ 50 \\ 50 \end{pmatrix}. \quad (1.2.2.1)$$

We solve this system using elementary row operations. Form the augmented matrix:

$$[\mathbf{A} \mid \mathbf{b}] = \begin{pmatrix} 2 & 1 & 0 & 0 & 50 \\ 1 & 0 & 0 & 1 & 50 \\ 0 & 1 & 1 & 0 & 50 \\ 1 & 0 & 2 & 0 & 50 \end{pmatrix}.$$

Step 1: Eliminate the first column below the pivot in row 1.

$$R_2 \leftarrow R_2 - \frac{1}{2}R_1, \quad R_4 \leftarrow R_4 - \frac{1}{2}R_1.$$

This gives

$$\begin{pmatrix} 2 & 1 & 0 & 0 & 50 \\ 0 & -\frac{1}{2} & 0 & 1 & 25 \\ 0 & 1 & 1 & 0 & 50 \\ 0 & -\frac{1}{2} & 2 & 0 & 25 \end{pmatrix}.$$

Step 2: Use row 3 (pivot in column 2) to eliminate the entries in column 2 of rows 2 and 4:

$$R_2 \leftarrow R_2 + \frac{1}{2}R_3, \quad R_4 \leftarrow R_4 + \frac{1}{2}R_3.$$

We obtain

$$\begin{pmatrix} 2 & 1 & 0 & 0 & 50 \\ 0 & 0 & \frac{1}{2} & 1 & 50 \\ 0 & 1 & 1 & 0 & 50 \\ 0 & 0 & \frac{5}{2} & 0 & 50 \end{pmatrix}.$$

Step 3: Use row 2 (pivot in column 3) to eliminate the entry in column 3 of row 4:

$$R_4 \leftarrow R_4 - 5R_2.$$

Thus,

$$\begin{pmatrix} 2 & 1 & 0 & 0 & 50 \\ 0 & 0 & \frac{1}{2} & 1 & 50 \\ 0 & 1 & 1 & 0 & 50 \\ 0 & 0 & 0 & -250 & -200 \end{pmatrix}.$$

Back-substitution: From row 4,

$$-250G = -200 \Rightarrow G = \frac{200}{250} = 0.8 \times 10 = 40.$$

From row 2,

$$\frac{1}{2}R + 1 \cdot G = 50 \Rightarrow \frac{1}{2}R + 40 = 50 \Rightarrow R = 20.$$

From row 3,

$$Y + R = 50 \Rightarrow Y + 20 = 50 \Rightarrow Y = 30.$$

From row 1,

$$2V + Y = 50 \Rightarrow 2V + 30 = 50 \Rightarrow V = 10.$$

Thus,

$$V = 10, \quad Y = 30, \quad R = 20, \quad G = 40.$$

The total number of balls is

$$T = V + Y + R + G = 10 + 30 + 20 + 40 = 100,$$

so the percentage distribution is

$$V = 10\%, \quad R = 20\%, \quad Y = 30\%, \quad G = 40\%.$$

Hence, option (A) correctly represents the balls in the bag.

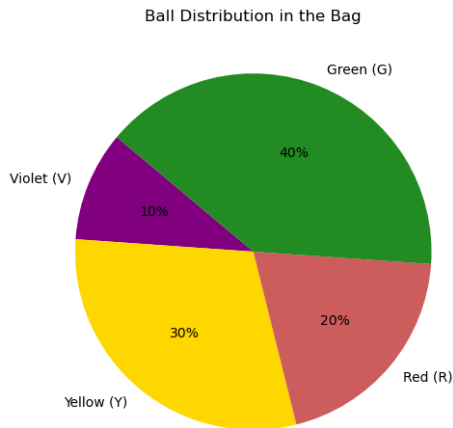


Fig. 1.2.2.1. Pie chart representing ball distribution.

`codes/ce2q5/ce2q5.py`

- 1.2.3 Consider a five-digit number $PQRST$ that has distinct digits P, Q, R, S , and T , and satisfies the following conditions: $P < Q$, $S > P > T$, and $R < T$. If integers 1 through 5 are used to construct such a number, the value of P is:

(GATE CE2 2025)

- a) 1
b) 2
c) 3
d) 4

Solution: Combining the inequalities gives

$$R < T < P < Q, \quad T < P < S. \quad (1.2.3.1)$$

Since $R < T < P$, the digit P must be greater than at least two other distinct digits, namely 1 and 2. Hence $P \neq 1, 2$.

Also, $P < Q$ and $P < S$, so P cannot be the maximum digit 5. Therefore, the only remaining possibility is $P = 3$.

For $P = 3$, the smaller digits $\{1, 2\}$ can be assigned to R and T , while the larger digits $\{4, 5\}$ can be assigned to Q and S . Hence all the inequalities are satisfied.

Thus, option (C) is correct.

codes/ce2q8/ce2q8.py

- 1.2.4 A business person buys potatoes of two different varieties P and Q , mixes them in a certain ratio and sells them at ₹192 per kg. The cost of variety P is ₹800 for 5 kg. The cost of variety Q is ₹800 for 4 kg. If the person gets 8% profit, what is the $P : Q$ ratio (by weight)?

(GATE CE2 2025)

- a) 5 : 4
b) 3 : 4
c) 3 : 2
d) 1 : 1

Solution: Let the profit percentage be $p = 0.08$. Since $SP = CP(1 + p)$, the cost price of the mixture is

$$CP = \frac{SP}{1 + p} \quad (1.2.4.1)$$

$$= \frac{192}{1.08} = \frac{1600}{9} \text{ ₹/kg.} \quad (1.2.4.2)$$

The unit costs of the two varieties are

$$C_P = \frac{800}{5} = 160 \text{ ₹/kg,} \quad (1.2.4.3)$$

$$C_Q = \frac{800}{4} = 200 \text{ ₹/kg.} \quad (1.2.4.4)$$

Let the weights mixed be W_P and W_Q . Equating the total cost of the mixture to the component costs gives

$$W_P C_P + W_Q C_Q = (W_P + W_Q) CP \quad (1.2.4.5)$$

$$W_P (CP - C_P) = W_Q (C_Q - CP). \quad (1.2.4.6)$$

Hence,

$$\frac{W_P}{W_Q} = \frac{C_Q - C_P}{C_P - C_P} \quad (1.2.4.7)$$

$$= \frac{200 - \frac{1600}{9}}{\frac{1600}{9} - 160} \quad (1.2.4.8)$$

$$= \frac{\frac{200}{9}}{\frac{160}{9}} = \frac{5}{4}. \quad (1.2.4.9)$$

Thus, the required ratio is 5 : 4, making option (A) correct.

codes/ce2q9/ce2q9.py

1.2.5 Three villages P , Q , and R are located in such a way that the distance $PQ = 13$ km, $QR = 14$ km, and $RP = 15$ km. A straight road joins Q and R . It is proposed to connect P to this road QR by constructing another road. What is the minimum possible length (in km) of this connecting road?

(GATE CE2 2025)

- a) 10.5
- b) 11.0
- c) 12.0
- d) 12.5

Solution: The minimum distance from vertex P to line QR is the altitude h_a . The semi-perimeter of triangle PQR is

$$s = \frac{13 + 14 + 15}{2} = 21. \quad (1.2.5.1)$$

Using Heron's formula, the area is

$$\Delta = \sqrt{21(21 - 14)(21 - 15)(21 - 13)} \quad (1.2.5.2)$$

$$= \sqrt{21 \times 7 \times 6 \times 8} \quad (1.2.5.3)$$

$$= 84 \text{ km}^2. \quad (1.2.5.4)$$

Taking $QR = 14$ km as the base,

$$h_a = \frac{2\Delta}{14} = \frac{2 \times 84}{14} = 12 \text{ km}. \quad (1.2.5.5)$$

Thus, option (C) is correct.

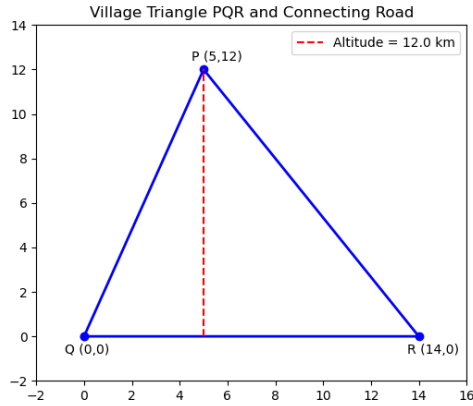


Fig. 1.2.5.1. Triangle PQR geometry and altitude from P to QR .

codes/ce2q10/ce2q10.py

1.2.6 For the matrix $[A]$ given below, the transpose is:

$$[A] = \begin{pmatrix} 2 & 3 & 4 \\ 1 & 4 & 5 \\ 4 & 3 & 2 \end{pmatrix} \quad (1.2.6.1)$$

(GATE CE2 2025)

- a) $\begin{pmatrix} 2 & 1 & 4 \\ 3 & 4 & 3 \\ 4 & 5 & 2 \end{pmatrix}$
- b) $\begin{pmatrix} 4 & 3 & 2 \\ 5 & 4 & 1 \\ 2 & 3 & 4 \end{pmatrix}$
- c) $\begin{pmatrix} 4 & 2 & 3 \\ 5 & 1 & 4 \\ 2 & 4 & 3 \end{pmatrix}$
- d) $\begin{pmatrix} 2 & 3 & 4 \\ 1 & 4 & 5 \\ 4 & 3 & 2 \end{pmatrix}$

Solution: The transpose operation interchanges rows and columns. Therefore,

$$[A^T]_{ij} = [A]_{ji}, \quad (1.2.6.2)$$

$$A^T = \begin{pmatrix} 2 & 1 & 4 \\ 3 & 4 & 3 \\ 4 & 5 & 2 \end{pmatrix}. \quad (1.2.6.3)$$

Thus, option (A) is correct.

codes/ce2q11/ce2q11.py

1.2.7 Integration of $\ln(x)$ with respect to x , i.e., $\int \ln(x) dx = \underline{\hspace{2cm}}$ (GATE CE2 2025)

- a) $x \ln(x) - x + C$
- b) $x - \ln(x) + C$
- c) $x \ln(x) + x + C$
- d) $\ln(x) - x + C$

Solution: Using integration by parts with $u = \ln(x)$ and $dv = dx$,

$$\int \ln(x) dx = x \ln(x) - \int x \cdot \frac{1}{x} dx \quad (1.2.7.1)$$

$$= x \ln(x) - \int 1 dx \quad (1.2.7.2)$$

$$= x \ln(x) - x + C. \quad (1.2.7.3)$$

Thus, option (A) is correct.

codes/ce2q12/ce2q12.py

1.2.8 Consider the pin-jointed truss shown in the figure. Influence line is drawn for the axial force in the member $G - I$, when a unit load travels on the bottom chord of the truss. Identify the CORRECT influence line from the options provided, and calculate the axial force values using the section cutting method when the unit load (1 N) is at joints D , G , I , L , and O . (GATE CE2 2025)

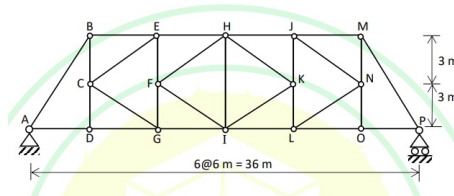


Fig. 1.2.8.1. Pin-jointed truss for Q14.

Solution: An influence line for a truss member shows how the axial force in that member changes as a unit load moves from one joint to another. Since the truss is pin-jointed, the moving load is considered only at the bottom joints A , D , G , I , L , O , and P , and the variation between joints is linear.

Section Cutting Method and Ordinate Calculations: To determine the axial force in bottom chord member $G - I$ using the section cutting method, we pass a vertical section through the panel containing $G - I$. By considering the equilibrium of the detached portion and taking moments about the corresponding center of moments (the opposite joint), we evaluate the influence coefficients for a unit load (1 N) placed at each bottom chord joint:

- **Load at Supports A and P :** When the unit load is at the end supports, the reactions cause zero internal force in the panel:

$$F_{GI}^{(A)} = 0, \quad F_{GI}^{(P)} = 0 \quad (1.2.8.1)$$

- **Load at Joint D :** Cutting the section through the panel and taking moments about the

center of moments gives:

$$F_{GI}^{(D)} \approx 0.33 \text{ (Tension)} \quad (1.2.8.2)$$

- **Load at Joint G (Panel Point):** Using the section method at the panel of member $G - I$, the peak tensile ordinate is obtained as:

$$F_{GI}^{(G)} = \frac{4}{3} \approx 1.33 \text{ (Tension)} \quad (1.2.8.3)$$

- **Load at Joint I:** As the unit load moves to joint I , the influence ordinate evaluates to:

$$F_{GI}^{(I)} = 1.00 \text{ (Tension)} \quad (1.2.8.4)$$

- **Load at Joint L:** Similarly, with the load at joint L :

$$F_{GI}^{(L)} = 0.67 \text{ (Tension)} \quad (1.2.8.5)$$

- **Load at Joint O:** With the load near the right support:

$$F_{GI}^{(O)} = 0.33 \text{ (Tension)} \quad (1.2.8.6)$$

Member $G - I$ is a bottom chord member. Under a downward moving load, such members generally develop tensile force, so the influence line is positive. Among the given options, only option (B) shows a positive piecewise linear influence line, zero at A and P , with a maximum ordinate of 1.33 near the panel of member $G - I$. Therefore, the correct option is

(B)

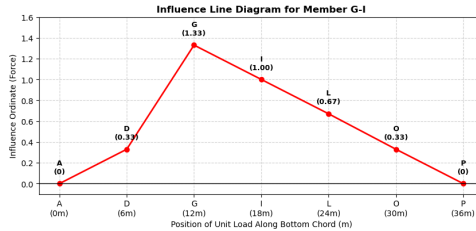


Fig. 1.2.8.2. Correct influence line for axial force in member $G - I$.

codes/ce2q14/ce2q14.py

1.2.9 Consider a velocity vector $\mathbf{V}$ in (x, y, z) coordinates given by $\mathbf{V} = u\mathbf{x} + v\mathbf{y}$. Pick one or more CORRECT statement(s) from the choices given below.

(GATE CE2 2025)

- z -component of Curl of velocity: $\nabla \times \mathbf{V} = \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right) \mathbf{z}$
- z -component of Curl of velocity: $\nabla \times \mathbf{V} = \left(\frac{\partial u}{\partial x} - \frac{\partial v}{\partial y} \right) \mathbf{z}$
- Divergence of velocity: $\nabla \cdot \mathbf{V} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y}$
- Divergence of velocity: $\nabla \cdot \mathbf{V} = \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x}$

Solution: For a two-dimensional velocity field $\mathbf{V} = u\mathbf{x} + v\mathbf{y}$, the z -component of curl is

$$(\nabla \times \mathbf{V})_z = \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y}. \quad (1.2.9.1)$$

Thus, statement (A) is correct.

The divergence is

$$\nabla \cdot \mathbf{V} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y}. \quad (1.2.9.2)$$

Thus, statement (C) is correct.

Therefore, the correct statements are (A) and (C).

codes/ce2q21/ce2q21.py

1.2.10 Given that A and B are not null sets, which of the following statements regarding probability is/are CORRECT?

(GATE CE2 2025)

- a) $\Pr(A \cap B) = \Pr(A) \Pr(B)$ if A and B are mutually exclusive.
- b) Conditional probability, $\Pr(A | B) = 1$ if $B \subset A$.
- c) $\Pr(A \cup B) = \Pr(A) + \Pr(B)$, if A and B are mutually exclusive.
- d) $\Pr(A \cap B) = 0$, if A and B are independent.

Solution: Since $B \subset A$,

$$A \cap B = B, \quad (1.2.10.1)$$

$$\Pr(A | B) = \frac{\Pr(A \cap B)}{\Pr(B)} = \frac{\Pr(B)}{\Pr(B)} = 1. \quad (1.2.10.2)$$

Hence, statement (B) is correct.

For mutually exclusive events,

$$\Pr(A \cap B) = 0, \quad (1.2.10.3)$$

$$\Pr(A \cup B) = \Pr(A) + \Pr(B). \quad (1.2.10.4)$$

Hence, statement (C) is correct. Statements (A) and (D) are incorrect for non-null sets.

Therefore, the correct statements are (B) and (C).

codes/ce2q22/ce2q22.py

1.2.11 Pick the CORRECT solution for the following differential equation

$$\frac{dy}{dx} = e^{x-y}$$

(GATE CE2 2025)

- a) $y = \ln(e^x + \text{Constant})$
- b) $\ln(y) = x + \text{Constant}$
- c) $\ln(y) = \ln(e^x) + \text{Constant}$
- d) $y = x + \text{Constant}$

Solution: The given differential equation is nonlinear:

$$\frac{dy}{dx} = e^{x-y} = e^x e^{-y}$$

To use Laplace transformation, we first convert it into a linear differential equation by introducing the substitution

$$u = e^y$$

Then,

$$\frac{du}{dx} = e^y \frac{dy}{dx}$$

Using the given equation,

$$\frac{du}{dx} = e^y \cdot e^{x-y} = e^x$$

Thus, the transformed problem reduces to

$$\frac{du}{dx} = e^x$$

Now take Laplace transforms on both sides with respect to x . Let

$$\mathcal{L}\{u(x)\} = U(s)$$

Then,

$$\mathcal{L}\left\{\frac{du}{dx}\right\} = sU(s) - u(0)$$

and

$$\mathcal{L}\{e^x\} = \frac{1}{s-1}$$

Hence,

$$sU(s) - u(0) = \frac{1}{s-1}$$

Therefore,

$$U(s) = \frac{1}{s(s-1)} + \frac{u(0)}{s}$$

Using partial fractions,

$$\frac{1}{s(s-1)} = -\frac{1}{s} + \frac{1}{s-1}$$

So,

$$U(s) = -\frac{1}{s} + \frac{1}{s-1} + \frac{u(0)}{s}$$

$$U(s) = \frac{u(0) - 1}{s} + \frac{1}{s-1}$$

Taking inverse Laplace transform,

$$u(x) = u(0) - 1 + e^x$$

Since $u = e^y$, we get

$$e^y = e^x + C$$

where $C = u(0) - 1$ is an arbitrary constant.

Taking natural logarithm,

$$y = \ln(e^x + C)$$

Hence, the correct solution is

$$y = \ln(e^x + \text{Constant})$$

Therefore, the correct option is

(A)

codes/ce2q36/ce2q36.py

1.2.12 The figure shows a propped cantilever with uniform flexural rigidity

$$EI$$

(in N.m

2

) and subjected to a moment

$$M$$

(in N.m). Consider forces and displacements in the upward direction as positive. Find the upward reaction at the propped support

$$B$$

(in N) when this support settles by

$$(-\Delta)$$

, given in metres.

(GATE CE2 2025)

a)

$$\frac{3M}{2L} - \frac{6EI\Delta}{L^3}$$

b)

$$\frac{8M}{3L} - \frac{2EI\Delta}{L^3}$$

c)

$$\frac{3M}{2L} - \frac{3EI\Delta}{L^3}$$

d)

$$\frac{M}{L} - \frac{8EI\Delta}{L^3}$$

Solution: Treat the reaction at the prop

$$B$$

as the redundant

$$R_B$$

. The basic determinate structure is a cantilever fixed at

$$A$$

and free at

$$B$$

. Using compatibility, the net vertical deflection at

$$B$$

must equal the imposed support settlement. Since upward displacement is taken positive and the support settles downward by

$$(-\Delta)$$

,

$$\delta_B = -\Delta$$

The end deflection at

$$B$$

due to an end moment

$$M$$

on a cantilever of length

$$L$$

is

$$\delta_M = -\frac{ML^2}{2EI}$$

The end deflection at

$$B$$

due to an upward redundant force

$$R_B$$

applied at the free end of the cantilever is

$$\delta_R = \frac{R_B L^3}{3EI}$$

By superposition,


$$\delta_M + \delta_R = -\Delta$$

Hence,

$$-\frac{ML^2}{2EI} + \frac{R_B L^3}{3EI} = -\Delta$$

Multiplying throughout by

$$3EI/L^3$$

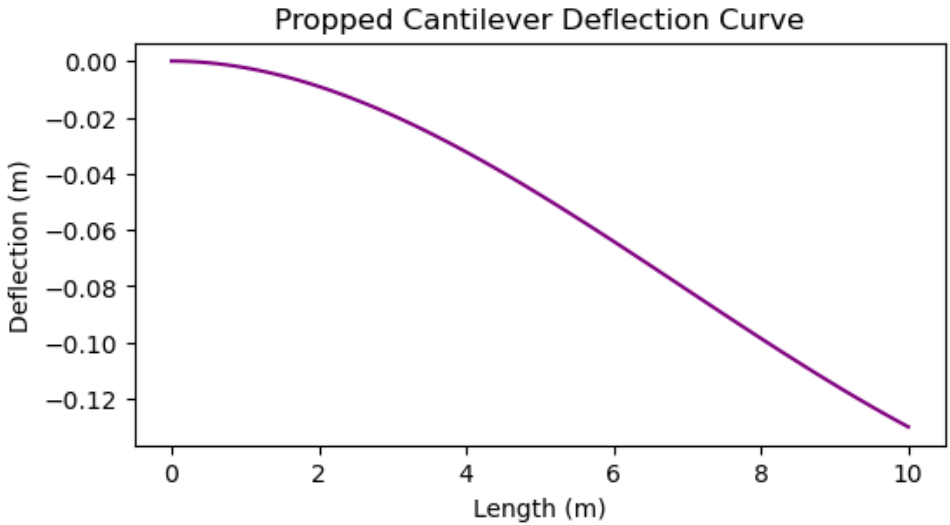

$$-\frac{3M}{2L} + R_B = -\frac{3EI\Delta}{L^3}$$

Therefore,

$$R_B = \frac{3M}{2L} - \frac{3EI\Delta}{L^3}$$

Thus, the upward reaction at support

B

is

$$\boxed{\frac{3M}{2L} - \frac{3EI\Delta}{L^3}}$$

Hence, the correct option is

(C)

codes/ce2q38/ce2q38.py

1.2.13 Consider the function given below and pick one or more CORRECT statement(s) from the following choices.

$$f(x) = x^3 - \frac{15}{2}x^2 + 18x + 20$$

(GATE CE2 2025)

- a) $f(x)$ has a local minimum at $x = 3$.
- b) $f(x)$ has a local maximum at $x = 3$.
- c) $f(x)$ has a local minimum at $x = 2$.
- d) $f(x)$ has a local maximum at $x = 2$.

Solution: To determine the local extrema, we differentiate the function.

$$f'(x) = 3x^2 - 15x + 18$$

Factorizing,

$$f'(x) = 3(x^2 - 5x + 6) = 3(x - 2)(x - 3)$$

Thus, the critical points are

$$x = 2, \quad x = 3$$

Now compute the second derivative:

$$f''(x) = 6x - 15$$

At $x = 2$,

$$f''(2) = 12 - 15 = -3 < 0$$

Hence, $f(x)$ has a local maximum at $x = 2$.

At $x = 3$,

$$f''(3) = 18 - 15 = 3 > 0$$

Hence, $f(x)$ has a local minimum at $x = 3$.

Therefore, the correct statements are

(A) and (D)

codes/ce2q44/ce2q44.py

1.2.14 Pick the CORRECT eigenvalue(s) of the matrix $[A]$ from the following choices.

$$[A] = \begin{bmatrix} 6 & 8 \\ 4 & 2 \end{bmatrix}$$

(GATE CE2 2025)

- a) 10
- b) 4
- c) -2
- d) -10

Solution: The eigenvalues are obtained from the characteristic equation

$$\det(A - \lambda I) = 0$$

Therefore,

$$\det \begin{bmatrix} 6 - \lambda & 8 \\ 4 & 2 - \lambda \end{bmatrix} = 0$$

Expanding,

$$(6 - \lambda)(2 - \lambda) - 32 = 0$$

$$12 - 8\lambda + \lambda^2 - 32 = 0$$

$$\lambda^2 - 8\lambda - 20 = 0$$

Factoring,

$$(\lambda - 10)(\lambda + 2) = 0$$

Hence, the eigenvalues are


$$\lambda = 10, \quad \lambda = -2$$

So, the correct options are

(A) and (C)

codes/ce2q45/ce2q45.py

- 1.2.15 In the pin-jointed truss shown in the figure, the members that carry zero force are identified. Which of the following options is/are zero-force members?

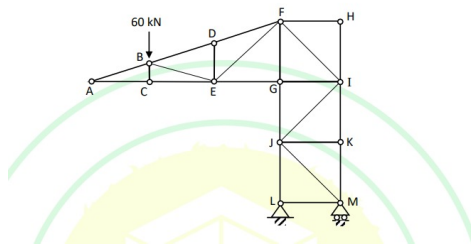

(GATE CE2 2025)

- a) BC
- b) EG
- c) FI
- d) JK

Solution: We apply the standard zero-force member rules for pin-jointed trusses:

- a) **At Joint C:** The bottom chord members AC and CE are collinear, and no external load acts at joint C (the 60 kN load is applied at joint B directly above). Therefore, by the zero-force member rule, member BC carries zero force:

$$BC = 0$$

- b) **At Joint J:** The horizontal chord members meeting at joint J are collinear, and no external

load or support reaction is applied at joint J . Hence, member JK carries zero force:


$$JK = 0$$

Thus, among the choices provided, both BC and JK are zero-force members. Therefore, the correct options are:

(A) and (D)

codes/ce2q46/ce2q46.py

- 1.2.16 A compound has a general formula $C_aH_bO_cN_d$ and molecular weight 187. A 935 mg/l solution of the compound is prepared in distilled deionized water. The Total Organic Carbon (TOC) is measured as 360 mg/l (as C). The Chemical Oxygen Demand (COD) and the Total Kjeldahl Nitrogen (TKN) are determined as 600 mg/l (as O_2) and 140 mg/l (as N), respectively. As per the reaction



which of the following options is/are CORRECT?

Atomic weights: $C = 12$, $H = 1$, $O = 16$, $N = 14$

(GATE CE2 2025)

- a) $a = 6$
- b) $b = 7$
- c) $c = 5$
- d) $d = 3$

Solution: The concentration of the compound is 935 mg/l = 0.935 g/l. Since the molecular weight is 187, the molar concentration is

$$\frac{0.935}{187} = 5 \times 10^{-3} \text{ mol/l}$$

From TOC,

$$(5 \times 10^{-3})(12a) = 360 \times 10^{-3}$$

$$0.06a = 0.36 \Rightarrow a = 6$$

From TKN,

$$(5 \times 10^{-3})(14d) = 140 \times 10^{-3}$$

$$0.07d = 0.14 \Rightarrow d = 2$$

Hence, option (D) is false.

Using molecular weight,

$$12a + b + 16c + 14d = 187$$

Substituting $a = 6$ and $d = 2$,

$$72 + b + 16c + 28 = 187$$

$$b + 16c = 87$$

From COD data, oxygen consumed is 600 mg/l = 0.6 g/l. Therefore, oxygen consumed per

mole of compound is

$$\frac{0.6}{5 \times 10^{-3}} = 120 \text{ g/mol of } O_2$$

Hence,

$$\text{moles of } O_2 = \frac{120}{32} = 3.75$$

From the given reaction,

$$\frac{4a + b - 2c - 3d}{4} = 3.75$$

Substituting $a = 6$ and $d = 2$,

$$\frac{24 + b - 2c - 6}{4} = 3.75$$

$$18 + b - 2c = 15$$

$$b - 2c = -3$$

Now write the two equations in matrix form:

$$\begin{pmatrix} 1 & 16 \\ 1 & -2 \end{pmatrix} \begin{pmatrix} b \\ c \end{pmatrix} = \begin{pmatrix} 87 \\ -3 \end{pmatrix}$$

Let

$$\mathbf{A} = \begin{pmatrix} 1 & 16 \\ 1 & -2 \end{pmatrix}, \quad \mathbf{x} = \begin{pmatrix} b \\ c \end{pmatrix}, \quad \mathbf{y} = \begin{pmatrix} 87 \\ -3 \end{pmatrix}$$

so that

$$\mathbf{Ax} = \mathbf{y}$$

The determinant of $\mathbf{A}$ is

$$|\mathbf{A}| = (1)(-2) - (1)(16) = -18$$

Thus,

$$\mathbf{A}^{-1} = \frac{1}{-18} \begin{pmatrix} -2 & -16 \\ -1 & 1 \end{pmatrix}$$

Hence,

$$\mathbf{x} = \mathbf{A}^{-1}\mathbf{y} = \frac{1}{-18} \begin{pmatrix} -2 & -16 \\ -1 & 1 \end{pmatrix} \begin{pmatrix} 87 \\ -3 \end{pmatrix}$$

$$\mathbf{x} = \frac{1}{-18} \begin{pmatrix} -174 + 48 \\ -87 - 3 \end{pmatrix} = \frac{1}{-18} \begin{pmatrix} -126 \\ -90 \end{pmatrix} = \begin{pmatrix} 7 \\ 5 \end{pmatrix}$$

Therefore,

$$b = 7, \quad c = 5$$

Thus,

$$a = 6, \quad b = 7, \quad c = 5, \quad d = 2$$

Therefore, the correct options are

(A), (B) and (C)

- 1.2.17 Consider a discrete random variable X whose probabilities are given below. The standard deviation of the random variable is _____ (round off to one decimal place).

x_i	1	2	4	8
$P(X = x_i)$	0.3	0.1	0.3	0.3

(GATE CE2 2025)

Solution: The mean is

$$\mu = E[X] = \sum x_i p_i$$

$$\mu = 1(0.3) + 2(0.1) + 4(0.3) + 8(0.3)$$

$$\mu = 0.3 + 0.2 + 1.2 + 2.4 = 4.1$$

Now,

$$E[X^2] = 1^2(0.3) + 2^2(0.1) + 4^2(0.3) + 8^2(0.3)$$

$$E[X^2] = 0.3 + 0.4 + 4.8 + 19.2 = 24.7$$

Hence the variance is

$$\sigma^2 = E[X^2] - \mu^2$$

$$\sigma^2 = 24.7 - (4.1)^2 = 24.7 - 16.81 = 7.89$$

Therefore, the standard deviation is

$$\sigma = \sqrt{7.89} = 2.81$$

Rounded off to one decimal place,

2.8

codes/ce2q51/ce2q51.py

- 1.2.18 The figure shows a network diagram for a construction project. The activities A, B, C, D, E, and F are represented by arrows and their durations are shown in the figure.

The total float available for the activity E in day(s) is equal to _____ (round off to the nearest integer).

(GATE CE2 2025)

Solution: From the network:

$$A : 1 \rightarrow 2 = 3 \text{ days}$$

$$B : 2 \rightarrow 4 = 5 \text{ days}$$

$$C : 1 \rightarrow 3 = 5 \text{ days}$$

$$D : 3 \rightarrow 4 = 2 \text{ days}$$

$$E : 4 \rightarrow 5 = 4 \text{ days}$$

$$F : 3 \rightarrow 5 = 8 \text{ days}$$

Forward pass:

Earliest event time at node 1:

$$TE_1 = 0$$

At node 2:

$$TE_2 = 0 + 3 = 3$$

At node 3:

$$TE_3 = 0 + 5 = 5$$

At node 4:

$$TE_4 = \max(TE_2 + 5, TE_3 + 2) = \max(3 + 5, 5 + 2) = 8$$

At node 5:

$$TE_5 = \max(TE_4 + 4, TE_3 + 8) = \max(8 + 4, 5 + 8) = 13$$

Backward pass:

$$TL_5 = 13$$

At node 4:

$$TL_4 = TL_5 - 4 = 13 - 4 = 9$$

At node 3:

$$TL_3 = \min(TL_4 - 2, TL_5 - 8) = \min(9 - 2, 13 - 8) = 5$$

At node 2:

$$TL_2 = TL_4 - 5 = 9 - 5 = 4$$

For activity E ($4 \rightarrow 5$), total float is

$$TF_E = TL_5 - TE_4 - t_E$$

$$TF_E = 13 - 8 - 4 = 1$$

Therefore, the total float available for activity E is

$$\boxed{1}$$

codes/ce2q53/ce2q53.py

1.2.19 The shaft of a 6 m wide gate in the figure will fail at a moment of 3924 kN.m about the hinge

P. The maximum value of water depth h (in m) that the gate can hold is _____ (round off to the nearest integer).

Note: Density of water = 1000 kg/m^3 , acceleration due to gravity = 9.81 m/s^2 .

(GATE CE2 2025)

Solution: The inclined gate spans 3 m horizontally and 4 m vertically, so its length is

$$L = \sqrt{3^2 + 4^2} = 5 \text{ m}$$

The width of gate is $b = 6 \text{ m}$. Hence, area of the inclined gate is

$$A = 5 \times 6 = 30 \text{ m}^2$$

Let the water depth above hinge level be h . The top end of the gate is 4 m above the hinge, so the centroid of the inclined rectangular gate is at 2 m above hinge level. Hence its depth below free surface is

$$\bar{y} = h - 2$$

The hydrostatic force on the inclined plane is

$$F = \rho g A \bar{y}$$

$$F = 1000 \times 9.81 \times 30 \times (h - 2)$$

$$F = 294300(h - 2) \text{ N}$$

Since pressure varies linearly from bottom to top, and the top edge is at shallower depth, the resultant acts at a distance from hinge obtained from moment integration along the gate.

Take coordinate s along the gate from hinge upward. Vertical elevation of a point is

$$y = \frac{4}{5}s$$

Hence pressure intensity at that point is proportional to

$$p(s) = \rho g \left(h - \frac{4}{5}s \right)$$

Elemental force on strip ds is

$$dF = p(s) b ds = \rho g b \left(h - \frac{4}{5}s \right) ds$$

Moment about hinge:

$$M_P = \int_0^5 s dF$$

$$M_P = \rho g b \int_0^5 s \left(h - \frac{4}{5}s \right) ds$$

$$M_P = \rho g b \left[h \int_0^5 s ds - \frac{4}{5} \int_0^5 s^2 ds \right]$$

Now,

$$\int_0^5 s \, ds = \frac{25}{2} \quad \text{and} \quad \int_0^5 s^2 \, ds = \frac{125}{3}$$

Therefore,

$$M_P = \rho g b \left(\frac{25h}{2} - \frac{4}{5} \cdot \frac{125}{3} \right)$$

$$M_P = \rho g b \left(\frac{25h}{2} - \frac{100}{3} \right)$$

Substituting $\rho = 1000$, $g = 9.81$, $b = 6$,

$$M_P = 1000 \times 9.81 \times 6 \left(\frac{25h}{2} - \frac{100}{3} \right)$$

Failure occurs at

$$M_P = 3924 \text{ kN.m} = 3.924 \times 10^6 \text{ N.m}$$

Thus,

$$1000 \times 9.81 \times 6 \left(\frac{25h}{2} - \frac{100}{3} \right) = 3.924 \times 10^6$$

$$58860 \left(\frac{25h}{2} - \frac{100}{3} \right) = 3.924 \times 10^6$$

$$\frac{25h}{2} - \frac{100}{3} = 66.6667$$

$$\frac{25h}{2} = 100$$

$$25h = 200$$

$$h = 8$$

Therefore, the maximum water depth is

$$\boxed{8}$$

`codes/ce2q60/ce2q60.py`

1.2.20 On a two-lane highway, a horizontal curve of radius 300 m is provided. The design speed is 80 km/h.

If the longest wheelbase of vehicle expected on this highway is 7 m, then the extra widening required (in m) is _____ (round off to two decimal places).

(GATE CE2 2025)

Solution: Extra widening on a horizontal curve is given by

$$W_e = W_m + W_p$$

where W_m is the mechanical widening and W_p is the psychological widening.
For a two-lane road,

$$W_m = \frac{nl^2}{2R}$$

$$W_p = \frac{V}{9.5\sqrt{R}}$$

Given:

$$n = 2, \quad l = 7 \text{ m}, \quad R = 300 \text{ m}, \quad V = 80 \text{ km/h}$$

Now,

$$W_m = \frac{2 \times 7^2}{2 \times 300} = \frac{49}{300} = 0.1633 \text{ m}$$

Also,

$$W_p = \frac{80}{9.5\sqrt{300}}$$

$$\sqrt{300} = 17.3205$$

$$W_p = \frac{80}{9.5 \times 17.3205} = 0.4862 \text{ m}$$

Hence,

$$W_e = 0.1633 + 0.4862 = 0.6495 \text{ m}$$

Rounded off to two decimal places,

0.65

codes/ce2q64/ce2q64.py

- 1.2.21 If the Fore Bearing of the lines AB and BC are 60° and 122° , respectively, then the interior angle $\angle ABC$ (in degrees) is _____ (round off to the nearest integer).

(GATE CE2 2025)

Solution: The fore bearing of line AB is

$$FB_{AB} = 60^\circ$$

Hence the back bearing of line BA is

$$BB_{BA} = 60^\circ + 180^\circ = 240^\circ$$

The fore bearing of line BC is

$$FB_{BC} = 122^\circ$$

The interior angle at B , that is $\angle ABC$, is the angle between the directions BA and BC .

Therefore,

$$\angle ABC = |240^\circ - 122^\circ| = 118^\circ$$

Hence,

$$118^\circ$$

codes/ce2q65/ce2q65.py

